


Especificación Técnica Accesorios SCH 40 PVC

Normativa de referencia:

ASTM D2466


NSF 61, NSF 14

ANSI/ASME B1,20,1

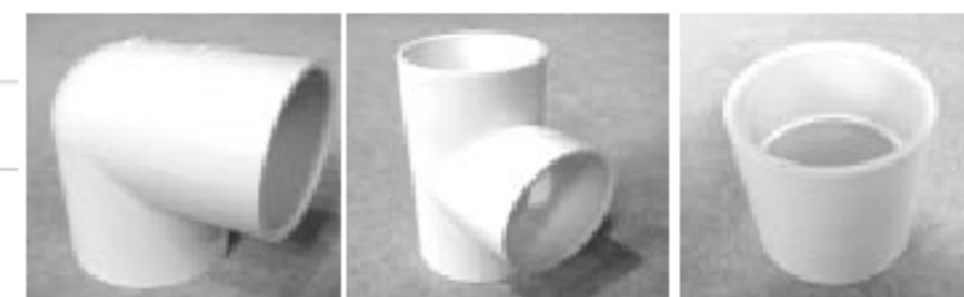



Diám. Nominal		Diámetro Entrada "A"			Diámetro Fondo "B"			"C"	"E"	"F"	"M"	D. Rosca "D"		D. Interno "D"		D. Espiga			
mm	Pulg.	Diám.	Toler.	Ova. Max.	Diám.	Toler.	Ova. Max.	Mín.	Mín.	Mín.	Mín.	Max.	Ova. Max.	Mín.	Ova. Max.	Diám.	Tol. XA	Tol. XB	Ova. Max.
12	1/2"	21.54	± 0.10	0.41	21.23	± 0.10	0.41	17.48	2.77	3.45	25.35	13.88	0.41	14.68	0.41	21.34	+0.18 -0.10	± 0.10	0.41
18	3/4"	26.87	± 0.10	0.51	26.57	± 0.10	0.51	18.26	2.87	3.58	31.01	18.85	0.51	18.80	0.51	26.67	+0.18 -0.10	± 0.10	0.51
25	1"	33.66	± 0.13	0.51	33.27	± 0.13	0.51	22.23	3.38	4.22	38.20	24.30	0.51	25.15	0.51	33.40	+0.20 -0.13	± 0.13	0.51
31	1 1/4"	42.42	± 0.13	0.61	42.04	± 0.13	0.61	23.83	3.56	4.45	47.52	32.46	0.61	33.91	0.61	42.16	+0.20 -0.13	± 0.13	0.61
38	1 1/2"	48.57	± 0.15	0.61	48.10	± 0.15	0.61	27.79	3.68	4.60	54.03	38.10	0.61	39.73	0.61	48.26	+0.25 -0.15	± 0.15	0.61
50	2"	60.63	± 0.15	0.61	60.17	± 0.15	0.61	29.36	3.91	4.90	66.90	49.24	0.61	51.33	0.61	60.33	+0.25 -0.15	± 0.15	0.61
62	2 1/2"	73.38	± 0.18	0.76	72.85	± 0.18	0.76	44.45	5.16	6.45	80.52	59.00	0.76	61.32	0.76	73.03	+0.30 -0.18	± 0.18	0.76
75	3"	89.31	± 0.20	0.76	88.70	± 0.20	0.76	47.63	5.49	6.86	97.56	73.66	0.76	76.40	0.76	88.90	+0.33 -0.20	± 0.20	0.76
100	4"	114.76	± 0.23	0.76	114.07	± 0.23	0.76	50.80	6.02	7.52	124.64	97.18	0.76	100.61	0.76	114.30	+0.38 -0.23	± 0.23	0.76
150	6"	168.83	± 0.28	1.52	168.00	± 0.28	1.52	76.20	7.11	8.89	182.96	146.34	1.52	152.04	1.52	168.28	+0.46 -0.28	± 0.28	1.78
200	8"	219.84	± 0.38	2.29	218.69	± 0.38	2.29	101.60	8.18	10.24	236.73	193.68	2.29	200.36	2.29	219.08	+0.64 -0.38	± 0.38	2.29
250	10"	273.81	± 0.38	3.05	272.67	± 0.38	3.05	127.00	9.27	11.58	295.00	242.33	3.05	251.89	3.05	273.05	+0.64 -0.38	± 0.38	2.54
300	12"	324.61	± 0.30	3.81	323.47	± 0.38	3.81	152.40	10.31	12.90	350.16	288.95	3.81	300.36	3.81	323.85	+0.64 -0.38	± 0.38	3.05

Nota: Todas las dimensiones están en milímetros.

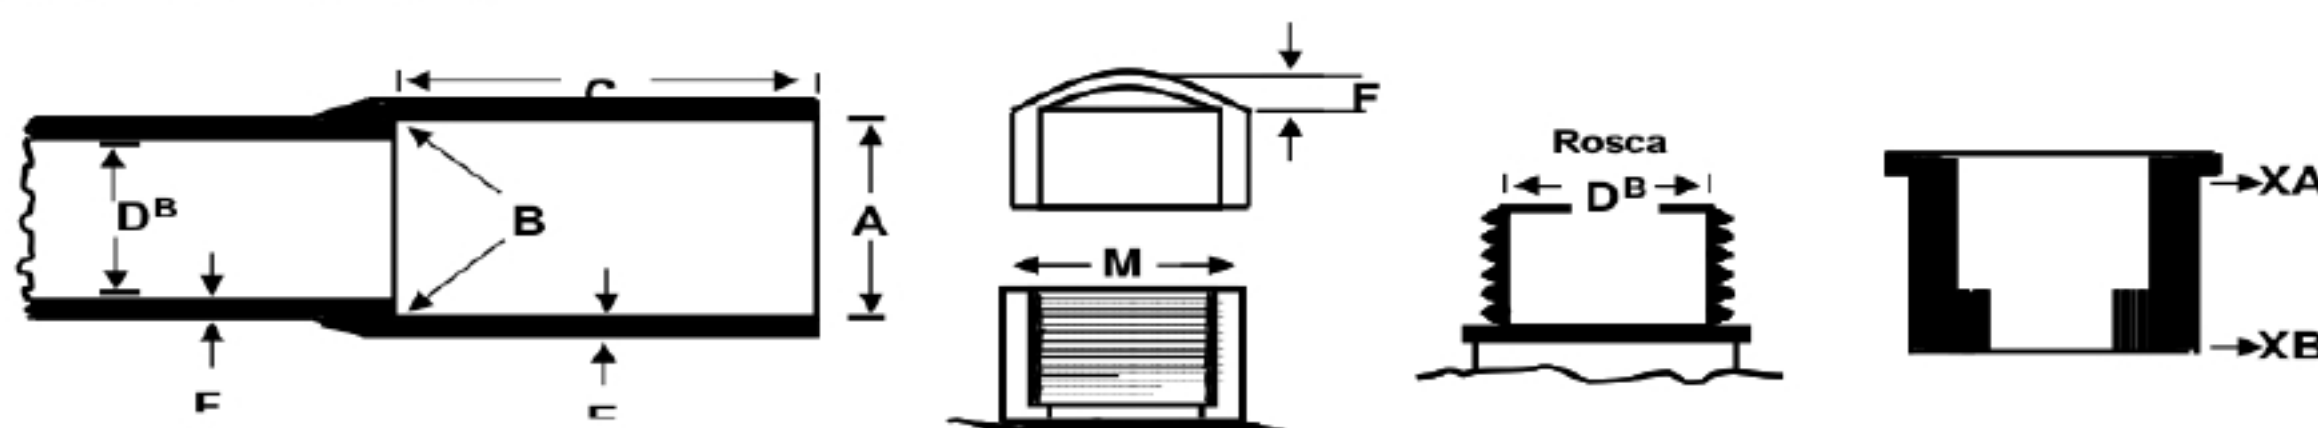

Conexiones Roscas

Diám. Nominal		Rosca Macho						Rosca Hembra					
		E1		E2		E3		I1		I2		I3	
mm	Pulg.	Diám.	Toler.	Diám.	Toler.	Diám.	Toler.	Diám.	Toler.	Diám.	Toler.	Diám.	Toler.
12	1/2"	17.55	± 0.25	19.80	± 0.25	20.70	± 0.25	21.40	± 0.25	19.05	± 0.25	17.95	± 0.25
18	3/4"	22.95	± 0.25	25.70	± 0.25	26.65	± 0.25	27.00	± 0.25	24.15	± 0.25	22.60	± 0.25
25	1"	29.15	± 0.30	32.35	± 0.30	33.35	± 0.30	33.50	± 0.30	30.50	± 0.30	29.05	± 0.30
31	1 1/4"	37.80	± 0.30	41.00	± 0.30	42.30	± 0.30	42.15	± 0.30	38.95	± 0.30	37.10	± 0.30
38	1 1/2"	43.80	± 0.30	47.00	± 0.30	48.10	± 0.30	48.25	± 0.30	45.45	± 0.30	44.00	± 0.30
50	2"	55.40	± 0.30	58.95	± 0.30	59.85	± 0.30	60.20	± 0.30	58.00	± 0.30	56.80	± 0.30
62	2 1/2"	66.70	± 0.40	71.40	± 0.40	72.50	± 0.40	73.75	± 0.40	68.40	± 0.40	65.55	± 0.40
75	3"	82.20	± 0.60	86.90	± 0.60	88.50	± 0.60	89.00	± 0.60	84.50	± 0.60	82.20	± 0.60
100	4"	107.15	± 0.60	111.35	± 0.60	112.55	± 0.60	114.05	± 0.60	109.40	± 0.60	107.40	± 0.60

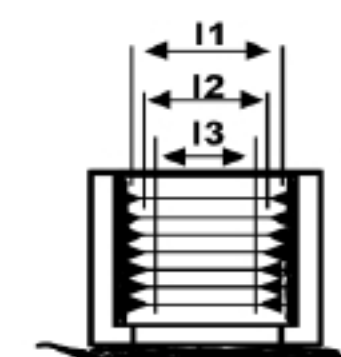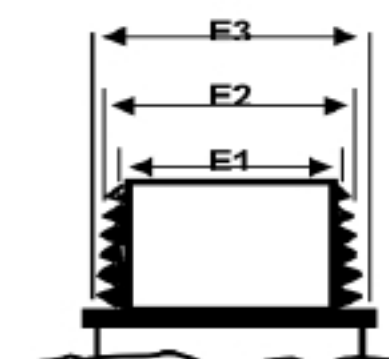

Nota: Todas las dimensiones están en milímetros. Esta table de Accesorios Roscas aplica cuando no exista galgas roscas patrón.




Certificaciones

Especificaciones técnicas unión 12mm (1/2") SCH 40 PVC con regulador de flujo

Normativa de referencia:

ASTM D2466

NSF 61, NSF 14

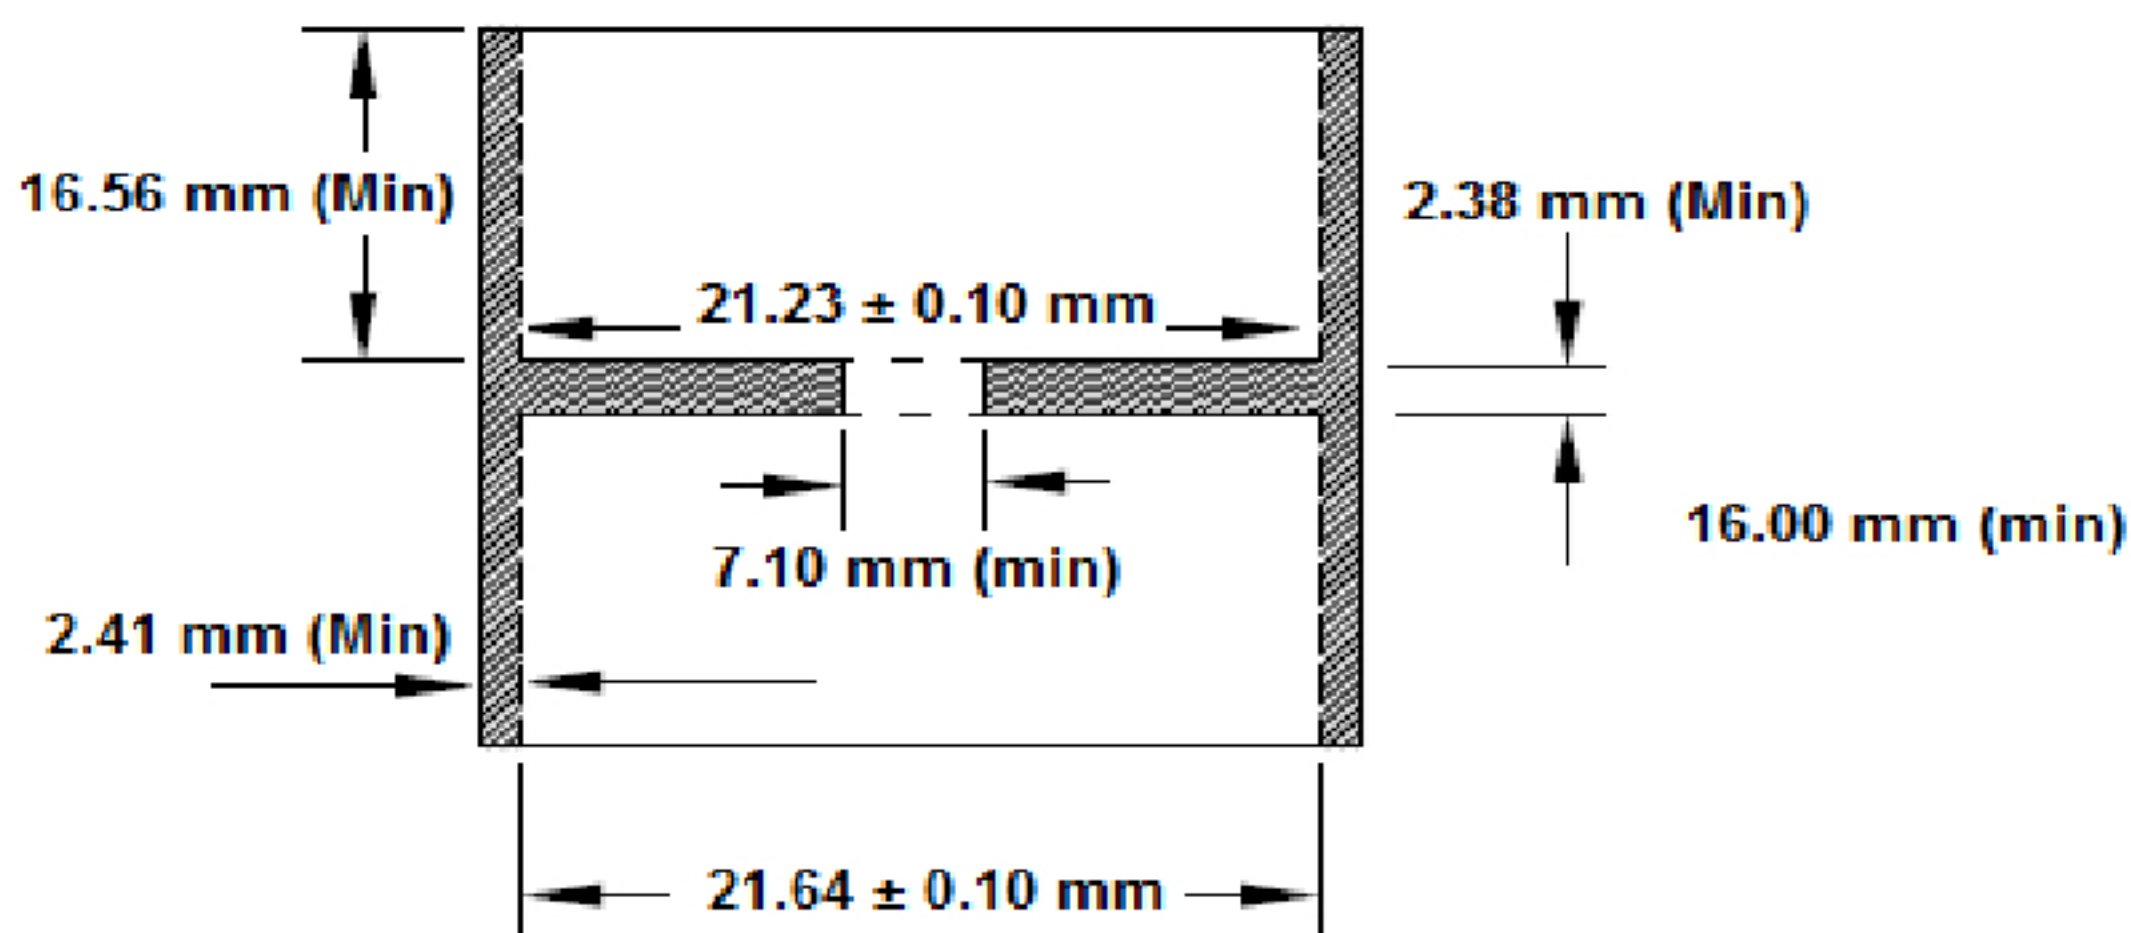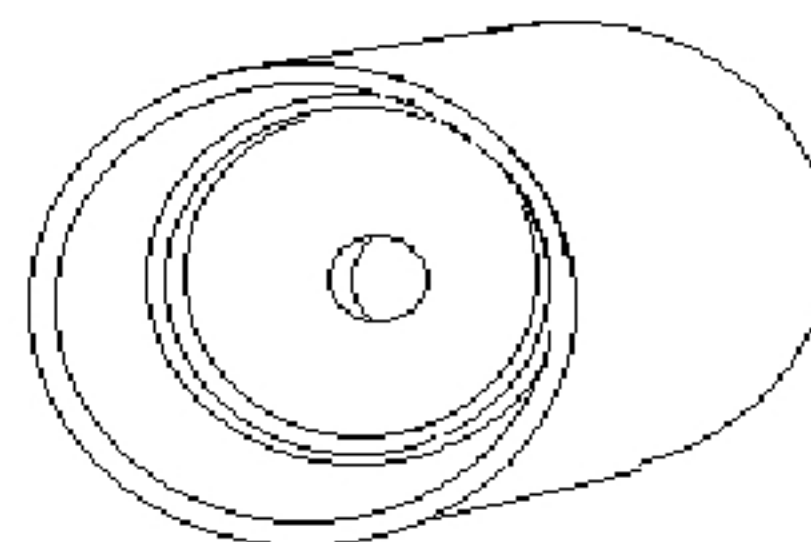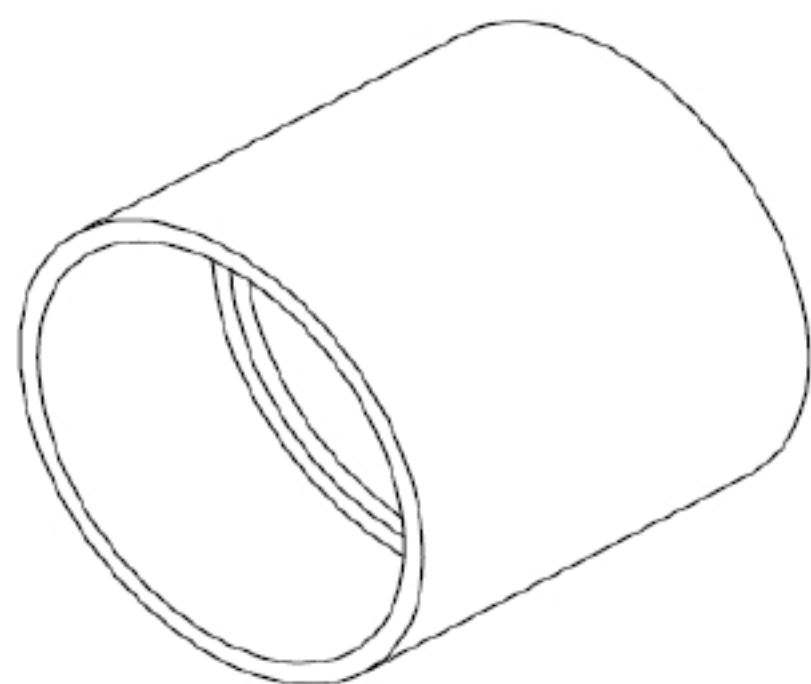

Certificaciones



pw