

EMT Compression Connector-Steel



www.prostar-ele.net
UL File # E358076

Features

- Compression type connector
- Concrete tight
- Assembled with a steel locknut
- Available with insulated throat

Standard Material:


- Steel with Zinc Plated



CAT #	Size	Dimensions		
		Length (A)	Threads Length (B)	Inner Dia. (C)
		(in)		
ZC-50S	1/2"	1.4000	0.4000	0.7087
ZC-75S	3/4"	1.4600	0.4000	0.9252
ZC-100S	1"	1.6535	0.6200	1.1811
ZC-125S	1-1/4"	1.9400	0.6300	1.5118
ZC-150S	1-1/2"	2.3200	0.7400	1.7559
ZC-200S	2"	2.1000	0.7200	2.2047
ZC-250S	2-1/2"	2.3800	0.8800	2.8800
ZC-300S	3"	2.8800	0.8800	3.5200
ZC-400S	4"	3.1900	1.0000	4.5000

★ Consult Manufacturer for Proper Installation

★ With acceptable tolerance

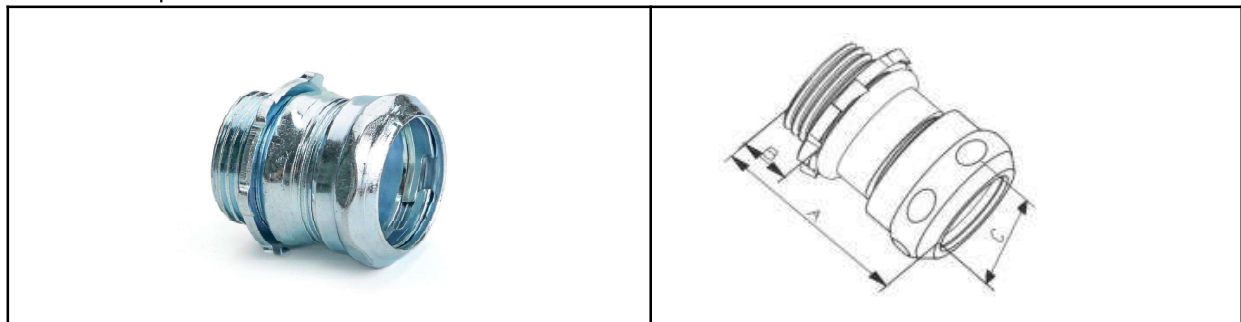

Applications:

- use to join EMT to box or enclosure in dry locations .

Issued date: 2025-6-27