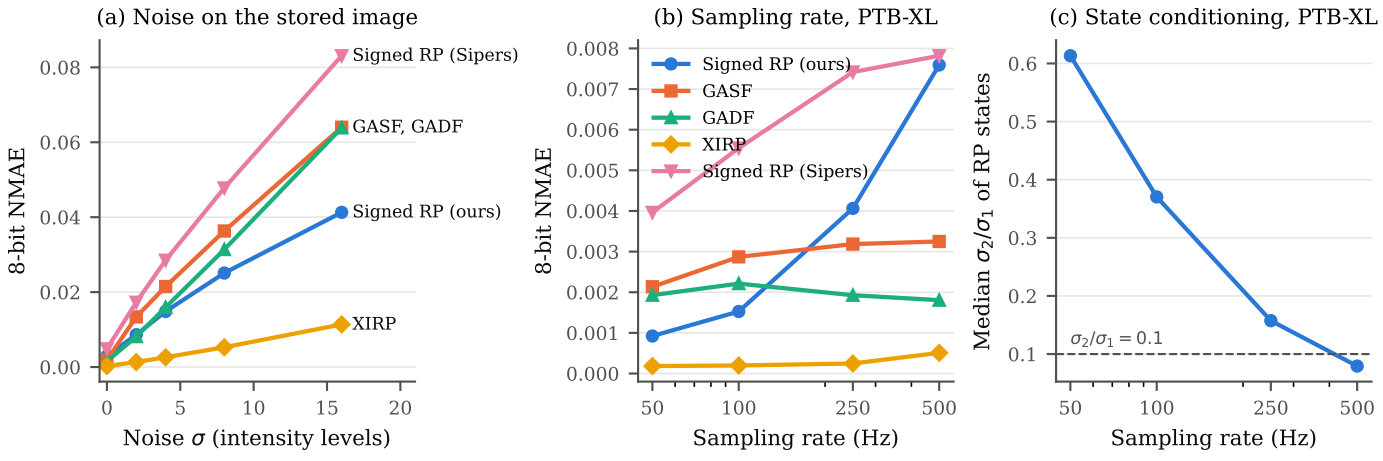
(a) Noise on the stored image
8-bit NMAE
Noise σ (intensity levels)
Signed RP (Sipers)
GASF, GADF
Signed RP (ours)
XIRP
(b) Sampling rate, PTB-XL
8-bit NMAE
Sampling rate (Hz)
Signed RP (ours)
GASF
GADF
XIRP
Signed RP (Sipers)
(c) State conditioning, PTB-XL
Median σ2/σ1 of RP states
σ2/σ1 = 0.1
Sampling rate (Hz)