

Wall mounted unit Air Conditioning Technical Data FTXA-CW



FTXA20C2V1BW
FTXA25C2V1BW
FTXA35C2V1BW
FTXA42C2V1BW
FTXA50C2V1BW

TABLE OF CONTENTS

FTXA-CW

1	Features	4
	FTXA-CW	4
2	Specifications	6
3	Options	8
4	Dimensional drawings	9
5	Centre of gravity	11
6	Piping diagrams	12
7	Wiring diagrams	13
	Wiring Diagrams - Single Phase	13
8	Sound data	14
	Sound Power Spectrum Sound	14
	Pressure Spectrum	17

1 Features

1 - 1 FTXA-CW

Where innovation meets creativity

1

- › A compact and functional design suitable for all interiors in a matt crystal white finish
- › The Coanda effect optimises the airflow for a comfortable climate. By using specially designed flaps, a more focused airflow allows a better temperature distribution throughout the whole room
- › The intelligent thermal sensor determines the current room temperature and distributes air evenly throughout the room before switching to an airflow pattern that directs warm or cool air to areas that need it
- › Using electrons to trigger chemical reactions with air borne particles, the Flash Streamer breaks down allergens such as pollen and fungal allergens and removes bothersome odours providing a better, cleaner air
- › Whisper quiet in operation: the operating of the unit can hardly be heard. The sound pressure level goes down to 19dBA!
- › Onecta app: control your indoor from any location with an app, via your local network or internet.
- › Voice command via Amazon Alexa or Google Assistant to control main functions such as set point, operation mode, fan speed, etc
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Seasonal efficiency values up to A+++ in cooling and heating



Coanda effect
- cooling



Coanda effect
- heating



Intelligent
thermal sensor



Onecta app



Econo mode



Energy
saving during
standby mode



Night set
mode



Fan only



Comfort mode

1 Features

1 - 1 FTXA-CW



Powerful mode



Auto cooling-heating changeover



Indoor unit silent operation



Outdoor unit silent operation



3-D air flow



Vertical auto swing



Horizontal auto swing



Auto fan speed



Fan speed steps



Dry programme



Silver allergen removal and air purifying filter



Flash Streamer



Practically inaudible



Titanium apatite deodorising filter



Air filter



Weekly timer



Infrared remote control



Wired remote control



Centralised control



Auto-restart



Self diagnosis



Multi model application

1

2 Specifications

2 - 1 Specifications

Technical specifications					FTXA20CW		FTXA25CW		FTXA35CW		FTXA42CW		FTXA50CW		
Power input	Cooling	Nom.	kW		0.020		0.022		0.023		0.028		0.030		
	Heating	Nom.	kW		0.020				0.220		0.036		0.039		
Casing	Colour				White										
Dimensions	Unit	Height	mm		295										
		Width	mm		798										
		Depth	mm		189										
	Packed unit	Height	mm		305										
		Width	mm		875										
		Depth	mm		406										
Weight	Unit	kg		11.5											
	Packed unit	kg		14											
Packing	Weight	kg		2.5											
Heat exchanger	Length	mm		622											
	Rows	Quantity		2											
	Fin pitch	mm		1.40											
	Face area	m²		0.214											
	Stages	Quantity		18											
	Passes	Quantity		3.000											
	Tube type			ø5 Hi-XB											
	Tube material			Copper											
	Tube diameter	mm		5											
	Fin	Type	ML fin (Multi louver)												
	Heat exchanger 2	Quantity			2										
Length		mm		614											
Rows		Quantity		1											
Fin pitch		mm		1.40											
Face area		m²		0.047											
Stages		Quantity		4											
Fan	Type	Cross flow fan													
	Quantity	1													
	Air flow rate	Cooling	High	m³/min	11.0	11.5		11.9		13.1		13.5			
				cfm	388	406		420		463		477			
		Medium	m³/min	8.2	8.6				9.8		10.4				
			cfm	290	304				346		367				
Low		m³/min	6.1				7.2		7.6						
		cfm	215				254		268						
Fan	Air flow rate	Cooling	Silent operation	m³/min	4.6								5.2		
				cfm	162								184		
	Heating	High	m³/min	10.9	11.1		11.5		14.6		15.1				
			cfm	385	392		406		516		533				
		Medium	m³/min	8.7	9.0				10.5		11.1				
			cfm	307	318				371		392				
		Low	m³/min	6.4				7.7		8.2					
			cfm	226				272		290					
	Silent operation	m³/min	4.5				5.2		5.7						
		cfm	159				184		201						
	Fan motor	Quantity	1												
		Model	MM9G21V28VA												
Speed		Cooling	High	rpm	1,100	1,140		1,180		1,210		1,240			
			Medium	rpm	870	900				980		1,020			
			Low	rpm	690				780		820				
			Silent operation	rpm	570				620						
Heating		High	rpm	1,090	1,110		1,140		1,310		1,350				
		Medium	rpm	920	940				1,070		1,190				
		Low	rpm	740				850		930					
		Silent operation	rpm	590				640		680					
Sound power level	Cooling	dBA		57				60							
Sound pressure level	Cooling	High	dBA	39	40		41		45		46				
		Medium	dBA	32	33				37		39				
		Low	dBA	25				29		31					
		Silent operation	dBA	19				21		24					
	Heating	High	dBA	39	40		41		45		46				
		Medium	dBA	32	33				37		42				
		Low	dBA	25				29		33					
		Silent operation	dBA	19				21		24					
Refrigerant	Type	R-32													
	GWP	675.0													
Piping connections	Liquid	OD	mm	6.35											
	Gas	OD	mm	9.50								12.70			
	Drain	18													
	Heat insulation	Both liquid and gas pipes													

2 Specifications

2 - 1 Specifications

Technical specifications			FTXA20CW	FTXA25CW	FTXA35CW	FTXA42CW	FTXA50CW
Air filter	Type		Removable / washable				
	Quantity	pc	2				
Air direction control			Right, Left, Horizontal, Downward				
Temperature control			Microcomputer control				
Control systems	Infrared remote control		ARC466A85				
	Wired remote control		BRC073A1				

Standard accessories: Installation manual;Quantity: 1;

Standard accessories: Operation manual;Quantity: 1;

Standard accessories: Air filter;Quantity: 2;

Standard accessories: Infrared remote control;Quantity: 1;

Standard accessories: Remote controller mounting plate;Quantity: 1;

Standard accessories: Screw bag;Quantity: 1;

Standard accessories: Screw cover;Quantity: 2;

Standard accessories: AAA dry-cell batteries;Quantity: 2;

Standard accessories: General safety precautions;Quantity: 1;

Electrical specifications				FTXA20CW	FTXA25CW	FTXA35CW	FTXA42CW	FTXA50CW
Power supply	Name			V1				
	Phase			1~				
	Frequency		Hz	50				
	Voltage		V	220-240				
Current	Nominal running current (RLA) - 50Hz	Heating	A	0.3	0.4		0.5	
Wiring connections - 50Hz	For power supply		Quantity	3				
			Remark	3 for power supply, 4 for interunit wiring (Earth wire included)				
Current	Nominal running current (RLA)	Cooling	A	0.3	0.4		0.5	

3 - 1 Options

3

FTXA-CB
FTXA-CS
FTXA-CW

[illegible]


1. Standard accessory
2. This option features a(n) ·S21· connector. To connect this option to the indoor unit, therefore conversion wire harness ·EKRS21· is required.
3. This option cannot operate together with the wireless LAN functionality that is a standard feature of the indoor unit.
When connecting this option to the indoor unit, turn off the indoor unit's wireless LAN functionality.

4D147525

4 Dimensional drawings


4 - 1 Dimensional Drawings

FTXA-CB / FTXA-CS / FTXA-CW CTXA-CB / CTXA-CS / CTXA-CW

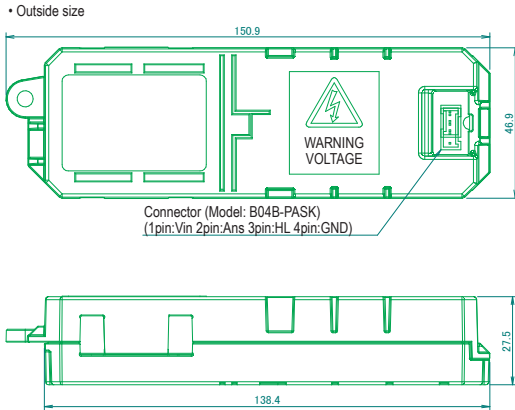

• Method of mounting

Don't blockage the vent of streamer unit.
Ensure the exit wind speed 0.2m/sec of the vent.
Ensure the spatial distance 8.5mm over at the vent of streamer unit.

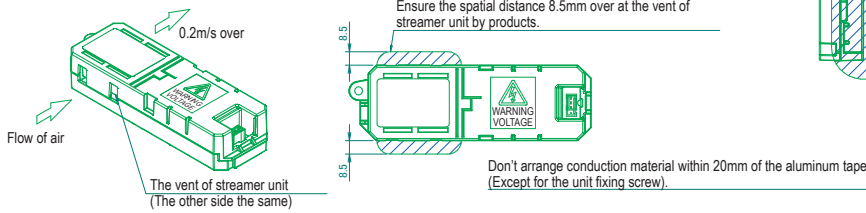

• Main specifications


Items		Contents
Outside	Outside size	150.9×46.9×27.5mm
	Weight	100g
Material of resin	Material	ABS
	Flame retardance	UL94-5VA
	Tracking index	Over CTI600V
Applicable laws		Electrical Appliance and Material Safety Act IEC60335-1(4th), IEC60335-2-65(4th)
Ambient conditions	Storage temperature	-25~70 (Non-Energization)
	Operating ambient temperature	-10~60 (Energization)
Basic specifications	Operating ambient humidity	5~95%RH (No dew deposit)
	Input voltage	14V±5%
	Maximum output voltage	6.5±0.5kV
	Rating output voltage	5.0±0.5kV
	Rating output current	Hi 55.5μA±10%
		Lo 10μA±10%
	ON/OFF	Inputted voltage into Vin (ON/OFF)
	Hi ↔ Lo Switching	Inputted 5V into HL (Loe tap)
	Current monitor	Yes
	Detectable over current	Yes
	Detectable low voltage	Under 3kV
Generation amount of Ozone		4.26ml/hr (Hi 14±2; 50±10%RH)
Method of mounting		Fixing by the right and left hook Fixing by the screw section

3D095530G

4 Dimensional drawings

4 - 1 Dimensional Drawings

FTXA-CB
FTXA-CS
FTXA-CW

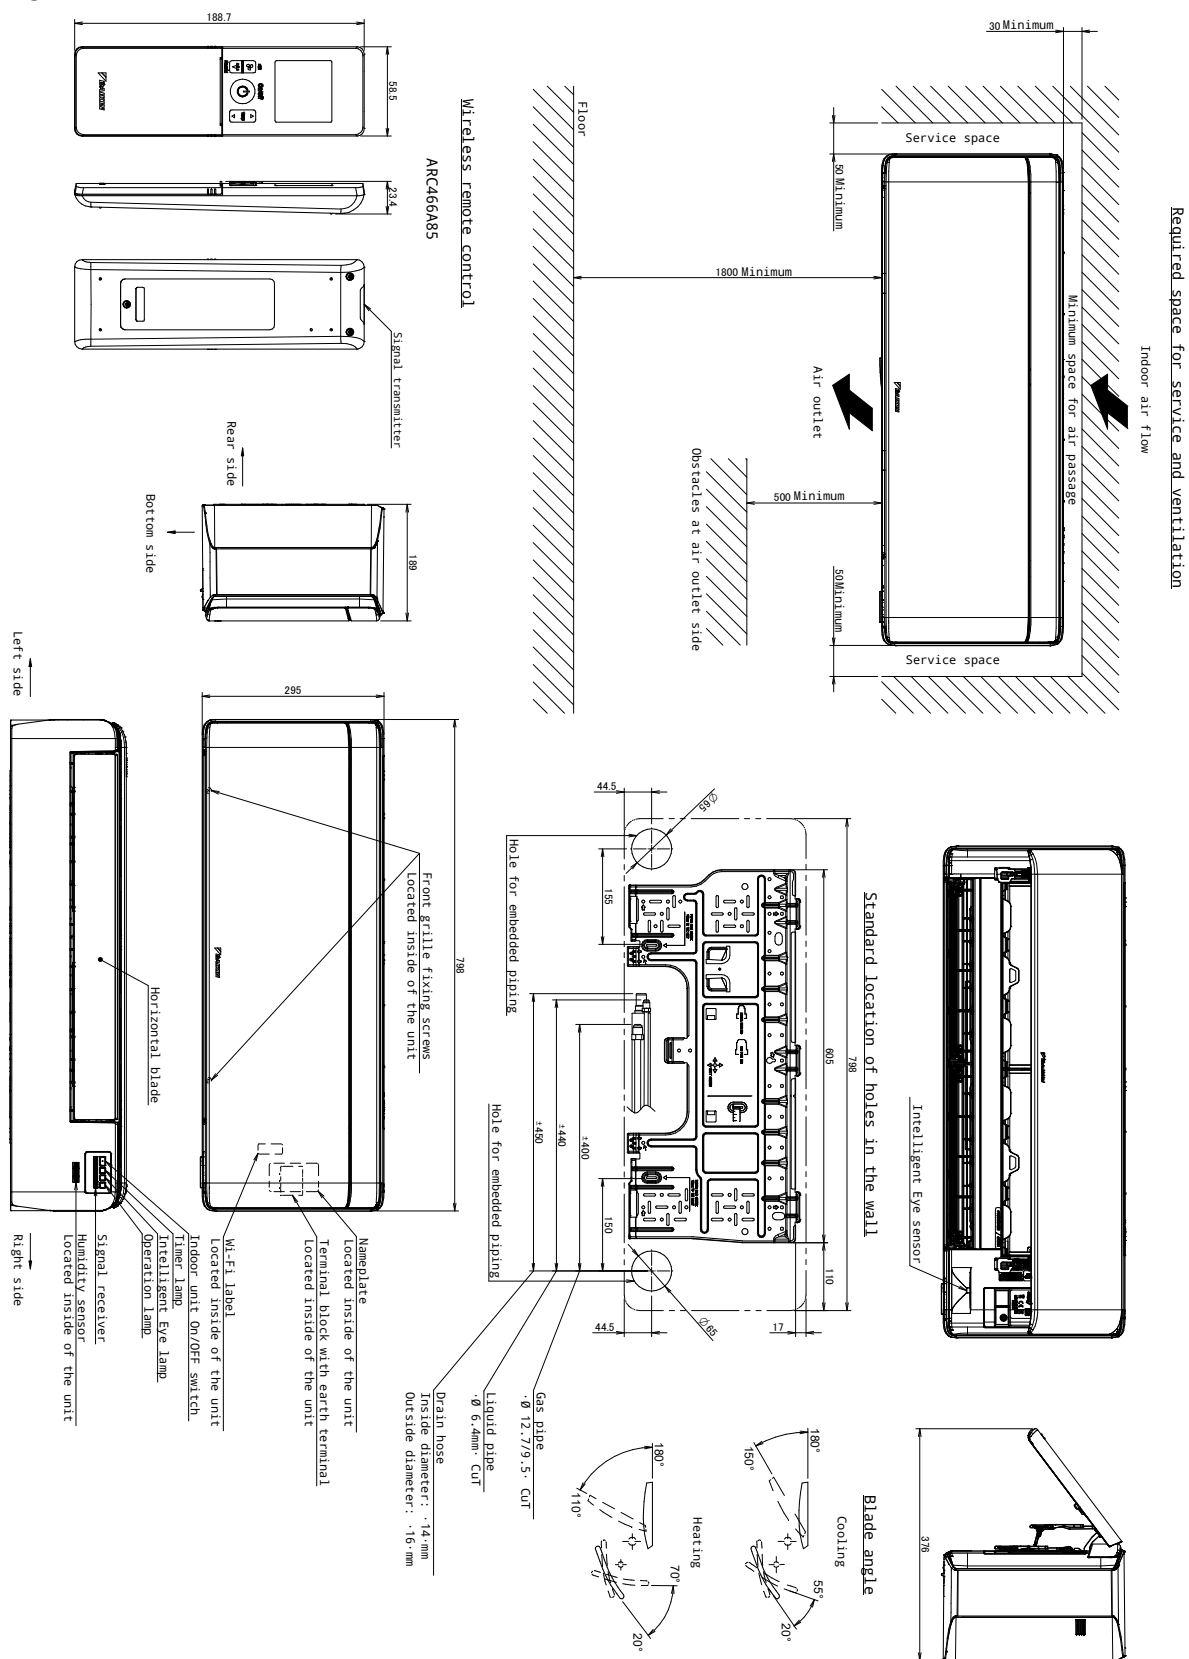

2D147597


5 Centre of gravity

5 - 1 Centre of Gravity

FTXA-CB

FTXA-CS

FTXA-CW

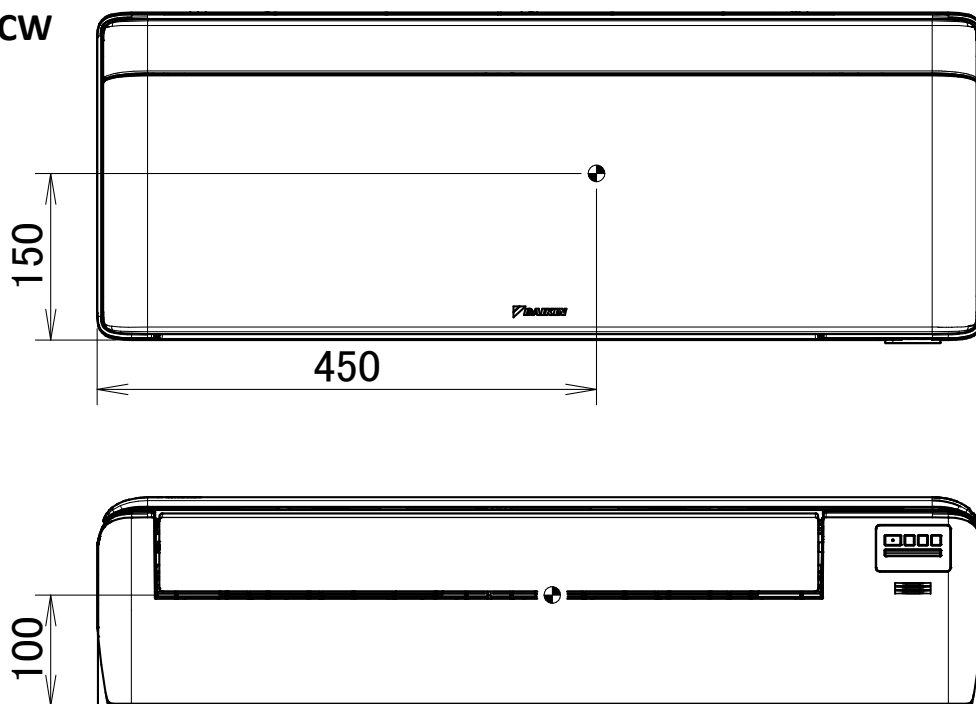

4D147660

6 Piping diagrams

6 - 1 Piping Diagrams

6

FTXA-CB
FTXA-CS
FTXA-CW


Legend

-  Fan motor
-  Thermistor
-  Heat exchanger
-  Crossflow fan
-  Distributor
-  Screw connection

Refrigerant flow

-  Cooling
-  Heating

AA	Class
9.5	15~42
12.7	50

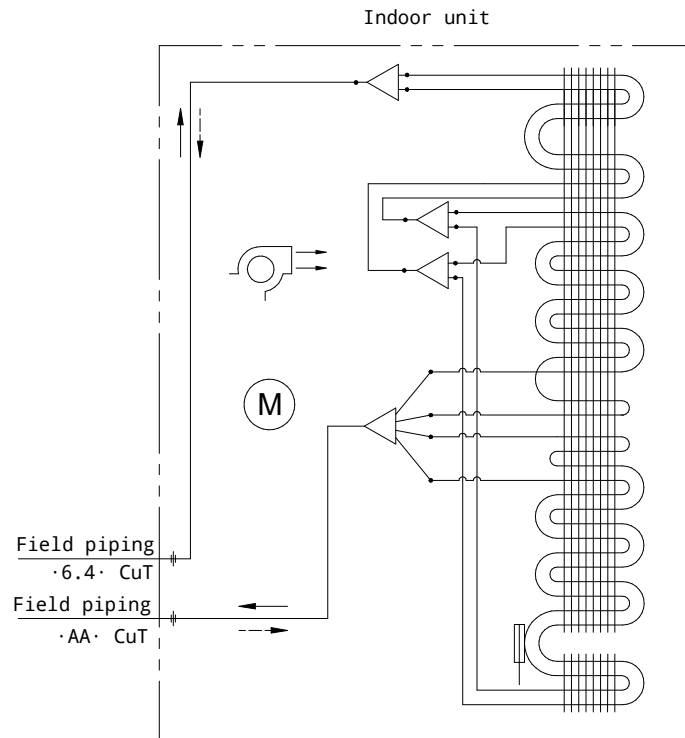


3D147549

7 Wiring diagrams

7 - 1 Wiring Diagrams - Single Phase

FTXA-CB
FTXA-CS
FTXA-CW

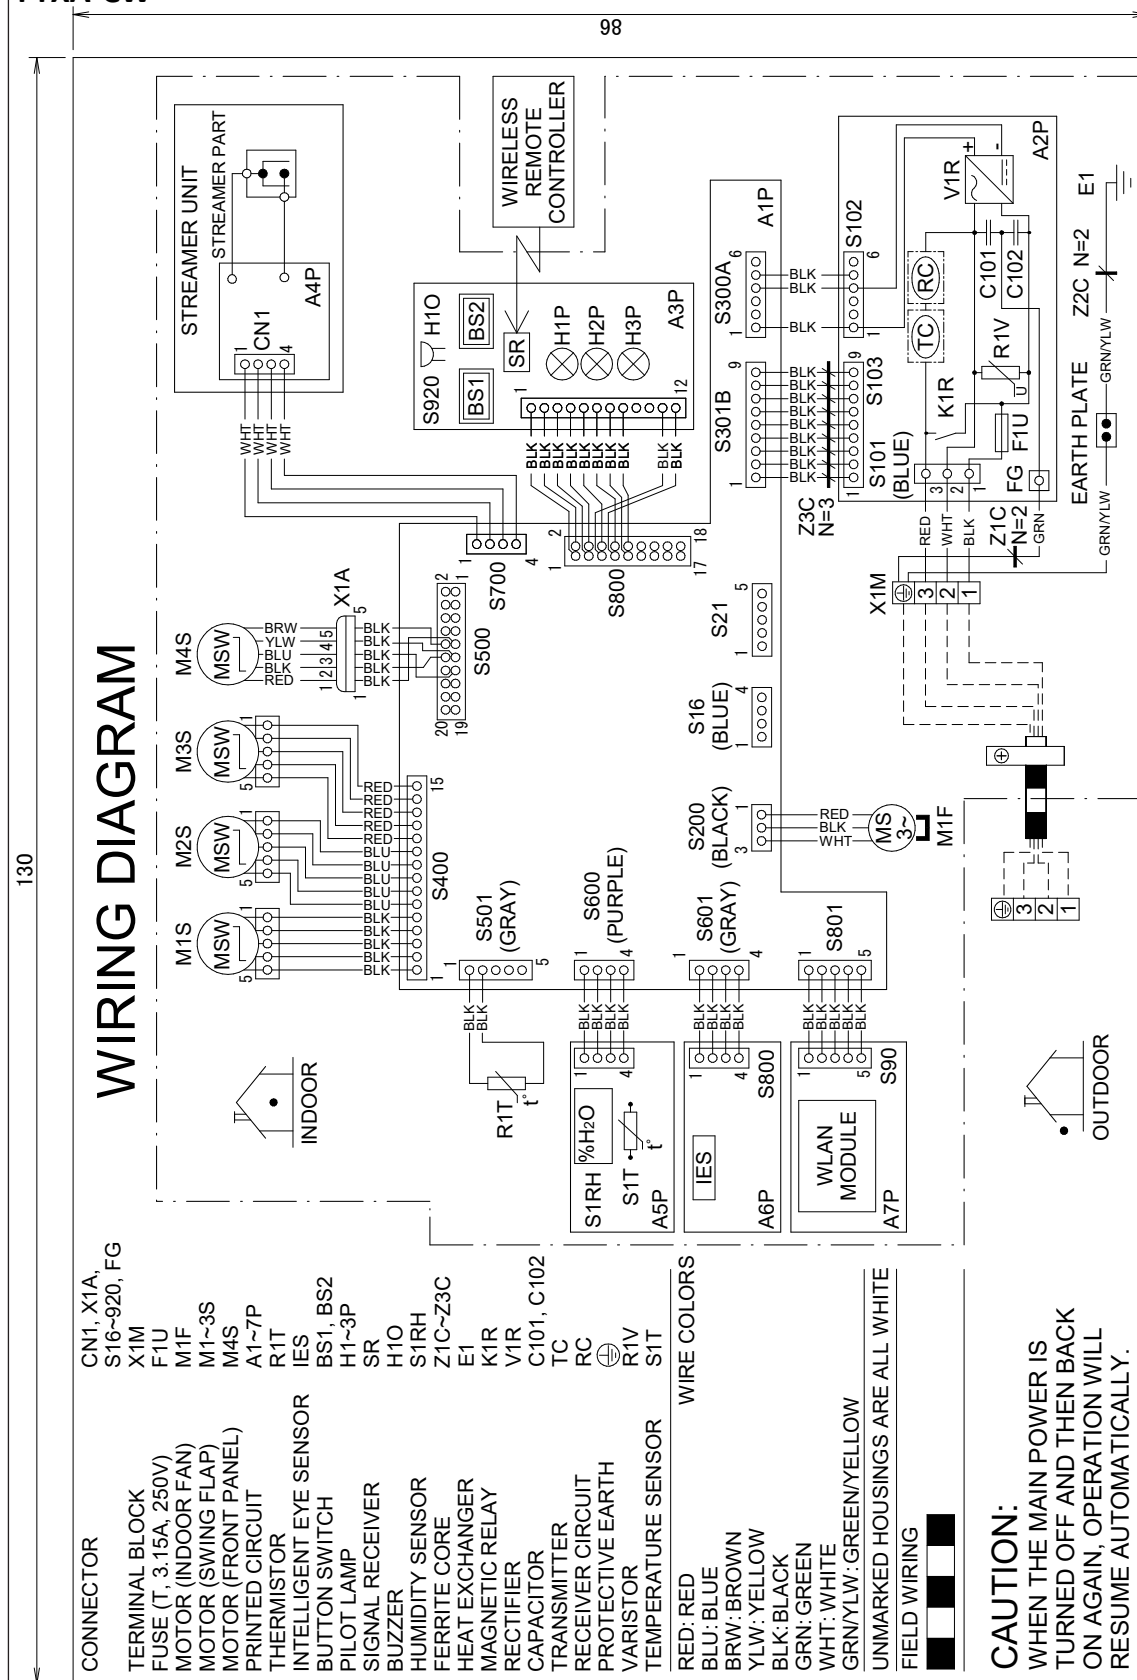


3D145108

8 Sound data

8 - 1 Sound Power Spectrum

8

FTXA20CB
FTXA20CS
FTXA20CW

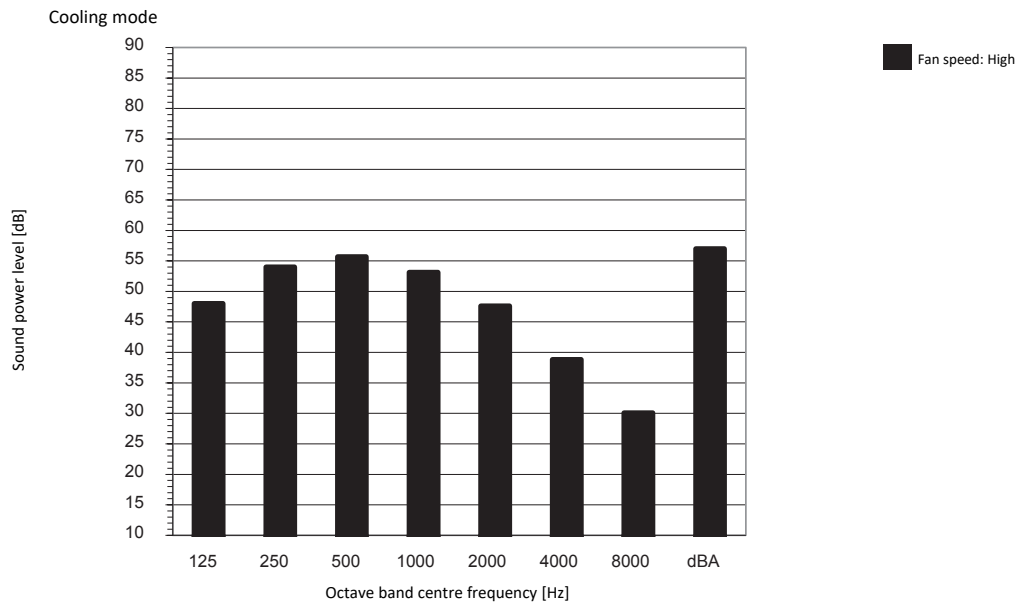


Notes

1. dBA = A-weighted sound power level (A scale according to IEC).
2. Reference acoustic intensity $0\text{dB} = 10^{-12} \text{ W/m}^2$
3. Measured according to ISO 3744

3D115037B

FTXA25CB
FTXA25CS
FTXA25CW

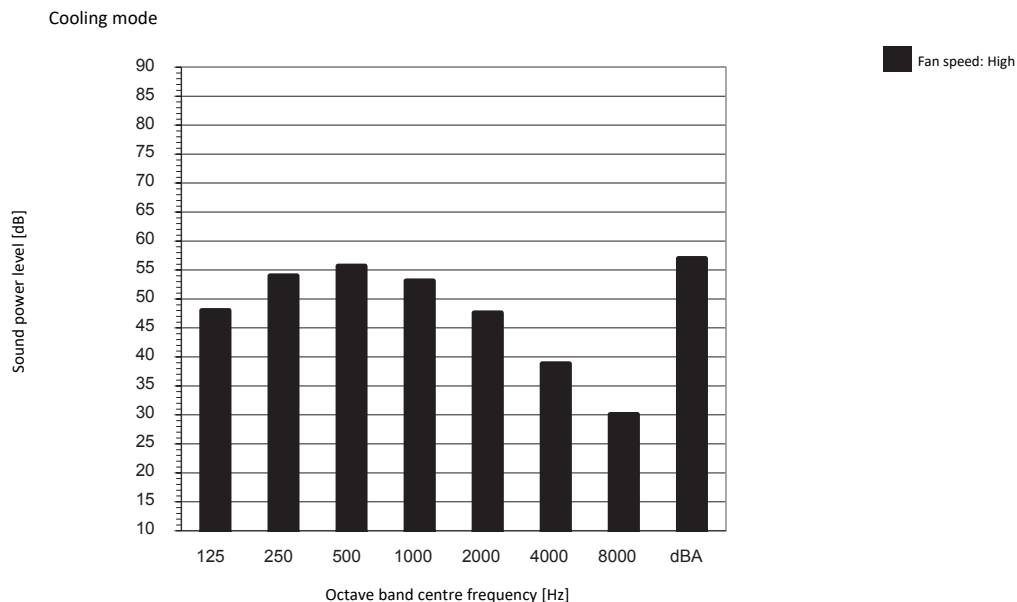

Notes


1. dBA = A-weighted sound power level (A scale according to IEC).
2. Reference acoustic intensity $0\text{dB} = 10^{-12} \text{ W/m}^2$
3. Measured according to ISO 3744

3D115038B

8 Sound data

8 - 1 Sound Power Spectrum

FTXA35CB
FTXA35CS
FTXA35CW

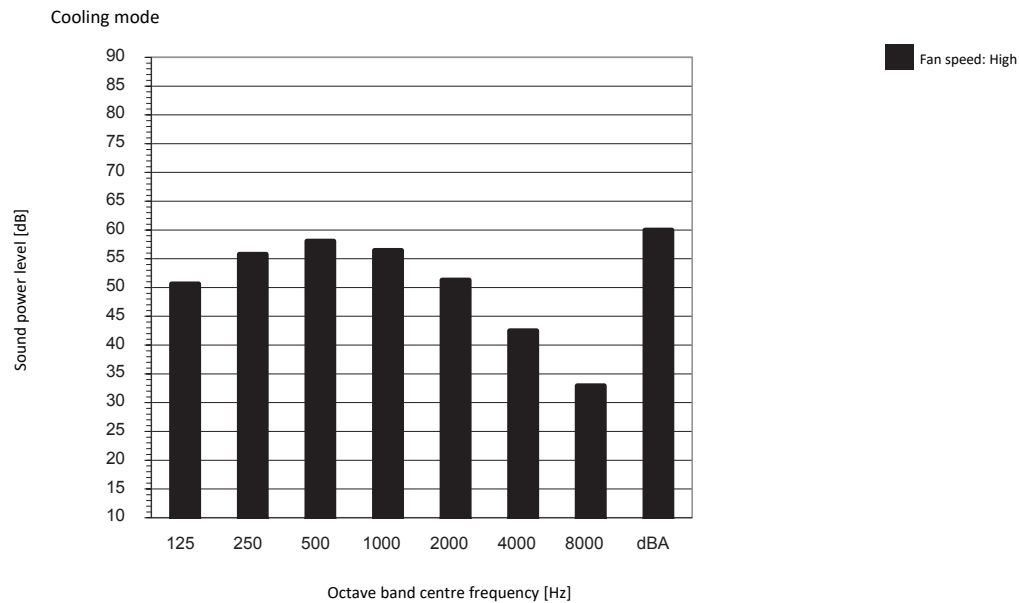


Notes

1. dBA = A-weighted sound power level (A scale according to IEC).
2. Reference acoustic intensity $0\text{dB} = 10^{-12} \text{ W/m}^2$
3. Measured according to ISO 3744

3D115039B

FTXA42CB
FTXA42CS
FTXA42CW

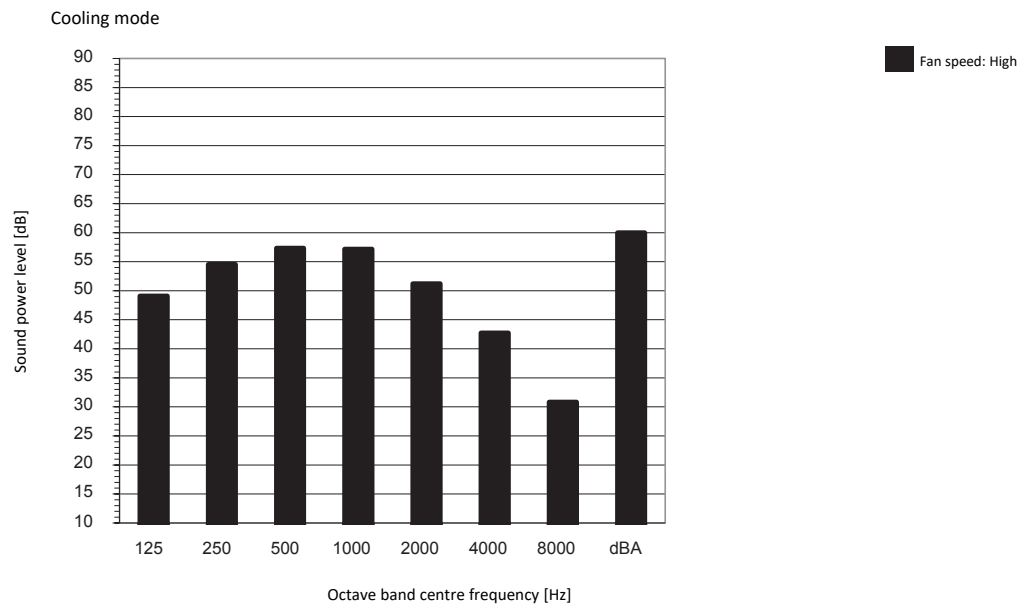

Notes


1. dBA = A-weighted sound power level (A scale according to IEC).
2. Reference acoustic intensity $0\text{dB} = 10^{-12} \text{ W/m}^2$
3. Measured according to ISO 3744

3D115040B

8 Sound data

8 - 1 Sound Power Spectrum

FTXA50CB
FTXA50CS
FTXA50CW

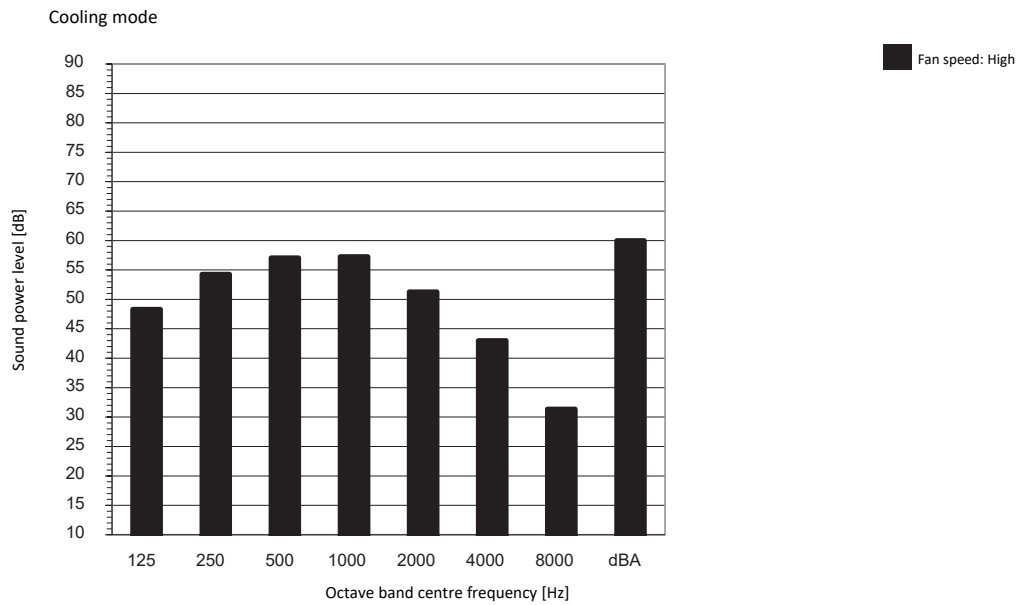

Notes


1. dBA = A-weighted sound power level (A scale according to IEC).
2. Reference acoustic intensity $0\text{dB} = 10^{-12} \text{ W/m}^2$
3. Measured according to ISO 3744

3D115041B

8 Sound data

8 - 2 Sound Pressure Spectrum

FTXA20CB FTXA20CS FTXA20CW

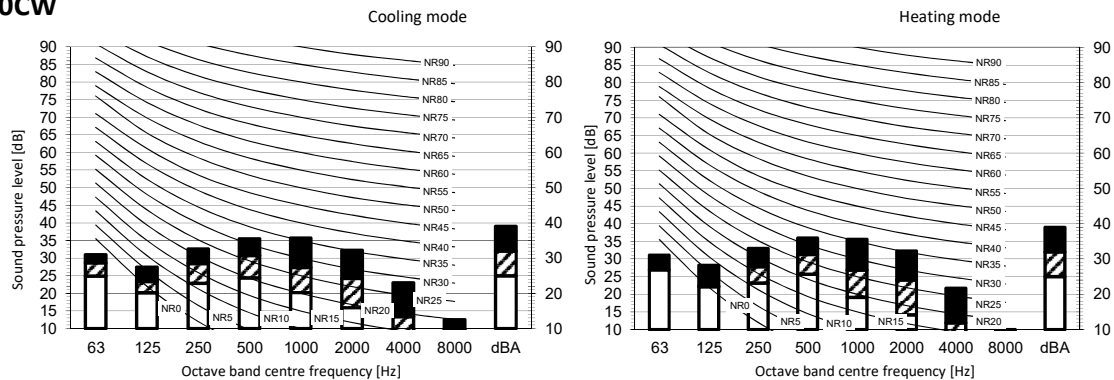


Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

A Scale

- B Fan speed: High
C Fan speed: Medium
D Fan speed: Low

Location of microphone



Cooling Total dB				
A	B	C	D	
dBA	39	32	25	


Heating Total dB				
A	B	C	D	
dBA	39	32	25	

Notes

- Operating conditions: power source 220-240 V 50 Hz; JIS standard
- Background noise already taken into account.
- Operating noise varies depending on operation and ambient conditions.
- The operation noise measuring method is in accordance with JISC9612.
- Measuring location: anechoic chamber

3D114919C

FTXA25CB FTXA25CS FTXA25CW

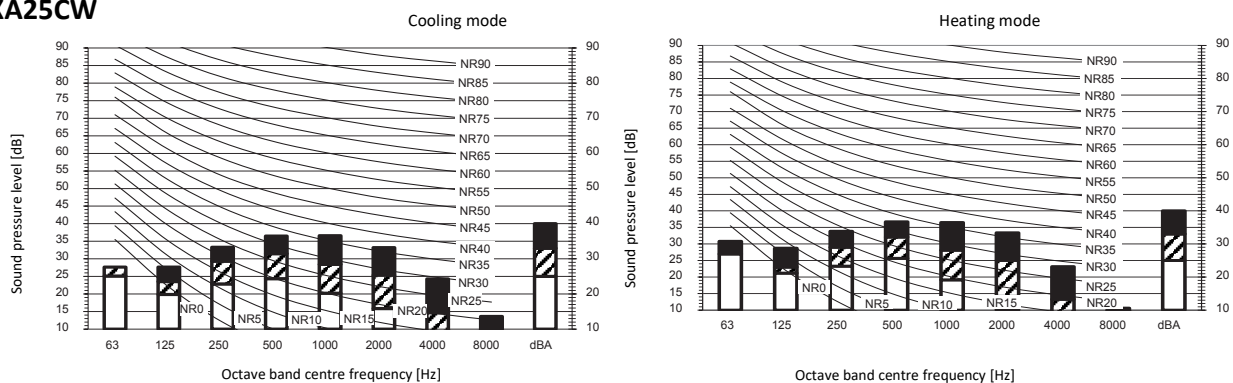


Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

A Scale

- B Fan speed: High
C Fan speed: Medium
D Fan speed: Low

Location of microphone



Cooling Total dB				
A	B	C	D	
dBA	40	33	25	

Heating Total dB				
A	B	C	D	
dBA	40	33	25	

Notes

- Operating conditions: power source 220-240 V 50 Hz; JIS standard
- Background noise already taken into account.
- Operating noise varies depending on operation and ambient conditions.
- The operation noise measuring method is in accordance with JISC9612.
- Measuring location: anechoic chamber


3D114920C

8 Sound data

8 - 2 Sound Pressure Spectrum

8

FTXA35CB FTXA35CS FTXA35CW

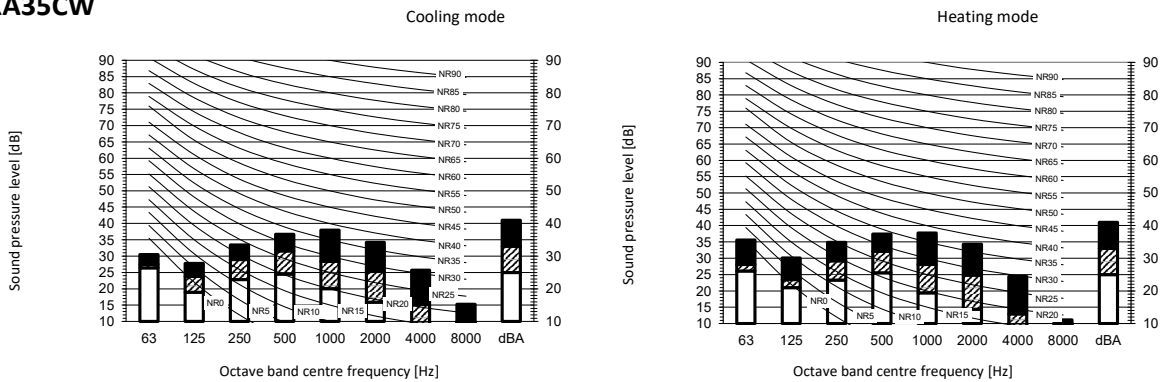


Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

A Scale

- B Fan speed: High
- C Fan speed: Medium
- D Fan speed: Low

Location of microphone



Cooling Total dB				
A	B	C	D	
dBA	41	33	25	


Notes

- Operating conditions: power source 220-240 V 50 Hz; JIS standard
- Background noise already taken into account.
- Operating noise varies depending on operation and ambient conditions.
- The operation noise measuring method is in accordance with JISC9612.
- Measuring location: anechoic chamber

Heating Total dB				
A	B	C	D	
dBA	41	33	25	

3D114921C

FTXA42CB FTXA42CS FTXA42CW

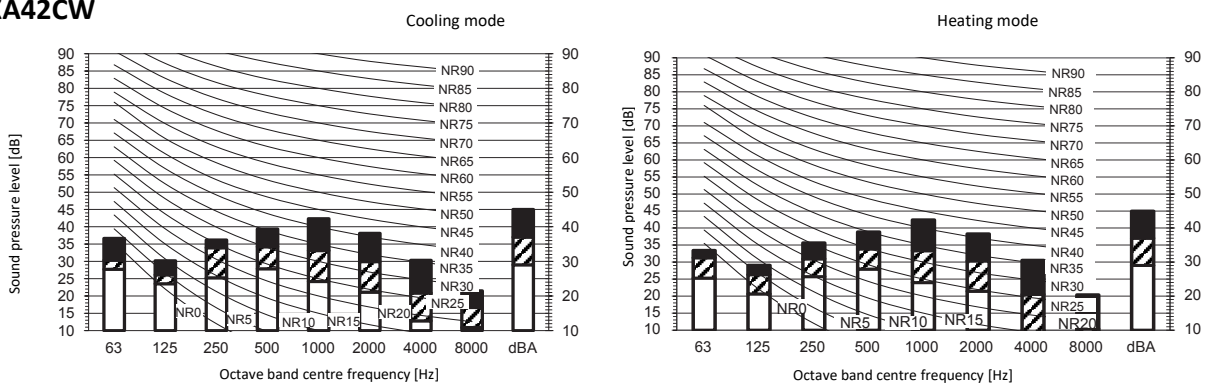


Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

A Scale

- B Fan speed: High
- C Fan speed: Medium
- D Fan speed: Low

Location of microphone



Cooling Total dB				
A	B	C	D	
dBA	45	37	29	

Notes

- Operating conditions: power source 220-240 V 50 Hz; JIS standard
- Background noise already taken into account.
- Operating noise varies depending on operation and ambient conditions.
- The operation noise measuring method is in accordance with JISC9612.
- Measuring location: anechoic chamber

Heating Total dB				
A	B	C	D	
dBA	45	37	29	

3D114922C

8 Sound data


8 - 2 Sound Pressure Spectrum

FTXA50CB

FTXA50CS

FTXA50CW

8

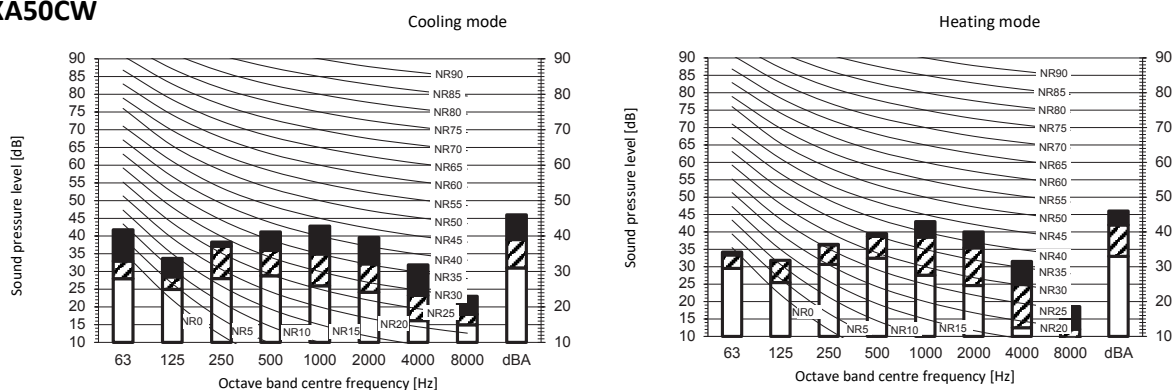


Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

A Scale

- B Fan speed: High
- C Fan speed: Medium
- D Fan speed: Low

Location of microphone




Cooling				Heating			
Total dB				Total dB			
A	B	C	D	A	B	C	D
dBA	46	39	31	dBA	46	42	33

Notes

- Operating conditions: power source 220-240 V 50 Hz; JIS standard
- Background noise already taken into account.
- Operating noise varies depending on operation and ambient conditions.
- The operation noise measuring method is in accordance with JISC9612.
- Measuring location: anechoic chamber

3D114923D

Daikin Europe N.V. Naamloze Vennootschap · Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · RPR Oostende (Responsible Editor)



EEDEN23



08/2023



Daikin Europe N.V. participates in the ECP programmes for Fan Coil Units and Variable Refrigerant Flow systems, Daikin Applied Europe S.p.A. participates in the ECP programmes for Liquid Chilling Packages and Hydronic Heat Pumps. Check ongoing validity of certificate: www.eurovent-certification.com

The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. / Daikin Central Europe HandelsGmbH. Daikin Europe N.V. / Daikin Central Europe HandelsGmbH have compiled the content of this publication to the best of their knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. / Daikin Central Europe HandelsGmbH explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.