


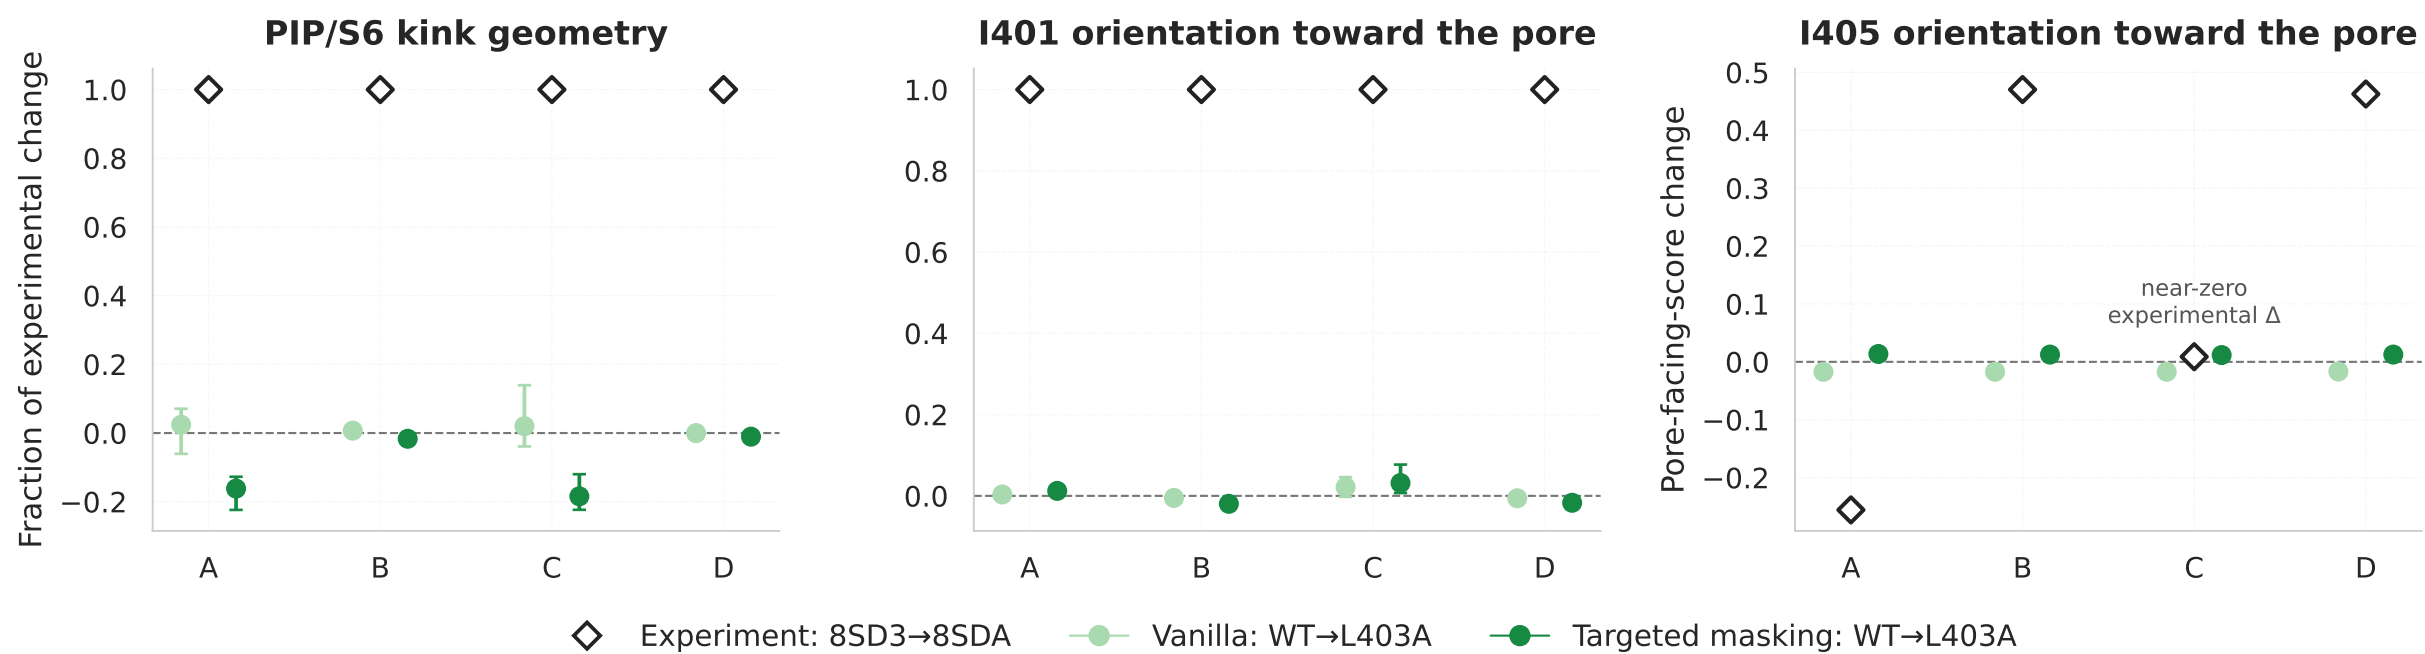

Experimental-target error across the subunit-resolved conformational panel

PIP/S6 kink angle (°)	0.95	1.00	0.99	1.00	0.96	1.00	1.00	1.00
Whole-S6 rotation (°)	0.85	0.92	1.00	1.00	0.76	0.87	1.00	1.00
I401 azimuth (°)	0.99	0.95	1.00	1.00	0.98	0.84	1.00	1.00
I405 azimuth (°)	0.91	1.00	1.00	0.96	1.00	0.57	1.00	0.97
I401 pore-facing score	0.99	0.98	1.00	1.00	0.96	0.94	1.00	1.00
I405 pore-facing score	0.87	1.00	1.00	0.95	1.00	0.14	1.00	0.95
S4-S5 radial position (Å)	0.68	0.92	0.81	0.97	0.44	0.78	0.88	0.98
Maximum linker C α displacement (Å)	0.90	1.00	0.90	1.00	0.87	1.00	0.95	1.00
F412 side-chain displacement (Å)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
F412-L316 contact (Å)	0.34	0.66	0.66	0.84	0.16	0.53	0.52	0.76
F412-L329 contact (Å)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
F412-403 neighbor contact (Å)	0.36	0.54	1.00	1.00	1.00	1.00	1.00	1.00
	A Vanilla	A Masked	B Vanilla	B Masked	C Vanilla	C Masked	D Vanilla	D Masked

Canonical subunit and protocol

Normalized experimental-target error
0 = exact recovery; 1 = no/opposing recovery

