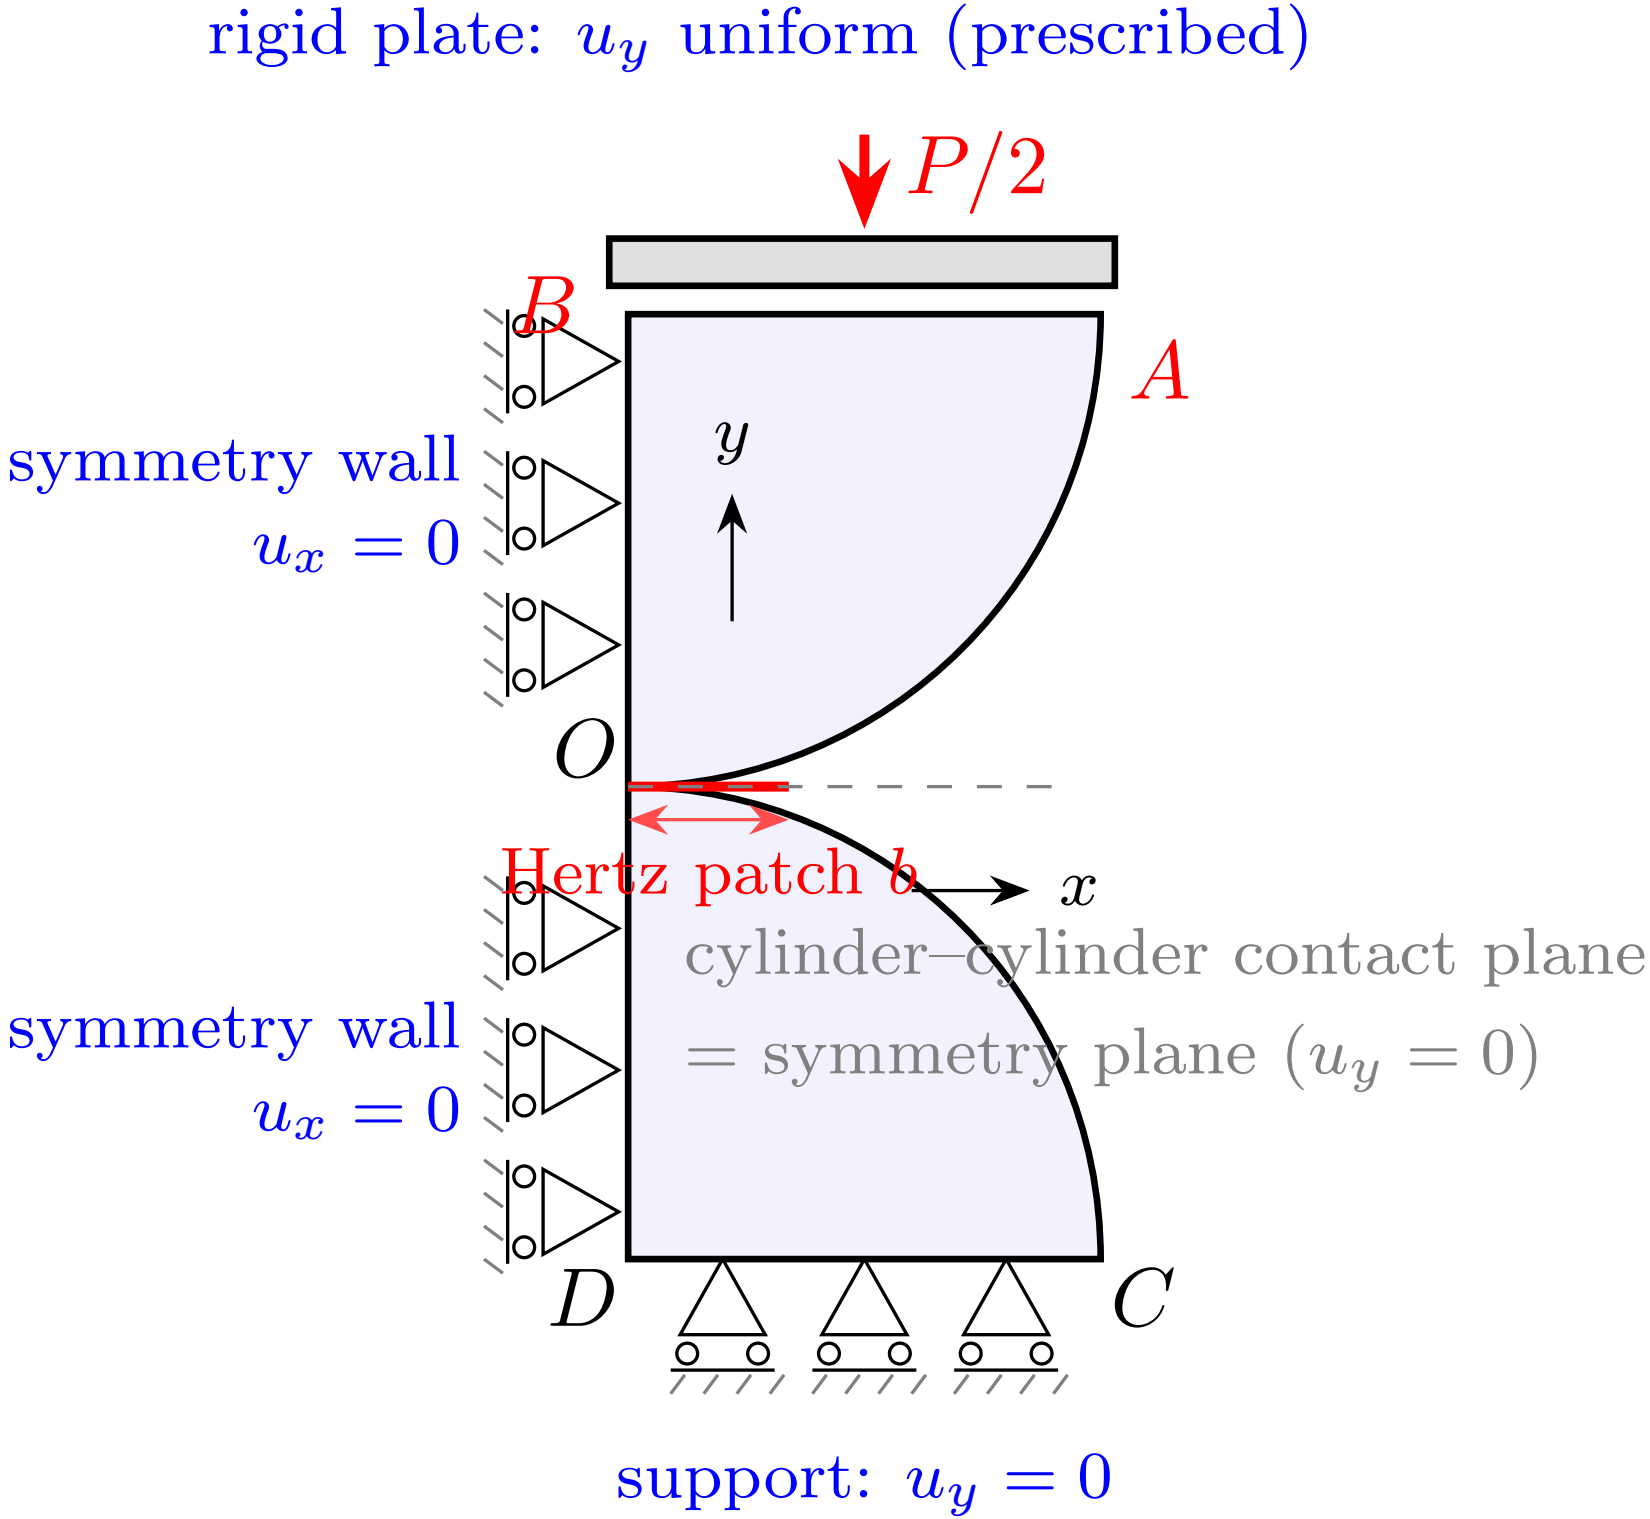
rigid plate: u_y uniform (prescribed)
$P/2$
B
A
symmetry wall
$u_x = 0$
y
O
Hertz patch b
x
cylinder–cylinder contact plane
= symmetry plane ($u_y = 0$)
symmetry wall
$u_x = 0$
D
C
support: $u_y = 0$