

HOMEOWNER EDITION

Window + Door Replacement Guide *and Options*

How to evaluate an opening, choose the right replacement approach, prepare for installation, and compare every FourlinQ window and door system.

A clearer replacement journey.

You do not need to diagnose the wall, choose the installation method, or take fabrication measurements alone. Use this guide to prepare the brief; FourlinQ verifies the opening before anything is ordered.

01

Evaluate

Decide what needs attention.

02

Survey

Check frame, wall, water, and access.

03

Select

Choose operation, material, glass, and finish.

04

Install

Protect, remove, set, seal, and test.

05

Handover

Inspect, learn, document, and maintain.

INSIDE THIS BROCHURE

Is it time to replace?	03	Choose the replacement path	04
Plan the survey and quote	05	What installation looks like	06
Material, glass, and design decisions	07	All options at a glance	08
Window option pages	09-12	Door option pages	13-19
What is inside the frame	20	Finish options	21
Care and warranty	22	Showrooms and direct lines	23

One opening, one verified scope. Final dimensions, replacement method, code requirements, structural work, waterproofing, and permits are confirmed during project review.

Is it really time to replace?

Some symptoms need cleaning or adjustment. Others point to a failed seal, unsafe operation, or hidden water damage. Start with the symptom, then let the site survey confirm the cause.

01

Maintain first

Surface dirt

Clean glass, frames, gaskets, sills, and tracks with mild soap and water.

Minor stiffness

Debris, dried residue, or a loose adjustment can make hardware feel rough.

Room-side condensation

Often indicates indoor humidity meeting a cooler surface. Ventilation may help.

Cosmetic wear

Scratches, dirty seals, or worn accessories do not automatically mean replacement.

02

Schedule an assessment

Hard to open or lock

Sticking, dragging, dropped panels, or recurring lock misalignment can signal worn hardware or movement.

Drafts or uneven comfort

Check perimeter seals, glazing, drainage, and the wall connection before choosing a remedy.

Fog between glass panes

Moisture trapped inside an insulated glass unit points to a failed glass seal.

Persistent leaks

The source can be the unit, perimeter seal, flashing, wall, roof, or drainage path.

03

Act promptly

Broken or loose glass

Keep people away, secure the area, and arrange professional removal.

Unsafe operation

A sash or panel that can fall, detach, or cannot serve its required exit needs immediate attention.

Water damage

Staining, swelling, rot, mold, or soft framing can indicate concealed damage that must be opened and repaired.

Security failure

A unit that will not close or lock should be secured and assessed immediately.

Do not cover a recurring leak with new trim or sealant until the water path is understood. Replacement succeeds only when the opening and surrounding wall are sound.

Three replacement paths.

The visible problem does not always reveal the correct scope. A FourlinQ survey checks the existing frame, rough opening, waterproofing, structure, trim, floor level, and drainage before recommending a method.

METHOD	WHAT IS REMOVED	BEST USED WHEN	TRADE-OFFS TO CONFIRM
Insert or pocket	Old sash or panel, operating hardware, and selected covers. The sound existing frame stays.	The frame is square, dry, structurally sound, compatible, and worth preserving.	Usually less disruption, but the new unit sits inside the old frame and can reduce visible glass. The old perimeter still matters.
Full-frame	The complete old window or door frame, often including interior/exterior trim at the opening.	The frame is damaged, leaking, incompatible, out of square, or the project needs a new sill/flashing detail.	Allows inspection and repair to the rough opening. More finish work, protection, time, and access are usually required.
Opening conversion	The unit plus the wall or structural work needed to change size, shape, sill height, or use.	Turning a window into a door, enlarging an opening, or creating a new architectural composition.	May require an architect/engineer, permits, structural support, weathering design, electrical relocation, and new interior/exterior finishes.

Keep

Sound structure, dry wall, serviceable trim, and any finish that the selected method can preserve without hiding a defect.

Replace

Failed glass, worn operating parts, damaged frame, compromised seals, and materials included in the approved scope.

Repair first

Rot, cracks, substrate failure, blocked drainage, structural movement, and wall leaks outside the window or door system.

Safety and code check. Bedrooms, upper floors, guards, fall prevention, safety glazing, threshold accessibility, and emergency exits can change what is allowed. The current opening is not proof that it meets current requirements.

What the project team needs.

A few homeowner details speed up the first conversation. Fabrication dimensions still come from the formal site survey.

- ✓

Photos inside and outside
Include the whole opening, close-ups of damage, sill/threshold, head, jambs, and the wall above.
- ✓

Approximate opening size
Width and height are enough for the first brief. Do not order from homeowner measurements.
- ✓

Room and use
Bedroom, kitchen, bathroom, living room, balcony, lanai, entrance, or commercial frontage.
- ✓

How it should operate
What opens now, what feels difficult, desired ventilation, access, security, and cleaning needs.
- ✓

Material and finish direction
uPVC or aluminium, interior/exterior color, glass privacy, grids, screens, and hardware preferences.
- ✓

Access and protection
Floor level, parking, stairs, lifts, scaffolding, furniture, landscaping, pets, children, and work-hour limits.
- ✓

Known water or structural history
Prior leaks, repairs, cracks, mold, pest damage, movement, or concealed services near the opening.
- ✓

Decision and schedule
Who approves the design, target completion, site restrictions, and any permit or building-admin process.

WHAT SHAPES THE QUOTE

Type + quantity Operation, count, configuration	Size + glass Panel area, safety, privacy, coating	Material + finish uPVC or aluminium, profile, color	Installation Method, access, removal, protection	Make-good work Trim, plaster, paint, tile, waterproofing
---	---	---	--	--

Before approval, ask for: product and configuration, included glass/hardware/finish, replacement method, exclusions, make-good responsibility, disposal, schedule, payment milestones, warranty, and the process for hidden damage or variation work.

What a professional replacement looks like.

The exact sequence changes by method and site, but the logic stays consistent: protect, verify, remove carefully, repair the opening, set the new system, weather it, and test every function.

01

Protect

Confirm access and scope. Cover floors and furniture. Establish a safe work zone.

02

Verify

Recheck unit, opening, orientation, finish, glass, hardware, and any site condition that changed.

03

Remove

Take out only what the approved method requires. Corroded metal can require controlled chipping back to sound substrate.

04

Inspect

Check the uncovered opening for water, rot, cracks, substrate failure, and structural concerns.

05

Repair

Resolve approved opening defects and prepare a clean, supported, level installation surface.

06

Set + fasten

Position the frame plumb, level, square, and true. Fasten and pack without distorting it.

07

Seal + finish

Complete drainage, perimeter weathering, insulation, trim, sealant, and approved make-good work.

08

Test + hand over

Operate, lock, drain, clean, inspect glass/finish, explain care, and document the punch list.

HOMEOWNER PREPARATION

Before the crew arrives

Remove curtains, blinds, fragile decor, and nearby furniture. Confirm building access, parking, power, water, and work-hour rules.

Keep the area safe

Plan for children and pets. Disarm affected sensors. Protect valuable landscaping and identify concealed utilities or alarms.

Before sign-off

Open, close, lock, and inspect every unit. Review seals, trim, glass, cleanup, care, warranty documents, and any remaining punch-list item.

Hidden damage can only be priced accurately after it is exposed. Agree in writing how work pauses, how the condition is documented, who approves a variation, and when installation resumes.

Material, glass, and design.

Choose the operating type first, then build the specification around the actual room, exposure, opening size, desired sightline, and maintenance expectations.

FRAME MATERIAL

uPVC

- Fire retardant
- Thermally efficient, multi-chamber design
- Never rusts or corrodes
- No painting or maintenance required
- Galvanized steel reinforced for security
- EPDM gaskets, fully weatherproof
- 6mm to 12mm glass options

FRAME MATERIAL

Aluminium

- Slim sightlines for a modern minimal look
- High strength-to-weight ratio
- Suitable for large-span openings
- Corrosion-resistant

FOURLINQ PROFILE DIRECTIONS

- Standard / Regular Systems · Wall thickness 1.2mm to 3.0mm.
- Alu Slim Systems · Minimum-sightline aluminium profile.

Operation

Airflow, exterior/interior clearance, panel weight, daily access, cleaning, insect screen, and emergency use.

Glass

Clear view, privacy, solar control, safety, security, sound, panel size, and the frame's supported glass build-up.

Finish

Interior/exterior palette, sheen, wood-grain direction, adjacent paint/tile, physical sample, and long-term care.

Hardware

Handle reach, lock points, child safety, corrosion exposure, replacement access, and service requirements.

Weathering

Gaskets, sill/threshold, drainage, flashing, perimeter seal, roof overhang, wind-driven rain, and facade exposure.

Codes + structure

Safety glazing, guards, egress, fall prevention, accessibility, wind load, support, permits, and building rules.

Glass labels in the option pages describe available design directions from the current catalog. Final availability, thickness, make-up, safety treatment, and performance are confirmed with the project specification.

Every window. Every door.

Each system has its own page with how it works, where it fits, typical replacement considerations, features, and glass directions.

Window option

	Casement Smooth operation. Reliable performance.	09
	Sliding Elegant. Versatile. Thoroughly reliable.	10
	Special Shapes Make a statement with glass.	11
	Awning Light and security, beautifully combined.	12

Door option

	Sliding Door Elegant. Versatile. Thoroughly reliable.	13
	Slide & Fold Opens fully, panel by panel, wall to wall.	14
	Casement Door Secure and elegant single-leaf hinged doors.	15
	French Sliding Door Classic French door look, sliding operation.	16
	Large Panel Doors Maximum glass, minimal frame.	17
	Lift & Slide Effortless sliding on large, heavy panels.	18
	90 Series Premium deep-profile door line.	19



NEED HELP CHOOSING?

Begin with the opening, not the product name.

Bring photos, approximate sizes, room use, and the change you want. FourlinQ can narrow the range before the formal site survey.

Casement

WINDOW

Smooth operation. Reliable performance.



SYSTEM ILLUSTRATION · FINAL CONFIGURATION CONFIRMED IN QUOTATION

HOW IT WORKS

A side-hinged window that opens outward like a door. The full sash can catch the breeze for broad ventilation, then closes against the frame for a secure weather seal.

BEST FOR

Bedrooms, living rooms, and locations where maximum ventilation is the priority.

REPLACEMENT APPROACH

A side-hinged operation can suit an existing opening after survey. The old frame is not assumed reusable: corrosion, chipping, waterproofing, and substrate condition determine insert or full-frame scope.

FEATURE DIRECTION · VERIFY IN QUOTATION

- Multi-chamber uPVC profile
- 6mm to 12mm glass options
- Galvanized steel reinforcement
- EPDM gaskets, weatherproof seal

GLASS DIRECTIONS TO DISCUSS

Clear Float

Low-E Coated

Frosted Privacy

Tinted Bronze

CONFIRM AT SURVEY

The sash opens outward, so confirm clearance from walkways, screens, grills, plants, and roof projections.

Dimensions, glass build-up, hardware, drainage, structural support, and code compliance are confirmed for the actual opening before fabrication.

Sliding

Elegant. Versatile. Thoroughly reliable.

WINDOW



HOW IT WORKS

One or more window panels move horizontally along a track. Nothing projects into the room or outward from the facade, making the system practical where clearance is limited.

BEST FOR

Balconies, counters, corridors, and wide openings where no sash should project inward or outward.

REPLACEMENT APPROACH

Useful when the existing opening already suits a horizontal track. The survey checks sill level, drainage, squareness, and available glass area.

FEATURE DIRECTION · VERIFY IN QUOTATION

- Multi-chamber uPVC profile
- Smooth horizontal track operation
- 6mm to 12mm glass options
- Internal glazing beads for security

GLASS DIRECTIONS TO DISCUSS

Clear Float

Low-E Coated

Tinted Grey

Laminated Safety

CONFIRM AT SURVEY

Tracks must stay level and clear. Ask how each moving panel can be removed or cleaned safely.

Dimensions, glass build-up, hardware, drainage, structural support, and code compliance are confirmed for the actual opening before fabrication.

Special Shapes

Make a statement with glass.

WINDOW



SYSTEM ILLUSTRATION · FINAL CONFIGURATION CONFIRMED IN QUOTATION

HOW IT WORKS

A made-to-measure window for arches, circles, triangles, trapezoids, raked heads, and other non-standard geometry. Shape units are often fixed and can be composed with operating windows.

BEST FOR

Arches, circles, triangles, raked heads, and feature glazing drawn to a specific architectural geometry.

REPLACEMENT APPROACH

Usually measured and fabricated as a full custom unit. Existing templates, adjacent assemblies, flashing, and structural support must be verified on site.

FEATURE DIRECTION · VERIFY IN QUOTATION

- Custom geometry, arches, circles, triangles
- Combinable with other window types
- 6mm to 12mm glass options
- Multi-chamber profile

GLASS DIRECTIONS TO DISCUSS

Clear Float

Low-E Coated

Tinted Bronze

Laminated Safety

CONFIRM AT SURVEY

Some shapes are fixed rather than operable. Ventilation and emergency-egress needs may require a paired operating unit.

Dimensions, glass build-up, hardware, drainage, structural support, and code compliance are confirmed for the actual opening before fabrication.

Awning

Light and security, beautifully combined.

WINDOW



SYSTEM ILLUSTRATION · FINAL CONFIGURATION CONFIRMED IN QUOTATION

HOW IT WORKS

A top-hinged window that opens outward from the bottom. The projecting sash supports ventilation while providing some protection from light rain, subject to wind and exposure.

BEST FOR

Kitchens, bathrooms, high-level openings, and rooms that need ventilation with some rain protection.

REPLACEMENT APPROACH

A top-hinged operation can suit an existing opening or a larger fixed-glass composition after the old frame, substrate, exterior clearance, and water path are surveyed.

FEATURE DIRECTION · VERIFY IN QUOTATION

- Top-hinged, opens outward
- Ventilation even during rain
- Multi-chamber uPVC profile
- EPDM gaskets, weatherproof seal

GLASS DIRECTIONS TO DISCUSS

Clear Float

Frosted Privacy

Laminated Safety

Tinted Bronze

CONFIRM AT SURVEY

Confirm exterior opening clearance and safe access to the handle, hinges, stay arm, and insect screen.

Dimensions, glass build-up, hardware, drainage, structural support, and code compliance are confirmed for the actual opening before fabrication.

Sliding Door

Elegant. Versatile. Thoroughly reliable.

DOOR



HOW IT WORKS

Elegant, attractive, and versatile while being thoroughly reliable. Slides horizontally along a track, ideal where outward clearance is limited.

BEST FOR

Daily access to a balcony, lanai, or garden where a swinging leaf would consume floor space.

REPLACEMENT APPROACH

The existing threshold, drainage path, floor finish, and panel-removal route are checked before the old system is removed.

FEATURE DIRECTION · VERIFY IN QUOTATION

- Multi-chamber uPVC profile
- Space-saving horizontal slide
- 6mm to 12mm glass options
- Galvanized steel reinforcement

GLASS DIRECTIONS TO DISCUSS

Clear Float

Low-E Coated

Tinted Grey

Laminated Safety

CONFIRM AT SURVEY

A low threshold improves access, but waterproofing and exterior drainage remain non-negotiable.

Dimensions, glass build-up, hardware, drainage, structural support, and code compliance are confirmed for the actual opening before fabrication.

Slide & Fold

DOOR

Opens fully, panel by panel, wall to wall.



HOW IT WORKS

Four-panel accordion folding door. Each panel is hinged to the next and runs on a bottom track. When opened, the panels fold and stack to one side, creating a full clear opening with no frame in the way. The lead panel carries the handle and starts the movement. Suited to living areas, patios, and spaces that should open completely to the outside.

BEST FOR

Living and entertainment spaces that should open almost completely to a patio, lanai, or garden.

REPLACEMENT APPROACH

Often changes the operating pattern and load distribution, so the head, jambs, sill, stacking zone, and structural support need a full survey.

FEATURE DIRECTION · VERIFY IN QUOTATION

- 4-panel accordion configuration
- Panels fold and stack to one end
- Full clear opening when folded
- Bottom track with rolling pivot hardware
- Lead panel handle activation

GLASS DIRECTIONS TO DISCUSS

Clear Float

Low-E Coated

Tinted Bronze

Laminated Safety

CONFIRM AT SURVEY

Reserve clear space for the folded panel stack and confirm the direction it should collect.

Dimensions, glass build-up, hardware, drainage, structural support, and code compliance are confirmed for the actual opening before fabrication.

Casement Door

DOOR

Secure and elegant single-leaf hinged doors.



SYSTEM ILLUSTRATION · FINAL CONFIGURATION CONFIRMED IN QUOTATION

HOW IT WORKS

Reinforced uPVC casement door combining aesthetic versatility with the security demands of main entry points. Multi-chamber profile with galvanized steel reinforcement.

BEST FOR

Main or secondary entries that need a familiar hinged operation, weather seal, and multi-point locking.

REPLACEMENT APPROACH

The survey confirms swing direction, finished floor levels, threshold detail, lock side, and whether the existing frame is fully removed.

FEATURE DIRECTION · VERIFY IN QUOTATION

- Multi-chamber reinforced profile
- Galvanized steel core
- Multi-point locking
- EPDM gaskets, weatherproof seal

GLASS DIRECTIONS TO DISCUSS

Frosted Privacy

Clear Float

Laminated Safety

CONFIRM AT SURVEY

Confirm inward or outward swing against furniture, steps, screens, and local egress requirements.

Dimensions, glass build-up, hardware, drainage, structural support, and code compliance are confirmed for the actual opening before fabrication.

French Sliding Door

Classic French door look, sliding operation.

DOOR



SYSTEM ILLUSTRATION · FINAL CONFIGURATION CONFIRMED IN QUOTATION

HOW IT WORKS

Four-panel sliding door with a traditional French door aesthetic. The two centre panels are active, each handle-fitted, and slide to open, with the outer two panels fixed in place. A decorative grid pattern runs across all four panels. Combines the visual character of a classic double door with the space-saving practicality of a sliding system.

BEST FOR

Traditional elevations that need a centered opening without the floor-space demand of two swinging leaves.

REPLACEMENT APPROACH

Typically replaces a wide door assembly as one coordinated frame. Panel alignment, center opening, track level, and drainage are set together.

FEATURE DIRECTION · VERIFY IN QUOTATION

- 4-panel configuration (2 active centre, 2 fixed outer)
- Both active centre panels are handle-fitted
- Decorative grid pattern across all panels
- Centre-sliding operation
- Multi-chamber uPVC profile

GLASS DIRECTIONS TO DISCUSS

Clear Float

Frosted Privacy

Laminated Safety

CONFIRM AT SURVEY


Decorative grids change the sightline. Review the full elevation, not only a small finish sample.

Dimensions, glass build-up, hardware, drainage, structural support, and code compliance are confirmed for the actual opening before fabrication.

Large Panel Doors

DOOR

Maximum glass, minimal frame.

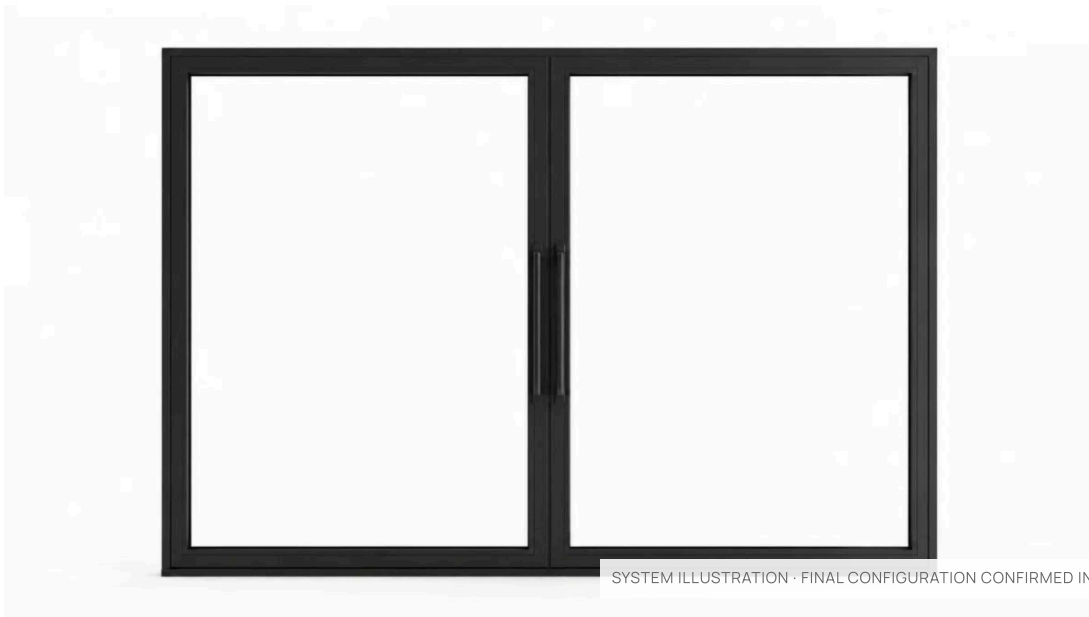

HOW IT WORKS

A large-format glazed door direction for wide openings and restrained framing. Operation, panel arrangement, span, hardware, and threshold are custom-specified after survey and product-master confirmation.

BEST FOR

Wide living-room and lanai openings where uninterrupted glass and minimal framing matter most.

REPLACEMENT APPROACH

Custom-specified after checking structural support, delivery access, handling space, threshold build-up, and the final drainage route.

FEATURE DIRECTION · VERIFY IN QUOTATION

- Large-format glazed opening
- Minimal-frame design direction
- Operation and panel layout confirmed per project
- Structure, delivery, threshold, and drainage planned together
- Consultation required

GLASS DIRECTIONS TO DISCUSS

Clear Float

Low-E Coated

Tinted Bronze

Laminated Safety

CONFIRM AT SURVEY

Large glass is heavy. Panel size, safety glass, hardware, and installation method are confirmed per project.

Dimensions, glass build-up, hardware, drainage, structural support, and code compliance are confirmed for the actual opening before fabrication.

Lift & Slide

Effortless sliding on large, heavy panels.

DOOR



SYSTEM ILLUSTRATION · FINAL CONFIGURATION CONFIRMED IN QUOTATION

HOW IT WORKS

A large-door direction built around a handle-operated lift-and-slide mechanism: the moving panel lifts away from its compression seal for travel, then reseats when closed. Final panel layout is project-specific.

BEST FOR

Large, heavy panels that need smooth daily movement and a compression seal when closed.

REPLACEMENT APPROACH

The system is set as a complete frame-and-panel assembly. The finished opening must be level, plumb, square, supported, and weathered correctly.

FEATURE DIRECTION · VERIFY IN QUOTATION

- Handle-operated lift mechanism
- Compression seal re-engages when closed
- Panel layout and movement confirmed per project
- Structure, delivery, threshold, and drainage planned together
- Consultation required

GLASS DIRECTIONS TO DISCUSS

Clear Float

Low-E Coated

Tinted Bronze

Laminated Safety

CONFIRM AT SURVEY

Allow for the panel travel or pocket, handle clearance, service access, and a safe delivery route.

Dimensions, glass build-up, hardware, drainage, structural support, and code compliance are confirmed for the actual opening before fabrication.

90 Series

Premium deep-profile door line.

DOOR



HOW IT WORKS

A premium deep-profile door line for projects that need a more substantial frame. Leaf or panel layout, glazing, operation, hardware, and dimensional limits are confirmed in the approved project specification.

BEST FOR

Premium residential openings that call for a deeper profile and a project-specific leaf or panel arrangement.

REPLACEMENT APPROACH

Custom-specified after the opening, preferred operation, layout, structural support, and threshold condition are surveyed.

FEATURE DIRECTION · VERIFY IN QUOTATION

- Premium deep-profile door line
- Leaf or panel layout confirmed per project
- Glazing and operation confirmed per project
- Hardware and dimensional limits confirmed per project
- Consultation required

GLASS DIRECTIONS TO DISCUSS

Clear Float

Low-E Coated

Laminated Safety

CONFIRM AT SURVEY

Configuration and dimensional limits are project-specific; confirm them before finalizing adjacent finishes.

Dimensions, glass build-up, hardware, drainage, structural support, and code compliance are confirmed for the actual opening before fabrication.

What is inside the uPVC frame.

Seven features from the FourlinQ brochure work together as one system: glass, profile, reinforcement, seals, glazing security, and controlled drainage.



- 01

Thick Glass
6mm to 12mm thick glass.
- 02

Smooth Homogenous Profile
Smooth homogenous profile enables easy cleaning.
- 03

Galvanized Steel Reinforcement
Galvanized steel reinforcement for strength, stability, and security.
- 04

Multi-Chamber Profile
Multi-chamber designed profile for excellent heat insulation and energy savings.
- 05

Internal Glazing Beads
Internal glazing beads for added security.
- 06

EPDM Gaskets
EPDM gaskets for air and water tightness.
- 07

Drainage Holes
Drainage holes for proper drainage.

THE FOURLINQ ADVANTAGES

Attractive Appearance	Fire Retardant	Thermal Efficiency	Corrosion Resistant
Long Lasting Performance	Weather Resistance	Sound Insulation	

Twelve uPVC finishes.

Use this page to narrow the palette, then review a physical profile sample beside the actual wall, floor, metalwork, and daylight before approval.

WOOD GRAIN



Oak Light

Pale golden blonde with soft, fine grain. The lightest wood option, airy and natural. Works well in Scandinavian-inspired and minimalist interiors.



Oak Malt

Warm medium-blonde with golden-amber tones and slightly pronounced grain. Natural and unpretentious, like raw, unfinished timber. Pairs well with earth-tone interiors.



Black Wood

Deep espresso brown-black where wood grain is still perceptible in raking light. Moody and rich, like ebonized oak or dark wenge.



Gray Wood

Cool gray base with subtle brown-taupe grain lines, like driftwood or weathered timber. A crossover finish that is neither fully wood nor fully solid.



Dark Oak

Medium-dark reddish-brown with clearly defined, flowing grain lines in deep amber and brown. Classic and warm, reminiscent of mahogany-adjacent hardwoods.



Walnut

Rich chocolatey brown with prominent, swirling grain. Bold contrast between dark base and lighter streaks. The most premium timber look in the lineup.



Golden Oak

Bright honey-amber with a strong open-grain pattern, almost orange-gold in direct light. The most vivid wood finish. Suits traditional Filipino and Spanish colonial interiors.

SOLID



Jet Black

Deep, near-total black with a smooth matte-to-satin surface. Completely uniform, no grain. High contrast and architectural. The darkest and most dramatic option.



Charcoal Gray

Mid-dark gray, softer than Jet Black with a slightly cooler tone. Sits between anthracite and concrete in character, industrial but not aggressive. Very popular on contemporary facades.



Matte Quartz

Flat medium gray with almost no sheen, stone-like and understated. Lighter and warmer than Charcoal. Closest visually to polished concrete or a quartz countertop.



Silica Cream

Warm off-white with sandy undertones. Softer than pure white, blends naturally with concrete, stone, and tropical-palette walls.



White

Clean, bright white with a smooth uniform surface. The most versatile option: it matches any wall color and reads as modern or classic depending on context.

ALUMINIUM POWDER-COAT



Gray



Black



Brown



White

Printed and screen colors are approximations. Availability can vary by material, profile system, hardware, and project. Approve the supplied physical sample and written specification.

Keep the new system working well.

Simple care protects drainage, seals, finishes, glass, and hardware. Ask the installation team to demonstrate the exact cleaning and adjustment points before handover.

Frames + gaskets

Use clean water or mild detergent on a soft cloth. Rinse and dry. Wipe, do not pull, the weather seals.

Avoid abrasive pads, strong solvents, bleach, paint thinner, and unapproved polish.

Sills + tracks

Vacuum or brush out grit. Keep drainage openings clear. Wash with mild soap and water when needed.

Do not fill drainage paths with sealant, paint, cement, or debris.

Glass

Loosen dirt with water and mild soap, rinse, then dry from top to bottom with a clean soft cloth.

Avoid blades, scrapers, abrasive applicators, and impact near glass edges.

Hardware

Wipe handles, hinges, rollers, and locks with a soft damp cloth. Report rough movement before forcing it.

Do not use household chemicals or lubricants unless FourlinQ approves them for the component.

10

YEAR LIMITED
WARRANTY

Verified scope: corrosion resistance, long lasting performance, weather resistance, and sound insulation.

Full terms, exclusions, registration, project-specific coverage, and installation responsibilities are supplied with the order. Keep the signed specification, warranty document, invoice, and handover record.

After installation: operate and lock each unit, inspect seals and drainage, check glass and finish in normal light, record any punch-list item, and save the care and warranty documents.

YOUR NEXT STEP

Bring the opening. We will build the answer.

Send photos and approximate sizes, or bring your floor plan to a showroom. The project team will help define the system, survey scope, finish, glass, installation method, and quote.

SALES

0925-848-8888

ASSISTANCE

0925-896-5978

EMAIL

sales@fourlinq.com

Ortigas: CW Home Depot

Unit 41 Doña Julia Vargas Ave., cor. Meralco Avenue, Brgy. Ugong, Pasig City

Alabang: CW Home Depot

Alabang Showroom G/F Unit B-22 / Alabang Showroom 2/F Unit A-44, Alabang Zapote Road cor. Filinvest Ave., Westgate Alabang, Muntinlupa

Cebu Branch

Door 9 Centro Fortuna Building, A.S. Fortuna Street, Banilad, Mandaue City, Cebu

This brochure is a planning guide, not a fabrication drawing, engineering calculation, permit approval, or site-specific installation instruction. Product availability and specifications can change. Final configuration, dimensions, material, finish, glass, hardware, drainage, structural support, code compliance, installation scope, and warranty are governed by the approved FourlinQ quotation and project documents.