

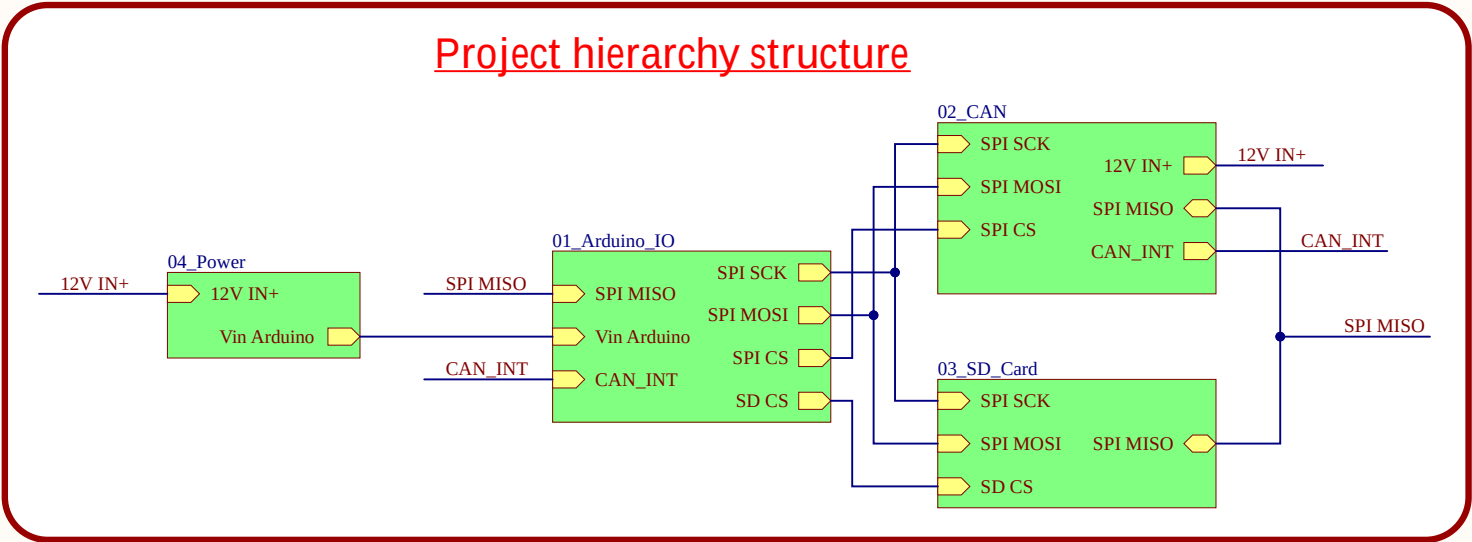
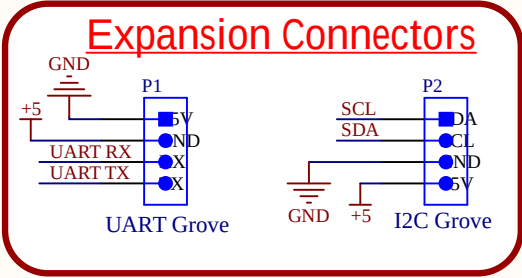


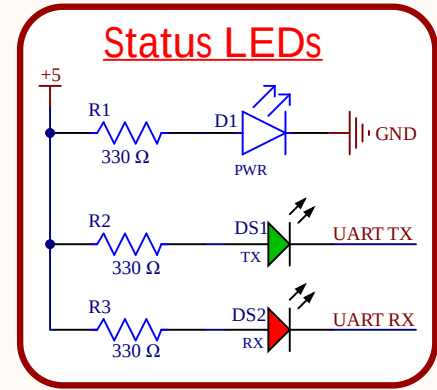


Title			
CANCore Shield			
Size	Number		Revision
A	CCS-001		V1.0
Date:	7/31/2026		Sheet of
File:	C:\Users\...\TOP_Sheet.SchDoc		Drawn By: Ayoub ELBOUHI

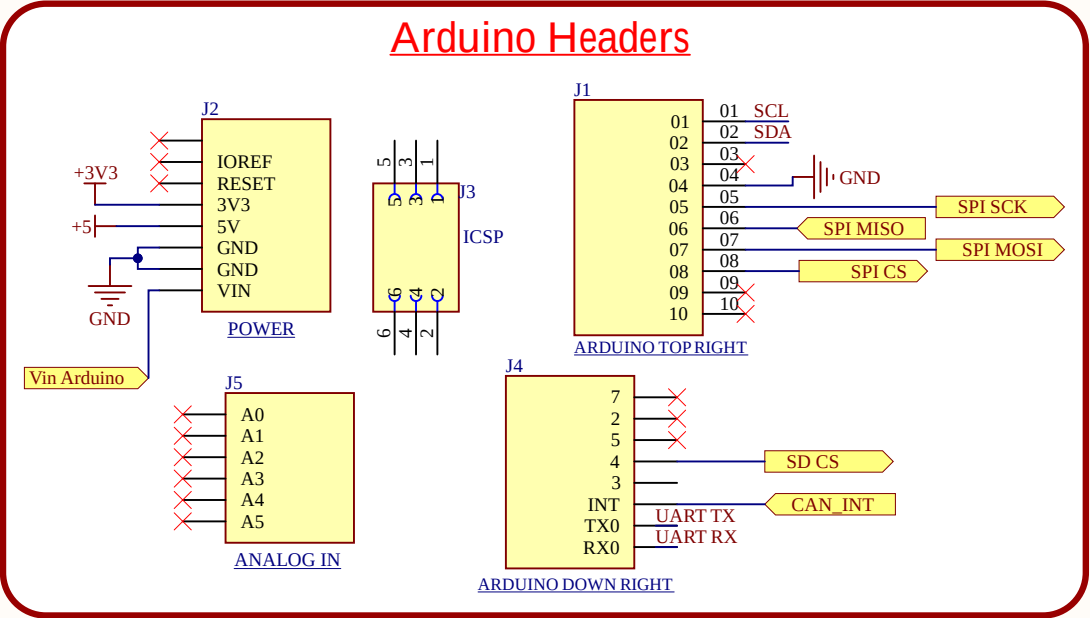


Title			CANCore Shield		
Size	Number		Revision		V1.0
A	CCS-001				
Date:	7/31/2026			Sheet of	
File:	C:\Users\..01_Arduino_IO.SchDoc			Drawn By: Ayoub ELBOUHI	


PWR : eFuse Block

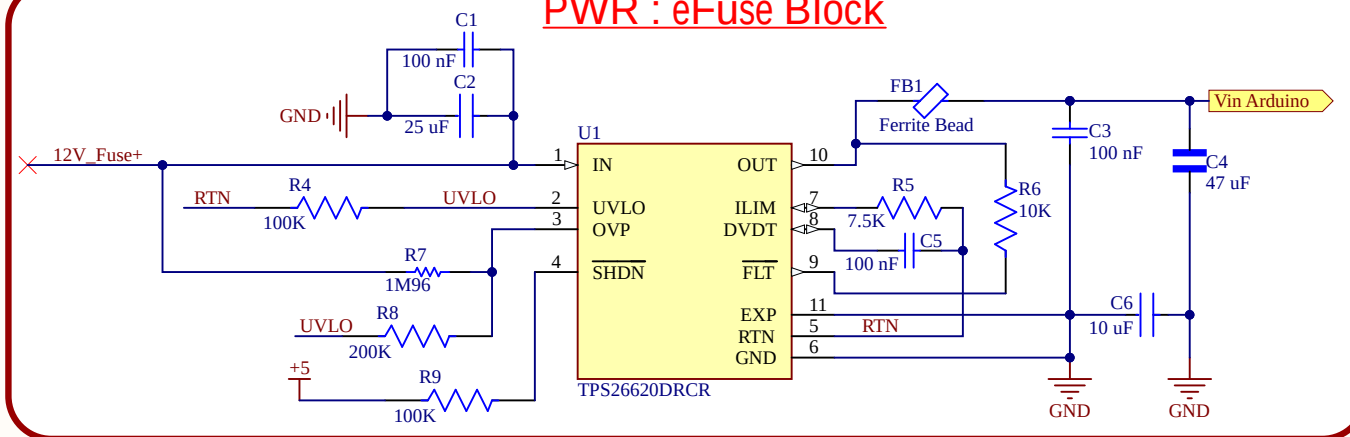





PWR : MOSFET Block

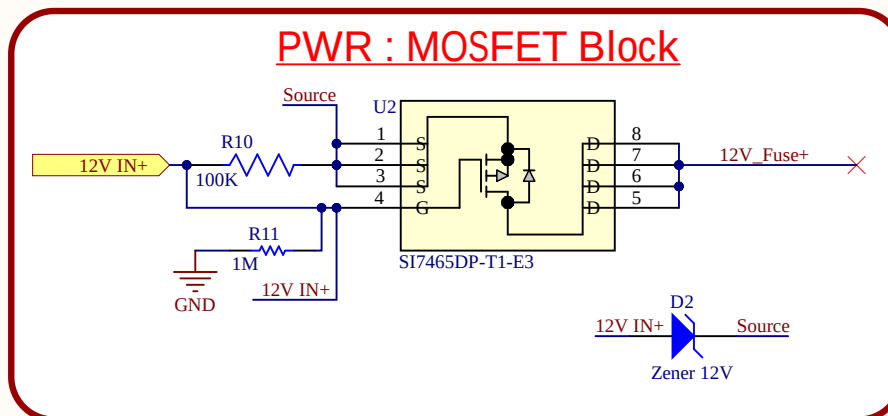

Title				CANCore Shield	
Size	Number	CCS-001		Revision	V1.0
A					
Date:	7/31/2026		Sheet	of	
File:	C:\Users\...04_Power.SchDoc		Drawn By:	Ayoub ELBOUHI	

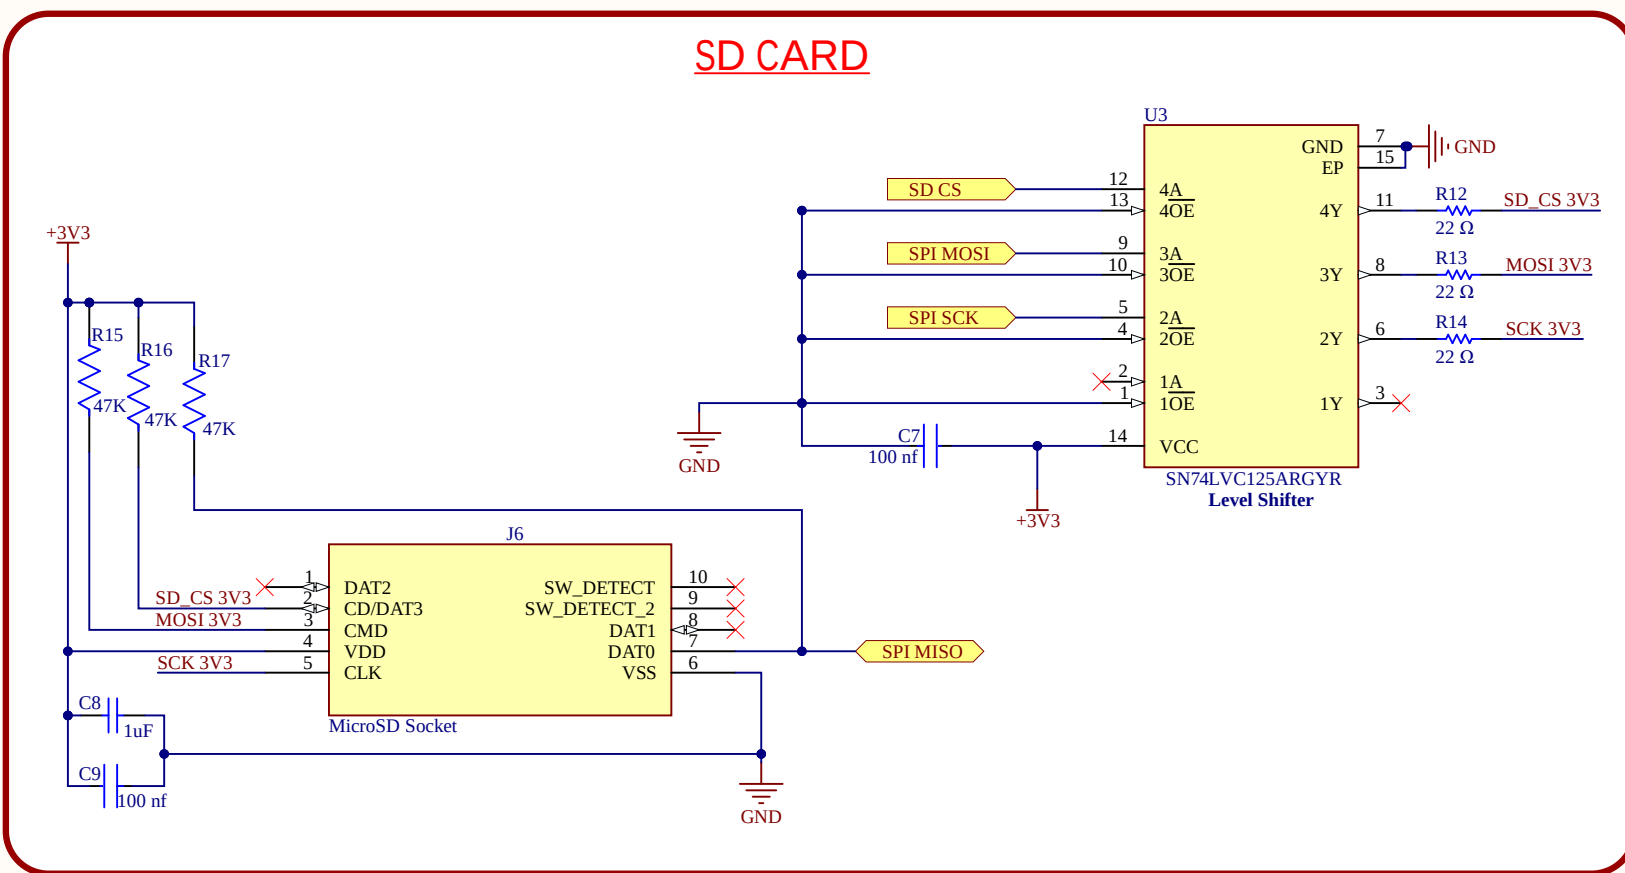

Title				CANCore Shield			
Size		Number				Revision	
A		CCS-001				V1.0	
Date:		7/31/2026			Sheet of		
File:		C:\Users\A03_SD_Card\SchDoc			Drawn By: Ayoub ELBOUHI		

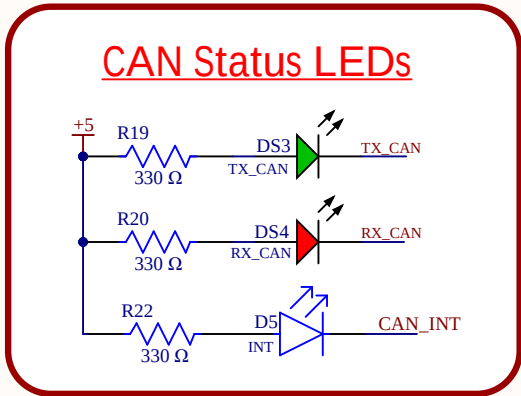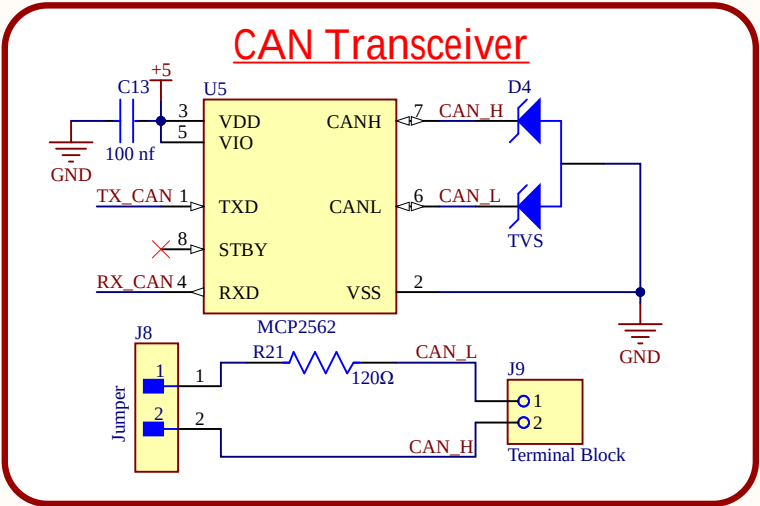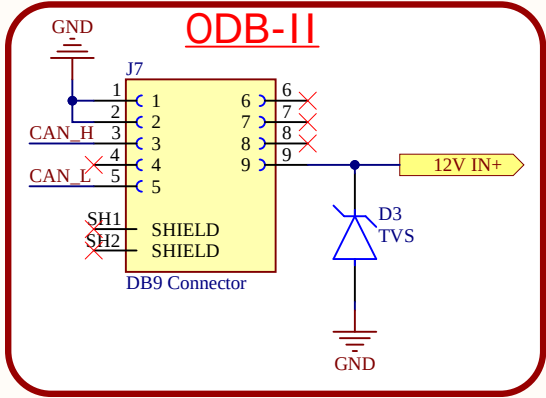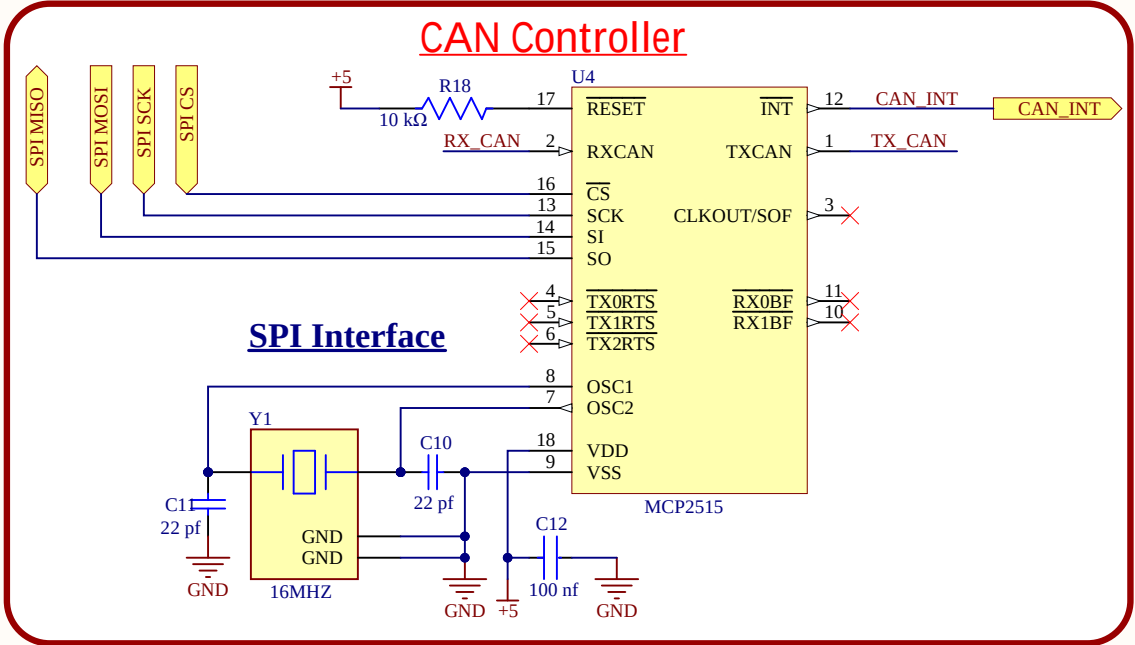


Title			CANCore Shield	
Size	Number	CCS-001		Revision
A				V1.0
Date:	7/31/2026	Sheet of		
File:	C:\Users\...\02_CAN.SchDoc	Drawn By: Ayoub ELBOUHI		

J7

PCB Edge

CANCore Shield V1.0
AYOUB ELBOUHI
31-07-2026
<https://github.com/aelbouhi0131-lang>

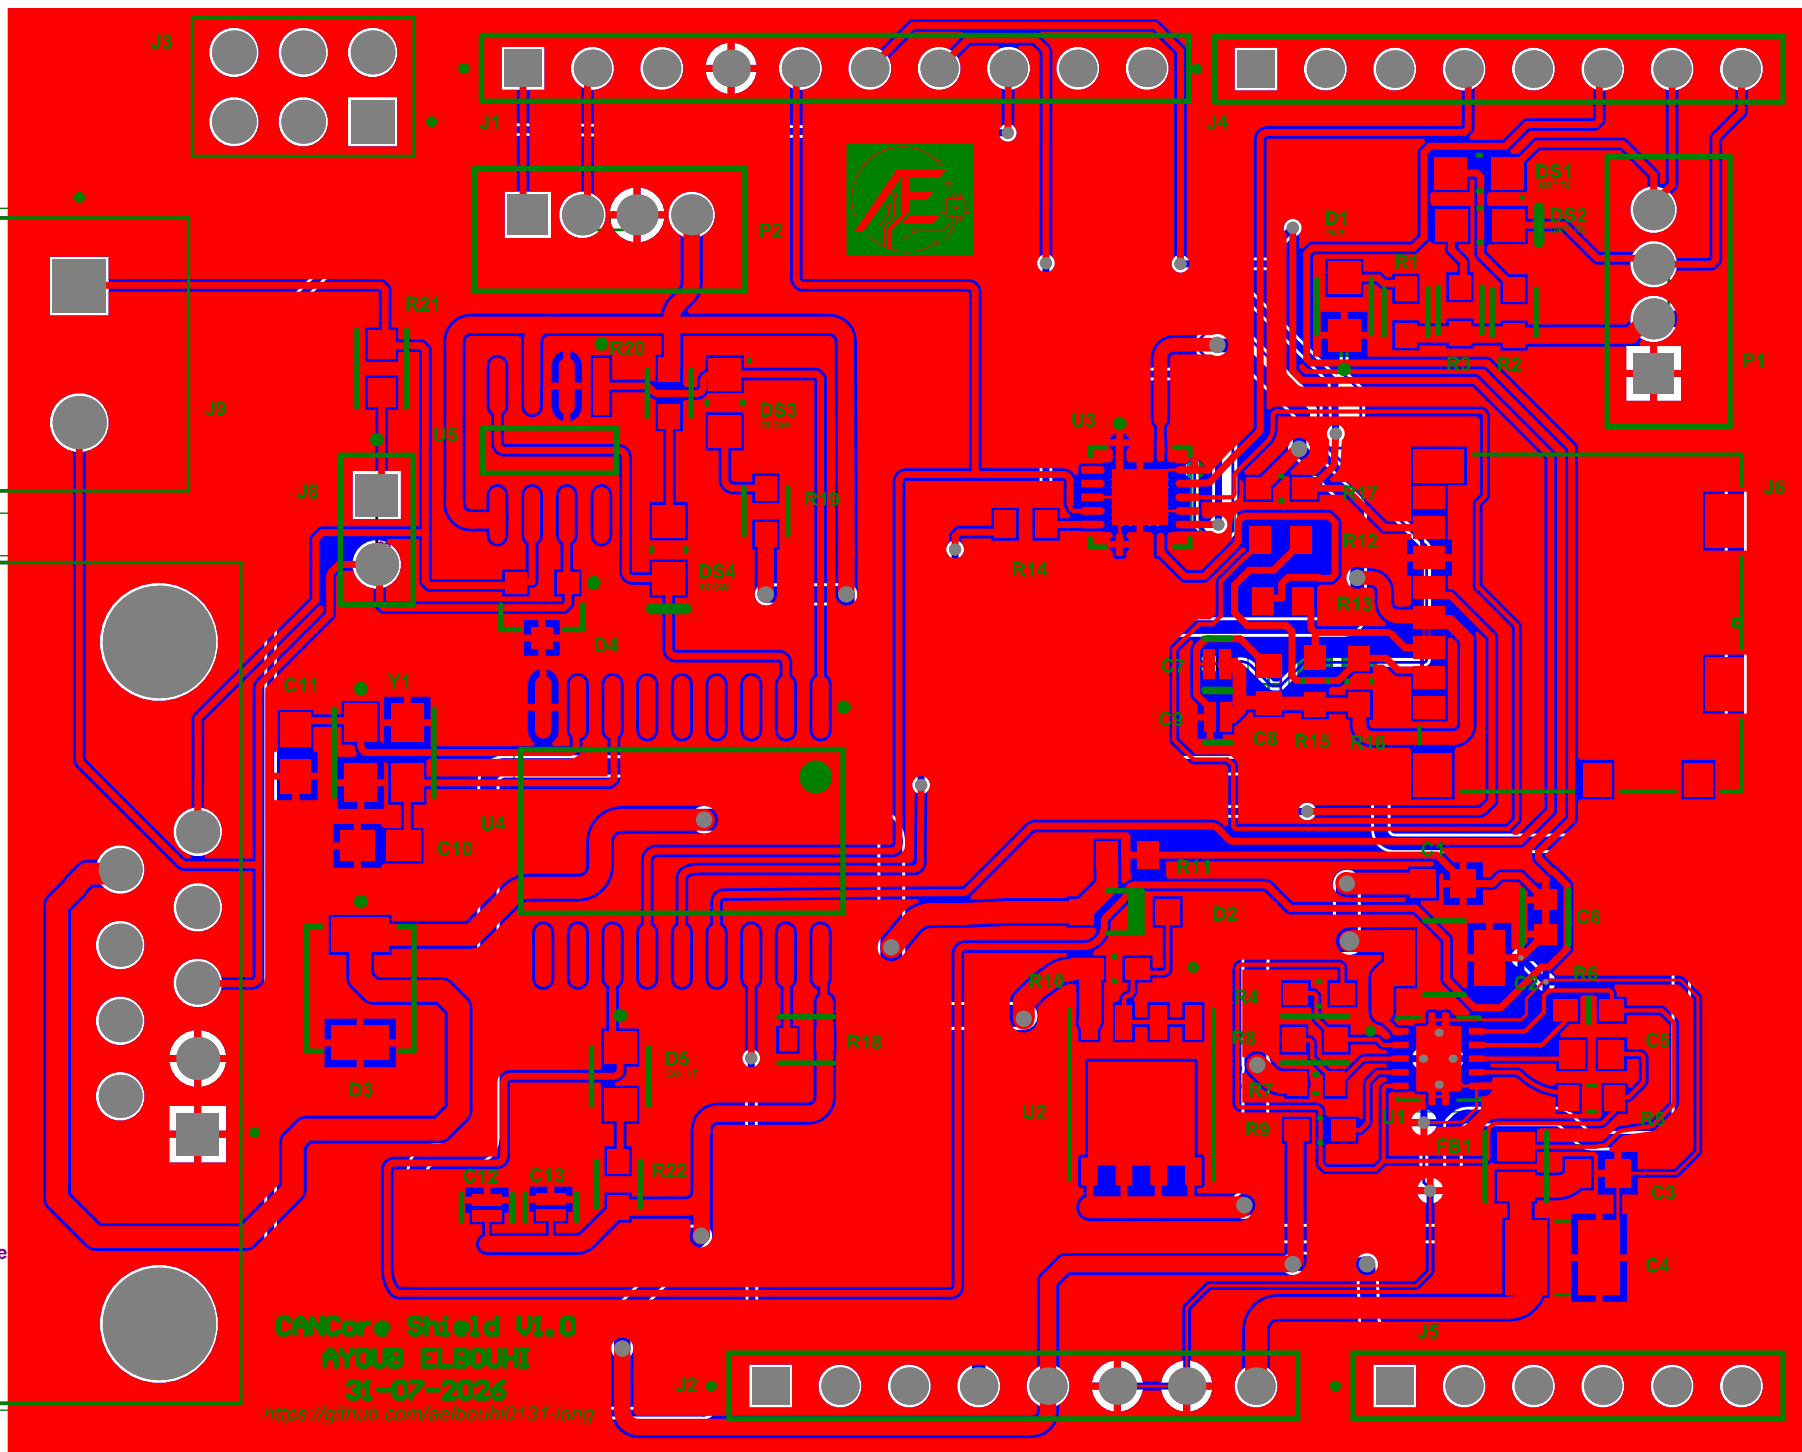

Comment	Description	Designator	Footprint	Manufacturer	Quantity
100 nF	Chip Capacitor, 0.1 uF +/- 10%, 50 V, .65 to 1.25 degC, 0805 (1608 Metric), Reel5, Tape and Reel	C1, C3, C5	CAPC1608080505M1 0715	CMP-2350-03643-1	3
25 uF	CAP CER 25uF 50V T50 1210	C2	FF-GRM32 MFG	CMP-2000-05361-2	1
47 uF	SMD capacitor K79(EIA) with equivalence 47uF Tol 10%, Rated voltage 10Vdc 120V	C4	CAPC3225X270N	69M32ERT1A479E15 1	1
10 uF	Ceramic Capacitor for Automotive 50uF +2% 10VDC, 1608 0603 Paper T10	C6	FR-GCM188-Q-1- PFC_C	CMP-06035-04699-1	1
100 nF	None	C7, C8, C12, C13	FR-G204-L-0-52_0-50 W_1_0-0FC_5	CMP-14477-023485-2	4
1uF		C9	CAPC1608080505M1 0715	CMP-2006-02031-1	1
22 uF		C10, C11	CAPC1608080505M1 0715	CMP-2006-04072-1	2
PWR	LED ORANGE CLEAR SMD	D1	FR-LTST-C170BK-T- MFG	CMP-23017-000036-1	1
3.3V 12V	Surface Mount Zener Diode, 12 V, 2-Pin 2.1 x 1.55 x 1.45 mm K100273, .65 to 1.25 degC, Reel5, Tape and Reel	D2	DIOD-SOD123-2_V	CMP-0734-00003-2	1
TVS	TVS DIODE 24V 38.5V SMB	D3	FR-SMBJ MFG	CMP-07401-000035-1	1
TVS	4in direction ESD Protection Diode, 5 V, 10 uA, 3-Pin SOD723, Reel5, Tape and Reel	D4	SCI-SOT23-2_V	CMP-2300-03007-1	1
INT	LED BLUE CLEAR SMD	D5	FR-LTST-C170BK-T- MFG	CMP-23017-000033-1	1
TX	Ultra Bright AHBuCap Chip LED, 75 mW, .65 to .85 degC, 2-Pin SMD (0805), Reel5, Tape and Reel	D101	LTST-LTST-C170BK-T- 2_V	CMP-2000-06020-1	1
RX	LED Red, 75 mW, .54 med., .65 to .85 degC, 2- Pin SMD, Reel5, Tape and Reel	D102	LTST-C170BK-T_V	CMP-2000-07593-1	1
TX_CAN	Ultra Bright AHBuCap Chip LED, 75 mW, .65 to .85 degC, 2-Pin SMD (0805), Reel5, Tape and Reel	D103	LTST-LTST-C170BK-T- 2_V	CMP-2000-06020-1	1
RX_CAN	LED Red, 75 mW, .54 med., .65 to .85 degC, 2- Pin SMD, Reel5, Tape and Reel	D104	LTST-C170BK-T_V	CMP-2000-07593-1	1
	Chip Ferrite Bead, 360S, 6000 ohm 100MHz, 0.250, 25%, 300mA	F61	FR-BLM21-0-2-40_05- PFC_S-PFC_C	CMP-0606-00602-3	1
ARDUINO TOP RIGHT		J1	DAMTEC_ESQ-110-14- G-S	ESQ-110-14-G-S	1
POWER		J2	DAMTEC_ESQ-108-14- G-S	ESQ-108-14-G-S	1
IC3P	6 Position Header Connector 0.100 (2.54mm) Through Hole Tin	J3	BULLINS_PPTC032/FB HMC	PPTC032/FB_HC	1
ARDUINO DOWN RIGHT		J4	DAMTEC_ESQ-108-14- G-S	ESQ-108-14-G-S	1
ANALOG IN		J5	DAMTEC_ESQ-106-14- G-S	ESQ-106-14-G-S	1
MicroSD Socket		J6	104031-0811_MDL	1040310811	1
308 Connector	Drush, Stamped Signal SA, Right Angle PCB Through Hole, FR-4, .08mm (0.326in), Row Pitch 2.54mm, 3 Socket, Flush Gold, Bright Tin Shell, 4-40, Removable Front Screwlock (Hex Height 4.8mm), Ground Tab with Boardlock	J7	AMPHENOL_177505 60AACH48	17750560AACH48	1
Jumper	CONV HEADER VERT 20X2 2.54MM	J8	FR-15W-102-07-G-5- MFG	CMP-02766-000084-1	1
Terminal Block	PCB Terminal screw Screw 16AWG 400V 17 And 2-Position COMBICON P1 Series (Phoenix Contact 1850161)	J9	PHOENIX_1850161	1850161	1
UART Grove	Male Header, Pitch 2 mm, 1 x 4 Position, Height 6 mm, Tail Length 3.4 mm, -25 to 85 degC, Reel5, Bulk	P1	ST-84B-PH-K-5_V	CMP-2000-05165-1	1
I2C Grove	Male Header, Pitch 2 mm, 1 x 4 Position, Height 6 mm, Tail Length 3.4 mm, -25 to 85 degC, Reel5, Bulk	P2	ST-84B-PH-K-5_V	CMP-2000-05165-1	1
330 O	RES SMD 330 OHM 1% 1/10W 0805	R1, R2, R3, R18, R20, R22	FR-RT0603 MFG	CMP-03412-025644-1	6
100K	RES SMD 100K OHM 1% 1/10W 0805	R4, R9, R10	FR-RC0603-Q_5S- MFG	CMP-2300-03662-2	3
7.5K	1/4KOhm 4.21% 0.1W, 1/10W Chip Resistor 0805 (1608 Metric) Moisture Resistant Thick Film	R5	RESC160805DN	RESC03P-077K5L	1
10K	RES SUR CHM 1% 1/10W 0805	R6	FR-RC0603-Q_5S-MFG	CMP-2300-03664-2	1
100K	10K 0.1% 1% 0805 (1608 Metric), SMD	R7	RESC0603(1608)_L1	CMP-1012-00880-1	1
200K	RES SMD 200K OHM 1% 1/10W 0805	R8	FR-RC0603-Q_5S- PC_B	CMP-03412-037788-1	1
1M	Chip Resistor, 2 Mohm, +/- 1%, 100 mW, .65 to 105 degC, 0603 (1608 Metric), Reel5, Tape and Reel	R11	RESC160805S525M1 0715	CMP-1659-00056-1	1
22 O	Chip Resistor, 22 Ohm, +/- 1%, 0.1 W, 85 to 155 degC, 0603 (1608 Metric), Reel5, Tape and Reel	R12, R13, R14	RESC160805S525M1 0715	CMP-1659-00033-1	3
47K	RES SMD 47K OHM 1% 1/10W 0805	R15, R16, R17	FR-RC0603P-0747N, MFG	CMP-1659-00056-2	3
10 KΩ	RES SUR CHM 1% 1/10W 0803	R18	FR-RC0603-Q_5S- PFC_C	CMP-2300-03664-2	1
100Ω	Thin Film Chip Resistor, Automotive Grade 1200 1% 010mmTC 0805	R21	FR-AT0803 IPC_A	CMP-03412-046015-1	1
TPS26620DRCR		U1	IC_TPS26620DRCR	TPS26620DRCR	1
917465DP-11-E3	P-CHANNEL 60-V (D-0) MOSFET	U2	PowerPAK_SO-8_VIS	917465DP-11-E3	1
SN74VLC125ARDVR	C-BUF NON-INVERT 1.5-µA I _{OL}	U3	FR-RCV0014A-MFG	CMP-0440-00228-5	1
MCPS515	Controller With SPI Interface, 18-Pin SOIC, Extended Temperature, Tape and Reel	U4	SOIC-5218_N	CMP-0186-00137-2	1
MCPS262	C-TRANSCIVER 1/1, BIOS	U5	FR-C04-067-0N-IPC_B	CMP-06279-000005-1	1
16MHz	Crystal 16MHz 400ppm (T ₀) ±30ppm (Stability) 10pF T ₀ FUND 800 4-Pin SMD T/R	Y1	FR-ABMBG-MFG	CMP-27762-000637-2	1