



AEROVENT

FANS AND BLOWERS MANUFACTURING

Ventilation, air moving & engineering specialists

Manila Office : 1933-C Augusto Francisco Street Sta. Ana, Manila, Philippines

(02)85619413 - (02)83533350 - (02)83532763 - 09289480600 (SMART) - 09176547061 (GLOBE)

(32)4258174 - 09996649997 (SMART) - 09173096960 (GLOBE)

Plant Address : #7635 Narra Road Bayan-bayanan San Vicente, San Pedro Laguna, Philippines

Email: aeroventblower@gmail.com / Website: www.aeroventfbm.com

25RLF

- ✓ Reversible louver series
- ✓ Exhaust or intake type
- ✓ Wall mounting
- ✓ Single speed (exhaust or intake)
- ✓ Cord operated shutter
- ✓ **Advanced blade design**
- ✓ Air volume = 876 m³/h (exhaust)



Air Volume - Exhaust [CMH]

835

Consumption - Exhaust [W]


34

Noise - Exhaust [dB(A)]

45

RPM - Exhaust [min⁻¹]

1,060

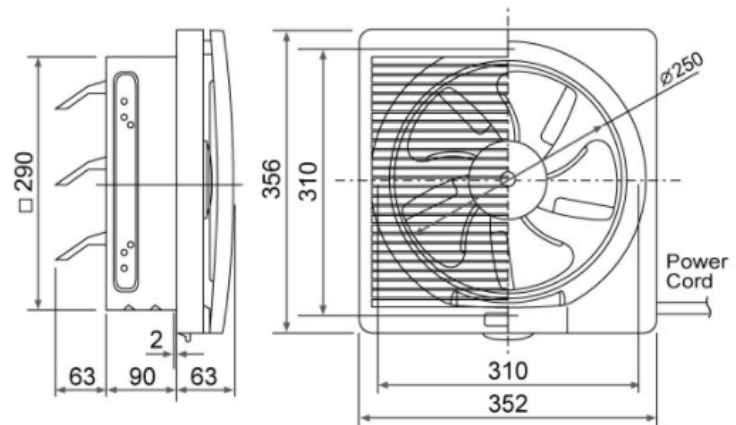

25RLF Dimension

Weight [kg]

2.70

- Reversible louver type
- The fan shall be suitable for wall mounting
- On-off and reverse operated by pull cord switch
- Condenser motor with thermo cut-off
- Well lubricated bearing for long life operation
- Propeller fan incorporated with **Advanced blade design** enables powerful airflow at low noise
- Shutter operated by pull cord which switches on or off the fan simultaneously
- Orifice equipped with oil cup collects oil drops effectively
- Front louver with blind shutter enhances privacy and safety protection
- Pre-painted steel frame and shutter strengthen product durability
- Installation size = 300 x 300 mm
- Safety design base on IEC requirement
- Our global product had been approved by each country requirement.