


# Teensy 4.1 Pin Notes

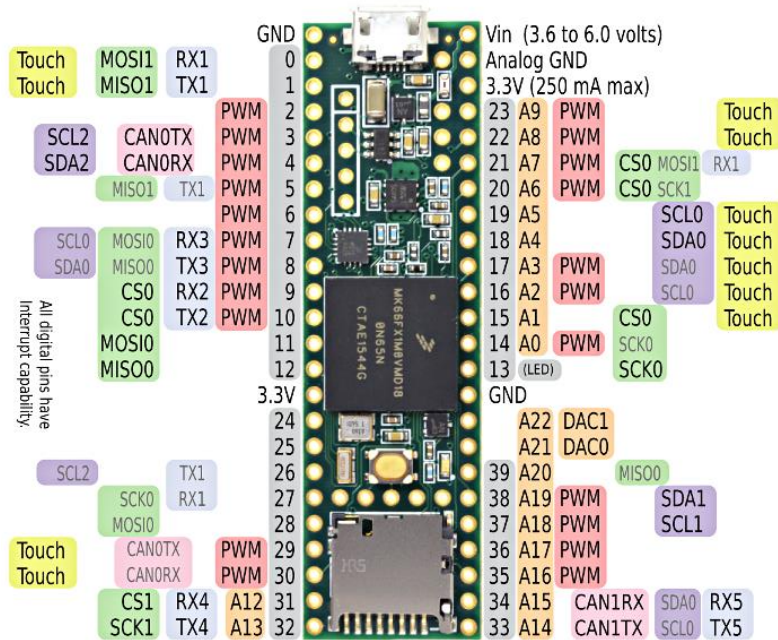

Rotary encoders: pins 2-9,  
laser input: 7 pins,  
button: 1 pin  
pins 18,19: i2c LCD

- Any gray pins can be used for GPIO: rotary encoders, laser input, button
- Pins 18 and 19: May need I2C port to connect to LCD to display key and scale
- Pins 0 and 1 can be used for midi circuit

Example: [https://www.pjrc.com/teensy/td\\_libs\\_MIDI.html](https://www.pjrc.com/teensy/td_libs_MIDI.html)

