


in HEAVY MOTORS | inTram h2 (HIGH PLATFORM 2-CAR)

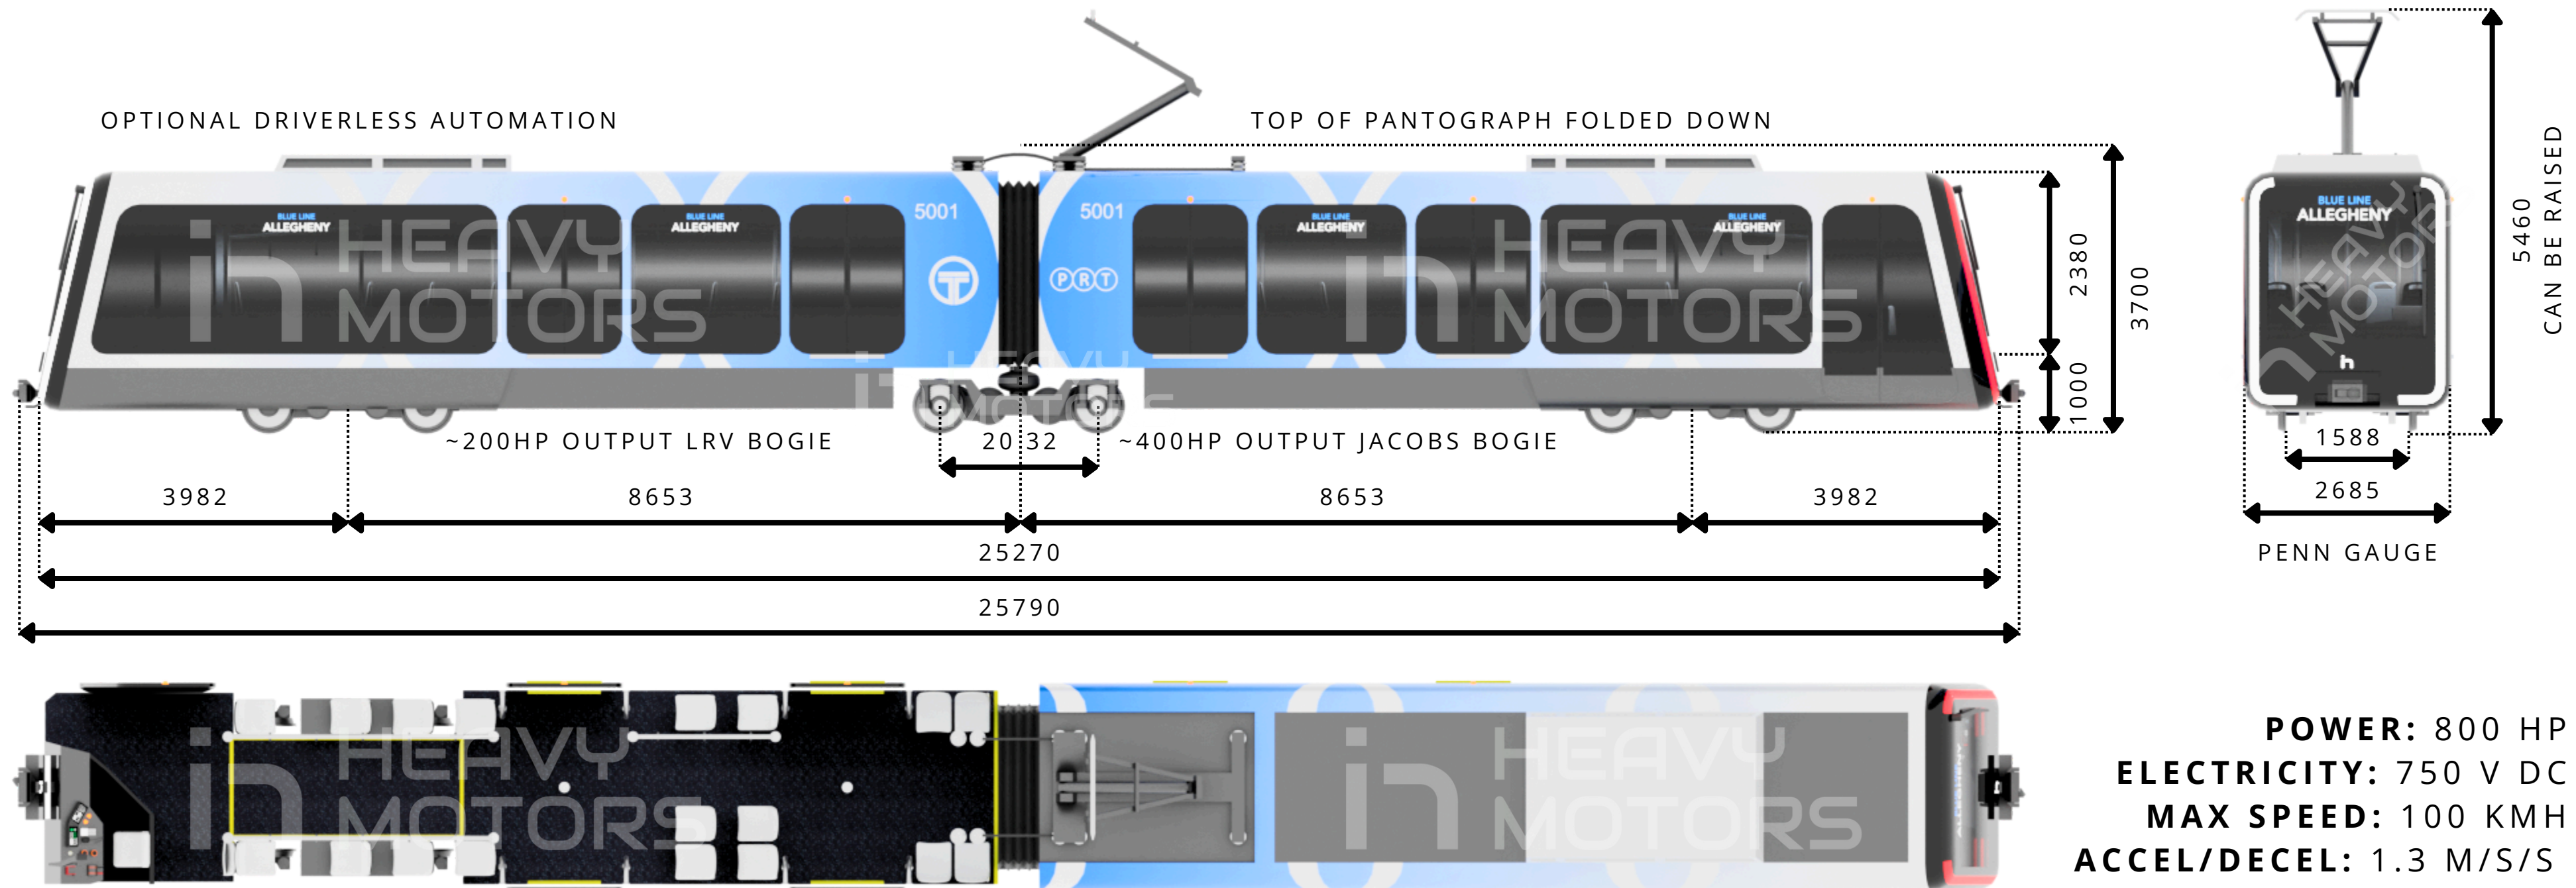

15% LIGHTER THAN THE SD-400. **15-20% CHEAPER** LIFECYCLE COST THAN THE S-200.

ALUMINUM + STAINLESS STEEL SHELL FOR REDUCED WEIGHT & COST

LOW FLOOR ACCESSIBLE FRONT DOOR BOARDING & ACCESS RAMP.

ALL UNITS ARE IN MILLIMETERS




BOGIES

Power is distributed between 2 inside-frame light rail bogies at each end of the tram and a single Jacobs bogie under the center vestibule of the tram.


INSIDE-FRAME BOGIE

- 4 traction motors
- 40 kW power rating
- combined 200 hp

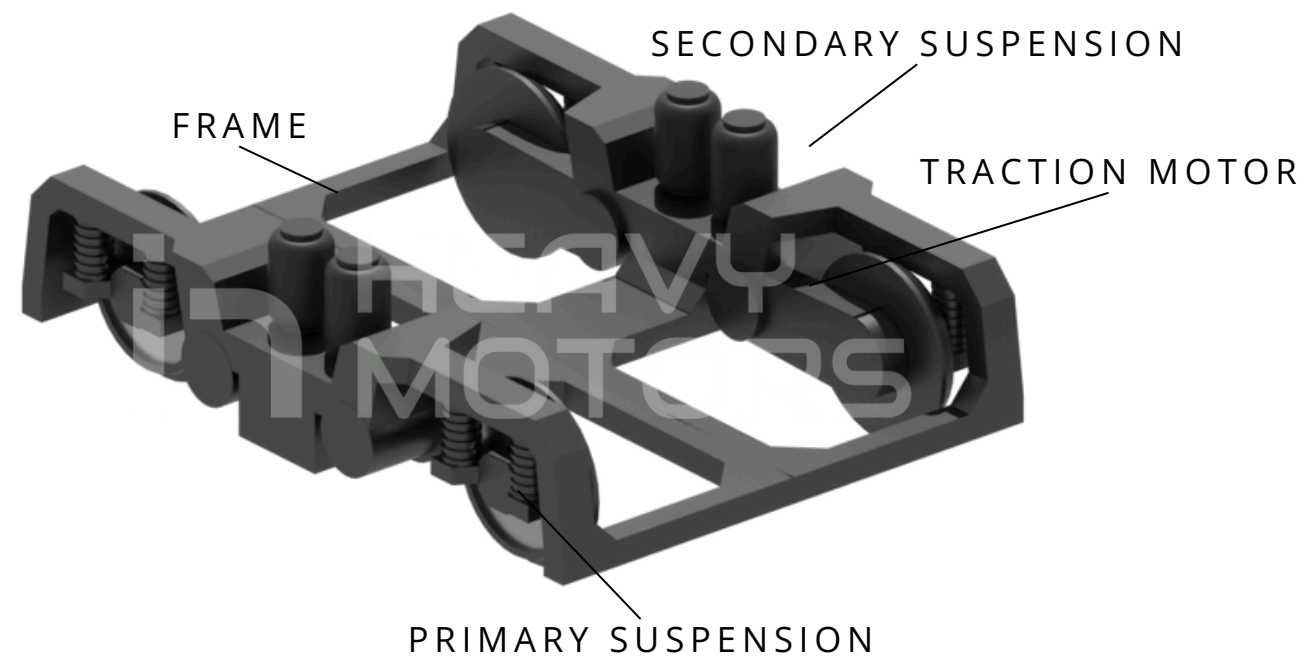


JACOBS BOGIE

- 2 traction motors
- 150 kW power rating
- combined 400 hp

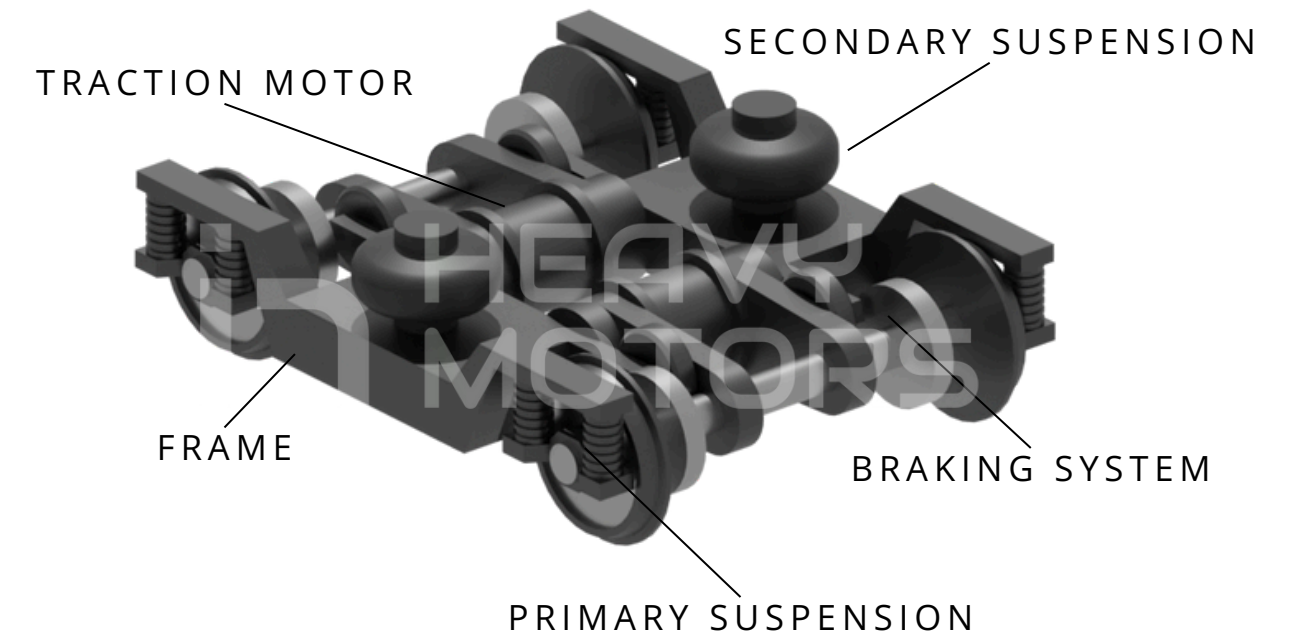

800 HP COMBINED POWER OUTPUT

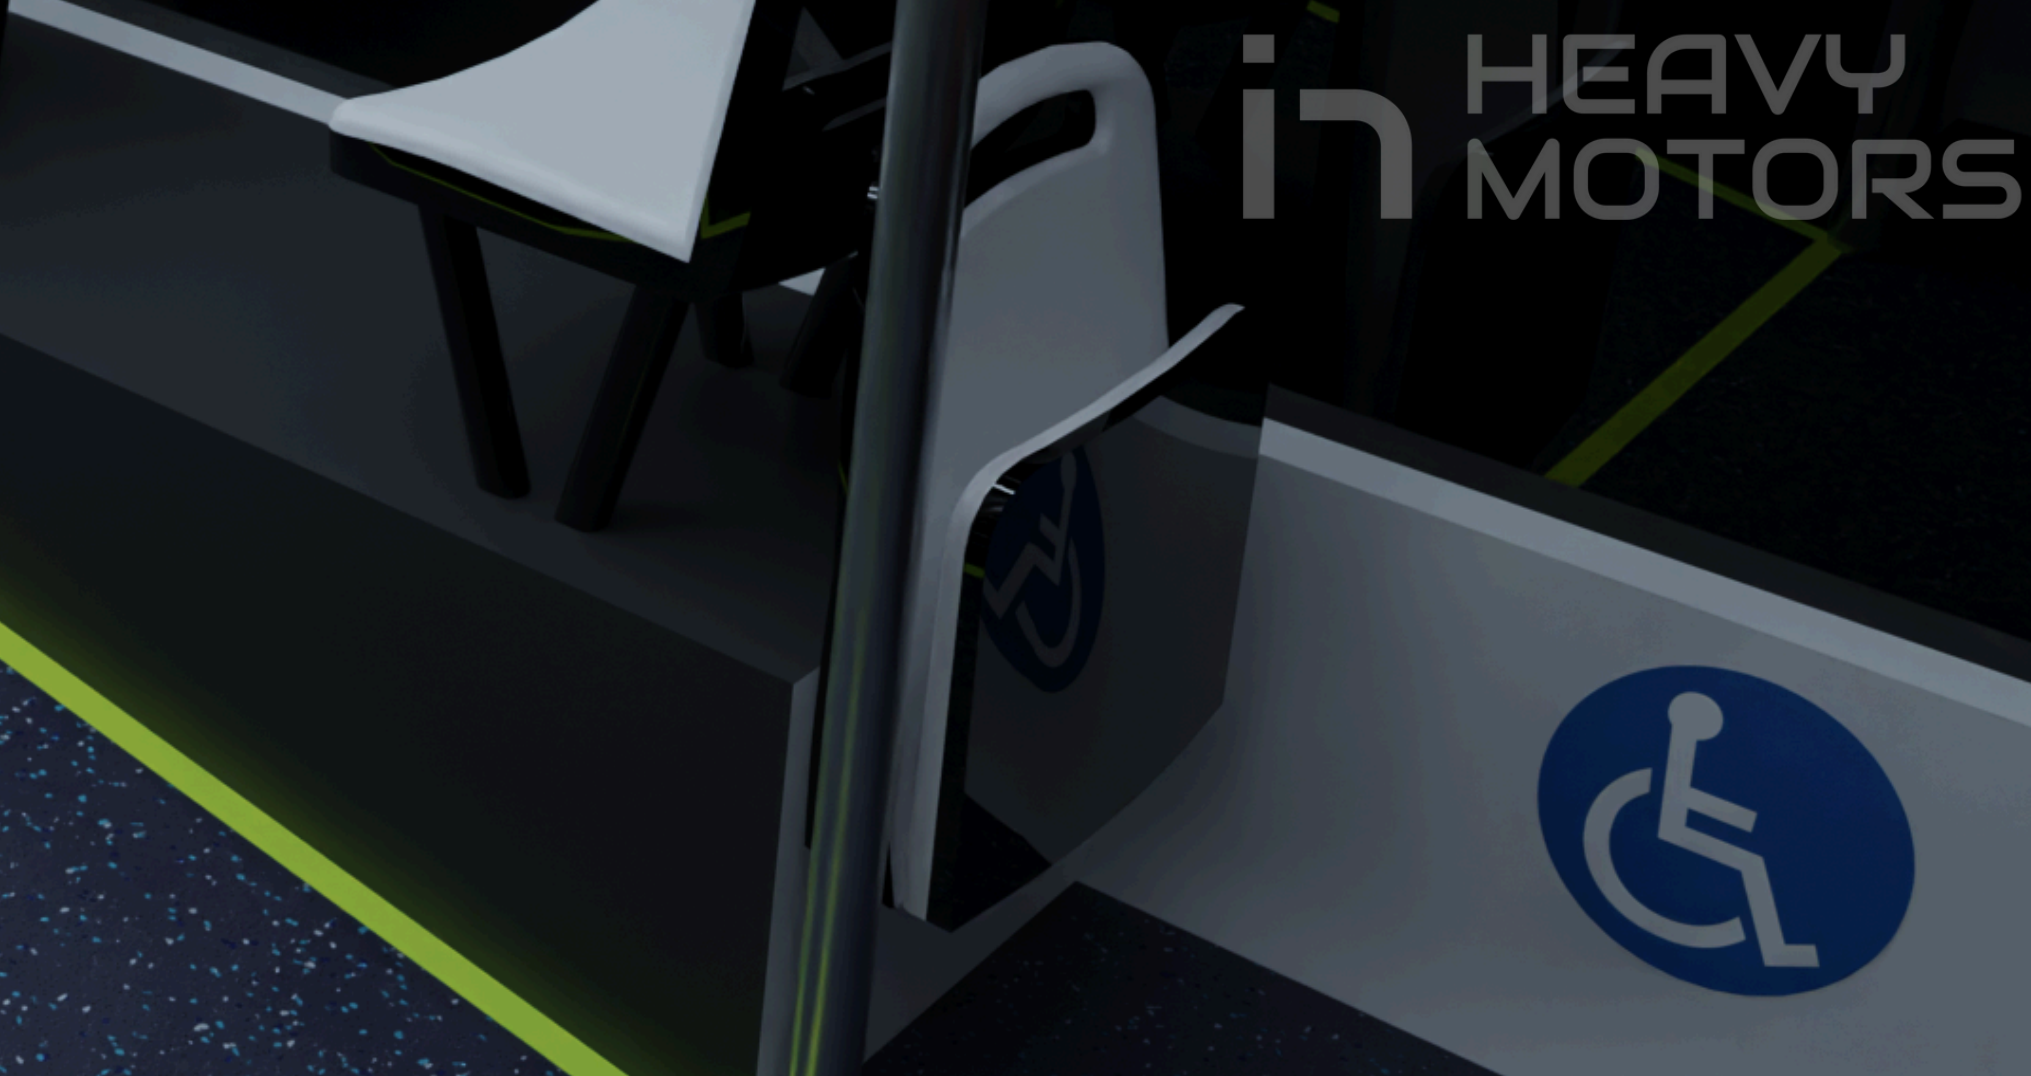

EASY ACCESSIBILITY

Unlike the previous generation Siemens SD-400s and CAF LRVs, the inTram h2 allows for direct street-level accessible boarding and wheelchair mobility throughout the entire length of the tram.

A 16° retractable ramp is located at each low-platform boarding door to the left of the driver's cab.

A 9.65° 3.05 m long ramp connects the low-platform boarding section to the rest of the cabin at high-platform level.

A wheelchair-specific seat is located in the low-platform area of each car.



REFRESHED INTERIORS

The inTram h2s are designed with more spacious and modern cabins. Many aspects found on buses such as longitudinal and individual seating have been added to increase interior hall space for accessible passengers.


LED lights have been added to provide ambient customizable cabin lighting.

LCD screens display detailed route maps and speakers throughout the cabin announce important information.

Seats have also been updated for improved padding comfort.



INTERIOR LAYOUT

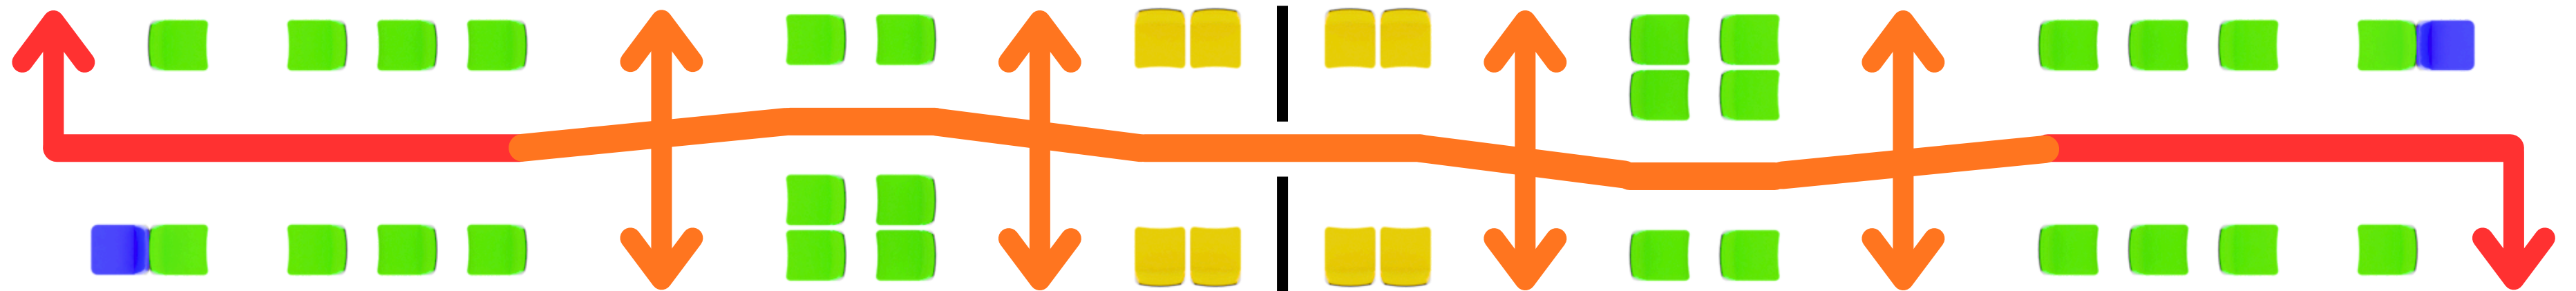

KEY

-  FORWARD/REAR FACING SEAT
-  LONGITUDINAL SEAT
-  WHEELCHAIR SEAT
-  HIGH-LEVEL CORRIDOR
-  LOW-LEVEL CORRIDOR

TOTAL CAPACITY

SITTING: 36 (+2 fold-down seats)
STANDING: 160-180

IN AN EVACUATION

All exits are to be used. Note the 34-35 inch drop from the high-level boarding doors. Passengers should avoid crossing over the vestibule unless necessary.

**DRIVERLESS SYSTEM
TO BE IMPLEMENTED IF ECONOMICAL**



HYBRID GOA3 + LIDAR/CAMERA SYSTEM
NEW CBTC INFRASTRUCTURE REQUIRED

RIGHT-OF-WAY (EX. DOWNTOWN SUBWAY)

ATO + CBTC-ATP/ATC

STREET-LEVEL RUNNING

LIDAR/CAMERA GUIDANCE SYSTEM + CBTC-ATP/ATC

LONG-RANGE CAMERA DETECTION

SHORT-RANGE LIDAR COLLISION
PREVENTION SYSTEM

ATP EMERGENCY AUTO-BRAKING
WITH LIDAR COLLISION
PREVENTION DETECTION

OPTION TO START WITH GOA2

