


# Project iSwitchPi

## Intelligent Power Switch für Raspberry Pi

Make working with the Pi easy.



# Inhaltsverzeichnis

|  |           |
|--|-----------|
| <b>1. Abstract.....</b>                            | <b>4</b>  |
| <b>2. First Ideas .....</b>                        | <b>4</b>  |
| 2.1 Market Review .....                            | 4         |
| 2.2 Findings .....                                 | 5         |
| <b>3. Overview.....</b>                            | <b>5</b>  |
| <b>4. Problem Statement.....</b>                   | <b>1</b>  |
| 4.1 Additional Requirements.....                   | 1         |
| 4.2 State-Diagram .....                            | 2         |
| 4.3 Input and Output of the machine .....          | 2         |
| 4.4 State Diagram .....                            | 3         |
| 4.5 Activities upon entering a state .....         | 3         |
| <b>5. Component A: Electronics .....</b>           | <b>3</b>  |
| 5.1 Schema.....                                    | 4         |
| 5.2 Printed Circuit Board .....                    | 4         |
| 5.3 Puls Generator.....                            | 5         |
| 5.4 Communication between Pi and Electronic.....   | 5         |
| 5.5 C-Program for ATtiny44 .....                   | 6         |
| <b>6. Component B: Python Shutdown Script.....</b> | <b>7</b>  |
| <b>7. GPIO Pins used .....</b>                     | <b>7</b>  |
| <b>8. Install iSwitchPi.....</b>                   | <b>8</b>  |
| <b>9. Test Setup.....</b>                          | <b>8</b>  |
| <b>10. Programming the ATtiny44 .....</b>          | <b>8</b>  |
| <b>11. Components on the PCB .....</b>             | <b>9</b>  |
| <b>12. Conclusion.....</b>                         | <b>10</b> |
| <b>13. Links.....</b>                              | <b>10</b> |
| <b>14. Attachments .....</b>                       | <b>11</b> |
| 14.1 Example Scripts für iSwitchPi.....            | 11        |
| 14.2 Parts List iSwitchPi.....                     | 11        |
| 14.3 Code iSwitchPi.....                           | 13        |

# 1. Abstract

A Raspberry Pi does not have an On/Off switch and there is no easy way to shutdown the Pi while keeping the filesystem intact.

This Intelligent Power Switch brings a clever solution to this problem: Power-On the Pi by pressing a pushbutton and also properly Power-Off the Pi with another press on the same button. The intelligence is provided by a program running in an AVR MCU ATtiny44. This C-program implements a Finite State Machine in the MCU.


A small Python script is running in the Pi itself.

Just one single GPIO-Pin is used for two-way communication between the Pi and the iSwitchPi board.

The iSwitchPi board additionally provides a square wave output with variable frequency that can be used to trigger interrupts on the Pi.

This project description presents an elegant solution for the problem of switching the Pi on and off. The goal was to have a small pc board whose functionality can be described as follows:

- one pushbutton only for power on and power off
- form factor as a Raspberry hat for eas of use
- only one communication line to the pi - in other words. only one GPIO pin used on the Pi
- awarness of the Pi's status (running or not running)
- only one communication line to and from the pi - in other words. only one GPIO pin used on the Pi
- square signal output capability with variable/defined frequency to be used as a timer interrupt for the Pi
- later versions usable on a breadboard.

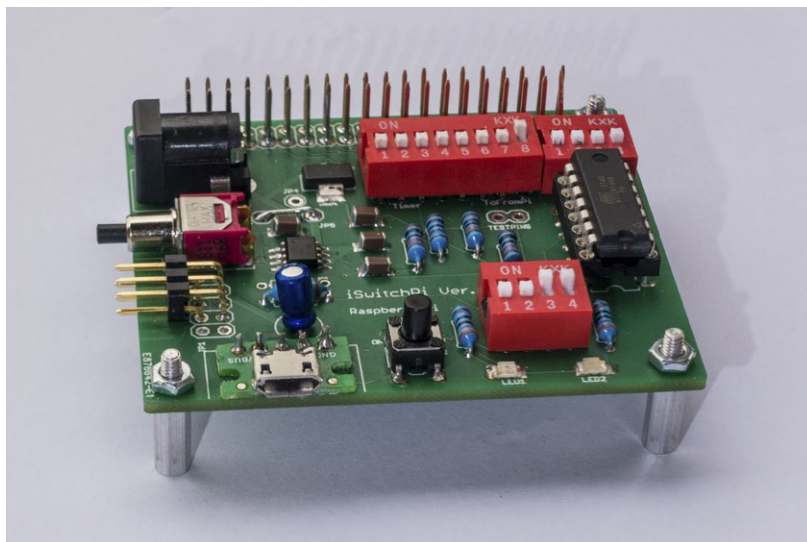

*The iSwitchPi Board*

## 2. First Ideas

### 2.1 Market Review

There are a number of electronic add-ons to be found on the market - they all try (and succeed) to solve the prob-

lem of power up/down the Pi. All of them consist of two components:

- a small pcb board with connections for pushbutton, 5 Volt in, 5 Volt out, GPIO to Pi
- a small shell script or Python script running in the Pi

I found the following products and tried some of them in my own lab. None of the has an square wave generator.

- Pi-Supply from the English Company [Pi-Supply](#). This add-on uses two pushbuttons for power on and power off, respectively. It uses two GPIO pins on the Pi. Works well.
- Pi-Shutdown button as decribed on [Instructables](#). This solution uses an embedded controller ATtiny13/85.
- ATX-Raspi from [LowPowerLab](#). This product is close to what i had in mind.
- ykrud from [Yepkit](#). This product also uses an embedded controller. Seems very ok but uses 2 GPIO pins.

## 2.2 Findings


That review showed that I needed to go back to the drawing board to start finding my own solution which is based on ideas that were used in some of the products. I decided to use an ATtiny44 microcontroller.

- There will be an electronic component (pcb board) with all the neccesary componentes and the MCU. Two different board will be made: a small board to be used on a breadboard and another (almost) hat-compliant board to be stacked on a Pi. Only ONE GPIO-Pin will be used for communication.
- There will also be a Python script that is started in the Pi at boot time.

## 3. Overview

The add-on will consist of pcb in the form of a Pi hat. At the heart will work a microcontroller ATtiny44 for which I developed a C program that implements the necessary logic. This is called the iSwitchPi board.

This is a overview:

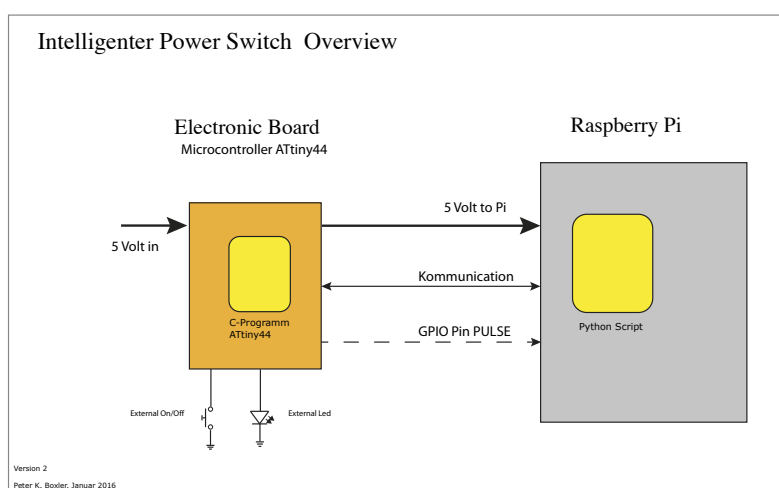

System Overview

## 4. Problem Statement

First step is always an thorough analysis of all the requirements.

I tried the following description in plain sentences:

There is a small pushbutton to switch the Pi on and off. Is the Pi switched off a short press on the pushbutton switches on the 5 Volt Power for the Pi and the led blinks fast. If the Pi does not come on (,running') power is again cut after a wait time of about 30 sec.

If the Pi comes up we have normal operation, 5 volt power stays on and the led is fully on.

A short press on the pushbuttons signals to the Pi to shutdown and activates a timer. The led blinks slow. Power is cut after the timer reaches a predefined value.

A long press on the pushbutton signals the Pi to reboot - power stays on in this case.


Additionally: if the system waits for the Pi to come up a another short press on the button directs the system on keep power on without checking whether Pi is running.

If the Pi-Pin suddenly goes to low (Pi not running), the System starts the power down sequence.

That covers situations where the Pi Pi is shutdown in a terminal window.

Such a prosa description ist not very good and usually not complete. Sentences are misleading and there might be ambiguity.

That is where Finite State Machines come to the rescue. A state diagram together with a state table describes the machine completely and the transfer to C code is easy. A finite state machine has defined inputs, states, transistions and also defined outputs.

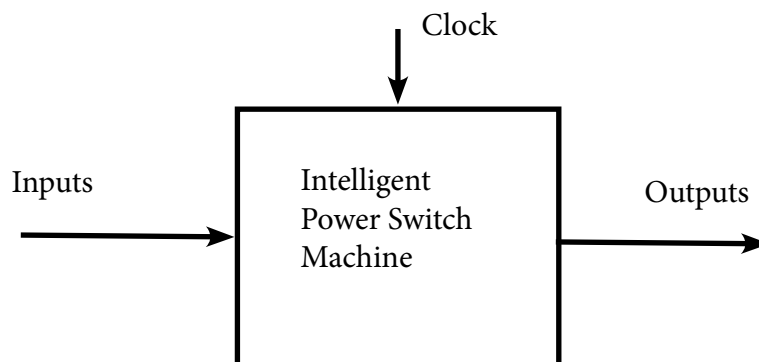

### 4.1 Additional Requirements

These are additional requirements for the iSwitchPi Board:


- One ON-/OFF-Switch (Pushbutton) on top of the board.
- An additional ON-/OFF-Switch (Pushbutton) sideways - in case the top switch is not reachable due to stacking.
- A pin-connector for an external ON-/OFF-Switch (Pushbutton) and external led. In case the Pi is in an enclosure.
- 5 Volt Input via Barrel Jack 5.5/2.1 mm or via UBS-Micro connector and also via the pin-connector.
- 5 Volt supply to the Pi via solder bridge. Can be taken out for other requirements (There are Pi-hats on the market that require that 5 Volt is supplied through them).
- Cutouts for camera-connector and display-connector not needed in first versions.

- Protection against overvoltage (on Input) and reverse polarity to be added in later versions.

## 4.2 State-Diagram

After several tries the following state diagram with 7 states was found:

### State-Diagram Intelligent Power iSwitchPi

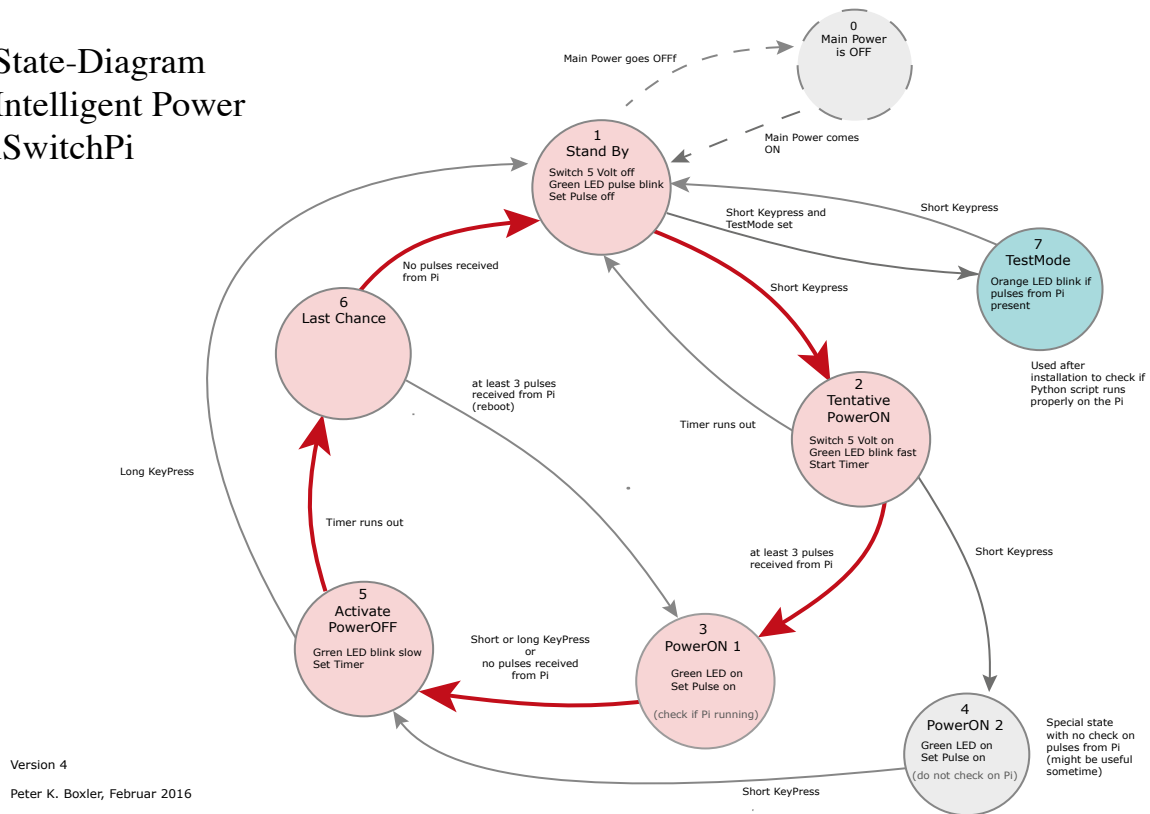

State Diagram iSwitchPi

## 4.3 Input and Output of the machine

These tables define all inputs and outputs (each input can be one or zero)

| Iiput          | Shortform | Source                      |
|----------------|-----------|-----------------------------|
| Short Keypress | KT        | Pushbutton                  |
| Long Keypress  | LT        | Pushbutton (>1.5 sec)       |
| TimerSignal    | TS        | Timer reaches defined count |
| SignalFromPi   | SPi       | Pulses from Pi received     |

| Output                    | Shortform    | What is this                 |
|---------------------------|--------------|------------------------------|
| 5 Volt for Pi             | 5V           | 5 Volt power to PI on or off |
| Green Led on              | Ledon/Ledoff | Led is on or off             |
| Led blink slow            | Ledsl        | Led blinks slow              |
| Led blink fast            | Ledfst       | Led blinks fast              |
| Signal to Pi for Reboot   | StPireb      | Send one single pulse to Pi  |
| Signal to Pi for Shutdown | StPishut     | Send 2 pulses to Pi          |

|               |            |                                  |
|---------------|------------|----------------------------------|
| Start Timer   | STo or STf | On /Off (means start/stop Timer) |
| Pulsgenerator | ON/OFF     | Puls Generation ON/OFF           |

#### 4.4 State Diagram

The state diagram describes the workings of finite state machine completely. The transfer to a c-program is simple. A certain state combined with a combination of input signals leads to a new state as shown in state diagram.

| State                | Inputs |    |    |     |    | Next State           |
|----------------------|--------|----|----|-----|----|----------------------|
|                      | SK     | LK | TS | SPi | TM |                      |
| 1 Stand by           | 1      | x  | x  | x   | x  | 2 Tentative Power On |
| 1 Stand by           | 1      | x  | x  | x   | 1  | 7 Test Mode          |
| 2 Tentative Power On | x      | x  | 0  | 1   |    | 3 Power On-1         |
| 2 Tentative Power On | x      | x  | 1  | 0   |    | 1 Stand by           |
| 2 Tentative Power On | 1      | x  | x  | x   |    | 4 Power On-2         |
| 3 Power On-1         | 0      | 0  | x  | 0   |    | 5 Activate Power Off |
| 3 Power On-1         | 1      | 0  | x  | 0   |    | 5 Activate Power Off |
| 3 Power On-1         | 0      | 1  | x  | 0   |    | 5 Activate Power Off |
| 4 Power On-2         | 1      | x  | x  | x   |    | 5 Activate Power Off |
| 5 Activate Power Off | x      | x  | 1  | 0   |    | 1 Stand by           |
| 5 Activate Power Off | x      | 1  | x  | x   |    | 1 Stand by           |
| 6 Last Chance        | x      | x  | x  | 0   |    | 1 Stand by           |
| 6 Last Chance        | x      | x  | x  | 1   |    | 3 Power On           |
| 7 Test Mode          | X      |    |    |     |    | 1 Stand by           |

#### 4.5 Activities upon entering a state

Every state of the machine usually has some entry-actions associated with this state. These actions are executed once upon entering the state and they usually result in changes in the outputs.

| State                             | Activity on Input  |
|-----------------------------------|--|
| 1 Stand by                        | 5 Volt Power off<br>Set Led to Pulse blink<br>Timer stop<br>Pulsgenerator stop |
| 2 Tentative Power On              | 5 Volt Power On<br>Green Led blink fast<br>Timer start<br>Pulsgenerator start  |
| 3 Power on-1 (normal operation)   | Green Led full on<br>Timer stoppen   |
| 4 Power on-2 (spezieller Betrieb) | Green Led full on<br>Timer stoppen   |
| 5 Activate Power Off              | Green Led blink slow<br>Timer start  |
| 6 Last Chance                     | nothing  |
| 7 Test Mode                       | 5 Volt Power On<br>Green led full on   |

### 5. Component A: Electronics

The iSwitchPi implements the on / off function of the Pi power supply in software and hardware. The state diagram and the state tables define the c-program to be created for the ATtiny44. The Pi itself will send regular pulses by means of a script (see below), which signal: I am still alive, do not turn off the power.

## 5.1 Schema

The hardware component of the iSwitchPi is designed to be in the form of a raspberry hat. Usage is simple: stack on top of the Pi, connect a 5 volt power supply and you are ready to run. Additional hats can be stacked on top of the iSwitchPi.

The electrical scheme of the iSwitchPi looks like this.

5 Volt Power to the Pi is switched on/off with a High-Side Switch MCP2505. This clever device has a voltage drop of only around 15 mV in the ON state. It handles up to 2 Amps. It is controlled by the MCU. The input voltage of 5 V is reduced to 3.3 V for the microcontroller using a LM1171MP-3.3 module. Thus, the communication line for the Pi is also addressed with this level (GPIO pins for the Pi are rated 3.3 v max).

The Python script running in the Pi (iswitchpi.py) signals ‚I am alive‘ with pulses on a selected GPIO-Pin. The script can, however, also receive signals from the iSwitchPi on the same GPIO-Pin: the number of incoming pulses determine the type of the command which is sent to the OS: shutdown halt or reboot.


The heart of iSwitchPi is an ATtiny44 microcontroller.

C program (firmware) for the microcontroller, see later.

### Note:

Future version of the iSwitchPi need to include a protection against wrong polarity and overvoltage. This will be the same circuit as on the Raspberry board. See this text for details:

Raspberry [voltage protection](#).

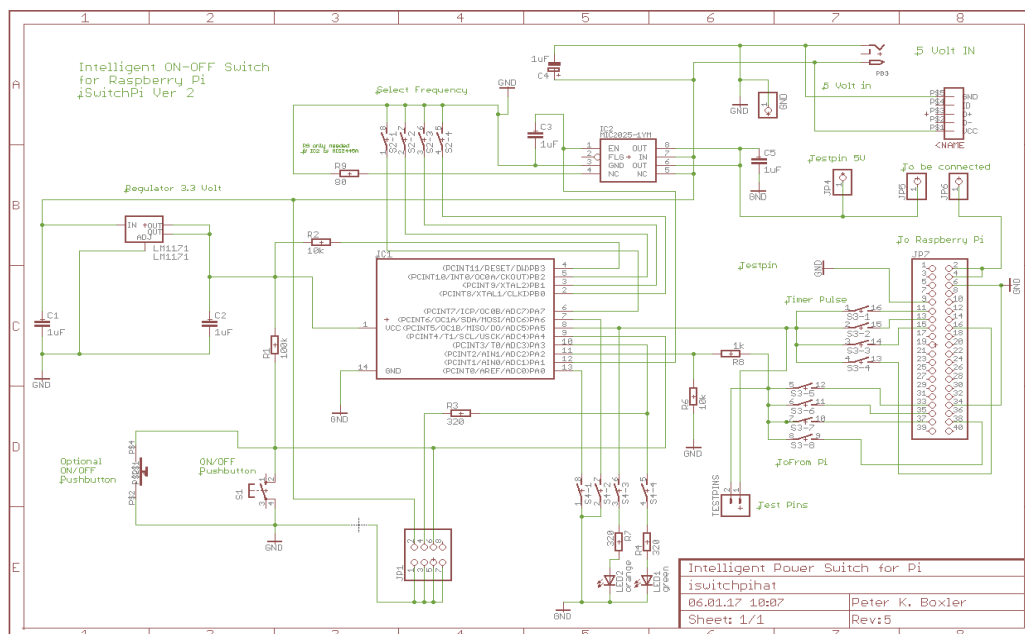

Schema iSwitchPi

## 5.2 Printed Circuit Board




The output of the Eagle PCB program is a board-file. This file is sent to (in my case) to

[Eurocircuits](#)

and this company will fabricate the printed circuit board. The first batch of 10 prototype boards cost about 90 Euros.

Notes on the board:

The Attiny sits in a 14-pol socket. There is no ICSP-Connection on the board and the MCU is plugged from the socket if reprogramming is needed.

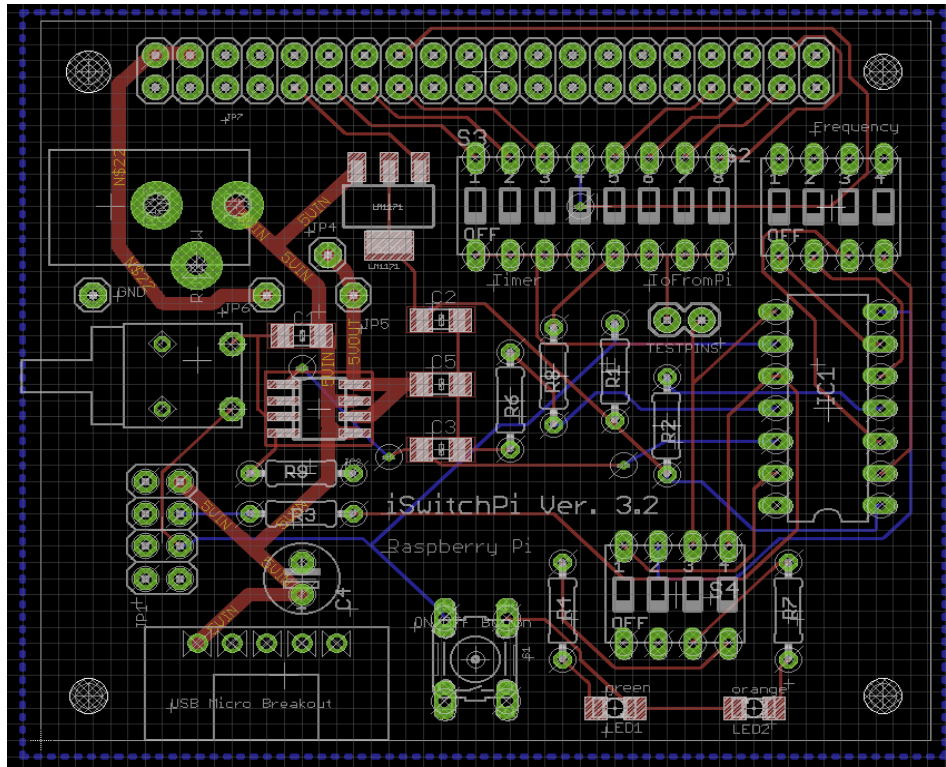

*PCB iSwitchPi*

### 5.3 Puls Generator

In addition to the on-off switching functionality, the iSwitchPi circuit also supplies a variable frequency square wave (Duty Cycle ca. 10%). This can be used to interrupt the Pi for other purposes.

- fixed frequencies selectable with dip-switch 0.2/0.5/1/5/10/50/100/500 Hz

The GPIO-Pin is also selectable with a 4-pos dip-switch. GPIO-Pins 17,22, 23 or 27 are available.

### 5.4 Communication between Pi and Electronic


The Python script described below basically creates a 50ms pulse on the defined GPIO pin every second. These pulses signal to the iSwitchPi: I am still alive. That GPIO-Pin is routed to an input pin on the ATtiny44.

The program in ATtiny44 is always listening on that input, in order to receive these pulses. If no pulses are received, it is assumed that the Pi is no longer running or is in a reboot process. The power-off sequence is then initiated.

If the pushbutton is pressed (short or long for shutdown or reboot, respectively), the Attiny sends pulses to the Pi (on the same line): one pulse means shutdown, two pulses are reboot.

These pulses, however, are sent only after a pulse from the Pi has arrived - only at this point in time it is known that the Pi is listening.

The following scheme will illustrate the communication between Python script and c-program in the ATtiny44.

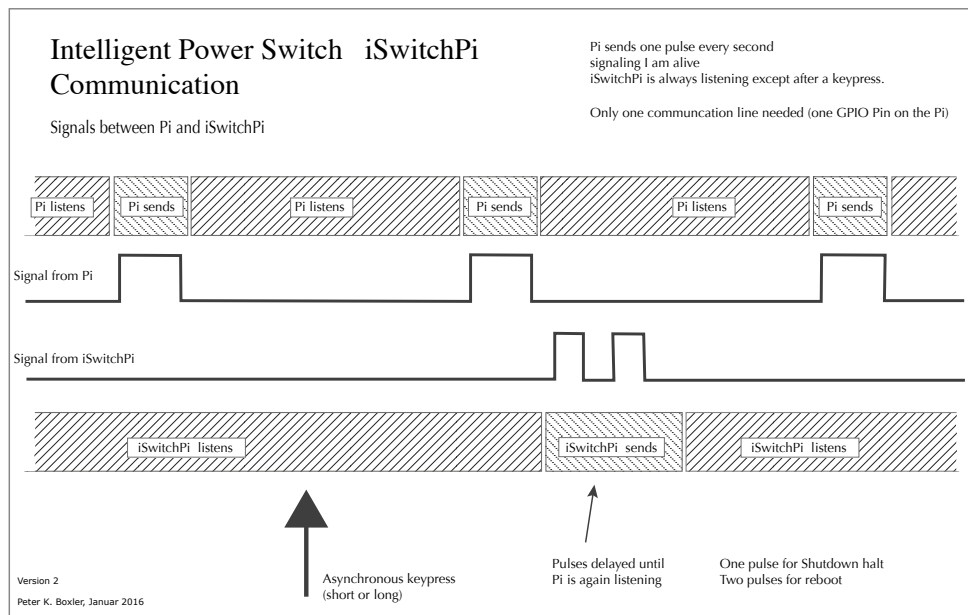

*Communication*

## 5.5 C-Program for ATtiny44

The executable for the Attiny44 is compiled/linked from two C programs:


- Implementation of the Finite State Machine with 7 states (iswitchpi.c)
- Implementation of the puls generator using Timer 1 (square.c)

The use of the I/O pins of the ATtiny is documented in the source code. The C program implements the finite machine with 7 states according to the state table. The push button for triggering the various functions is debounced with C code by Peter Dannegger. His code is published and discussed on Mikrocontroller.net. It works great, but is not easy to understand. I added an additional `key_clear()` function. This makes it easier to synchronize the push-button with the states. The ATtiny44 needs to run at 1 Mhz, the Makefile specifies this clock frequency. So make sure the fuses are set to 62 DF FF (default values).

There are also good tutorials for programming AVR microcontrollers in Mikrocontroller.net.

The code of the C program is available on GitHub

Flashing the executable to the ATtiny44 see further down.

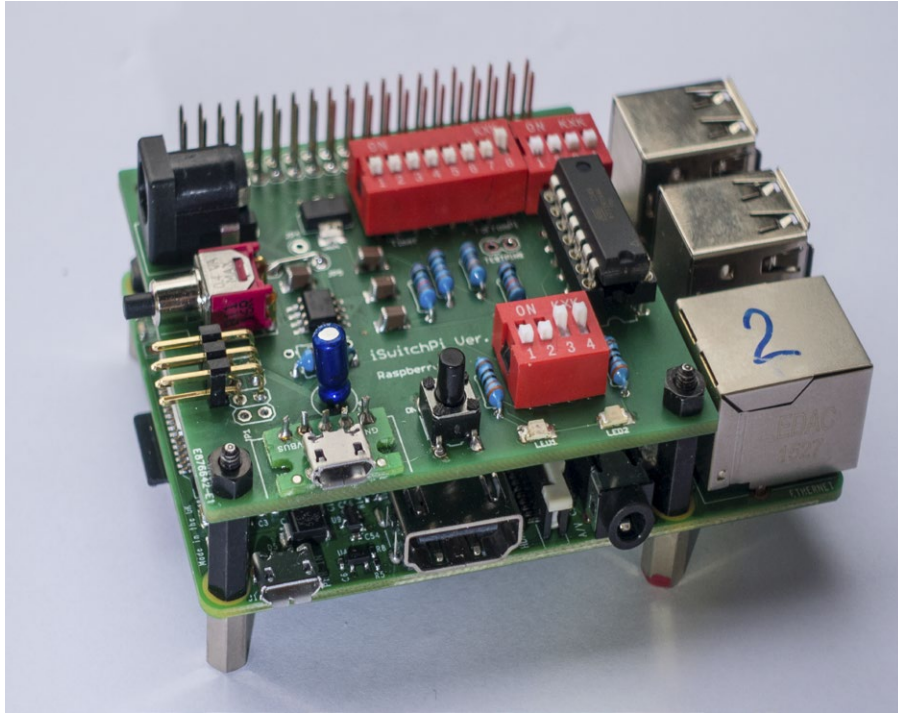

*iSwitchPi stacked on a Pi 2 Modell B*

## 6. Component B: Python Shutdown Script

The electronics communicates with a small Python script that is running in the Pi. That script is started at boot time (Entry in /etc/rc.local).

The clever thing here is that only one GPIO-Pin is used for this 2-way communication. See comm-diagramm for details.

The Python script is started at boot time with the following line added to /etc/rc.local. (replace folder myservices with your own folder within pi home:

```
python /home/pi/myservices/iswitchpi.py [-d N] [-p nn] &
```

Two commandline parms are accepted: -d for debugoptions and -p for selection of GPIO Pin used. Both are optional.

- 0: No debug output (quiet)
- 1: simple debug out, is default value
- 2: Full debug output for testing.

Commandline parm -p specifies the GPIO pin to be used for communication with the iswitchPi board. This must correspond to the Pin selected with the dip-switch on the board!

- no parm -p: by default GPIO-Pin 20 is used.
- Possible values (pins) - p 13 or - p 19 or -p 26 or- p 20

## 7. GPIO Pins used

Only one GPIO pin is required for the basic function of the iSwitchPi (Power On / Off). If you want to use the Pulse function, a second GPIO pin is necessary.

- Communication between the iSwitchPi board and the pythonscript iswitchpy.py in the Pi. The desired pin number is selected on the board using the 4-pol. dip switch, GPIO pins 13, 19, 20 and 26 are available. The pin must also be defined in the Pythonscript. By default, the script uses the pin GPIO 20 (physical pin number 38). A different (above-mentioned pin) can be defined by means of the command line parameter -d. See above.
- If the pulse function of the iSwitchPi board is used, a further GPIO pin is necessary. The desired pin number is selected on the board by means of the 4-pol. pip switch. GPIO pins 17, 22, 23 and 27 are available. Use the same pin in your script that uses the interrupt.

## 8. Install iSwitchPi

Read the **Quick Start Guide to iSwitchPi** (English und German). The document details the installation procedure.


### Note

Install starts with installing the Python script iswitchpi.py in the Raspberry Pi. This script needs to run ok prior to stacking the board onto the Pi. However, without an oscilloscope is it somewhat difficult to see whether the pulses sent from the script reach the correct GPIO pin on the board. For this reason, the board can be put in TestMode by setting dip-switch 4, position 1 to ON. In this mode the board acts as a visualizer to check the pulses. Only if the pulses are verified the board will work ok.

Check out the Quick Start Guide.

## 9. Test Setup

This is the breadboard use to develop iSwitchPi.

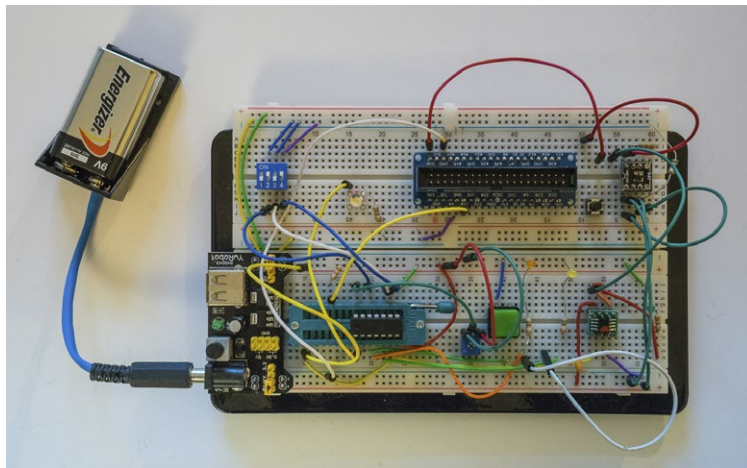

*Test Setup iSwitchPi on a Breadboard (ohne Pi)*

## 10. Programming the ATtiny44

I developed the code for iSwitchPi on a Mac. The toolchain used is

[CrossPack for AVR Development](#) .


This package installs the following components:

- tThe compiler avr-gcc with all the neccesary libraries

- The Commandline-Uploader AVRDUDE

I built a small board with a zero-force socket to flash the MCU. This board connects to the programmer Olimex AVR-ISP-MK2 with itself is connected to the Mac with a USB cable.

Flashing is done with uploader AVRDUDE - the makefile does this with the command make flash.

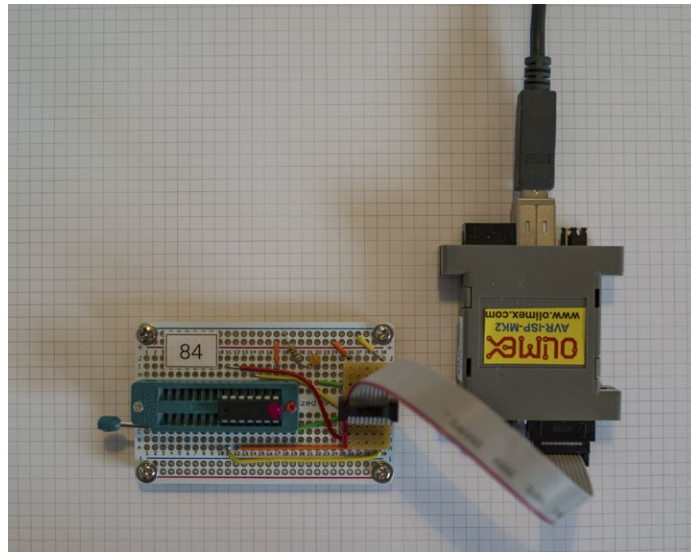

*Programmer für ATtiny44*

#### Note zu CrossPack Version:

On a Mac OSX 10.9 (and higher) one needs to install AVRDUDE Version 5.11.1. Version 6.01 does not work with Olimex ISPMK2. Check out these discussions:

<http://www.avrfreaks.net/forum/olimex-isp-mk2-error-mac-osx-109>


<http://www.avrfreaks.net/comment/1011406#comment-1011406>

That is why I have installed CrossPack-AVR-20121203.

## 11. Components on the PCB



## iSwitchPi Components

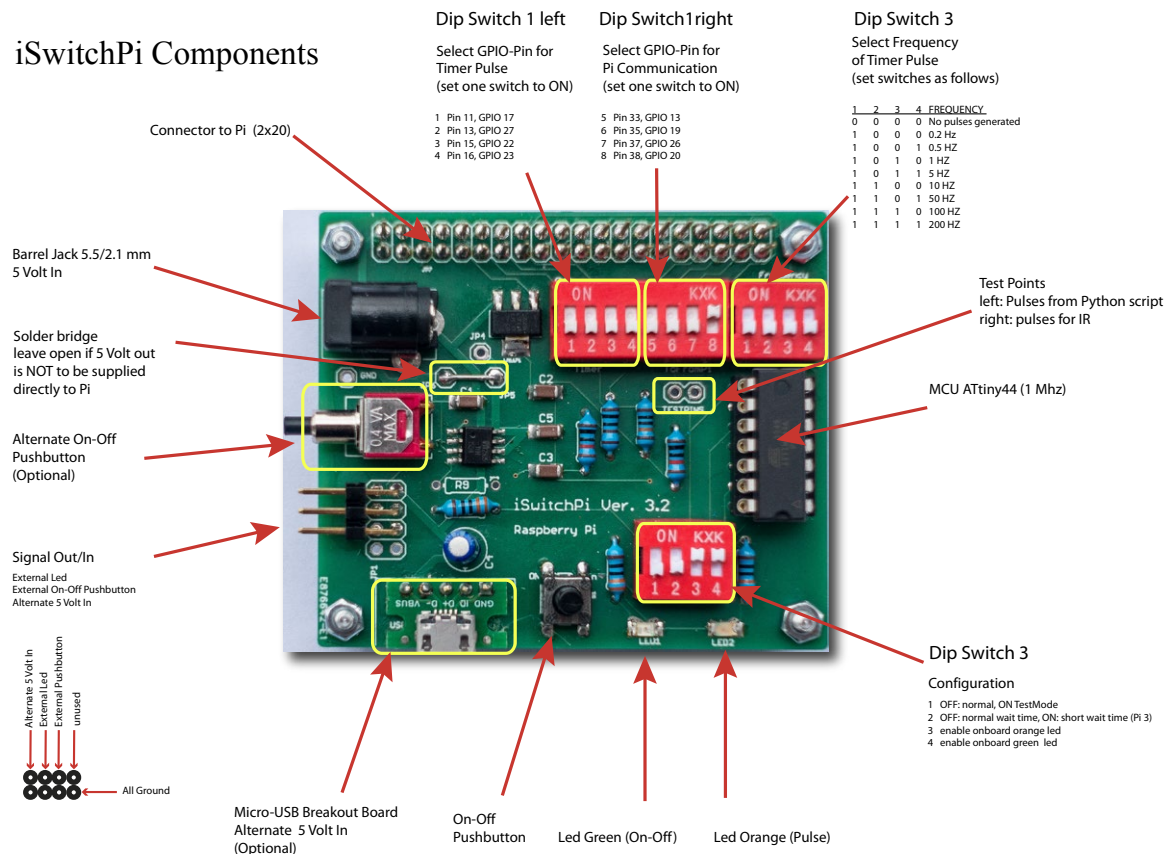

Peter K. Boxler, Dec. 2016

## Komponenten auf den iSwitchPi Board

## 12. Conclusion

The attempt to formulate the problem description by means of a Finite State Machines has cost a lot of effort, but has made the solution much clearer. Writing the C program was relatively simple since state diagram and the state tables define everything. There were no serious logical problems with the program flow during testing.

What again confirms the old truth of sytems engineering; think first, code later.

## 13. Links

[My Raspberry Projects](#)

[Projekt-Website](#)

Source Code iSwitchPi incl. Eagle Files

[GitHub](#)

**Other Links**

Initial State Raspberry Pi GPIO Pins

[Raspberry Foundation](#)

About Finite State Machines

<http://www.mikrocontroller.net/articles/Statemachine>

Tutorials for AVR Mikrocontroller

<http://www.mikrocontroller.net/articles/AVR-Tutorial>

Eagle PCB Design Software

<http://www.cadsoft.de>

The Best Resource on the Web

<https://www.adafruit.com>

In der CH zu empfehlen, führt Adafruit Produkte

<http://www.play-zone.ch>

## 14. Attachments

### 14.1 Example Scripts für iSwitchPi

Folder sources/examples on GitHub contains 2 Python Scripts, one of which shows how the square-wave output of iSwitchPi can be used in a Python script with an interrupt handler.

- Script example-interrupt.py shows, how a led can be blinked using an interrupt-handler. This, of course, can be done without interrupts but having an external source for periodic interrupts make this easy.
- Script example-sighandler.py shows how to gracefully terminate a Python script - eg. after ctrl-c or a kill signal is used. Sometimes one wishes to reset GPIO pins before terminating. This is one way of doing it.

### 14.2 Parts List iSwitchPi

| Part        | Value        | Package  | Note               | Supplier  | PartNumber |
|-------------|--------------|----------|--------------------|-----------|------------|
| Condensator |              |          |                    |           |            |
| C1          | 1uF          | SMD1206  | ceramic            | Any       |            |
| C2          | 1uF          | SMD1206  | ceramic            | Any       |            |
| C3          | 1uF          | SMD1206  | ceramic            | Any       |            |
| C4          | 1uF          | E2,5-6E  |                    | Any       |            |
| C5          | 1uF          | SMD1206  | ceramic            | Any       |            |
| IC          |              |          |                    |           |            |
| IC1         | MCU ATTINY44 | DIL14    | Attiny             |           |            |
| IC2         | MIC2025-1YM  | SO08     | High-Side Switch   |           |            |
| LM117       | LM117IMP-3.3 | SOT223   | 3.3 Volt Regulator | Distrelec | 110-38-693 |
| Led         |              |          |                    |           |            |
| LED1        | green        | SMD 1206 | SMD 1206           |           |            |
| LED2        | orange       | SMD 1206 | SMD 1206           |           |            |
| Resistor    |              |          |                    |           |            |
| R1          | 100k         | 0204/7   |                    | Any       |            |
| R2          | 10k          | 0204/7   |                    | Any       |            |

|   |                 |          |                              |                          |  |
|---|-----------------|----------|------------------------------|--------------------------|--|
| R3  | 320             | 0204/7   |                              | Any                      |  |
| R4  | 320             | 0204/7   |                              | Any                      |  |
| R6  | 10k             | 0204/7   |                              | Any                      |  |
| R7  | 320             | 0204/7   |                              | Any                      |  |
| R8  | 1k              | 0204/7   |                              | Any                      |  |
| R9  | 80              |          |                              |                          | Nur bei MIC2445A                                   |
|   |                 |          |                              |                          |  |
| DIP-Switch                                  |                 |          |                              |                          |  |
| S2  |                 | DIP04S   | Dip 4-Pol                    | Any                      |  |
| S3  |                 | DIP08S   | Dip 8-Pol                    | Any                      |  |
| S4  |                 | DIP04S   | Dip 4-Pol                    | Any                      |  |
|   |                 |          |                              |                          |  |
| Pin Header                                  |                 |          |                              |                          |  |
| J1  |                 | 1X02     | Onboard green<br>Led On/Off  |                          |  |
| J2  |                 | 1X02     | without Pi                   |                          |  |
| JP1   |                 | 2X04     | Input/Output                 |                          |  |
| JP3   |                 | 1X01     | Optional 5 V IN              |                          |  |
| TestPins                                    |                 | 1X02     | TestPins                     |                          |  |
| JP5   |                 | 1X01     | 5 V to Pi, connect<br>to JP6 |                          |  |
| JP6   |                 | 1X01     | 5 V to Pi, connect<br>to JP5 |                          |  |
| JP7   | extra long pins | 2X20-BIG | GPIO Stacking<br>Header      | Adafruit                 | 2223   |
|   |                 |          |                              |                          |  |
| Pushbutton                                  |                 |          |                              |                          |  |
| S1  | 6x6 mm          | B3F-10XX | Pushbutton On/Off            | Adafruit                 | 367/1490/<br>P00000256<br>P00000681                |
|   |                 |          |                              |                          |  |
| Other                                       |                 |          |                              |                          |  |
| IC-Socket 14-pol                            |                 |          | for ATtiny44                 | Any                      |  |
|   |                 |          |                              |                          |  |
| 5 Volt IN                                   |                 |          |                              |                          |  |
| PB3   | 2.1MMJACK       |          | Barrel Jack<br>5.5/2.1 mm    | Adafruit                 | 373  |
| PB4   | ADAUSBMICRO     |          | USB-Micro-Brea-<br>kout      | Adafruit, Play-Zo-<br>ne | 1833/P00001025                                     |
|   |                 |          |                              |                          |  |
| Only if High-Side<br>Switch is<br>MIC 2445A |                 |          |                              |                          |  |
| R8  | 80              | 0204/7   |                              | Any                      |  |
|   |                 |          |                              |                          |  |
| Optional, second<br>Pushbutton On/Off       |                 |          |                              |                          |  |
| PB1   | Button legend   |          | Pushbutton On/Off            | Distrelec                | 135-75-923<br>off-(on) 1P, 6A52-<br>F4H9AE, Eledis |
|   |                 |          |                              |                          |  |
| Montage                                     |                 |          |                              |                          |  |
|   | Standoff        | 4 Pieces | 11mm/2.5mm                   | Adafruit                 | 2336   |
|   |                 |          |                              |                          |  |



## 14.3 Code iSwitchPi

A snippet of the c-code implementing the Finite State Machine:

```
//
// ---- Main Loop. forever -----
// ---- Implements State Machine -----
for(;;)
{
    // _delay_ms(10);                // for testing

    switch (state) {
/*-----*/
/* state 1 Stand-by State, all is off, waiting for short keypress */
/* Power to Pi ist off, led blinks short pulses */
/* Waiting for short keypress */
/*-----*/
        case state1:

            if (first_time & (1<<0))    // first_time time throu ?
            {
                PORTA &= ~(1<<LED1 | 1<<VPOWER); // all outputs off
                key_clear(1<<KEY0 );
                blinkwhat=PULSED_Blink;
                tick2=0;
                blinkon=1;
                pwm_stop();                // stop pulse generation
output on PA5
                pastpulses=0;                // pulse counter reset (pulses from Pi)
                first_time =0xff;            // set first_time all other states
                first_time &= ~(1<<0);        // clear first_time this state
            }
            if (get_key_short(1<<KEY0 )) {    // get debounced keypress
                if (!(PINA & (1<<TESTPIN)) ) // if Testpin is low: signalling TESTMODE
                    state=state7;           // next state is state 7
                else
                    state=state2;            // next state is state 2
            }
            break;

/*-----*/
/* state 2 Tentative Power on, waiting for Pi to come up */
/* Power to Pi ist on, led is blinking fast */
/* Short keypress switches to state 4 (power on without checking */
/* whether Pi is on) */
/*-----*/
        case state2:

            if (first_time & (1<<1)) {        // first_time time throu ?
                PORTA |= (1<<VPOWER);        //switch 5 volt power on
                blinkwhat=REGULAR_Blink;
                blinkint=POWERON_Blink_int;
                tick2=0;                //start timer
                sekunde=0;
                pwm_start();                // start pulse generati-
on output on PA5
                first_time =0xff;            // set first_time all other states
                first_time &= ~(1<<1) ;        // clear first_time this state
            }

            pwm_check();

            if ((blinkwhat>0) && (sekunde > POWERON_Delay_long)) {
                blinkwhat=0;
                state=state1;                // Pi did not come on, so gaback to stand by
            }

            if (get_key_short(1<<KEY0 )) {    // get debounced keypress short
                blinkwhat=0;
                state=state4;
            }

            // how many pi pulses have we received ? if we have Pi is alive
            // so we go to state 3 (normal operation state)
            if (pastpulses > 3) {state=state3;}

            break;

/*-----*/
/* state 3 Power ON Number 1, regular operating state */
/* Power to Pi ist on, led is on */
/*-----*/
    }
```

```

/* Loss of signal from Pi changes state to 5 */
/* Short keypress signals Pi to shut down, changes state to 5 */
/* Long keypress signals Pi to reboot, stays in state 3 */
/*-----*/
case state3:
    if (first_time & (1<<3)) { // first_time time throu ?
        PORTA |= (1<<LED1); // led full on
        blinkwhat=0;
        key_clear( 1<<KEY0 );
        first_time =0xff; // set first_time all other states
        first_time &= ~( 1<<3) ; // clear first_time this state
    }
    pwm_check(); // check various inputs for frequen-
cy of pulse on PA5

    if (get_key_short( 1<<KEY0 )) { // get debounced keypress short
        cli();
        sendnow=1; // set flag so IR handler can send signal
        sei(); // Interrupt enable
        state=state5; // next state 5
        poweroff_delay=POWEROFF_Delay_HALT_long; // Poweroff delay for halt
    }

    if( get_key_long( 1<<KEY0 )) { // get debounced keypress long
        cli();
        sendnow=2; // set flag so IR handler can send signal
        sei(); // Interrupt enable
        state=state5; // next state 5
        // Pi will reboot
        poweroff_delay=POWEROFF_Delay_REBOOT_long; // Poweroff delay for halt
    }

    // check number of pulses from Pi, zero means: Pi is not alive
    if (pastpulses < 2 ) {
        state=state5; // ok, start power off sequence
        poweroff_delay=POWEROFF_Delay_REBOOT_long; // Poweroff delay for halt
    }
    break;

/*-----*/
/* state 4 Power ON Number 2, special operating state */
/* we do not care about pulses from Pi */
/* Power to Pi ist on, led is on */
/* Short keypress signals Pi to shut down, changes state to 5 */
/*-----*/
case state4:
    if (first_time & (1<<4)) { // first_time time throu ?
        PORTA |= (1<<LED1); // led full on
        blinkwhat=0;
        key_clear( 1<<KEY0 ); // ignore keypresses that might have come

        first_time =0xff; // set first_time all other states
        first_time &= ~( 1<<4) ; // clear first_time this state
    }
    pwm_check(); // Pulse generation
    // Check DIP-Switch (PINB0 to PINB2) and Analog Input
on PINA6

    if (get_key_short( 1<<KEY0 )) { // get debounced keypress short
        cli();
        sendtopi(1); // set flag so IR handler can send signal
        sei(); // Interrupt enable
        state=state5;
        _delay_ms(10);
        poweroff_delay=POWEROFF_Delay_REBOOT_long; // Poweroff delay for halt
    }
    break;

/*-----*/
/* state 5 Activate Power off, prepare to shut off */
/* irrelevant of signals from Pi */
/* Power to Pi ist still on, led is blinkng slow */
/* Short keypress changes to state 4 (keep power on regardless */
/* of signal from Pi) */
/* Long keypress switches off immediately (goto state 1) */
/* goto stand by state if timer runs out */
/*-----*/
case state5:
    if (first_time & (1<<5)) { // first_time time throu ?
        blinkwhat=REGULAR_Blink; // set led to blink
        blinkint=POWEROFF_Blink_int;
    }

```

```

        key_clear( 1<<KEY0 );           // ignore keypresses that might have come
        pastpulses=0;
        tick2=0;                         //start timer
        sekunde=0;
        first_time =0xff;                 // set first_time all other states
        first_time &= ~( 1<<5) ;         // clear first_time this state
    }
    pwm_check();                         // Pulse generation
                                        // Check DIP-Switch (PINB0 to PINB2) and Analog Input
on PINA6

    if (get_key_short( 1<<KEY0 )) {     // get debounced keypress short
        state=state3;
    }
    if( get_key_long( 1<<KEY0 )) {      // get debounced keypress long
        state=state1;                   // next state 5
                                        // Pi will reboot
    }

/* removed this - not in state diagram
    // check Signal from Pi, how many pulses have we received
    if (pastpulses > 4) {                // Pi seems to be alive, ok keep power on
        state=state3;
    }
*/

    // wait for POWEROFF_Delay sec before switching off 5 volt supply
    if ((blinkwhat>0) && (sekunde > poweroff_delay)) {
        blinkwhat=0;
        state=state6;                   // next state is state 5
    }

    break;
/*-----*/
/* state 6 Last Chance
/* we are about to switch 5 volt power off
/* but before we do that we check the signal from Pi again :
/* If further pulses came in (Pi rebooted) we keep power on
/* If no more pulses came in we go to state 1
/*-----*/
case state6:
    first_time =0xff;                   // set first_time all other states
    key_clear( 1<<KEY0 );

    // check Signal from Pi
    if (pastpulses > 3) {
        state=state3;
    }
    else state=state1;

    break;

/*-----*/
/* state 7 TESTMODE only
/* Power to Pi is switched on, green led is on
/* Orange Led blinks every 3 seconds IF and only if pulses from Pi
/* are ok received.
/* Short keypress: next state is state1 (off)
/*-----*/
case state7:
    if (first_time & (1<<7)) {          // first_time time throu ?
        PORTA |= (1<<VPOWER);           //switch 5 volt power on
        PORTA |= (1<<LED1);              // led full on
        blinkwhat=0;
        key_clear( 1<<KEY0 );
        tick2=0;                         //start timer
        sekunde=0;
        blink_led();
        first_time =0xff;                 // set first_time all other states
        first_time &= ~( 1<<7) ;         // clear first_time this state
    }
    if (get_key_short( 1<<KEY0 )) {      // get debounced keypress short
        state=state1;
    }

    // check signal from Pi blink orange led when 2 pulses have been received
    if (pastpulses > 2) {
        blink_led();
        pastpulses=0;
    }
}

//---- End of Switch Statement -----

```

Ende des Dokumentes.

Peter K. Boxler, Februar 2016