



Universiteit Gent  
Faculteit Wetenschappen  
Vakgroep Fysica en Sterrenkunde

<sup>2</sup> No title yet

<sup>3</sup> No sub-title neither, obviously...

---

<sup>4</sup> Alexis Fagot

5



Thesis to obtain the degree of  
Doctor of Philosophy in Physics  
Academic years 2012-2017







Universiteit Gent  
Faculteit Wetenschappen  
Vakgroep Fysica en Sterrenkunde


Promotoren: Dr. Michael Tytgat  
Prof. Dr. Dirk Ryckbosch

Universiteit Gent  
Faculteit Wetenschappen  
Vakgroep Fysica en Sterrenkunde  
Proeftuinstraat 86, B-9000 Gent, België  
Tel.: +32 9 264.65.28  
Fax.: +32 9 264.66.97

17



Thesis to obtain the degree of  
Doctor of Philosophy in Physics  
Academic years 2012-2017





## Acknowledgements

<sup>19</sup> Ici on remerciera tous les gens que j'ai pu croiser durant cette aventure et qui m'ont permis de passer  
<sup>20</sup> un bon moment

<sup>21</sup> *Gent, ici la super date de la mort qui tue de la fin d'écriture*  
<sup>22</sup> *Alexis Fagot*



# Table of Contents

23

24	<b>Acknowledgements</b>	i
25	<b>Nederlandse samenvatting</b>	vii
26	<b>English summary</b>	ix
27	<b>1 Introduction</b>	1-1
28	1.1 A story of High Energy Physics . . . . .	1-1
29	1.2 Organisation of this study . . . . .	1-1
30	<b>2 Investigating the TeV scale</b>	2-1
31	2.1 The Standard Model of Particle Physics . . . . .	2-2
32	2.1.1 A history of particle physics . . . . .	2-2
33	2.1.2 Construction and test of the model . . . . .	2-11
34	2.1.3 Investigating the TeV scale . . . . .	2-12
35	2.2 The Large Hadron Collider & the Compact Muon Solenoid . . . . .	2-14
36	2.2.1 LHC, the most powerful particle accelerator . . . . .	2-14
37	2.2.1.1 Particle acceleration . . . . .	2-15
38	2.2.2 CMS, a multipurpose experiment . . . . .	2-18
39	2.2.2.1 The silicon tracker, core of CMS . . . . .	2-20
40	2.2.2.2 The calorimeters, measurement of particle's energy . . . . .	2-20
41	2.2.2.3 The muon system, corner stone of CMS . . . . .	2-22
42	<b>3 Muon Phase-II Upgrade</b>	3-1
43	3.1 High Luminosity LHC and muon system requirements . . . . .	3-2
44	3.2 Necessity for improved electronics . . . . .	3-5
45	3.3 New detectors and increased acceptance . . . . .	3-8
46	3.4 Implications of the different upgrades on the Level-1 Trigger. Improvement of physics performance. . . . .	3-8
48	<b>4 Physics of Resistive plate chambers</b>	4-1
49	4.1 Principle . . . . .	4-1
50	4.1.1 Electron drift velocity . . . . .	4-4
51	4.2 Rate capability and time resolution of Resistive Plate Chambers . . . . .	4-4
52	4.2.1 Operation modes . . . . .	4-4
53	4.2.2 Detector designs and performance . . . . .	4-6
54	4.2.2.1 Double-gap RPC . . . . .	4-7
55	4.2.2.2 Multigap RPC (MRPC) . . . . .	4-8
56	4.2.2.3 Charge distribution and performance limitations . . . . .	4-9
57	4.3 Signal formation . . . . .	4-12
58	4.4 Gas transport parameters . . . . .	4-12

---

<b>5 Longevity studies and Consolidation of the present CMS RPC subsystem</b>	<b>5-1</b>
5.1 Resistive Plate Chambers at CMS . . . . .	5-1
5.1.1 Overview . . . . .	5-1
5.1.2 The present RPC system . . . . .	5-2
5.1.3 Pulse processing of CMS RPCs . . . . .	5-3
5.2 Testing detectors under extreme conditions . . . . .	5-4
5.2.1 The Gamma Irradiation Facilities . . . . .	5-7
5.2.1.1 GIF . . . . .	5-7
5.2.1.2 GIF++ . . . . .	5-9
5.3 Preliminary tests at GIF . . . . .	5-11
5.3.1 Resistive Plate Chamber test setup . . . . .	5-11
5.3.2 Data Acquisition . . . . .	5-13
5.3.3 Geometrical acceptance of the setup layout to cosmic muons . . . . .	5-13
5.3.3.1 Description of the simulation layout . . . . .	5-14
5.3.3.2 Simulation procedure . . . . .	5-16
5.3.3.3 Results . . . . .	5-17
5.3.4 Photon flux at GIF . . . . .	5-17
5.3.4.1 Expectations from simulations . . . . .	5-17
5.3.4.2 Dose measurements . . . . .	5-22
5.3.5 Results and discussions . . . . .	5-23
5.4 Longevity tests at GIF++ . . . . .	5-24
5.4.1 Description of the Data Acquisition . . . . .	5-27
5.4.2 RPC current, environmental and operation parameter monitoring . . . . .	5-28
5.4.3 Measurement procedure . . . . .	5-29
5.4.4 Longevity studies results . . . . .	5-29
<b>6 Investigation on high rate RPCs</b>	<b>6-1</b>
6.1 Rate limitations and ageing of RPCs . . . . .	6-1
6.1.1 Low resistivity electrodes . . . . .	6-1
6.1.2 Low noise front-end electronics . . . . .	6-1
6.2 Construction of prototypes . . . . .	6-1
6.3 Results and discussions . . . . .	6-1
<b>7 Conclusions and outlooks</b>	<b>7-1</b>
7.1 Conclusions . . . . .	7-1
7.2 Outlooks . . . . .	7-1
<b>A A data acquisition software for CAEN VME TDCs</b>	<b>A-1</b>
A.1 GIF++ DAQ file tree . . . . .	A-1
A.2 Usage of the DAQ . . . . .	A-2
A.3 Description of the readout setup . . . . .	A-3
A.4 Data read-out . . . . .	A-3
A.4.1 V1190A TDCs . . . . .	A-4
A.4.2 DataReader . . . . .	A-6
A.4.3 Data quality flag . . . . .	A-10
A.5 Communications . . . . .	A-12
A.5.1 V1718 USB Bridge . . . . .	A-13
A.5.2 Configuration file . . . . .	A-13
A.5.3 WebDCS/DAQ intercommunication . . . . .	A-17
A.5.4 Example of inter-process communication cycle . . . . .	A-18

---

106	A.6 Software export . . . . .	A-18
107	<b>B Details on the offline analysis package</b>	<b>B-1</b>
108	B.1 GIF++ Offline Analysis file tree . . . . .	B-1
109	B.2 Usage of the Offline Analysis . . . . .	B-2
110	B.2.1 Output of the offline tool . . . . .	B-3
111	B.2.1.1 ROOT file . . . . .	B-3
112	B.2.1.2 CSV files . . . . .	B-5
113	B.3 Analysis inputs and information handling . . . . .	B-6
114	B.3.1 Dimensions file and IniFile parser . . . . .	B-6
115	B.3.2 TDC to RPC link file and Mapping . . . . .	B-7
116	B.4 Description of GIF++ setup within the Offline Analysis tool . . . . .	B-9
117	B.4.1 RPC objects . . . . .	B-9
118	B.4.2 Trolley objects . . . . .	B-10
119	B.4.3 Infrastructure object . . . . .	B-11
120	B.5 Handeling of data . . . . .	B-12
121	B.5.1 RPC hits . . . . .	B-13
122	B.5.2 Clusters of hits . . . . .	B-14
123	B.6 DAQ data Analysis . . . . .	B-15
124	B.6.1 Determination of the run type . . . . .	B-16
125	B.6.2 Beam time window calculation for efficiency runs . . . . .	B-17
126	B.6.3 Data loop and histogram filling . . . . .	B-18
127	B.6.4 Results calculation . . . . .	B-19
128	B.6.4.1 Rate normalisation . . . . .	B-19
129	B.6.4.2 Rate and activity . . . . .	B-21
130	B.6.4.3 Strip masking tool . . . . .	B-23
131	B.6.4.4 Output CSV files filling . . . . .	B-25
132	B.7 Current data Analysis . . . . .	B-29



## Nederlandse samenvatting –Summary in Dutch–

<sup>133</sup>

<sup>134</sup>

<sup>135</sup> Le resume en Neerlandais (j'aurais peut-être pu apprendre la langue juste pour ça...).



## English summary

<sup>137</sup> Le meme résume mais en Anglais (on commencera par la hein!).



# List of Figures

138

139	2.1	Through the gold foil experiment Rutherford could show that most of the mass of atoms was contained in a positively charged nucleus and could then propose a more accurate atomic model than that of Thomson. . . . .	2-3
140	2.2	Figure 2.2a: Meson octet. Figure 2.2b: Baryon octet. Figure 2.2c: Baryon decuplet. .	2-8
141	2.3	The elementary particles of the Standard Model are showed along with their names and properties. Their interactions with the strong, weak and electromagnetic forces have been explicated using color squares. In the left column, the scalar higgs boson is depicted, while the central is focused on the matter particles, the fermions, and the right on the force carriers, the gauge bosons. The role of the Higgs boson in electroweak symmetry breaking is highlighted, and the corresponding way properties of the various particles differ in the (high-energy) symmetric phase (top) and the (low-energy) broken-symmetry phase (bottom) are showed. . . . .	2-11
142	2.4	CERN accelerator complex. . . . .	2-15
143	2.5	Pictures of the different accelerators. From top to bottom: first the LINAC 2 and the <i>Pb</i> source of LINAC 3. Then the Booster and the LEIR. Finally, the PS, the SPS and the LHC. . . . .	2-16
144	2.6	Figure 2.6a: schematics of the LHC cryodipoles. 1: Superconducting Coils, 2: Beam pipe, 3: Heat exchanger Pipe, 4: Helium-II Vessel, 5: Superconducting Bus-bar, 6: Iron Yoke, 7: Non-Magnetic Collars, 8: Vacuum Vessel, 9: Radiation Screen, 10: Thermal Shield, 11: Auxiliary Bus-bar Tube, 12: Instrumentation Feed Throughs, 13: Protection Diode, 14: Quadrupole Bus-bars, 15: Spool Piece Bus-bars. Figure 2.6b: magnetic field and resulting motion force applied on the beam particles. . .	2-17
145	2.7	Figure 2.7a: picture of the LHC quadrupoles. Figure 2.7b: magnetic fields and resulting focussing force applied on the beam by 2 consecutive quadrupoles. . . . .	2-18
146	2.8	Picture of the CMS barrel. The red outer layer is the muon system hosted into the red iron return yokes. The calorimeters are the blue cylinder inside in magnet solenoid and the tracker is the inner yellow cylinder built around the beam pipe. . . . .	2-19
147	2.9	View of the CMS apparatus and of its different components. . . . .	2-19
148	2.10	Slice showing CMS sub-detectors and how particles interact with them. . . . .	2-20
149	2.11	CMS tracker. . . . .	2-20
150	2.12	Figure 2.12a: picture of the ECAL. Figure 2.12b: picture of the lead tungstate crystals composing the ECAL. . . . .	2-21
151	2.13	CMS hadron calorimeter barrel. . . . .	2-21
152	2.14	A quadrant of the muon system, showing DTs (yellow), RPCs (blue), and CSCs (green). . . . .	2-22
153	2.15	Figure 2.15a: Barrel wheel with its detector rings and return yokes. Figure 2.15b: CSC endcap disk with the 2 CSC stations. The outer station is made of 10 deg detectors while the inner station is made of 20 deg detectors. Figure 2.15c: RPC endcap disk. The inner station is not equipped and the inner CSC station can be seen.	2-23
154			
155			
156			
157			
158			
159			
160			
161			
162			
163			
164			
165			
166			
167			
168			
169			
170			
171			
172			
173			
174			
175			
176			
177			

178	2.16	Figure 2.16a: Cross section of a DT module showing the two superlayers measuring the $\phi$ coordinate, perpendicular to the cross section plane, and the superlayer measuring the $\eta$ coordinate, placed in between the two others with honeycomb and parallel to the cross section plane. The DT detector is sandwiched in between 2 RPCs whose readout strips are perpendicular to the cross section plane, measuring the $\phi$ coordinate. Figure 2.16b: A DT cell is shown together with its electric field. The path of a muon through a superlayer is shown. . . . .	2-23
185	2.17	Figure 2.17a: cathode strips and anode wire layout of a CSC panel. Figure 2.17b avalanche development and charge collection by anode wires and induction on cathode strips inside of a CSC panel. . . . .	2-24
188	2.18	Muon track reconstruction through the 6 panels of a CMS CSC using the information of anode wire groups and cathode strip charge distribution combined with comparator bits to decide on which half strip the muon is more likely to have passed. . . . .	2-24
191	2.19	Double gap layout of CMS RPCs. Muons passing through the gas volumes will create electron-ions pairs by ionising the gas. this ionisation will immediately translate into a developing avalanche. . . . .	2-25
194	3.1	Detailed timeline projection of for LHC and HL-LHC operation until 2039 showing the evolution of the instantaneous and integrated luminosity as designed (Figure 3.1a) and in the ultimate case where the instantaneous luminosity is increased to $7.5 \times 10^{34} \text{ cm}^{-2}\text{s}^{-1}$ (Figure 3.1b) [20, 22]. . . . .	3-2
198	3.2	Absorbed dose in the CMS cavern after an integrated luminosity of 3000 fb. Using the interaction point as reference, R is the transverse distance from the beamline and Z is the distance along the beamline. . . . .	3-3
201	3.3	A quadrant of the muon system, showing DTs (yellow), RPCs (blue), and CSCs (green). The locations of new forward muon detectors for Phase-II are contained within the dashed box and indicated in red for GEM stations (ME0, GE1/1, and GE2/1) and dark blue for improved RPC (iRPC) stations (RE3/1 and RE4/1). . . . .	3-4
205	3.4	Figure 3.4a: Extrapolated fraction of failing channels of the present DT MiC1 electronics as a function of the integrated luminosity for different scenari until LS4. Figure 3.4b: Comparison of the current (left) and upgraded (right) DT data processing. So far, the data is sent to service cavern of CMS facility via copper-to-optical-fiber translators (CuOF) by each MiC1. There, data including RPCs and outer hadron calorimeter is combined into trigger primitives (TPG) and transmitted by the Twin-Mux system to CMS Track Finder. The time-to-digital converter (TDC) data is collected and sent to the CMS data acquisition system (DAQ) by the micro read-out server ( $\mu$ ROS). After the upgrade, the TDC data will be sent via optical links to a patch panel inside the experimental cavern by each MiC2, and transferred to the back-end, where triggering and event building will be performed. . . . .	3-6
216	3.5	Figure 3.5a: The event loss fractions as a function of the instantaneous luminosity is compared for CFEBs (Phase-1) and DCFEBs (Phase-II) at different CSC locations. HL-LHC luminosity is marked with the dashed brown line. Figure 3.5b: Comparison of the current (left) and upgraded (right) CSC data processing. A part of the connections in between ALCTs and DCFEBs, and the trigger mother boards (TMBs) and data acquisition mother boards (DMBs) will be upgraded toward optical data transfer. The detector dependent units (DDUs) used as interface in between CSCs' front-end electronics and the CMS DAQ will be replaced by new FED boards. . . . .	3-7
224	3.6	RMS of the multiple scattering displacement as a function of muon $p_T$ for the proposed forward muon stations. All of the electromagnetic processes such as bremsstrahlung and magnetic field effect are included in the simulation. . . . .	3-8

227	4.1	Different phases of the avalanche development in the RPC gas volume subjected to a constant electric field $E_0$ . a) An avalanche is initiated by the primary ionisation caused by the passage of a charged particle through the gas volume. b) Due to its growing size, the avalanche starts to locally influence the electric field. c) The electrons, lighter than the cations reach the anode first. d) The ions reach the cathode. While the charges have not recombined, the electric field in the small region around the avalanche stays affected and locally blind the detector. . . . .	4-2
234	4.2	Effeciency (circles and stars with 30 mV and 100 mV thresholds respectively) and streamer probability (opened circles) as function of the operating voltatge of a 2 mm single gap HPL RPC flushed with a gas mixture containing (a) 5%, (b) 2%, (c) 1% and (d) no $SF_6$ [36]. . . . .	4-3
238	4.3	Movement of the charge carriers in an RPC. Figure 4.3a: Voltage across an RPC whose electrode have a relative permittivity of 5 at the moment the tension s applied. Figure 4.3b: After the charge carriers moved, the electrodes are charged and there is no voltage drop over the electrodes anymore. The full potential is applied on the gas gap only. Figure 4.3c: The streamer discharge initiated by a charged particle transports electrons and cations towards the anode and cathode respectively. . . . .	4-5
244	4.4	Typical oscilloscope pulses in streamer mode (Figure 4.4a) and avalanche mode(Figure 4.4b). In the case of streamer mode, the very small avalanche signal is visible. . . . .	4-5
246	4.5	Rate capability comparison for the streamer and avalanche mode of operation. An order of magnitude in rate capability for a maximal efficiency drop of 10% is gained by using the avalanche mode over the streamer mode. . . . .	4-6
249	4.6	Possible double-gap RPC layouts: a) "standard" 1D double-gap RPC, as used in CMS experiment, where the anodes are facing each other and a 1D read-out plane is sandwiched in between them, b) double read-out double-gap RPC as used in AT-LAS experiment, where the cathodes are facing each other and 2 read-out planes are used on the outer surfaces. This last layout can offer the possibility to use a 2D reconstruction by using orthogonal read-out planes. . . . .	4-7
255	4.7	Comparison of performance of CMS double and single gap RPCs using cosmic muons [47]. Figure 4.7a: Comparison of efficiency sigmoids. Figure 4.7b: Voltage distribution at 95% of maximum efficiency. Figure 4.7c: $\Delta_{10\%}^{90\%}$ distribution. . . . .	4-7
258	4.8	Presentation of ALICE MRPC using 250 $\mu m$ gas gaps, 620 $\mu m$ outer glass electrodes and 550 $\mu m$ inner floating electrodes. More details on the labels are given in [48]. . . . .	4-8
261	4.9	Particle identification applied to electrons in the STAR experiment. The identifica- tion is performed combining ToF and $dE/dx$ measurements [53]. . . . .	4-9
262	4.10	Comparison of the detector performance of ALICE ToF MRPC [54] at fixed applied voltage (in blue) and at fixed effective voltage (in red). The effective voltage is kept fixed by increasing the applied voltage accordingly to the current drawn by the detector.	4-9
265	4.11	Ratio between total induced and drifting charge have been simulated for single gap, double-gap and multigap layouts [55]. The total induced charge for a double-gap RPC is a factor 2 higher than for a multigap. . . . .	4-10
268	4.12	Charge spectra have been simulated for single gap, double-gap and multigap lay- outs [55]. It appears that when single gap shows a decreasing spectrum, double and multigap layouts exhibit a spectrum whose peak is detached from the origin. The detachment gets stronger as the number of gaps increases. . . . .	4-11
272	4.13	The maximal theoretical efficiency is simulated for single gap, double-gap and multi- gap layouts [55] at a constant gap thickness of 2 mm and using an effective Townsend coefficient of $9 \text{ mm}^{-1}$ . . . . .	4-11

275	5.1	Signals from the RPC strips are shaped by the FEE described on Figure 5.1a. Output LVDS signals are then read-out by a TDC module connected to a computer or converted into NIM and sent to scalers. Figure 5.1b describes how these converted signals are put in coincidence with the trigger. . . . .	5-3
279	5.2	Description of the principle of a CFD. A comparison of threshold triggering (left) and constant fraction triggering (right) is shown in Figure 5.2a. Constant fraction triggering is obtained thanks to zero-crossing technique as explained in Figure 5.2b. The signal arriving at the input of the CFD is split into three components. A first one is delayed and connected to the inverting input of a first comparator. A second component is connected to the noninverting input of this first comparator. A third component is connected to the noninverting input of another comparator along with a threshold value connected to the inverting input. Finally, the output of both comparators is fed through an AND gate. . . . .	5-4
288	5.3	(5.3a) Extrapolation from 2016 data of single hit rate per unit area in the barrel region. (5.3b) Extrapolation from 2016 data of single hit rate per unit area in the endcap region. . . . .	5-6
291	5.4	Background Fluka simulation compared to 2016 Data at $L = 10^{34} \text{ cm}^{-2} \cdot \text{s}^{-1}$ in the fourth endcap disk region. A mismatch in between simulation and data can be observed. [To be understood.] . . . . .	5-7
294	5.5	Layout of the test beam zone called X5c GIF at CERN. Photons from the radioactive source produce a sustained high rate of random hits over the whole area. The zone is surrounded by 8 m high and 80 cm thick concrete walls. Access is possible through three entry points. Two access doors for personnel and one large gate for material. A crane allows installation of heavy equipment in the area. . . . .	5-8
299	5.6	$^{137}\text{Cs}$ decays by $\beta^-$ emission to the ground state of $^{137}\text{Ba}$ (BR = 5.64%) and via the 662 keV isomeric level of $^{137}\text{Ba}$ (BR = 94.36%) whose half-life is 2.55 min. . . . .	5-9
301	5.7	Floor plan of the GIF++ facility. When the facility downstream of the GIF++ takes electron beam, a beam pipe is installed along the beam line (z-axis). The irradiator can be displaced laterally (its center moves from $x = 0.65$ m to 2.15 m), to increase the distance to the beam pipe. . . . .	5-9
305	5.8	Simulated unattenuated current of photons in the xz plane (Figure 5.8a) and yz plane (Figure 5.8b) through the source at $x = 0.65$ m and $y = 0$ m. With angular correction filters, the current of 662 keV photons is made uniform in xy planes. . . . .	5-10
308	5.9	Description of the RPC setup. Dimensions are given in mm. A tent containing RPCs is placed at 1720 mm from the source container. The source is situated in the center of the container. RE-4-2-BARC-161 chamber is 160 mm inside the tent. This way, the distance between the source and the chambers plan is 2060 mm. Figure 5.9a provides a side view of the setup in the xz plane while Figure 5.9b shows a top view in the yz plane. . . . .	5-11
314	5.10	RE-4-2-BARC-161 chamber is inside the tent as described in Figure 5.9. In the top right, the two scintillators used as trigger can be seen. This trigger system has an inclination of 10° relative to horizontal and is placed above half-partition B2 of the RPCs. PMT electronics are shielded thanks to lead blocks placed in order to protect them without stopping photons from going through the scintillators and the chamber. . . . .	5-12

319	5.11 Hit distributions over all 3 partitions of RE-4-2-BARC-161 chamber is showed on these plots. Top, middle and bottom figures respectively correspond to partitions A, B, and C. These plots show that some events still occur in other half-partitions than B2, which corresponds to strips 49 to 64, in front of which the trigger is placed, contributing to the inefficiency of detection of cosmic muons. In the case of partitions A and C, the very low amount of data can be interpreted as noise. On the other hand, it is clear that a little portion of muons reach the half-partition B1, corresponding to strips 33 to 48. . . . .	5-13
320		
321		
322		
323		
324		
325		
326		
327	5.12 Results are derived from data taken on half-partition B2 only. On the 18 <sup>th</sup> of June 2014, data has been taken on chamber RE-2-BARC-161 at building 904 (Prevessin Site) with cosmic muons providing us a reference efficiency plateau of $(97.54 \pm 0.15)\%$ represented by a black curve. A similar measurement has been done at GIF on the 21 <sup>st</sup> of July with the same chamber giving a plateau of $(78.52 \pm 0.94)\%$ represented by a red curve. . . . .	5-14
328		
329		
330		
331		
332		
333	5.13 Representation of the layout used for the simulations of the test setup. The RPC is represented as a yellow trapezoid while the two scintillators as blue cuboids looking at the sky. A green plane corresponds to the muon generation plane within the simulation. Figure 5.9a shows a global view of the simulated setup. Figure 5.9b shows a zommed view that allows to see the 2 scintillators as well as the full RPC plane. . . . .	5-15
334		
335		
336		
337		
338	5.14 $\gamma$ flux $F(D)$ is plot using values from table 5.1. As expected, the plot shows similar attenuation behaviours with increasing distance for each absorption factors. . . . .	5-18
339		
340	5.15 Figure 5.15a shows the linear approximation fit done via formulae 5.7 on data from table 5.2. Figure 5.15b shows a comparison of this model with the simulated flux using a and b given in figure 5.15a in formulae 5.4 and the reference value $D_0 = 50\text{cm}$ and the associated flux for each absorption factor $F_0^{ABS}$ from table 5.1 . . . . .	5-20
341		
342		
343		
344	5.16 Dose measurements has been done in a plane corresponding to the tents front side. This plan is 1900 mm away from the source. As explained in the first chapter, a lens-shaped lead filter provides a uniform photon flux in the vertical plan orthogonal to the beam direction. If the second line of measured fluxes is not taken into account because of lower values due to experimental equipments in the way between the source and the tent, the uniformity of the flux is well showed by the results. . . . .	5-22
345		
346		
347		
348		
349		
350	5.17 . . . . .	5-23
351	5.18 Evolution of the maximum efficiency for RE2 (5.18a) and RE4 (5.18b) chambers with increasing extrapolated $\gamma$ rate per unit area at working point. Both irradiated (blue) and non irradiated (red) chambers are shown. . . . .	5-25
352		
353		
354	5.19 Evolution of the working point for RE2 (5.19a) and RE4 (5.19b) with increasing extrapolated $\gamma$ rate per unit area at working point. Both irradiated (blue) and non irradiated (red) chambers are shown. . . . .	5-25
355		
356		
357	5.20 Evolution of the maximum efficiency at HL-LHC conditions, i.e. a background hit rate per unit area of $300\text{Hz}/\text{cm}^2$ , with increasing integrated charge for RE2 (5.20a) and RE4 (5.20b) detectors. Both irradiated (blue) and non irradiated (red) chambers are shown. The integrated charge for non irradiated detectors is recorded during test beam periods and stays small with respect to the charge accumulated in irradiated chambers. . . . .	5-26
358		
359		
360		
361		
362		
363	5.21 Comparison of the efficiency sigmoid before (triangles) and after (circles) irradiation for RE2 (5.21a) and RE4 (5.21b) detectors. Both irradiated (blue) and non irradiated (red) chambers are shown. . . . .	5-26
364		
365		
366	5.22 Evolution of the Bakelite resistivity for RE2 (5.22a) and RE4 (5.22b) detectors. Both irradiated (blue) and non irradiated (red) chambers are shown. . . . .	5-27
367		

368	5.23 Evolution of the noise rate per unit area for the irradiated chamber RE2-2-BARC-9 only. . . . .	5-27
370	A.1 (A.1a) View of the front panel of a V1190A TDC module [61]. (A.1b) View of the 371 front panel of a V1718 Bridge module [62]. (A.1c) View of the front panel of a 6U 372 6021 VME crate [63]. . . . .	A-3
373	A.2 Module V1190A <i>Trigger Matching Mode</i> timing diagram [61]. . . . .	A-4
374	A.3 Structure of the ROOT output file generated by the DAQ. The 5 branches ( <code>EventNumber</code> , 375 <code>number_of_hits</code> , <code>Quality_flag</code> , <code>TDC_channel</code> and <code>TDC_TimeStamp</code> ) are visible on 376 the left panel of the ROOT browser. On the right panel is visible the histogram cor- 377 responding to the variable <code>nHits</code> . In this specific example, there were approximately 378 50k events recorded to measure the gamma irradiation rate on the detectors. Each 379 event is stored as a single entry in the <code>TTree</code> . . . . .	A-10
380	A.4 The effect of the quality flag is explained by presenting the content of <code>TBranch</code> 381 <code>number_of_hits</code> of a data file without <code>Quality_flag</code> in Figure A.4a and the con- 382 tent of the same <code>TBranch</code> for data corresponding to a <code>Quality_flag</code> where all TDCs 383 were labelled as <code>GOOD</code> in Figure A.4b taken with similar conditions. It can be noted 384 that the number of entries in Figure A.4b is slightly lower then in Figure A.4a due 385 to the excluded events. . . . .	A-12
386	A.5 Using the same data as previously showed in Figure A.4, the effect of the quality 387 flag is explained by presenting the reconstructed hit multiplicity of a data file with- 388 out <code>Quality_flag</code> in Figure A.5a and the reconstructed content of the same RPC 389 partition for data corresponding to a <code>Quality_flag</code> where all TDCs were labelled as 390 <code>GOOD</code> in Figure A.5b taken with similar conditions. The artificial high content of bin 391 0 is completely suppressed. . . . .	A-12
392	A.6 WebDCS DAQ scan page. On this page, shifters need to choose the type of scan 393 (Rate, Efficiency or Noise Reference scan), the gamma source configuration at the 394 moment of data taking, the beam configuration, and the trigger mode. These in- 395 formation will be stored in the DAQ ROOT output. Are also given the minimal 396 measurement time and waiting time after ramping up of the detectors is over before 397 starting the data acquisition. Then, the list of HV points to scan and the number of 398 triggers for each run of the scan are given in the table underneath. . . . .	A-14
399	B.1 Example of expected hit time distributions in the cases of efficiency (Figure B.1a) 400 and noise/gamma rate per unit area (Figure B.1b) measurements as extracted from 401 the raw ROOT files. The unit along the x-axis corresponds to ns. The fact that 402 "the" muon peak is not well defined in Figure B.1a is due to the contribution of all 403 the RPCs being tested at the same time that don't necessarily have the same signal 404 arrival time. Each individual peak can have an offset with the ones of other detectors. 405 The inconsistancy in the first 100 ns of both time distributions is an artefact of the 406 TDCs and are systematically rejected during the analysis. . . . .	B-16
407	B.2 The effect of the quality flag is explained by presenting the reconstructed hit multi- 408 plicity of a data file without <code>Quality_flag</code> . The artificial high content of bin 0 is the 409 effect of corrupted data. . . . .	B-19





# List of Tables

418

419	4.1	Properties of the most used electrode materials for RPCs. . . . .	4-4
420	5.1	Total photon flux ( $E\gamma \leq 662$ keV) with statistical error predicted considering a $^{137}\text{Cs}$ activity of 740 GBq at different values of the distance $D$ to the source along the x-axis of irradiation field [58]. . . . .	5-17
421	5.2	Correction factor $c$ is computed thanks to formulae 5.5 taking as reference $D_0 = 50$ cm and the associated flux $F_0^{ABS}$ for each absorption factor available in table 5.1.	5-19
422	5.3	The data at $D_0$ in 1997 is taken from [58]. In a second step, using Equations 5.8 and 5.9, the flux at $D$ can be estimated in 1997. Then, taking into account the attenuation of the source activity, the flux at $D$ can be estimated at the time of the tests in GIF in 2014. Finally, assuming a sensitivity of the RPC to $\gamma$ $s = 2 \cdot 10^{-3}$ , an estimation of the hit rate per unit area is obtained. . . . .	5-21
423	A.1	Inter-process communication cycles in between the webDCS and the DAQ through file string signals. . . . .	A-19
424			
425			
426			
427			
428			
429			
430			
431			



432

## List of Acronyms

433

### List of Acronyms

434

435

#### A

436

437

438

439

AFL Almost Full Level  
ALCTs anode local charged track boards

440

441

#### B

442

443

444

445

446

447

BARC Bhabha Atomic Research Centre  
BLT Block Transfer  
BNL Brookhaven National Laboratory  
BR Branching Ratio

448

449

#### C

450

452

453

454

455

456

457

458

459

CAEN Costruzioni Apparecchiature Elettroniche Nucleari S.p.A.  
CERN European Organization for Nuclear Research  
CFD Constant Fraction Discriminator  
CFEBs cathode front-end boards  
CMB Cosmic Microwave Background  
CMS Compact Muon Solenoid  
CSC Cathode Strip Chamber  
CuOF copper-to-optical-fiber translators

460

461

462

#### D

463

464

465

466

467

DAQ Data Acquisition  
DCS Detector Control Software  
DQM Data Quality Monitoring  
DT Drift Tube

468		
469	<b>E</b>	
470		
471		
472	ECAL	electromagnetic calorimeter
473		
474	<b>F</b>	
475		
476		
477	FCC	Future Circular Collider
478	FEE	Front-End Electronics
479	FEB	Front-End Board
480		
481	<b>G</b>	
482		
483		
484	GE-/-	Find a good description
485	GE1/1	Find a good description
486	GE2/1	Find a good description
487	GEANT	GEometry ANd Tracking - a series of software toolkit platforms developed by CERN
488		
489	GEM	Gas Electron Multiplier
490	GIF	Gamma Irradiation Facility
491	GIF++	new Gamma Irradiation Facility
492		
493	<b>H</b>	
494		
495		
496	HCAL	hadron calorimeter
497	HL-LHC	High Luminosity LHC
498	HPL	High-pressure laminate
499	HV	High Voltage
500		
501	<b>I</b>	
502		
503		
504	iRPC	improved RPC
505	IRQ	Interrupt Request
506	ISR	Intersecting Storage Rings
507		
508	<b>L</b>	
509		
510		

511	LEIR	Low Energy Ion Ring
512	LEP	Large Electron-Positron
513	LHC	Large Hadron Collider
514	LS1	First Long Shutdown
515	LS2	Second Long Shutdown
516	LS3	Third Long Shutdown
517	LV	Low Voltage
518	LVDS	Low-Voltage Differential Signaling

519

520

**M**

522

523	MiC1	first version of Minicrate electronics
524	MC	Monte Carlo
525	MCNP	Monte Carlo N-Particle
526	ME-/-	Find good description
527	ME0	Find good description
528	MRPC	Multigap RPC

529

530

**N**

532

533	NIM	Nuclear Instrumentation Module logic signals
-----	-----	--

534

535

**P**

537

538	PMT	PhotoMultiplier Tube
539	PS	Proton Synchrotron
540	PU	pile-up

541

542

**Q**

544

545	QCD	Quantum Chromodynamics
546	QED	Quantum Electrodynamics

547

548

**R**

550

551	RE-/-	Find a good description
552	RE2/2	Find a good description
553	RE3/1	Find a good description

554	RE3/2	Find a good description
555	RE4/1	Find a good description
556	RE4/2	Find a good description
557	RE4/3	Find a good description
558	RMS	Root Mean Square
559	ROOT	a framework for data processing born at CERN
560	RPC	Resistive Plate Chamber

561

562

## S

564

565	SC	Synchrocyclotron
566	SLAC	Stanford Linear Accelerator Center
567	SM	Standard Model
568	SPS	Super Proton Synchrotron
569	SUSY	supersymmetry

570

571

## T

573

574	TDC	Time-to-Digital Converter
575	TDR	Technical Design Report
576	ToF	Time-of-flight
577	TPG	trigger primitives

578

579

## W

581

582	webDCS	Web Detector Control System
-----	--------	-----------------------------

583

584

## Y

586

587

587	YETS	Year End Technical Stop
-----	------	-------------------------

# 1

## Introduction

588

589

<sup>590</sup> **1.1 A story of High Energy Physics**

<sup>591</sup> **1.2 Organisation of this study**



# 2

592

593

## Investigating the TeV scale

594 „We may regard the present state of the universe as the effect of the  
595 past and the cause of the future. An intellect which at any given mo-  
596 ment knew all of the forces that animate nature and the mutual posi-  
597 tions of the beings that compose it, if this intellect were vast enough  
598 to submit the data to analysis, could condense into a single formula  
599 the movement of the greatest bodies of the universe and that of the  
600 lightest atom; for such an intellect nothing could be uncertain and  
601 the future just like the past would be present before its eyes.”

602

603 - Pierre Simon de Laplace, *A Philosophical Essay on Probabilities*, 1814

Throughout history, physics experiment became more and more powerful in order to investigate finer details of nature and helped understanding the elementary blocks of matter and the fundamental interactions that bond them in the microscopic world. Nowadays, the Standard Model (SM) of particle physics is the most accurate theory designed to explain the behaviour of particles and was able to make very precise predictions that are constantly verified, although some hints of new physics are visible as bricks are still missing to have a global comprehension of the Universe.

To highlight the limits of the SM and test the different alternative theories, ever more powerful machines are needed. This is in this context that the Large Hadron Collider (LHC) has been thought and built to accelerate and collide particles at energies exceeding anything that had been done before. Higher collision energies and high pile-up imply the use of enormous detectors to measure the properties of the interaction products. The Compact Muon Solenoid (CMS) is a multipurpose experiment that have been designed to study the proton-proton collisions of the LHC and give answers on various high energy physics scenari. Nevertheless, the luminosity delivered by the collider will in the future be increased to levels beyond the original plans to improve its discovery potential giving no choice to experiments such as CMS to upgrade their technologies to cope with the increased radiation levels and detection rates.

## 2.1 The Standard Model of Particle Physics

In this early 21<sup>st</sup> century it is now widely accepted that matter is made of elementary blocks referred to as *elementary particles*. The physics theory that classifies and describes the best the behaviour and interaction of such elementary particles is the so called Standard Model that formalizes 3 of the 4 fundamental interactions (electromagnetic, weak and strong interactions). It's development took place during the 20<sup>th</sup> century thanks to a strong collaboration in between the theoretical and experimental physicists.


### 2.1.1 A history of particle physics

The idea that nature is composed of elementary bricks, called *atomism*, is not contemporary as it was already discussed by Indian or Greek philosophers during antiquity. In Greece, atomism has been rejected by Aristotelianism as the existance of *atoms* would imply the existance of a void that would violate the physical principles of Aristotle philosophy. Aristotelianism has been considered as a reference in the european area until the 15<sup>th</sup> century and the italian *Rinascimento* where antic text and history started to be more deeply studied. The re-discovery of Platon's philosophy would allow to open the door to alternative theories and give a new approach to natural sciences where experimentation would become central. A new era of knowledge was starting. By the begining of the 17<sup>th</sup> century, atomism was re-discovered by philosophers and the very first attempt to estimate an *atom* size would be provided by Magnetus in 1646. Although his *atoms* correspond to what would nowadays be called *molecules*, Magnetus achieved feats by calculating that the number of molecules in a grain of incense would be of the order of  $10^{18}$  simply by considering the time necessary to smell it everywhere in a large church after the stick was lit on. It is now known that this number only falls short by 1 order of magnitude.

An alternative philosophy to atomism popularized by Descartes was corpuscularianism. Built on ever divisible corpuscles, contrary to atoms, it's principles would be mainly used by alchemists like Newton who would later develop a corpuscular theory of light. Boyle would combine together ideas of both atomism or corpuscularianism leading to mechanical philosophy. The 18<sup>th</sup> century have

seen the development of engineering providing philosophical thought experiments with repeatable demonstration and a new point of view to explain the composition of matter and Lavoisier would greatly contribute to chemistry and atomism by publishing in 1789 a list of 33 chemical elements corresponding to what is now called *atoms*. In the early 19<sup>th</sup> century Dalton would summarize the knowledge on composition of matter and Fraunhofer would invent the spectrometer and discover the spectral lines. The rise of atomic physics, chemistry and mathematical formalism would unravel the different atomic elements and ultimately, the 20<sup>th</sup> century would see the very first sub-atomic particles.

#### Discovery of the inner structure of the atom

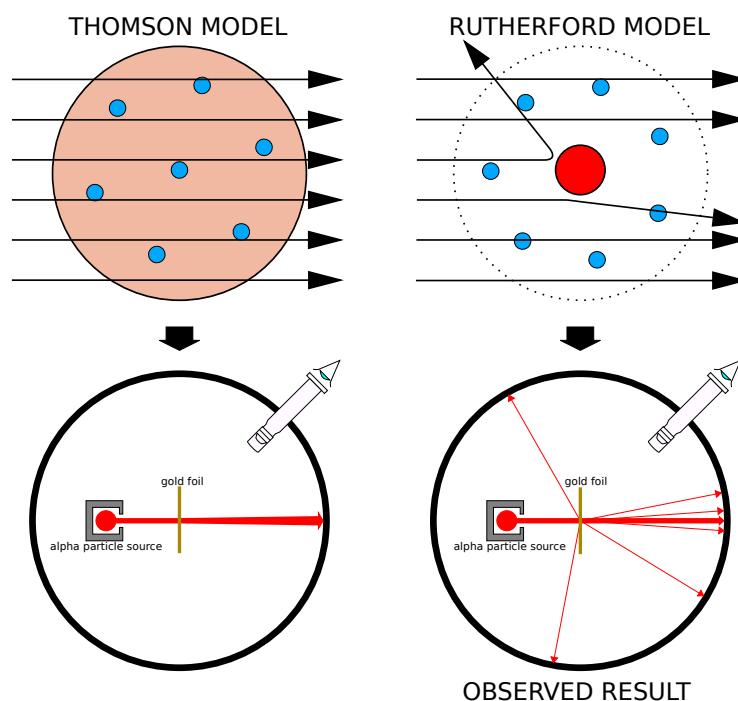

*Figure 2.1: Through the gold foil experiment Rutherford could show that most of the mass of atoms was contained in a positively charged nucleus and could then propose a more accurate atomic model than that of Thomson.*

The negative *electron* would be the first to be discovered in 1897 by Thomson after 3 decades of research on cathode rays by proving that the electrification observed in an electroscope, as reported by Perrin, was due to the rays themselves and that they had to be composed of electrically charged particles. In 1900, Becquerel would show the *beta rays* emitted by radium had the same charge over mass ratio than what measured by Thomson for cathode rays, pointing to electrons as a constituent of atoms. In 1907, Rutherford and Royds showed that *alpha* particles, once captured in a tube and subjected to an electric spark causing an electron avalanche, where helium ions as they could combine with 2 electrons to form a  ${}^4\text{He}$ . This discovery was directly followed by the constraint of the atom structure in 1909 through the gold foil experiment in which the deflection angle of alpha particles fired at a very thin gold foil was measured and highlighted atoms where mainly empty with

665 nearly all its mass contained into a tiny positively charged *nucleus*. With these two observations,  
 666 he could formulate the Rutherford model of the atom in 1911, shown together with the Thomson  
 667 plum pudding model in Figure 2.1. The link in between atomic number and number of positive and  
 668 negative charges contained into the atoms would fast be understood and the different kind of element  
 669 transmutation appeared to be purely nuclear processes making clear that the electromagnetic nature  
 670 of chemical transformation could not possibly change nuclei. Thus a new branch in physics appeared  
 671 to study nuclei exclusively: the nuclear physics.

672 Moreover, in 1913 quantum physics would be introduced into the atomic model by Bohr based  
 673 on the assumptions of Plank to explain spectral lines, and other observed quantum effects. The same  
 674 year, Moseley would confirm Bohr's model and Debye would extend it by introducing elliptical  
 675 orbits.

676 By studying alpha emission and the product of their interaction with nitrogen gas, Rutherford  
 677 reported in 1919 the very first nuclear reaction leading to the discovery that the hydrogen nucleus was  
 678 composed of a single positively charged particle that was later baptised *proton*. This idea came from  
 679 1815 Prout's hypothesis proposing that all atoms are composed of "*protyles*" (i.e. hydrogen atoms).  
 680 By using scintillation detectors, Rutherford could highlight typical hydrogen nuclei signature and  
 681 understand that the impact of alpha particles with nitrogen would knock out an hydrogen nucleus  
 682 and produce an oxygen 17, as explicated in Formula 2.1 and would then postulate that protons are  
 683 building bricks of all elements.



684 With this assumption and the discovery of isotopes together with Aston, elements with identical  
 685 atomic number but different masses, Rutherford would propose that all elements' nuclei but hydrogen's are composed of both charged particles, protons, and of chargeless particles, which he called  
 686 *neutrons*, and that these neutral particles would help maintaining nuclei as one, as charged protons  
 687 were likely to electrostatically repulse each other, and introduced the idea of a new force, a *nuclear*  
 688 force. Though the first idea concerning neutrons was a bond state of protons and electrons as it was  
 689 known that the beta decay, emitting electrons, was taking place in the nucleus, it was then showed  
 690 that such a model would hardly be possible due to Heisenberg's uncertainty principle and by the  
 691 recently measured *spin* of both protons and electrons. The spin, discovered through the study of  
 692 the emission spectrum of alkali metals, would be understood as a "two-valued quantum degree of  
 693 freedom" and formalized by Pauli and extended by Dirac, to take the relativist case into account.  
 694 Measured to be  $\frac{1}{2}\hbar$  for both, it was impossible to arrange an odd number of half integer spins and  
 695 obtain a global nucleus spin that would be integer. Finally, in 1932, following the discovery of a new  
 696 neutral radiation, Chadwick could discover the neutron as an uncharged particle with a mass similar  
 697 to that of the proton whose half integer spin would reveal to be the solution to explain the nuclear  
 698 spin.  
 699

## 700 Development of the Quantum Electrodynamics

701 Historically, the development of the quantum theory revolved around the question of emission and  
 702 absorption of discrete amount of energy through light. Einstein used the initial intuition of Plank  
 703 about the black-body radiation to develop in 1905 a model to explain the photoelectric effect in  
 704 which light was described by discrete quanta now called *photons*. For this model, Einstein introduced  
 705 the concept of wave-particle duality as classical theory was not able to describe the phenomenon.  
 706 With the new understanding of atoms and of their structure, classical theories also proved unable

707 to explain atoms stability. Indeed, using classical mechanics, electrons orbiting around a nucleus  
 708 should radiate an energy proportional to their angular momentum and thus lose energy through  
 709 time and the spectrum of energy emission should then be continuous, but it was known since the  
 710 19<sup>th</sup> century and the discovery of spectral lines that the emission spectrum of material was discrete.

711 This was Bohr who first suggested that a quantum description of the atom was necessary in 1913.  
 712 Using the correspondence principle stating that at large enough numbers the quantum calculations  
 713 should give the same results than the classical theory, he proposed the very first quantum model  
 714 of the hydrogen atom explaining the line spectrum by introducing the principal quantum number  
 715  $n$  describing the electron shell. This model would then be improved by Sommerfeld that would  
 716 quantize the z-component of the angular momentum, leading to the second and third quantum  
 717 numbers, or azimuthal and magnetic quantum number,  $l$  and  $m$  defining for the second the orbital  
 718 angular momentum of the electrons on their shells and thus, the shape of the orbital, and for the third  
 719 the available orbital on the subshell for each electron. Nevertheless, although the model was not only  
 720 limited to spherical orbitals anymore, making the atom more realistic, the Zeeman effect couldn't be  
 721 completely explained by just using  $n$ ,  $l$  and  $m$ . A solution would be brought after the discovery of  
 722 Pauli in 1924, as Uhlenbeck, Goudsmit, and Kramers proposed in 1925 the idea of intrinsic rotation  
 723 of the electron, introducing a new angular momentum vector associated to the particle itself, and  
 724 not to the orbital, and associated to a new quantic number  $s$ , the *spin* projection quantum number  
 725 explaining the lift of degeneracy to an even number of energy levels.

726 The introduction of the *spin* happened 1 year after another attempt of improvement of the theory  
 727 was made by De Broglie in his PhD thesis. The original formulation of the quantum theory only  
 728 considered photons as energy quanta behaving as both waves and particles. De Broglie proposed  
 729 that all matter are described by waves and that their momentum is proportional to the oscillation of  
 730 quantized electromagnetic field oscillators. This interpretation was able to reproduce the previous  
 731 version of the quantum energy levels by showing that the quantum condition involves an integer  
 732 multiple of  $2\pi$ , as shown by Formula 2.2.

$$p = \hbar k \Leftrightarrow \int pdx = \hbar \int kdx = 2\pi\hbar n \quad (2.2)$$

733 Although the intuition of De Broglie about the wave-particle duality of all matter, his interpretation  
 734 was semiclassical and it's in 1926 that the first fully quantum mechanical wave-equation would  
 735 be introduced by Schrödinger to describe electron-like particles, reproducing the previous semiclassical  
 736 formulation without inconsistencies. This complexe equation describes the evolution of the  
 737 wave function  $\Psi$  of the quantum system, defined by its position vector  $\mathbf{r}$  and time  $t$  as an energy  
 738 conservation law, in which the hamiltonian of the system  $\hat{H}$  is explicit, by solving the Equation 2.3.

$$i\hbar \frac{\partial}{\partial t} |\Psi(\mathbf{r}, t)\rangle = \hat{H} |\Psi(\mathbf{r}, t)\rangle \quad (2.3)$$

739 In 1927, Dirac would go further in his paper about emission and absorption of radiation by  
 740 proposing a second quantization not only of the physical process at play but also of the electromagnetic  
 741 field, providing the ingredients to the first formulation of *Quantum Electrodynamics (QED)*  
 742 and the description of photon emission by electrons dropping into a lower energy state in which the  
 743 final number of particles is different than the initial one. To complete this model to the many-body  
 744 wave functions of identical particles, Jordan included creation and annihilation operators for fields  
 745 obeying Fermi-Dirac statistics leading to a model describing particles that would be referred to as  
 746 *fermions*. Nevertheless, in order to properly treat electromagnetism, the incorporation of the relativ-

ity theory developed by Einstein. Including gravity into quantum physics still is a challenge nowadays, but in 1928 Pauli and Jordan would show that special relativity's coordinate transformations could be applied to quantum fields as the field commutators were Lorentz invariant. Finally derived the same year, the Dirac equation, shown as Equation 2.4, similarly to Schrödinger's equation, is a single-particle equation but it incorporates special relativity in addition to quantum mechanics rules. It features the  $4 \times 4$  gamma matrices  $\gamma^\mu$  built using  $2 \times 2$  Pauli matrices and unitary matrix, the 4-gradient  $\partial_\mu$ , the rest mass  $m$  of any half integer spin massive particle described by the wave function  $\psi(x, t)$ , also called a Dirac spinor, and the speed of light  $c$ . In addition to perfectly reproduce the results obtained with quantum mechanics so far, it also provided with *negative-energy solutions* that would later be interpreted as a new form of matter, *antimatter* and give a theoretical justification to the Pauli equation that was phenomenologically constructed to account for the spin as in the non-relativistic limit, the Dirac equation is similar.

$$i\hbar\gamma^\mu\partial_\mu\psi - mc\psi = 0 \quad (2.4)$$

The successes of the QED was soon followed with theoretical problems as computations of any physical process involving photons and charged particles were showed to be only reliable at the first order of perturbation theory. At higher order of the theory, divergent contributions were appearing giving nonsensical results. Only two effects were contributing to these infinities.

- The self-energy of the electron (or positron), the energy that the particle has due its own interaction with its environment.
- The vacuum polarization, virtual electron–positron pairs produced by a background electromagnetic field in the vacuum which is not an "empty" space. These virtual pairs affect the charge and current distributions generated by the original electromagnetic field.

Solving this apparent problem was done by carefully defining the concepts of each observables, for example mass or charge, as these quantities are understood within the context of a non-interacting field equation, and that from the experiment point of view, they are abstractions as what is measured are "renormalized observables" shifted from there "bare" value by the interaction taking place in the measuring process. The infinities needed to be connected to corrections of mass and charge as those are fixed to finite values by experiment. This was the intuition of Bethe in 1947 who successfully computed the effect of such *renormalization* in the non-relativist case. Fully covariant formulations of QED including renormalization was achieved by 1949 by Tomonaga, Schwinger, Feynman and Dyson and Feynman is now famous for his association of diagrams to the term of the scattering matrix, greatly simplifying the representation and computation of interactions as the diagrams directly corresponded the measurable physical processes and would then be used in every quantum field theories. With the resolution of infinities, QED had mostly reached its final form, being still today the most accurate physical theory and would serve as a model to build all other quantum field theories.

## Development of the quark model and Quantum Chromodynamics

To explain the nuclear force that holds *nucleons* (protons and neutrons) together, Yukawa theoretically proposed in 1934 the existence of a force carrier called *meson* due to it's predicted mass in the range in between the electron and nucleon masses. Discovered in 1936 by Anderson and Neddermeyer, and confirmed using bubble chambers in 1937 by Street and Stevenson, a first meson

787 candidate was observed in the decay products of cosmic rays. Assuming it had the same electric  
 788 charge than electrons and protons, this particle was observed to have a curvature due to magnetic  
 789 field that was sharper than protons but smoother than electrons resulting in a mass in between that  
 790 of electrons and protons. But its properties were not compatible with Yukawa's theory, which was  
 791 emphasized by the discovery of a new candidate in 1947, again in cosmic ray products using photo-  
 792 graphic emulsions.

793 This new candidate, although it had a similar mass than the already believed *meson*, would rather  
 794 decay into it. For distinction, the first candidate would then be renamed "*mu meson*" when the second  
 795 would be the "*pi meson*". The *mu meson* was behaving like a heavy electron and didn't participate  
 796 in the strong interaction whereas the pion was believed to be the carrier of the nuclear interaction.  
 797 This lead to classify the *mu* in a new category of particles called *leptons* together with the electron  
 798 that shared similar properties and *the neutrino*, and be renamed *muon*. The *pi meson* was finally  
 799 found to be a triplet of particles: a positively charged, a negatively charged, and a neutral particle.  
 800 The neutral *pi meson* has been more difficult to identify as it wouldn't leave tracks on emulsions nor  
 801 on bubble chambers and needed to be studied via it's decay products. It was ultimately identified in  
 802 University of California's cyclotron in 1950 through the observation of its decay into 2 photons.

803 Also discovered in 1947 but in cloud chamber photographs, the *K meson* as also been an im-  
 804 portant step towards the establishment of the Standard Model. A triplet of particle, 2 charged and a  
 805 neutral, with a mass roughly half that of a proton, were reported. These particles were baptised *K*  
 806 *meson* in contrast to the "light" *pi* and *mu* "L-mesons". The particularity of the *K* were there very  
 807 slow decays with a typical lifetime of the order of  $10^{-10}$ s much greater than the  $10^{-23}$ s of *pi*-proton  
 808 reactions. The concept of *strangeness*, a new quantum number was then introduced by Pais as an  
 809 attempt to explain this phenomenon as *strange* particles appeared as a pair production of a strange  
 810 and anti-strange particle.

811 With the development of synchrotrons, the particle *zoo* would grow to several dozens during the  
 812 1950s as higher energies were reachable through acceleration. In 1961, a first classification system,  
 813 called Eightfold Way, was proposed by Gell-Mann and finding its roots in the Gell-Mann–Nishijima  
 814 formula, which relates the electric charge  $Q$ , the third component of the isospin  $I_3$ , the *baryon*  
 815 number  $B$  and the strangeness  $S$ , as explicitated in Formula 2.5. The isospin was a quantum number  
 816 introduced in 1932 to explain symmetries of the newly discovered neutron using representation  
 817 theory of SU(2). The baryon number, was introduced by Nishijima as a quantum number for baryons,  
 818 i.e. particles of the same family as nucleons. The mesons were classified in an octet and baryons of  
 819 spin  $\pm \frac{1}{2}$  and  $\pm \frac{3}{2}$  were respectively classified into an octet and a decuplet, as shown in Figure 2.2. To  
 820 complete the baryon decuplet, Gell-Mann predicted the existance of baryon  $\Omega^-$  which would later  
 821 be discovered in 1964.

$$Q = I_3 + \frac{1}{2}(B + S) \quad (2.5)$$

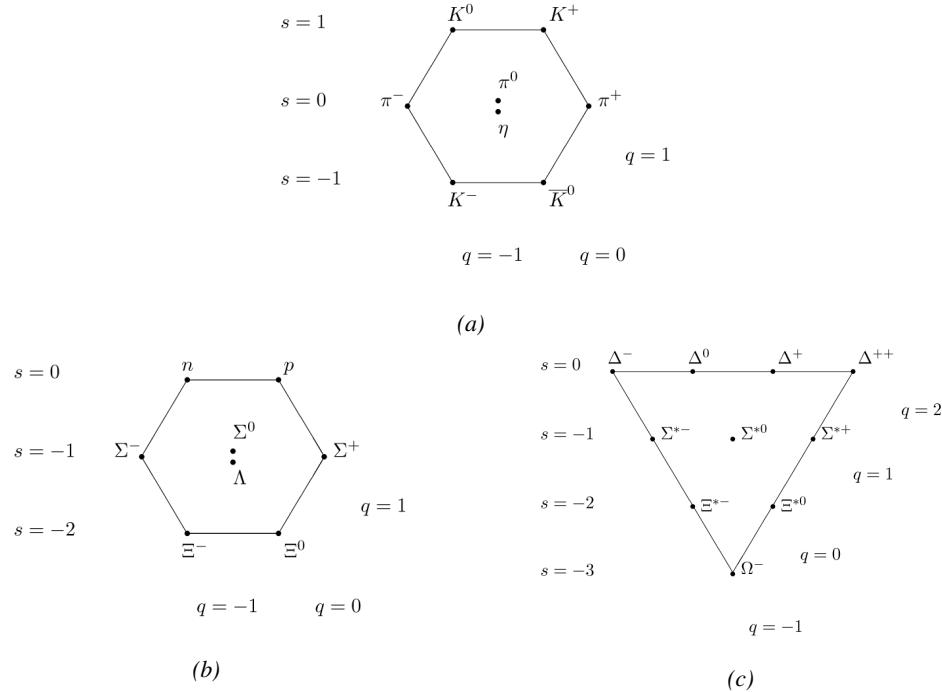


Figure 2.2: Figure 2.2a: Meson octet. Figure 2.2b: Baryon octet. Figure 2.2c: Baryon decuplet.

Strong of this classification using an SU(3) flavor symmetry, Gell-Mann, and independently Zweig, would propose a full theoretical model in which *hadrons* (strongly interacting particles, i.e. mesons and baryons) were not elementary particles anymore. They would rather be composed with 3 flavors of particles called *quarks* and there anti-particles. The 3 flavors were called *up*, *down* and *strange*. *Up* and *down* would be used to explain the nucleons and non-strange mesons, while *strange* would come into the composition of hadrons showing strangeness. *Up* and *down* flavors would be discovered in 1968 thanks to the deep inelastic scattering experiments conducted at the Stanford Linear Accelerator Center (SLAC), and *strange* could only be indirectly validated even though it provided a robust explanation to *kaon* ( $K$ ) and *pion* ( $\pi$ ). However, in the decade following the Gell-Mann-Zweig quark model proposition, several improvement to the model were brought, first by Glashow and Bjorken the same year that predicted the existence of a fourth quark flavor, the *charm*, that would equalize the then known number of quarks and leptons and finally in 1973 by Kobayashi and Maskawa that would increase the number of quarks to 6 to explain the experimental observation of CP violation. These two quarks would be referred to as *top* and *bottom* for the first time in 1975. It's only after these additions to the quark model that finally the *charm* would be discovered in 1974 at both SLAC and Brookhaven National Laboratory (BNL). A meson where the *charm* was bound with an *anti-charm*, called  $J/\psi$ , would help convince the physics community of the validity of the model. The *top* would be discovered soon after in 1977 in Fermilab and indicate the existence of the *bottom* that would resist to discovery until Fermilab's experiments CDF and D $\emptyset$  in 1995 due its very large mass and the energy needed to produce it.

As remarked by Struminsky, the original quark model proposal composed of 3 quarks should possess an additional quantum number due to mesons such as  $\Omega^-$  or  $\Delta^{++}$ . Indeed, these mesons are composed of 3 identical quarks, respectively 3 *strange* and *up* quark, with parallel spins, which

should be forbidden by the exclusion principle. Independentle, Greenberg and Han-Nambu proposed an additional SU(3) degree of freedom possessed by the quarks, that would later be refered to as *color charge gauge*, that could interact through *gluons*, the gauge boson octet corresponding to this degree of freedom. Nevertheless, as observing free quarks proved to be impossible, two visions of the quarks were argued mainly due to the failures to observe these particles free to prove their existence. On one side, Gell-Mann proposed to see quarks as mathematical construct instead of real particles, as they are always confined, implying that quantum field theory would not describe entirely the strong interaction. Opposed to this vision, Feynman on the contrary argued that quarks were real particles, that he would call *partons*, that should be described as all other particles by a distribution of position and momentum. The implications of quarks as point-like particles would be verified at SLAC and the concept of *color* would be added to the quark model in 1973 by Fritzsch and Leutwyler together with Gell-Mann to propose a description of the strong interaction through the theory of Quantum Chromodynamics (QCD). The discovery the same year of asymptotic freedom within the QCD by Groos, Politzer and Wilczek, allowed for very precise predictions thanks to the perturbation theory. Nowadays, the confinement of quarks is studied in experiments such as ALICE, through exploration of the quark-gluon plasma.

### 861 The Weak interaction, spontaneous symmetry breaking, the Higgs mechanism and the Elec- 862 troweak unification

863 The weak interaction is the process that causes radioactive decays. Thanks to the neutron discovery,  
864 Fermi could explain in 1934 the beta radiations through the beta decay process in which the neutron  
865 decays into a proton by emitting an electron. Though the missing energy observed during this  
866 process triggered a huge debate about the apparent non conservation of energy, momentum and spin  
867 of the process, Fermi, as Pauli before him, proposed that the missing energy was due to a neutral  
868 not yet discovered particle that would then be baptised *neutrino*. The impossibility to detect such  
869 a particle would leave some members of the scientific community sceptical, but hints of energy  
870 conservation and of the existence of the neutrino were provided by measuring the energy spectrum  
871 of electrons emitted through beta decay, as there was a strict limit on their energy. It's only 30 years  
872 later in 1953 that it would be discovered by the team of Cowan and Reines using the principle of  
873 inverse beta decay described through Formula 2.6. The experiment consisted in placing water tanks  
874 sandwiched in between liquid scintillators near a nuclear reactor with an estimated neutrino flux of  
875  $5 \times 10^{13} \text{ s}^{-1} \text{ cm}^{-2}$ . However, in order to explain the absence of some reactions in the experiment  
876 of Cowan and Reines, and constraint the beta decay theory of Fermi and extend it to the case of  
877 the muon, Konopinski and Mahmoud proposed in 1953 that the muon decay would eject a particle  
878 similar to the neutrino and thus predicted the existence of a muon neutrino that would be different  
879 than the one involved in the beta decay, related to the electron. With this, the idea of lepton number  
880 would arise. The muon neutrino would successfully be detected in 1962 by Lederman, Schwartz and  
881 Steinberger.

$$\bar{\nu} + p \rightarrow n + e^+ \quad (2.6)$$

882 The theory could not be valid though as the probability of interaction, called cross-section, would  
883 have been increasing without bond with the square of the energy. Fermi assumed in a two vector  
884 current coupling but Lee and Yang noted that an axial current could appear and would violate parity.  
885 The experiment of Wu in 1956 would confirm the parity violation and Gamow and Teller would try to  
886 account for it by describing Fermi's interaction through allowed (parity-violating) and superallowed

887 (parity-conserving) decays. But the success of QED as a quantum field theory would spark the  
888 development of such a theory to describe the weak interaction.

889 As previously discussed, the great success of QED was built on an underlying symmetry, inter-  
890 preted as a gauge invariance so that the effect of the force is the same in all space-time coordinates,  
891 and of the possibility to renormalize it in order to absorb the infinities. Independently in 1958,  
892 Glashow, and Salam and Ward used 1957 Schwinger ideas about vector intermediary for the decay  
893 processes, could find a way to unite both the electromagnetic and weak interaction into a gauge  
894 theory involving 4 gauge bosons, 3 of which were massive and carried out the weak interaction and  
895 a massless boson carrying the electromagnetic interaction. Among the 3 massive bosons, 2 were  
896 charged and 1 was neutral, similarly to the previously theorized *pi meson* vector of the Yukawa  
897 model and all have a mass much greater than nucleons and thus a very short life time implying a  
898 finite very short range contrary to the contact interaction originally proposed by Fermi.

899 Breakthrough in other fields of physics contributed in giving theoretical support and interpreta-  
900 tion to the unified electroweak theory. The stepping stone would be the use of spontaneous symmetry  
901 breaking that was inspired to Nambu at the end of the 1950s following the development of the BCS  
902 superconductivity mechanism in 1957. Cooper had shown that BCS pairs, pairs of electrons bound  
903 together at low temperature, could have lower energy than the Fermi energy and where responsi-  
904 ble for superconductivity. This lead to the discovery of Goldstone-Nambu bosons as a result of the  
905 spontaneous breaking of the chiral symmetry in a theory describing nucleons and mesons devel-  
906 opped by Nambu and Jona-Lasinio in 1961, and now understood as a low-energy approximation of  
907 QCD. Similarly to mechanism of energy gap appearance in superconductivity, the nucleon mass  
908 is suggested to the result of a self-energy of a fermion field and is studied through a four-fermion  
909 interaction in which, as a consequence of the symmetry, bound states of nucleon-antinucleon pairs  
910 appear and can be regarded as virtual pions. Though the symmetry is maintained in the equations,  
911 the ground state is not preserved. Goldstone would later the same year show that the bound states  
912 corresponds to spinless bosons with zero mass.

913 Although the model in itself didn't revolutionize particle physics, spontaneous symmetry break-  
914 ing would be generalized to quantum field theories. As all fundamental interactions are described  
915 using gauge theories based on underlying symmetries, processes such as the chiral symmetry break-  
916 ing would be introduced soon after the publication of Nambu and Jona-Lasinio. In 1962, Anderson,  
917 following an idea of Schwinger who suggested that zero-mass vector bosons were not necessarily  
918 required to describe the conservation of baryons contrary to the bosons emerging from chiral sym-  
919 metry breaking, discussed the implications of spontaneous symmetry breaking in particles physics.  
920 A model was finally independently built in 1964 by Brout and Englert, Higgs, and Guralnik, Hagen,  
921 and Kibble, who discovered that combining an additional field into a gauge theory in order to break  
922 the symmetry, the resulting gauge bosons acquire a nonzero mass. Moreover, Higgs stated that this  
923 implied the existence of at least one new massive, i.e. self-interacting, scalar boson, that are now  
924 known as *Higgs bosons* corresponding to this additional field. The Higgs mechanism today specific-  
925 ally refers to the process through which the gauge bosons of the weak interaction acquire mass. In  
926 1968, Weinberg could point to the Higgs mechanism to integrate a Higgs field into a new version  
927 of the electroweak theory in which the spontaneous symmetry breaking mechanism of the Higgs  
928 field would explicitly explain the masses of the weak interaction gauge bosons and the zero-mass  
929 of photons.

### 930 2.1.2 Construction and test of the model

931 The Standard Model of particle physics was built in the middle of the 1970s after the experimental  
 932 confirmation of the existence of quarks. It is based on the assembly of the models previously introduced  
 933 and describing the fundamental interactions, except for gravitation, and their gauge bosons  
 934 as well as the way elementary "matter" particles interact with the fields associated with these force  
 935 carriers. In this sense, the development of QED and the unification of the electroweak interaction,  
 936 of the Yukawa interaction and of QCD, and of the Higgs mechanism made it possible to explain most  
 937 of contemporary physics.

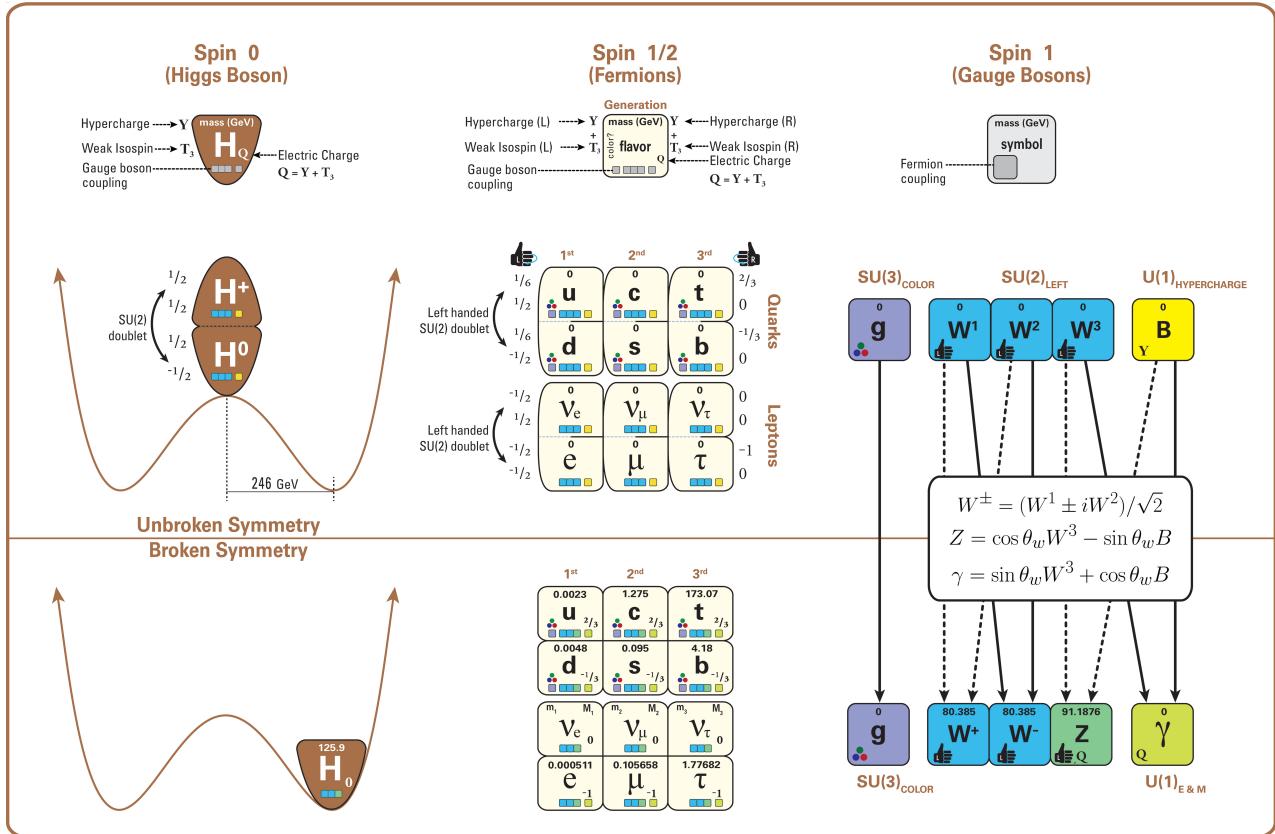


Figure 2.3: The elementary particles of the Standard Model are showed along with their names and properties. Their interactions with the strong, weak and electromagnetic forces have been explicited using color squares. In the left column, the scalar higgs boson is depicted, while the central is focused on the matter particles, the fermions, and the right on the force carriers, the gauge bosons. The role of the Higgs boson in electroweak symmetry breaking is highlighted, and the corresponding way properties of the various particles differ in the (high-energy) symmetric phase (top) and the (low-energy) broken-symmetry phase (bottom) are showed.

938 In the SM, "matter" particles, are described by 12 fermion fields of spin  $\frac{1}{2}$  obeying the Fermi-  
 939 Dirac statistics, i.e. subjected to the Pauli exclusion principle. To each fermion is associated its  
 940 corresponding antiparticle. The fermions are classified according to the way they interact and, thus,  
 941 according to the charges they carry. 6 of them are classified as quarks ( $u, d, c, s, t$ , and  $b$ ) and  
 942 are subjected to all interactions and the 6 others as leptons ( $e^-, \mu^-, \tau^-, \nu_e, \nu_\mu$ , and  $\nu_\tau$ ). Leptons

943 are not subjected to the strong interaction and among them, the 3 neutrinos only interact weakly as  
 944 they are neutral particles, which explains why they are so difficult to detect. The gauge boson fields  
 945 are the gluons  $g$  for the strong interaction, the photon  $\gamma$  for the electromagnetic interaction and the  
 946 weak bosons  $W^+$ ,  $W^-$ , and  $Z^0$  for the weak interaction. Finally, the Higgs field  $H^0$  is responsible,  
 947 through the spontaneous symmetry breaking, of the mixing of the massless electroweak boson fields  
 948  $W_1$ ,  $W_2$ ,  $W_3$ , and  $B$  leading to the observable states  $\gamma$ ,  $W^+$ ,  $W^-$ , and  $Z^0$  that can gain mass while  
 949 interacting with the Higgs field. This picture of the SM is summarized through Figure 2.3 where the  
 950 antifermions are not showed.

951 When the model was first finalized, the existence of the weak gauge bosons, of the charm, of the  
 952 third quark generation composed of top and bottom quarks to explain the observed CP violation was  
 953 not proven but the predictions were measured with good precision in the years following. First, the  
 954 charm quark would be discovered in 1974, followed by the bottom quark in 1977. The weak bosons  
 955 would be discovered during the next decade in 1983. The top quark would resist until 1995 due to  
 956 its very large mass but would offer the last piece of the elementary QCD particles. The very last  
 957 predicted elementary particle of the model that was not observed yet would prove to be very difficult  
 958 to observe. the Higgs boson needed the start of the LHC to finally be observed in 2012. A few years  
 959 more of tests were necessary to measure its properties to confirm the observation of a scalar boson  
 960 compatible with the predicted Higgs boson  $H^0$ . Eventhough only quark-antiquark (mesons) and 3  
 961 quark states (baryons) were observed, exotic hadrons were not forbidden by QCD and no limit of  
 962 quark is imposed by the theory. Moreover, gluons could form bond states by themselves and with  
 963 quarks. These two types of states are called *glueballs* and *hybrid hadrons*. For decades, experi-  
 964 ments have been conducted without confirmation of such possible states existing. Nevertheless, in  
 965 2014, tetraquarks were observed by LHCb, one of LHC's main experiments, and in 2015, the same  
 966 experiment reported the discovery of pentaquarks making the SM one of the best tested theories of  
 967 physics.

### 968 2.1.3 Investigating the TeV scale

969 Even though the SM is a well tested theory, several hints of physics going beyond its scope have  
 970 been observed. First of all, gravity is not explained through this model and huge difficulties are en-  
 971 countered when trying to include gravitation. The strength of gravitational interaction is expected to  
 972 be negligible at the scale of elementary particles, nevertheless, adding gravitation in the perspective  
 973 of developing a "theory of everything" leads to divergent integrals that could not be fixed through  
 974 renormalization.

975 Moreover, the SM considers neutrinos to be massless but it was shown in the late 1960s by the  
 976 Homestake experiment that the flux of solar neutrinos (i.e.  $\nu_e$ ) measured didn't match the predicted  
 977 values due to neutrino oscillations, confirmed in the early 2000s by the Sudbury Neutrino Obser-  
 978 vatory. This oscillation implies that neutrinos that can be observed are a superposition of massive  
 979 neutrino states. The research on neutrino oscillation is already quite advanced with experiments  
 980 looking at atmospheric, reactor or beam neutrinos in order to determine the elements of the mixing  
 981 matrix similar to the CKM matrix describing the mixing of quarks. Nevertheless, no answer to the  
 982 origin of neutrino mass is provided.

983 Another intriguing fact is that the universe is dominated by matter. However, the SM predicted  
 984 that matter and antimatter should have been created in equal amounts and no mechanism is able to  
 985 explain this matter-antimatter asymmetry. Although this asymmetry is seen from the visible uni-  
 986 verse, it may be possible that other unknown regions of the Universe are dominated by antimatter.

987 Another possibility to explain the apparent asymmetry would be the existence of a electric dipole  
988 in any fundamental particle that would permit matter and antimatter particles to decay at different  
989 rates.

990 The discrepancy of velocity dispersion of stars in galaxies with respect to the visible mass they  
991 contain is known since the end of the 19<sup>th</sup> century where Kelvin proposed that this problem could  
992 be solved if a "*great majority of [the stars] would be dark bodies*". Throughout the 20<sup>th</sup> century,  
993 physicists like Kapteyn, Zwicky, showed the first hints of a "*dark matter*" by studying star veloc-  
994 ities and galactic clusters, followed by robust measurements of galaxy rotation curves by Babcock  
995 which suggested that the mass-to-luminosity ratio was different from what would be expected from  
996 watching the visible light. Later in the 1970s, Rubin and Ford from direct light observations and  
997 Rogstad and Shostak from radio measurements showed that the radial velocity of visible objects in  
998 galaxies was increasing with increasing distance to the center of the galaxy. Finally observation of  
999 lensing effect by galaxy clusters, temperature distribution of hot gas in galaxies and clusters, and  
1000 the anisotropies in the Cosmic Microwave Background (CMB) kept on pointing to a "*dark matter*".  
1001 From all the data accumulated, the visible matter would only account to no more than 5% of the total  
1002 content on the visible universe. Alternative theories have tried to investigate modified versions of  
1003 the General Relativity as this theory is only well tested at the scale of the solar system but is not suf-  
1004 ficiently tested on wider ranges or even theories in which gravitation is not a fundamental force but  
1005 rather an emergent one, but so far, such theories have difficulties to reproduce all the experimental  
1006 observations as easily as through dark matter.

1007 A possible theory to offer dark matter candidates would be supersymmetry (SUSY) which pro-  
1008 poses a relationship in between bosons and fermions. In this model, each elementary particle,  
1009 through a spontaneous spacetime symmetry breaking mechanism would have a *super partner* from  
1010 the other family of particles. On top of providing heavy dark matter candidates, supersymmetry  
1011 could also help solving the *Hierarchy problem*, the very large scale difference in between the weak  
1012 interaction and gravity, although, as mentioned before, in the case gravity is found not to be a funda-  
1013 mental force, this problem would automatically fade.

1014  
1015 All these different aspects of physics beyond the Standard Model of particle physics and the  
1016 Standard model itself can be tested through the use of very energetic and intense hadron and ion col-  
1017 liders. The LHC at CERN is a perfect tool to seek answers to these open questions except maybe for  
1018 the gravity as gravity is extremely weak at particles level. For example, one of LHCb experiment's  
1019 goal is to investigate CP-violation and thus baryonic asymmetry. In 2017, the collaboration has an-  
1020 nounced to have so far a  $3.3\sigma$  statistical significance over a CP-violation through the study of the  
1021 decays of  $\Lambda_b^0$  and  $\overline{\Lambda}_b^0$  into a proton (or antiproton) and 3 pions. Many analysis teams are also working  
1022 hard on supersymmetry both in ATLAS and CMS collaborations, the two multipurpose experiments  
1023 of LHC, even though no evidence of a supersymmetrical theory was seen, the few hint having the  
1024 tendency to confirm the standard model. These experiments also have the possibility to investigate  
1025 ways to explain Majorana neutrino mass through Yukawa interactions of scalar particles.

1026 The higher the center-of-mass energy, the smaller details the experiments will be able to see, the  
1027 heavier the potential particle creation barrier will be, the stronger the cross-section of certain rare  
1028 decay channels will be. As a comparison, with collisions happening at 14 TeV, the LHC is approxi-  
1029 mately 2 orders of magnitude more sensitive to the Higgs than the Tevatron was with its already very  
1030 powerful 2 TeV. All these advantages eventually lead to new discoveries and deeper understanding  
1031 of the models describing our Universe. But the LHC only is a step forward to gather more precise  
1032 tests of the Standard Model and new knowledge about the physics beyond it. A successful physics

1033 campaign will probably serve to justify the building of new accelerators with even greater discovery  
 1034 potential like for example the Future Circular Collider (FCC) that would push even further the study  
 1035 of the unanswered questions of contemporary physics.

## 1036 2.2 The Large Hadron Collider & the Compact Muon Solenoid

1037 Throughout its history, CERN has played a leading role in high energy particle physics. Large re-  
 1038 gional facilities such as CERN were thought after the second world war in an attempt to increase  
 1039 international scientific collaboration and allows scientists to share the forever increasing costs of  
 1040 experiment facilities required due to the need for increasing the energy in the center of mass to  
 1041 deeper probe matter. The construction of the first accelerators at the end of the 50s, the Synchro-  
 1042 cyclotron (SC) and the Proton Synchrotron (PS), was directly followed by the first observation of  
 1043 antinuclei in 1965 [1]. Strong from the experience of the Intersecting Storage Rings (ISR), the very  
 1044 first proton-proton collider that showed hints that protons are not elementary particles, the Super  
 1045 Proton Synchrotron (SPS) was built in the 70s to investigate the structure of protons, the preference  
 1046 for matter over antimatter, the state of matter in the early universe or exotic particles, and lead to  
 1047 the discovery in 1983 of the W and Z bosons [2–5]. These newly discovered particles and the elec-  
 1048 troweak interaction would then be studied in details by the Large Electron-Positron (LEP) collider  
 1049 that will help to prove in 1989 that there only are three generations of elementary particles [6]. The  
 1050 LEP would then be dismantled in 2000 to allow for the LHC to be constructed in the existing tunnel.

### 1051 2.2.1 LHC, the most powerful particle accelerator

1052 The LHC has always been considered as an option to the future of CERN. At the moment of the  
 1053 construction of the LEP beneath the border between France and Switzerland, the tunnel was built in  
 1054 order to accomodate what would be a Large Hadron Collider with a dipole field of 10 T and a beam  
 1055 energy in between 8 and 9 TeV [7] directly followed in 1985 with the creation of a 'Working Group  
 1056 on the Scientific and Technological Future of CERN' to investigate such a collider [8]. The decision  
 1057 was finally taken almost 10 years later, in 1994, to construct the LHC in the LEP tunnel [9] and the  
 1058 approval of the 4 main experiments that would take place at the 4 interaction points would come in  
 1059 1997 [10] and 1998 [11]:

- 1060 • ALICE [12] has been designed in the purpose of studying quark-gluon plasma that is believed  
 1061 to have been a state of matter that existed in the very first moment of the universe.
- 1062 • ATLAS [13] and CMS [14] are general purpose experiments that have been designed with  
 1063 the goal of continuing the exploration of the Standard Model and investigate new physics.
- 1064 • LHCb [15] has been designed to investigate the preference of matter over antimatter in the  
 1065 universe through the CP violation.

1066 These large scale experiments, as well as the full CERN accelerator complex, are displayed on  
 1067 Figure 2.4. The LHC is a 27 km long hadron collider and the most powerful accelerator used for  
 1068 particle physics since 2008 [16]. The LHC was originally designed to collide protons at a center-  
 1069 of-mass energy of 14 TeV and luminosity of  $10^{34} \text{ cm}^{-2}\text{s}^{-1}$ , as well as Pb ions at a center-of-mass  
 1070 energy of 2.8 TeV/A with a peak luminosity of  $10^{27} \text{ cm}^{-2}\text{s}^{-1}$ . Run 1 of LHC, when the center-of-  
 1071 mass energy only was half of the nominal LHC energy, was enough for both CMS and ATLAS to

discover the Higgs boson [17] and for LHCb to discover pentaquarks [18] and confirm the existance of tetraquarks [19]. Nevertheless, after the Third Long Shutdown (LS3) (2024-2026), the accelerator will be in the so called High Luminosity LHC (HL-LHC) configuration [20], increasing its instantaneous luminosity to  $10^{35} \text{ cm}^{-2}\text{s}^{-1}$  for  $pp$  collisions and to  $4.5 \times 10^{27} \text{ cm}^{-2}\text{s}^{-1}$ , boosting the discovery potential of the LHC. The HL-LHC phase should last at least another 10 years depending on the breakthrough this machine would lead to. Already a new accelerating device, the FCC, as been proposed to prepare the future of high energy physics after the LHC.

### CERN's Accelerator Complex

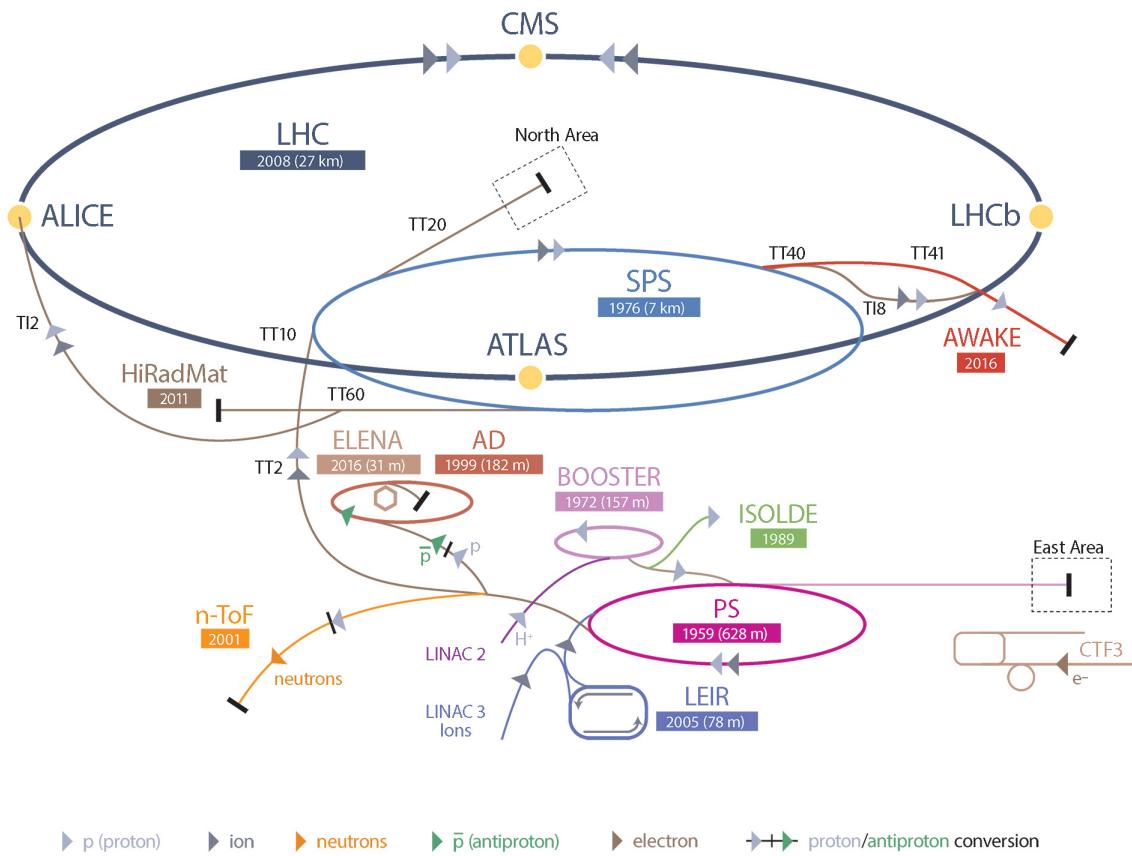


Figure 2.4: CERN accelerator complex.


#### 2.2.1.1 Particle acceleration

The LHC is the last of a long series of accelerating devices. Before being accelerated by the LHC, the particles need to pass through different acceleration stages. All these acceleration stages are visible on Figure 2.4 and pictures of the accelerators are showed in Figure 2.5.

The story of accelerated protons at CERN starts with a bottle of hydrogen gas injected into the source chamber of the linear particle accelerator *LINAC 2* in which a strong electric field strips the

1086 electron off the hydrogen molecules only to keep their nuclei, the protons. The cylindrical conductors,  
 1087 alternatively positively or negatively charged by radiofrequency cavities, accelerate protons by  
 1088 pushing them from behind and pulling them from the front and ultimately give them an energy of  
 1089 50 MeV, increasing their mass by 5% in the process.

1090

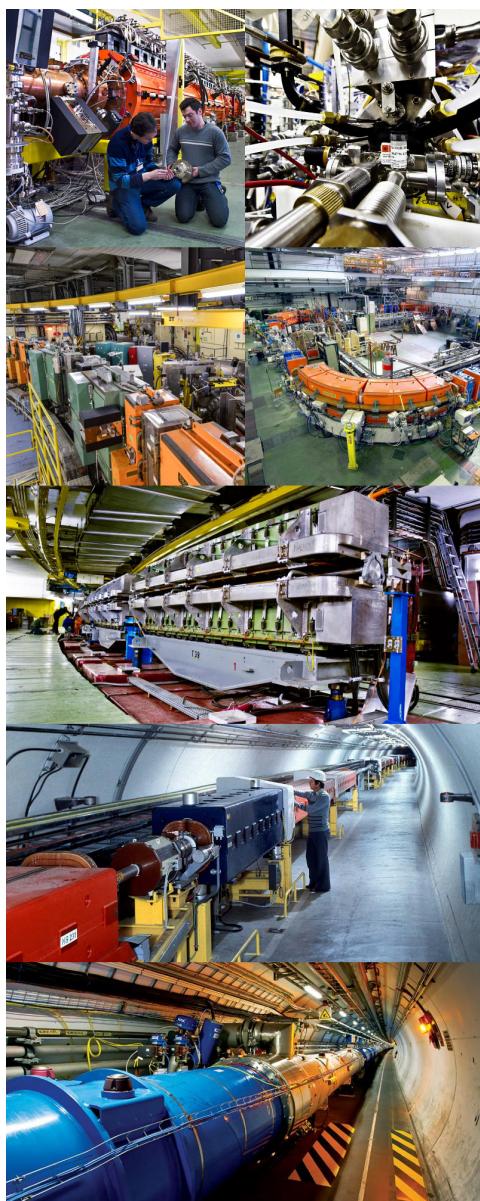

*Figure 2.5: Pictures of the different accelerators. From top to bottom: first the LINAC 2 and the Pb source of LINAC 3. Then the Booster and the LEIR. Finally, the PS, the SPS and the LHC.*

1091 When exiting the LINAC 2, the protons are divided into 4 bunches and injected into the 4 su-  
 1092 perimposed synchrotron rings of the *Booster* where they are then accelerated to reach an energy of

1093 1.4 GeV before being injected into the PS. Before the Booster was operational in 1972, the protons  
 1094 were directly injected into the PS from the LINAC 2 but the low injection energy limited the amount  
 1095 of protons that could be accelerated at once by the PS. With the Booster, the PS accepts approxi-  
 1096 mately 100 times more particles.

1097  
 1098 The 4 proton bunches are thus sent as one to the PS where their energy eventually reaches  
 1099 26 GeV. Since the 70s, the main goal of this 628 m circumference synchrotron has been to sup-  
 1100 ply other machines with accelerated particles. Nowadays, not only the PS accelerates protons, it also  
 1101 accelerates heavy ions from the *Low Energy Ion Ring (LEIR)*. Indeed, the LHC experiments are not  
 1102 only designed to study *pp*-collisions but also *Pb*-collisions. Lead is first injected into the dedicated  
 1103 linear collider *LINAC 3*, that accelerate the ions using the same principle than LINAC 2. Electrons  
 1104 are striped off the lead ions all along the acceleration process and eventually, only bare nuclei are  
 1105 injected in the LEIR whose goal is to transform the long ion pulses received into short dense bunches  
 1106 for LHC. Ions injected and stored in the PS were aceelerated by the LEIR from 4.2 MeV to 72 MeV.

1107  
 1108 Directly following the PS, is finally the last acceleration stage before the LHC, the 7 km long  
 1109 *SPS*. The SPS accelerates the protons to 450 GeV and inject proton in both LHC accelerator rings  
 1110 that will increase their energy up to 7 TeV. When the LHC runs with heavy lead ions for ALICE  
 1111 and LHCb, ions are injected and accelerated to reach the energy of 2.8 TeV/A.  
 1112


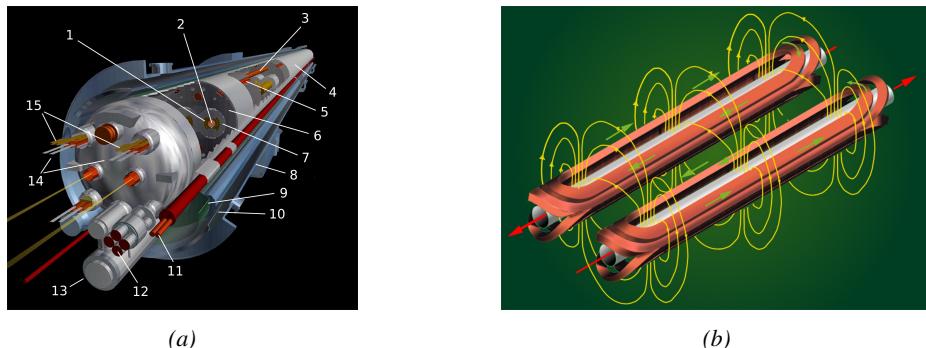


Figure 2.6: Figure 2.6a: schematics of the LHC cryodipoles. 1: Superconducting Coils, 2: Beam pipe, 3: Heat exchanger Pipe, 4: Helium-II Vessel, 5: Superconducting Bus-bar, 6: Iron Yoke, 7: Non-Magnetic Collars, 8: Vacuum Vessel, 9: Radiation Screen, 10: Thermal Shield, 11: Auxiliary Bus-bar Tube, 12: Instrumentation Feed Throughs, 13: Protection Diode, 14: Quadrupole Bus-bars, 15: Spool Piece Bus-bars. Figure 2.6b: magnetic field and resulting motion force applied on the beam particles.

1113 The LHC beams are not continuous and are rather organised in bunch of paticles. When in *pp*-  
 1114 collision mode, the beams are composed of 2808 bunches of  $1.15 \times 10^{11}$  protons separated by 25 ns.  
 1115 When in *Pb* collision mode, the 592 *Pb* bunches are on the contrary composed of  $2.2 \times 10^8$  ions  
 1116 separated by 100 ns. The two parrallel proton beams of the LHC are contained in a single twin-  
 1117 bore magnet due to the space restriction in the LEP tunnel. Indeed, building 2 completely separate  
 1118 accelerator rings next to each other was impossible. The dipoles of the 1232 twin-bore magnets are  
 1119 showed in Figure 2.6 alongside the magnetic field generated along the dipole section to accelerate the  
 1120 particles. The dipoles generate a nominal field of 8.33 T, needed to give protons and lead nucleons  
 1121 their nominal energy. Some 392 quadrupoles, presented in Figure 2.7, are also used to focus to the

1122 beams, as well as other multipoles to correct smaller imperfections.

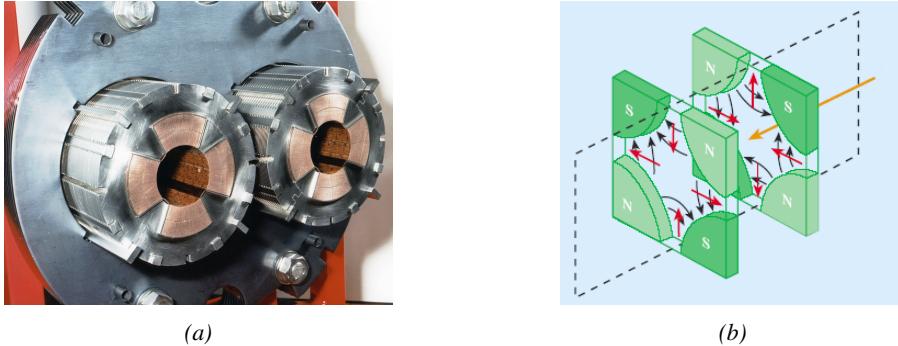

*Figure 2.7: Figure 2.7a: picture of the LHC quadrupoles. Figure 2.7b: magnetic fields and resulting focussing force applied on the beam by 2 consecutive quadrupoles.*

### 1123 2.2.2 CMS, a multipurpose experiment


1124 Among the four main LHC experiments is the Compact Muon Solenoid used as a multipurpose tool to  
1125 investigate the SM and physics beyond its scope. Proposed through a letter of intention in 1992 [14],  
1126 and as its name suggests, this very compact detector's uses the muons as a clear tag of most of SM  
1127 and new physics interesting channels. In the original 1997 Technical Design Report (TDR) [21], the  
1128 very first sentences were stating that "*Muons are an unmistakable signature of most of the physics*  
1129 *LHC is designed to explore. The ability to trigger on and reconstruct muons at the highest lumi-*  
1130 *nosities is central to the concept of CMS, the Compact Muon Solenoid.*" CMS participated in the  
1131 discovery of the Higgs boson and the measurement of its properties and couplings together with  
1132 ATLAS and is also actively involved in the search for SUSY and heavy ion collisions. Other exotic  
1133 physics are also being investigated using the data collected by CMS.

1134 The CMS apparatus in itself is the heaviest detector ever built starring a SI15m diameter and a  
1135 29 m length for a total weight of 14 kT. A thick 4 T solenoid magnet located at the beam interaction  
1136 point hosts trackers and calorimeters. Extending in all directions around the magnet, heavy iron  
1137 return yokes are installed to extend the magnetic field and support a muon system. The apparatus  
1138 consists of a barrel, referring to the magnet and the detectors contained in it and the part of the muon  
1139 system built directly in the cylinder around the magnet, and of 2 endcaps in the forward and back-  
1140 ward region of the detector that closes the apparatus and complete the detection coverage along the  
1141 beam line. A front view on the barrel is provided in Figure 2.8 while a detailed view of the apparatus  
1142 is given in Figure 2.9.


1143

1144 In order to efficiently detect all long leaving particles and measure their properties with good  
1145 precision, the CMS detector uses an onion like layout around of the interaction point in order to  
1146 maximize the covered solid angle. As detailed in Figure 2.10, in the innermost region of the detector,  
1147 closest to the interaction point, the silicon tracker records the trajectory of charged particles. Around  
1148 it, the electromagnetic calorimeter (ECAL) stops and measure the energy deposition of electrons  
1149 and photons. In the next layer, the hadron calorimeter (HCAL), hadrons are stopped and their energy  
1150 measured. These layers are contained inside of the magnet of CMS, the superconducting solenoid.  
1151 Outside of the magnet are the muon chambers embedded into iron return yokes used to control the

1152 magnetic field and gives muons, the only particles traveling completely through the whole detector, a  
 1153 double bending helping in reconstructing their energy and trajectory. Note that photons and neutral  
 1154 hadrons are differentiated from electrons and charged hadrons in the calorimeters by the fact that  
 1155 don't interact with the silicon tracker and that they are not influenced by the magnetic field.

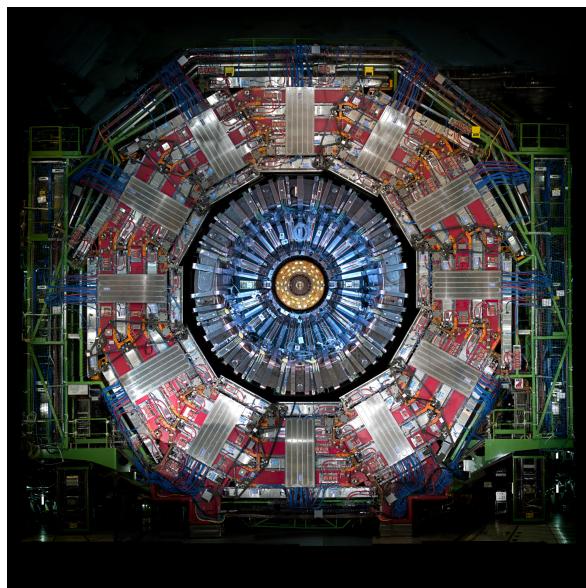

*Figure 2.8: Picture of the CMS barrel. The red outer layer is the muon system hosted into the red iron return yokes. The calorimeters are the blue cylinder inside in magnet solenoid and the tracker is the inner yellow cylinder built around the beam pipe.*

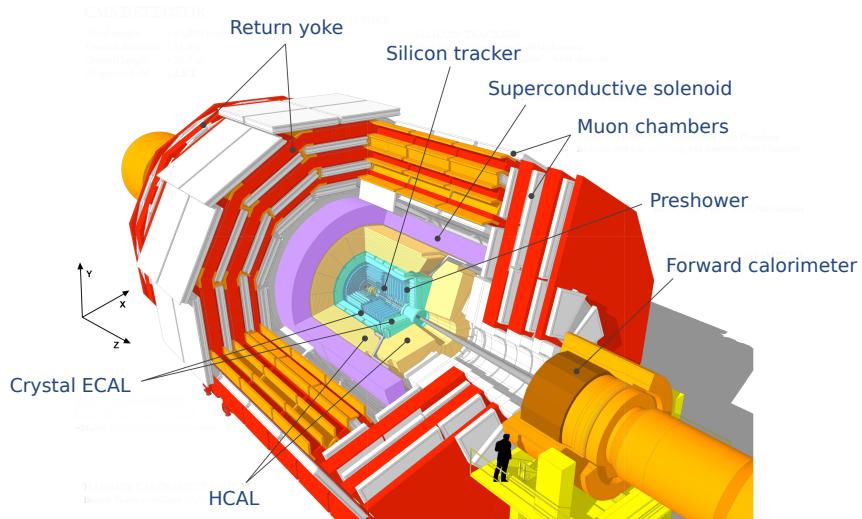

*Figure 2.9: View of the CMS apparatus and of its different components.*

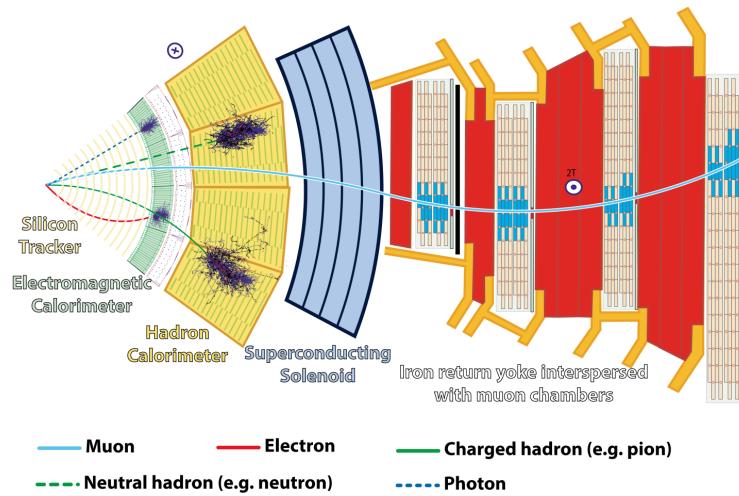


Figure 2.10: Slice showing CMS sub-detectors and how particles interact with them.

### 2.2.2.1 The silicon tracker, core of CMS

The silicon tracker visible on Figure 2.11 is divided into 2 different sub-systems: the *pixel detector* at the very core and the *microstrip detector* around it. This system is composed of 75 million individual readout channels with up to 6000 channels per squared centimeter for the pixels making it the world's biggest silicon detector. This density allows for measurements of the particle tracks with a precision of the order of  $10\ \mu\text{m}$ . This is necessary to reconstruct all the different interaction vertices with precision and have a precise measure of the curvature of the charged particles traveling through the magnetic field to estimate their charge and momentum.


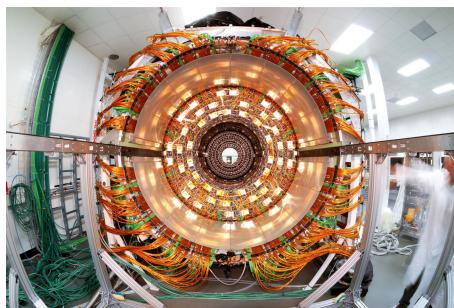


Figure 2.11: CMS tracker.

### 2.2.2.2 The calorimeters, measurement of particle's energy

The ECAL directly surrounding the tracker is composed of crystals of lead tungstate,  $\text{PbWO}_4$ , a very dense but optically transparent material used to stop high energy electrons and photons. These crystal blocks basically are extremely dense scintillators which scintillate in fast, short light bursts proportionally to the energy deposition. The light is yielded rapidly and contained at 80% in the corresponding 25 ns lasting bunch crossing. Each crystal is isolated from the other by the carbon fiber matrix they are embedded in. It is composed of a barrel containing more than 60,000 crystals

and of closing endcaps containing another 15,000 crystals. In front of the ECAL endcap is installed a preshower detector made out of two layers of lead and silicon strip detectors to increase the spatial resolution close to the beam line for pion-photon and single-double photon discrimination purposes. Figure 2.12 shows the calorimeter inside of the magnet and the crystals.

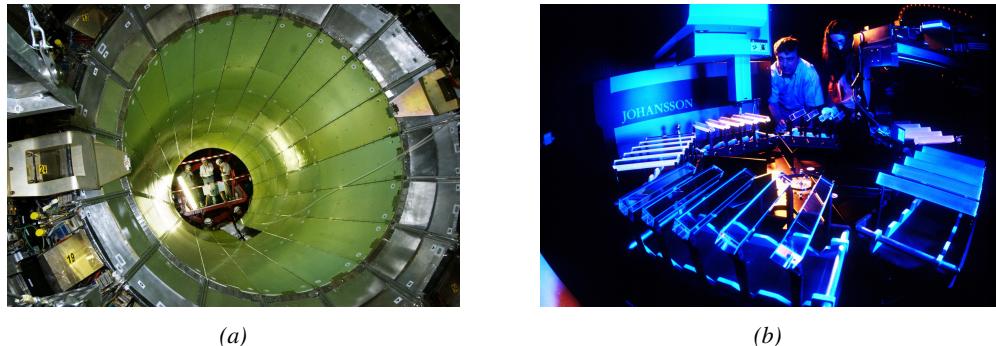

*Figure 2.12: Figure 2.12a: picture of the ECAL. Figure 2.12b: picture of the lead tungstate crystals composing the ECAL.*

The next layer is the HCAL measuring the hadrons momentum and providing indirect hints of non interacting neutral particles, such as neutrinos, as missing transverse momentum. Several layers of brass or steel are interleaved with plastic scintillators readout by photodiodes using wavelength-shifting fibers. The HCAL is also composed of a barrel, showed in Figure 2.13 and of endcaps. It also features forward calorimeters on both sides of CMS in the region very close to the beam line at high pseudorapidity ( $3.0 < |\eta| < 5.0$ ). The role of these forward calorimeters, made using steel and quartz fibers, is to measure very energetic hadrons.



*Figure 2.13: CMS hadron calorimeter barrel.*

Finally, in the outer region of the apparatus, a muon system is used to trigger on potentially interesting event by identifying muons. Indeed, the muon system is a very important part of the CMS trigger infrastructure designed to efficiently select data from the enormous data flow received by the detectors as the LHC delivers collisions at a rate of 40 MHz with a pile-ip of 20 to 30 collisions per bunch crossing during Phase-I and up to 200 during Phase-II, representing billions of interactions per second among which a large quantity are low energy collisions that are not likely to produce new reactions, and which is physically impossible for nowadays technologies to cope with. Working at a maximum rate of 100 kHz, the trigger system is able to select the 100,000 more interesting events

by looking at the energy distribution of the interaction products and clear signatures like muons reconstructed by the muon system. the vast majority of these events will not finally be stored after physics tests are applied.

### 2.2.2.3 The muon system, corner stone of CMS

The challenge for the muon system is to provide a robust and fast measurement of muons. Three different subsystems, and soon 4 after LS2, compose the muon system as showed in Figure 2.14 in which a quadrant of the CMS detector focused on muon system. Drift Tube (DT) are found in the barrel region covering the low pseudorapidity region where particles transverse momentum is lower and Cathode Strip Chamber (CSC) are found in the endcap region covering higher pseudorapidity region closer to beam line where particles have a stronger momentum. The redundancy of the system is insured by Resistive Plate Chamber (RPC) in both the barrel and endcap region. Nevertheless, the region closest to the beam line ( $|\eta| > 1.8$ ) was not equipped with RPCs. This lack of redundancy in the high pseudo rapidity region will be solved during LS2, the following Year End Technical Stop (YETS) in 2021 and 2022, and LS3 where the necessary services, detectors and Link System, that collects the data and synchronizes them, will be installed.


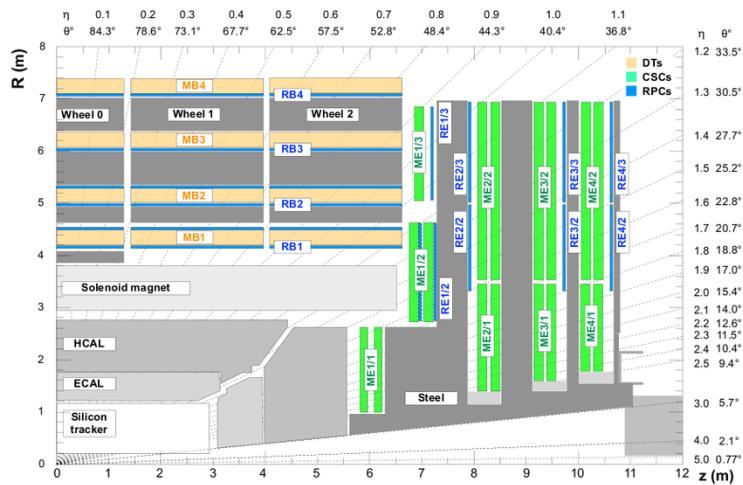


Figure 2.14: A quadrant of the muon system, showing DTs (yellow), RPCs (blue), and CSCs (green).


The barrel region is divided into 5 *wheels* made out of 4 *rings* of detectors with iron return yokes in between them whereas the endcaps are made out of 4 disks, each divided into pseudorapidity stations, 2 for CSCs (except for the first disk where 3 stations are equipped) and 3 for RPCs, although only 2 RPCs stations are equipped at present. The wheels and disks are showed in Figure 2.15. So far, each subsystem was dedicated to a particular task. DTs, in the barrel, and CSCs, in the endcaps, are used mainly for their spatial resolution. Indeed, DTs' resolution is of the order of 100  $\mu\text{m}$  along both the  $(r - \phi)$  and  $(r - z)$  components while the resolution of CSCs is similar but varies in a range from 50  $\mu\text{m}$  to 140  $\mu\text{m}$  depending on the distance to the beamline. On the other hand, RPCs are used for their time resolution as they can deliver an information on the muon tracks within 1.5 ns.

The 250 CMS DTs, found in the barrel covering the pseudorapidity region  $0 < |\eta| < 1.2$  and whose structure is shown in Figure 2.16, are composed of 3 *superlayers* of DT cells. Two of these superlayers are dedicated to measuring the  $\phi$  coordinate of the muons and while the last one

measures the  $\eta$  (or  $z$ ) coordinate. Each superlayer consists on 4 layers of 60 to 70 DT cells arranged in quincunx to allow for a precise reconstruction of the muon path through the DT layers. Each DT cell is a rectangular aluminium gas volume with a central anode wire. Cathode strips are placed on the narrow surface of the cells and electrode strips are placed on the wide surface to help shaping the electric field to ensure a consistent drift velocity of electrons in the drift volume. These detectors are operated using a 85/15 mixture of  $Ar$  and  $CO_2$ .

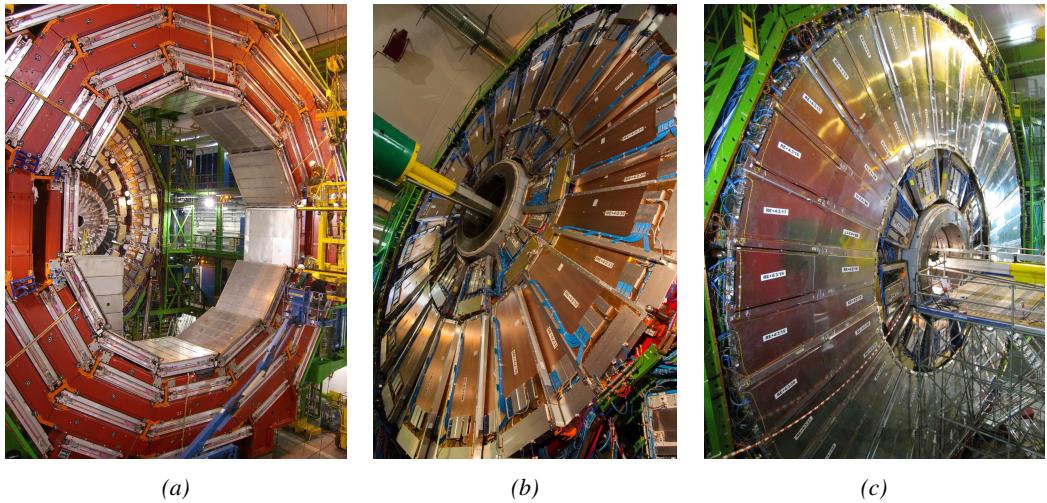

*Figure 2.15: Figure 2.15a: Barrel wheel with its detector rings and return yokes. Figure 2.15b: CSC endcap disk with the 2 CSC stations. The outer station is made of 10 deg detectors while the inner station is made of 20 deg detectors. Figure 2.15c: RPC endcap disk. The inner station is not equipped and the inner CSC station can be seen.*

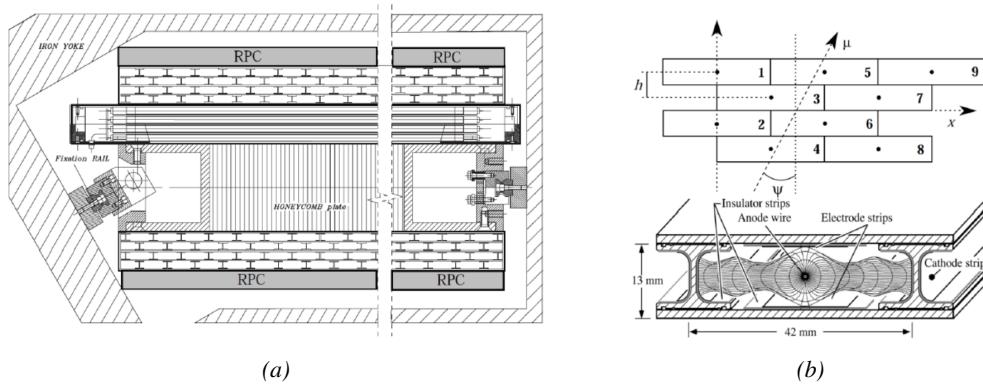

*Figure 2.16: Figure 2.16a: Cross section of a DT module showing the two superlayers measuring the  $\phi$  coordinate, perpendicular to the cross section plane, and the superlayer measuring the  $\eta$  coordinate, placed in between the two others with honeycomb and parallel to the cross section plane. The DT detector is sandwiched in between 2 RPCs whose readout strips are perpendicular to the cross section plane, measuring the  $\phi$  coordinate. Figure 2.16b: A DT cell is shown together with its electric field. The path of a muon through a superlayer is shown.*

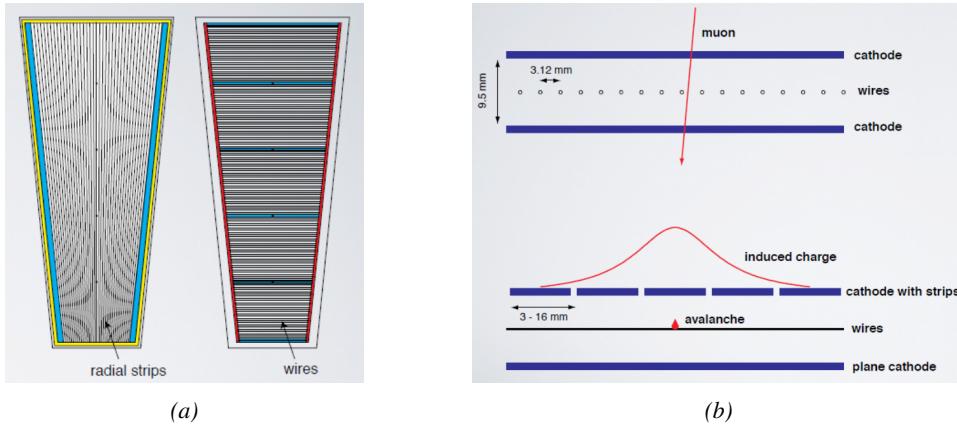


Figure 2.17: Figure 2.17a: cathode strips and anode wire layout of a CSC panel. Figure 2.17b avalanche development and charge collection by anode wires and induction on cathode strips inside of a CSC panel.

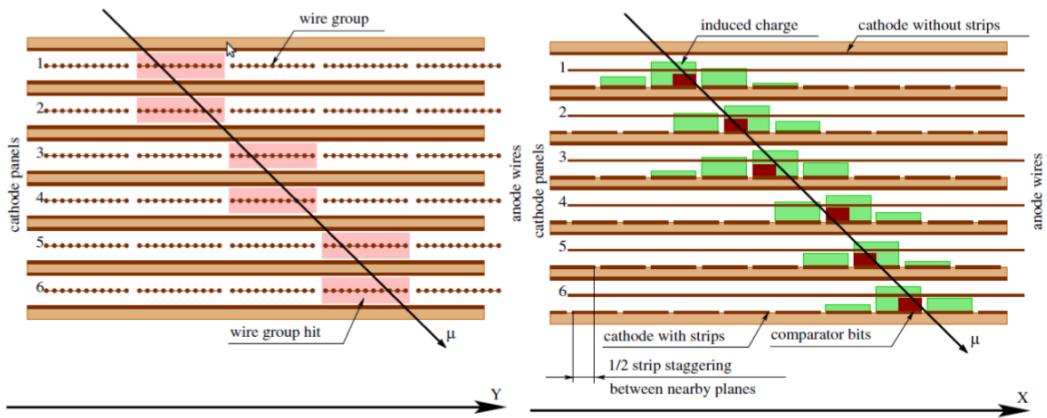


Figure 2.18: Muon track reconstruction through the 6 panels of a CMS CSC using the information of anode wire groups and cathode strip charge distribution combined with comparator bits to decide on which half strip the muon is more likely to have passed.

The 540 CMS CSCs, found in the endcaps covering the pseudorapidity region  $0.9 < |\eta| < 2.5$  and described through Figure 2.17, are composed of 6 panels of CSC, each panel consisting in a wide gas volume of 9.5 mm (7 mm in the case of ME1/1 station) containing anode wires and whose surfaces are cathodes. The top cathode is a wide copper plane of the size of the gas volume. The bottom cathode is divided into thin trapezoidal copper strips radially arranged to measure the azimuthal coordinate  $\phi$  with a pitch ranging from 8 to 16 mm. The  $0.50 \mu\text{m}$  anode wires are placed perpendicularly to the strips to measure radial coordinate  $r$  and are grouped by 10 to 15 with a wire to wire space of 3.2 mm. In the specific case of ME1/1 placed against the HCAL endcap, the  $0.30 \mu\text{m}$  anode wires have a wire to wire distance of 2.5 mm and are not disposed perpendicularly to the strips but slightly tilted by an angle of 29 deg to compensate for the lorentz force due to the very strong local magnetic field of 4 T. These detectors are operated with a 40/50/10 mixture of Ar, CO<sub>2</sub> and CF<sub>4</sub>. Combining the information of the multiple CSC panels, the detectors achieve a very precise measurement of the muon track.

Despite their excellent spatial resolution, the wire chambers (DTs and CSCs) are limited in terms of time resolution by the fact that the charge needs to drift towards the anode wire and be collected before having the confirmation that a particle was detected as the drift volume is not used to develop avalanches. Indeed, the stronger electric field close to the anode wire triggers the avalanche and the gain of the detector. Due to the drift, the time resolution is thus limited at best to approximately 2 to 3 ns. In addition, even though the intrinsic time resolution of the tracking chambers is rather good compared to the 25 ns in between successive collisions, the processing time of the trigger system doesn't allow for very fast triggering as it provides a time precision of only 12.5 ns. Thus, detectors fully dedicated to timing measurement have been installed as a redundant system. These detectors are RPCs, also gaseous detectors but that use current induction instead of charge collection allowing for a time resolution of the order of 1.5 ns only. Theoretically, depending on the design used, RPCs could reach a time resolution of the order of 10 ps but in the context of LHC where bunch crossing happen every 25 ns, a time resolution of 1.5 ns is sufficient to accurately assign the right bunch crossing to each detected muon.

The 1056 RPCs equipping the CMS muon system both in the barrel and endcap regions and covering the pseudorapidity region  $0 < |\eta| < 1.6$  are composed of two layers of RPC *gaps* as described in Figure 2.19. Each gap consists in two resistive electrodes made out of 2 mm thick Bakelite enclosing a 2 mm thick gas volume containing a 95.2/4.5/0.3 mixture of  $C_2H_2F_4$ ,  $i - C_4H_{10}$  and  $SF_6$ . Due to this geometry, the electric field inside of a gap is homogeneous and linear at every point in the gas translating into a uniform development of avalanches in the gas volume as soon as a passing muon ionises the gas. The two gaps sandwich a readout copper strip plane. A negative voltage is applied on the outer electrodes, used as cathodes, and the inner electrodes, the anodes, are simply connected to the ground as well as the readout panel that picks up the current induced by the accumulated charge of the growing avalanches in one or both of the gas gaps. This OR system allows for a lower gain (i.e. a lower electric field) on both gaps to reach the maximal efficiency of such a detector.

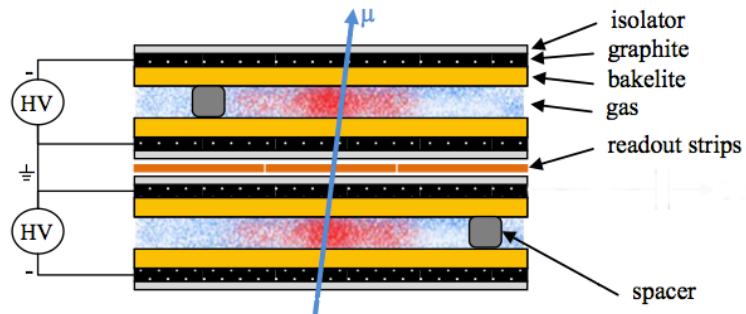


Figure 2.19: Double gap layout of CMS RPCs. Muons passing through the gas volumes will create electron-ion pairs by ionising the gas. this ionisation will immediately translate into a developing avalanche.



# 3

1262

1263

## Muon Phase-II Upgrade

1264 The very first proton beam successfully circulated in the LHC in September 2008 directly followed  
1265 by an incident leading to mechanical damage that would delay the LHC program for a year until  
1266 November 2009, the very first collisions at a center-of-mass energy of 7 TeV taking place in March  
1267 2010. The energy of the beam would be increased after a First Long Shutdown (LS1) starting early  
1268 2013 after less than 3 years of data taking. Nevertheless, this first data taking period at only 7 TeV  
1269 was sufficient to claim the discovery of a new particle compatible with the Higgs boson in July 2012.  
1270 During the 2 years of shutdown, the upgrade of the accelerator allowed for several maintainances  
1271 along the beam pipes, repair and consolidation of magnet connection and high-current splices. But  
1272 not only the LHC was upgraded. Indeed, the experiments at the 4 collision points also took the  
1273 advantage of this time to upgrade their system in prevision of the next LHC run (Run-II) until  
1274 2018 and the Second Long Shutdown (LS2) as the luminosity and energy of the beam would be  
1275 continuously increasing. By the end of Run-II, the luminosity will have reached twice its nominal  
1276 value when the center-of-mass energy has already got close to its nominal value by reaching an  
1277 historical 13 TeV for the first time in 2017.

1278 The next long shutdown will occur at the end of this year and will again be the occasion for sim-  
1279 ilar maintenance and consolidation in prevision of Run-III and the future upgrade of LS3. Still, the  
1280 main occupation of LS2 on LHC side will be the upgrade of LHC injectors. On the experiments side,  
1281 LHCb and ALICE will, in a very tight schedule, implement major upgrades while ATLAS and CMS  
1282 will wait until LS3 to upgrade their detectors in prevision of high luminosity *LHC-Phase-II*. ALICE  
1283 main challenge is an upgrade of their apparatus to cope with the 50 kHz  $Pb - Pb$  collisions. Simi-  
1284 larly, LHCb will upgrade their frontend readout electronics to cope with the full 40 MHz collisions  
1285 delivered by LHC. ATLAS will perform standard maintenance and CMS will focus on the urgent up-  
1286 grade of the pixel detector and on the installation of new muon detectors in order to take profit of LS2  
1287 time to mitigate the upgrade of detectors foreseen during LS3. Run-III will start in 2021 with the LHC  
1288 at its nominal center-of-mass energy and will bring LHC-Phase-I to an end at the end of 2023. By  
1289 then the luminosity will only increase to reach 2.5 times the nominal luminosity but during these 3  
1290 years of run, the LHC will deliver as much integrated luminosity as what what brought during the al-

most 7 years of both Run-I and II of data taking. Phase-I will end with an overall  $300 \text{ fb}^{-1}$  delivered.

1292

### 3.1 High Luminosity LHC and muon system requirements

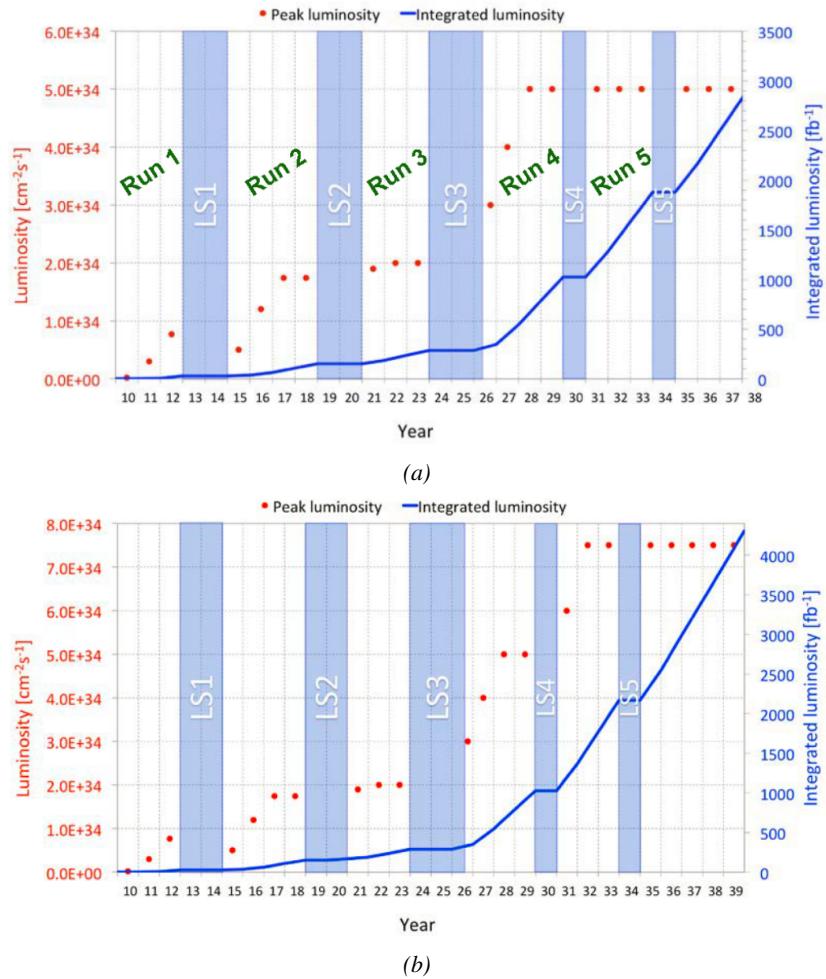


Figure 3.1: Detailed timeline projection of for LHC and HL-LHC operation until 2039 showing the evolution of the instantaneous and integrated luminosity as designed (Figure 3.1a) and in the ultimate case where the instantaneous luminosity is increased to  $7.5 \times 10^{34} \text{ cm}^{-2}\text{s}^{-1}$  (Figure 3.1b) [20, 22].

After approximately 15 years of operation, the LHC will undergo a new series of upgrade during the LS3 in order to boost its discovery potential as showed in Figure 3.1. This moment onward is what is referred to HL-LHC or Phase-II. The goal is to aim for a luminosity 5 to 7 times stronger than the nominal one trying to reach even 10 times this value if possible. Increasing the luminosity means that the beam size at the collision points needs to be reduced to boost the number of collisions per bunch crossing. For this purpose, new focusing and bending magnets, and collimators will be installed at the collision points as well as newly developed "crab cavities" that will tilt the particle

1294

1295

1296

1297

1298

1299

1300

1301 bunched just prior to the collisions by giving them transverse momentum and thus increasing their  
 1302 meeting area. In addition, the full proton injection line will be upgraded.

1303 Over its full lifetime, the HL-LHC is expected to deliver an outstanding integrated luminosity of  
 1304  $3000 \text{ fb}^{-1}$  leading, in the case of Higgs studies to measuring the couplings of the boson to a precision  
 1305 of 2 to 5% thanks to the estimated 15 millions of Higgs created every year providing a more precise  
 1306 measurement of potential deviations from the theoretical predictions. SUSY and heavy gauge boson  
 1307 studies would also see their mass range limits pushed away by at least 1 TeV and could lead to a new  
 1308 breakthrough. SUSY is a particularly important topic as it could give an answer to why the Higgs  
 1309 boson can stay so light while coupled to heavy particles by introducing the contributions of the super  
 1310 partners on top of providing dark matter candidates. Finally, the increase of luminosity will give the  
 1311 possibility to investigate "exotic" mode like for example the models introducing extra dimensions to  
 1312 explain the hierarchy problem.

1313 On the experiments side, the pile-up (PU) will be increased up to 150 to 200 interactions per  
 1314 bunch crossing in ATLAS and CMS, making necessary an strong upgrade of the trigger system and  
 1315 of the inner trackers and of the calorimeters. Both ATLAS and CMS will also need to upgrade  
 1316 the muon trigger at the level of the endcaps mainly focusing on the coverage near the beam line in  
 1317 order to increase the detection acceptance and event selection. Moreover, the increased luminosity  
 1318 will also lead to an increased background rate and a faster ageing of the detectors. This PhD work  
 1319 takes place into this very specific context of muon detector consolidation and certification for the  
 1320 HL-LHC period in order to provide the CMS experiment with robust new detectors and confirm that  
 1321 the present system will survive through the next 20 years of HL-LHC.


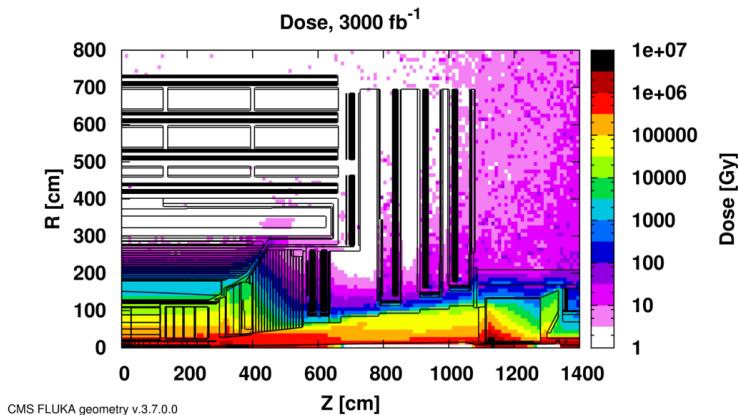


Figure 3.2: Absorbed dose in the CMS cavern after an integrated luminosity of  $3000 \text{ fb}$ . Using the interaction point as reference,  $R$  is the transverse distance from the beamline and  $Z$  is the distance along the beamline.

1322 The end of 2018 will mark the beginning of LS2 and the start of Phase-II upgrade activities.  
 1323 From the HL-LHC period onwards, i.e. past LS3, the performance degradation due to integrated  
 1324 radiation as well as the average number of inelastic collisions per bunch crossing, seen as pile-up  
 1325 into the detectors' readout that far exceeds this of the original LHC plans, will rise substantially and  
 1326 become a major challenge for all of the LHC experiments, like CMS, that were forced to address  
 1327 an upgrade program for Phase-II [23]. Dealing with the data from the muon detectors will force  
 1328 to upgrade the detectors and electronics towards the most recent technologies. Simultaneously, this  
 1329 will push new latency requirements onto the Level-1 trigger and the Data Acquisition (DAQ) that

will only be fulfilled by upgrading the system with electronics having deeper buffering and faster processing. Simulations of the expected distribution of absorbed dose in the CMS detector under HL-LHC conditions show, in Figure 3.2, that detectors placed close to the beam line will have to withstand high irradiation, the radiation dose being of the order of a few tens of Gy.

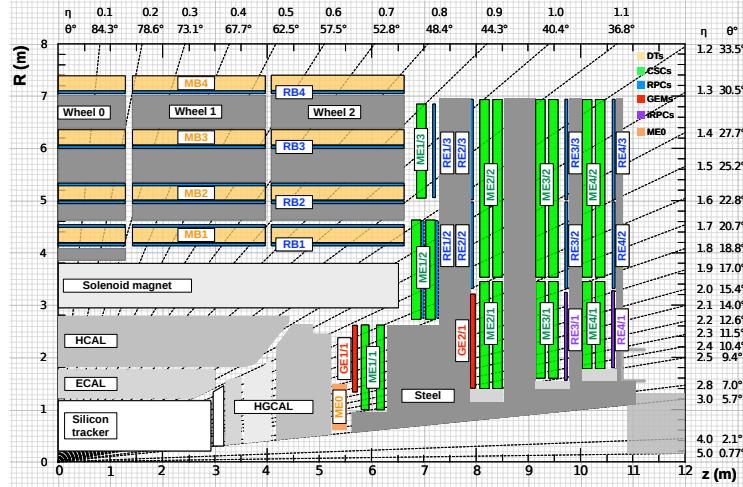

**Figure 3.3:** A quadrant of the muon system, showing DTs (yellow), RPCs (blue), and CSCs (green). The locations of new forward muon detectors for Phase-II are contained within the dashed box and indicated in red for GEM stations (ME0, GE1/1, and GE2/1) and dark blue for improved RPC (iRPC) stations (RE3/I and RE4/I).

The increase of irradiation close to the beam line will affect the background rate seen by the muon detectors in this area and tracking muons will prove to be difficult as this region is not yet equipped with all the detectors that were already foreseen for Phase-I. Improving this situation will come with the increase of hit numbers recorded along the particle track to reduce the ambiguity on muon versus background detection. Moreover, the measurement of small production cross-section and/or decay branching ratio processes, such as the Higgs boson coupling to charge leptons, and in particular to muons, or the  $B_s \rightarrow \mu^+ \mu^-$  decay, is of major interest and specific upgrades in the forward regions of the detector will be required to maximize the physics acceptance to the largest possible solid angle.

To ensure proper trigger performance within the present coverage, the muon system will be completed with new chambers and the electronics of the present system will need to be upgraded to ensure an efficient triggering. Figure 3.3 shows the addition of Gas Electron Multiplier (GEM) and improved RPC (iRPC) in the pseudo-rapidity region  $1.6 < |\eta| < 2.4$  to complete the redundancy of the already existing CSCs as originally scheduled in the CMS Technical Proposal [26]. A first step into this direction will be taken by installing GEMs on the first endcap disk in position GE1/1 during LS2, during which preparations for the future installation of more GEMs and RPCs will take place by installing the needed services. During the YETS following LS2, iRPCs will be installed on the third and fourth endcap disks in position RE3/I and RE4/I, and more GEMs will equip the second endcap in position GE2/1 and the inner layer, closest to the HCAL endcap called ME0 during LS3, finally completing the redundant coverage of the muon system and extending it a little by extending the reach to  $|\eta| = 2.8$ , the redundancy in the region  $2.4 < |\eta| < 2.8$  being maintained by the 6 GEM layers contained in each ME0 detector that provide enough tracking points to efficiently reject

1356 neutron-induced background.

1357 Nevertheless, the region beyond  $|\eta| > 2.8$  and extending to  $|\eta| = 5.0$  only is covered by the  
 1358 forward HCAL detectors and lack redundant muon detector coverage. Extensions of the tracker in  
 1359 the context of HL-LHC will increase its coverage up to  $|\eta| = 4.0$  but the identification of muons and  
 1360 measurement of their energy with reasonable precision only using the tracker is nearly impossible.  
 1361 Thus, this increased tracker coverage range needs to be put in parallel with a matching muon detector  
 1362 and will open doors to multi-lepton final states in which leptons are likely to have a low transverse  
 1363 momentum and to be found near the beam line.

1364

1365 Finally, as the muon system is composed only of gaseous detectors, strong environmental con-  
 1366 cerns have risen over the last years as the European directives will restrict the use of fluorine based  
 1367 gas mixtures. Both the CSC and RPC subsystems, using  $CF_4$ ,  $C_2H_2F_4$ , or  $SF_6$ , will need to adapt  
 1368 their working gas in order to strongly reduce the greenhouse potential of the mixtures released into  
 1369 the atmosphere due to gas leaks.

## 1370 3.2 Necessity for improved electronics

1371 Drift Tubes and Cathode Strip Chambers are important components used to identify and measure  
 1372 muons, especially thanks to their spatial resolution of the order of  $100\ \mu m$ . Nevertheless, the lumi-  
 1373 nosity and irradiation during HL-LHC will cause serious event loss and ageing on the electronics of  
 1374 these subsystems that will comprise the triggering and data transferring needs of CMS. Thus, elec-  
 1375 tronics upgrade are foreseen to address these expected problems. While only the RPCs' electronic  
 1376 system is able to operate under Phase-II requirements, DTs and CSCs will need to improve their  
 1377 trigger accept rate and latency to ensure that Level-1 trigger threshold stays at the same level [24],  
 1378 and DAQ data transfer rate, that respectively need to achieve a minimum of  $500\ kHz$ , get down to  
 1379  $12.5\ \mu s$  [25], and increase to  $1082\ Gbit/s$  DTs and to  $1026\ Gbit/s$  for CSCs. As of today, the Level-  
 1380 1 trigger accept rate of DTs doesn't reach  $300\ kHz$  while this of CSCs is below  $250\ kHz$  but the  
 1381 foreseen upgrades are expected to increase the rate way beyond the requirement in the of DTs and  
 1382 up to  $4\ MHz$  for CSCs [23].

1383 The first version of Minicrate electronics (MiC1) used by DTs don't allow for high enough  
 1384 trigger rate. In addition to this problem, it was showed that these electronics contain components  
 1385 that are not radiation hard enough to sustain HL-LHC conditions and thus, a too large number of  
 1386 channels may fail due to radiations. Considering the most optimistic scenario, at least 19% of the  
 1387 channels could have failed by LS4, as explicitated in Figure 3.4, far before the end of the HL-LHC  
 1388 campain. The MiC1 will be replaced on each detector by an improved version referred to as MiC2  
 1389 while front-end electronics and high-voltage modules will not need any replacement. On the other  
 1390 hand, CSCs showed that there electronics would be able to live through the 10 years of Phase-II but  
 1391 the limited buffer depth might cause memory overflows and readout inefficiencies with a fraction  
 1392 of event loss ranging from 5 to more than 10% at an instantaneous luminosity similar to which of  
 1393 HL-LHC depending on the expected background, as showed on Figure 3.5 through the different  
 1394 detector positions. Thus the replacement of CSCs' cathode front-end boards (CFEBs) by digital  
 1395 ones, DCFEBS, with deeper buffer would permit to make event loss negligible and satisfy HL-LHC  
 1396 requirements [23].

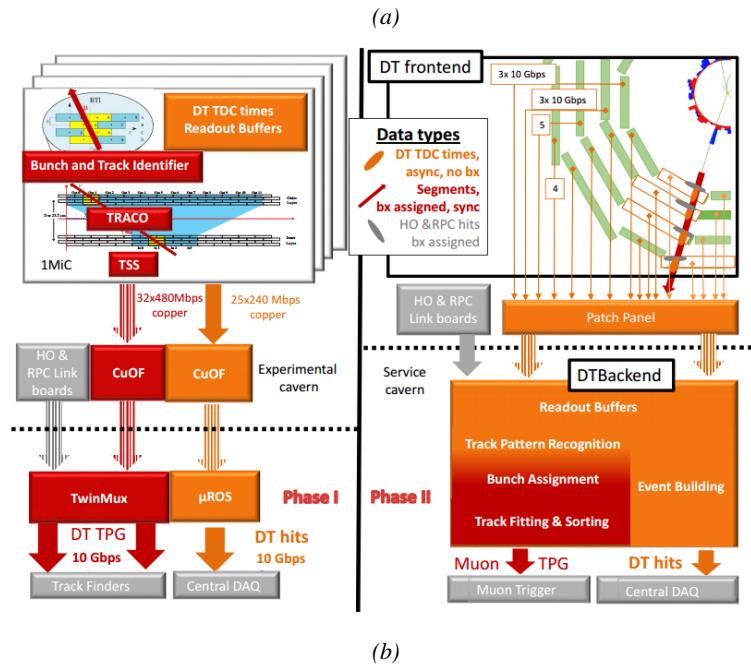
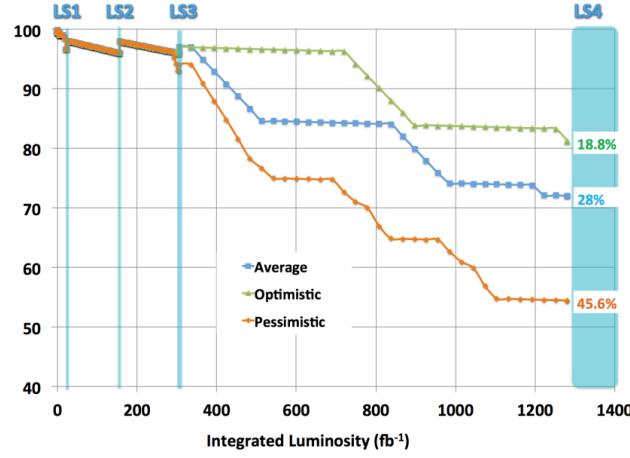


Figure 3.4: Figure 3.4a: Extrapolated fraction of failing channels of the present DT MiC1 electronics as a function of the integrated luminosity for different scenari until LS4. Figure 3.4b: Comparison of the current (left) and upgraded (right) DT data processing. So far, the data is sent to service cavern of CMS facility via copper-to-optical-fiber translators (CuOF) by each MiC1. There, data including RPCs and outer hadron calorimeter is combined into trigger primitives (TPG) and transmitted by the TwinMux system to CMS Track Finder. The time-to-digital converter (TDC) data is collected and sent to the CMS data acquisition system (DAQ) by the micro read-out server ( $\mu$ ROS). After the upgrade, the TDC data will be sent via optical links to a patch panel inside the experimental cavern by each MiC2, and transferred to the back-end, where triggering and event building will be performed.

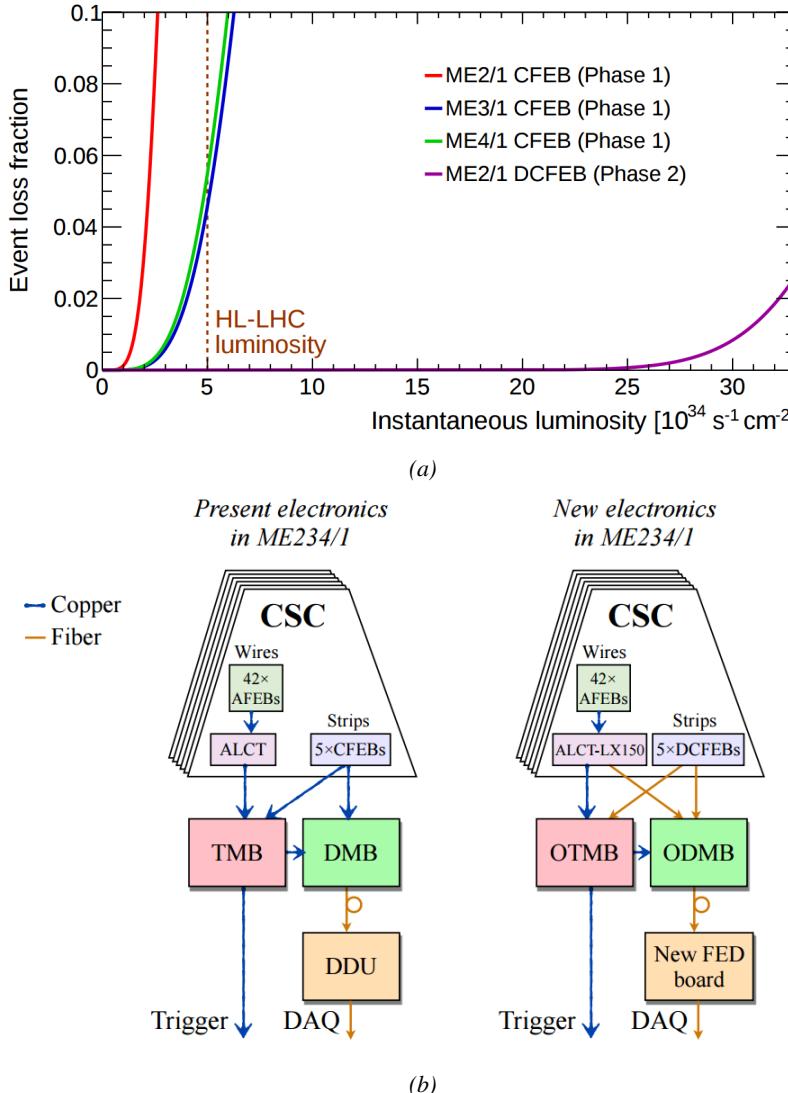


Figure 3.5: Figure 3.5a: The event loss fractions as a function of the instantaneous luminosity is compared for CFEBs (Phase-1) and DCFEBs (Phase-II) at different CSC locations. HL-LHC luminosity is marked with the dashed brown line. Figure 3.5b: Comparison of the current (left) and upgraded (right) CSC data processing. A part of the connections in between ALCTs and DCFEBs, and the trigger mother boards (TMBs) and data acquisition mother boards (DMBs) will be upgraded toward optical data transfer. The detector dependent units (DDUs) used as interface in between CSCs' front-end electronics and the CMS DAQ will be replaced by new FED boards.

1397 All these new DT and CSC electronics will be connected to the trigger electronics via optical  
 1398 links to ensure a faster communication. The main change will come from the new DT minicrate  
 1399 modules which will not anymore be responsible for trigger and event building logic which will be  
 1400 transferred to the back-end electronics instead located in the service cavern via the patch pannels to  
 1401 which the Time-to-Digital Converter (TDC) data will be sent. The trigger and data transfer logic will  
 1402 barely change for CSCs. The existing copper cable connections of cathode and anode FEBs (CFEBs,

and AFEBs which data is transmitted through the ALCTs) toward the trigger and data mother boards (TMBs and DMBs) will simply be replaced by optical fibers and the TMBs and DMBs upgraded with optical versions (OTMBs and ODMBs). As a new feature, the full anode wire data from ALCTs will be sent to the ODMBs causing a lack of FPGA memory resources in these ALCT boards that will thus need replacement.

### 3.3 New detectors and increased acceptance

In the present muon system, RPCs are used by CMS L1 trigger for their good timing performances. Indeed, a very good bunch crossing identification can be obtained with the present CMS RPC system, given their fast response of the order of 1 ns. In order to contribute to the precision of muon momentum measurements, muon chambers should have a spatial resolution less or comparable to the contribution of multiple scattering [21]. Most of the plausible physics is covered only considering muons with  $p_T < 100$  GeV thus, in order to match CMS requirements, a spatial resolution of  $\mathcal{O}(\text{few mm})$  the proposed new RPC stations, as shown by the simulation in figure 3.6. According to preliminary designs, RE3/1 and RE4/1 readout pitch will be comprised between 3 and 6 mm and 5  $\eta$ -partitions could be considered.

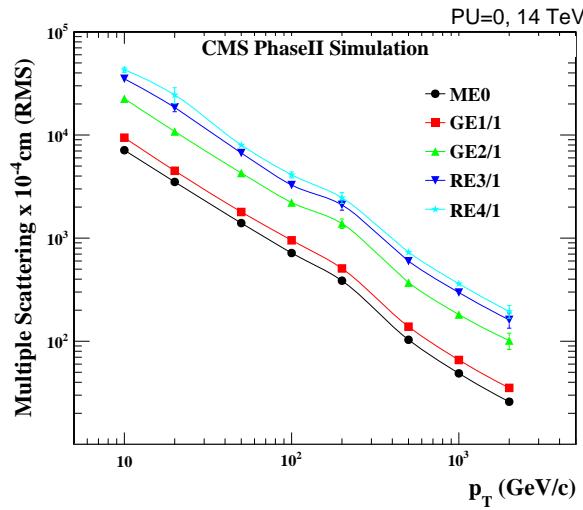


Figure 3.6: RMS of the multiple scattering displacement as a function of muon  $p_T$  for the proposed forward muon stations. All of the electromagnetic processes such as bremsstrahlung and magnetic field effect are included in the simulation.

<sup>1418</sup> **3.4 Implications of the different upgrades on the Level-1 Trig-**  
<sup>1419</sup> **ger. Improvement of physics performance.**

<sup>1420</sup> **3.5 Ecofriendly gas studies**

<sup>1421</sup> **3.5.1 Status of the studies and potential candidates**

<sup>1422</sup> **3.5.2 Implications in case of no suitable ecofriendly mixture**



# 4

1423

1424

## Physics of Resistive plate chambers

1425 A Resistive Plate Chamber (RPC) is a gaseous detector using the same physical processes described  
1426 in Chapter 3. It has been developed in 1981 by Santonico and Cardarelli [27], under the name of  
1427 *Resistive Plate Counter*, as an alternative to the local-discharge spark counters proposed in 1978  
1428 by Pestov and Fedotovich [28, 29]. Working with spark chambers implied using high-pressure gas  
1429 and high mechanical precision which the RPC simplified by formerly using a gas mixture of argon  
1430 and butane flowed at atmospheric pressure and a constant and uniform electric field propagated  
1431 in between two parallel electrode plates. Moreover, a significant increase in rate capability was  
1432 introduced by the use of electrode plate material with high bulk resistivity, preventing the discharge  
1433 from growing throughout the whole gas gap. Indeed, the effect of using resistive electrodes is that  
1434 the constant electric field is locally canceled out by the development of the discharge, limiting its  
1435 growth.


1436 Through its development history, different operating modes [30–32] and new detector designs [33–  
1437 35] have been discovered, leading to further improvement of the rate capability of such a detector.  
1438 Moreover, the addition of  $SF_6$  into the gas mix improved the stability of operation of the RPC [36,  
1439 37].

1440 The low developing costs and easily achievable large detection areas offered by RPCs, as well as  
1441 the wide range of possible designs, made them a natural choice to as muon chambers and/or trigger  
1442 detectors in multipurpose experiments such as CMS [21] or ATLAS [38], time-of-flight detectors in  
1443 ALICE [39], calorimeter with CALICE [40] or even detectors for volcanic muography with ToMu-  
1444 Vol [41].

### 1445 4.1 Principle

1446 RPCs are ionisation detectors composed of two parallel resistive plate electrodes in between which  
1447 a constant electric field is set. The space in between the electrodes, referred as *gap*, is filled with a  
1448 dense gas that is used to generate primary ionization into the gas volume. The free charge carriers  
1449 (electrons and cations) created by the ionization of the gas molecules are then accelerated towards

<sup>1450</sup> the electrodes by the electric field, as shown in Figure 4.1 [42].

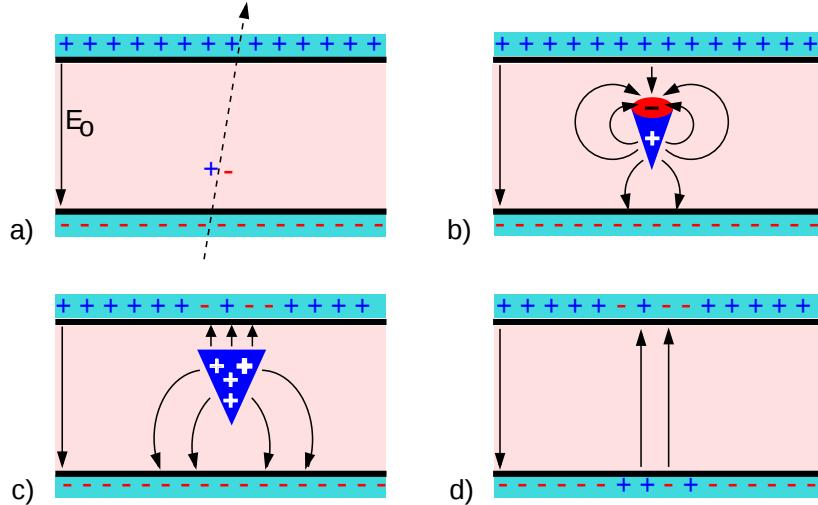


*Figure 4.1: Different phases of the avalanche development in the RPC gas volume subjected to a constant electric field  $E_0$ . a) An avalanche is initiated by the primary ionisation caused by the passage of a charged particle through the gas volume. b) Due to its growing size, the avalanche starts to locally influence the electric field. c) The electrons, lighter than the cations reach the anode first. d) The ions reach the cathode. While the charges have not recombined, the electric field in the small region around the avalanche stays affected and locally blind the detector.*

<sup>1451</sup> RPCs being passive detectors, a current on pick-up copper read-out placed outside of the gas  
<sup>1452</sup> volume is induced by the charge accumulation during the growth of the avalanche. As a result,  
<sup>1453</sup> the time resolution of the detector is substantially increased as the output signal is generated while  
<sup>1454</sup> the electrons are still in movement. The advantage of a constant electric field, over multi-wire  
<sup>1455</sup> proportional chambers, is that the electrons are being fully accelerated from the moment charge  
<sup>1456</sup> carriers are freed and feel the full strength of the electric field that doesn't depend on the distance to  
<sup>1457</sup> the readout and that the output signal doesn't need for the electrons to be physically collected.

<sup>1458</sup> The typical gas mixture RPCs are operated with is generally composed of 3 gas compounds.

- <sup>1459</sup> • Tetrafluoroethane ( $C_2F_4H_2$ ), also referred to as *Freon*, is the principal compound of the RPC  
<sup>1460</sup> gas mixtures, with a typical fraction above 90%. It is used for it's high effective Townsend  
<sup>1461</sup> coefficient and the great average fast charge that allows to operate the detector with a high  
<sup>1462</sup> threshold with respect to argon, for example, that has similar effective Townsend coefficient  
<sup>1463</sup> but suffers from a lower fast charge. To operate with similar conditions, argon would require a  
<sup>1464</sup> higher electric field leading to a higher fraction of streamers, thus limiting the rate capability  
<sup>1465</sup> of the detector [43].
- <sup>1466</sup> • Isobutane (i- $C_4H_{10}$ ), only present in a few percent in the gas mixtures, is used for its UV  
<sup>1467</sup> quenching properties [44] helping to prevent streamers due to UV photon emission during the  
<sup>1468</sup> avalanche growth.
- <sup>1469</sup> • Sulfur hexafluoride, ( $SF_6$ ), referred to simply as *SF6*, is used in very little quantities for its  
<sup>1470</sup> high electronegativity. Excess of electrons are being absorbed by the compound and streamers

are suppressed [37]. Nevertheless, a fraction of  $SF_6$  higher than 1% will not bring any extra benefit in terms of streamer cancelation power but will lead to higher operating voltage [36], as can be understood through Figure 4.2.

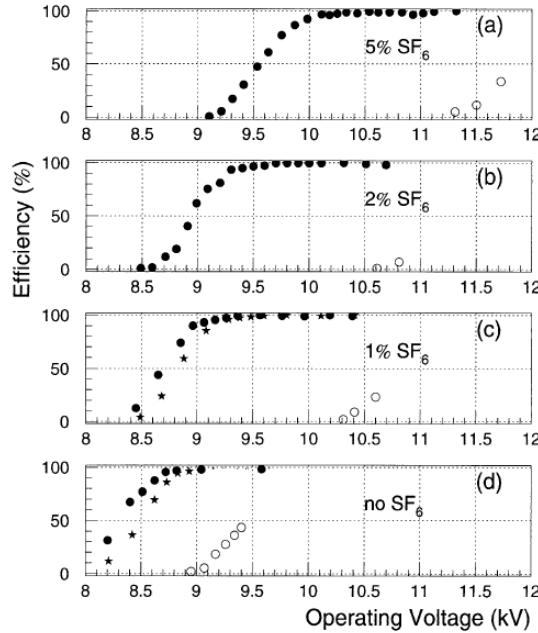

*Figure 4.2: Effeciency (circles and stars with 30 mV and 100 mV thresholds respectively) and streamer probability (opened circles) as function of the operating voltatge of a 2 mm single gap HPL RPC flushed with a gas mixture containing (a) 5%, (b) 2%, (c) 1% and (d) no  $SF_6$  [36].*

After an avalanche developed in the gas, a time long compared to the development of a discharge is needed to recombine the charge carriers in the electrode material due to their resistivity. This property has the advantage of affecting the local electric field and avoiding sparks in the detector but, on the other hand, the rate capability is intrinsically limited by the time constant  $\tau_{RPC}$  of the detector. Using a quasi-static approximation of Maxwell's equations for weakly conducting media, it can be shown that the time constant  $\tau_{RPC}$  necessary to the charge recombination at the interface in between the electrode and the gas volume is given by the Formula 4.1 [45].

$$\tau_{RPC} = \frac{\epsilon_{electrode} + \epsilon_{gas}}{\sigma_{electrode} + \sigma_{gas}} \quad (4.1)$$

A gas can be assimilated to vacuum, leading to  $\epsilon_{gas} = \epsilon_0$  and  $\sigma_{gas} = 0$ , and the electrodes permittivity and conductivity can be written as  $\epsilon_{electrode} = \epsilon_r \epsilon_0$  and  $\sigma_{electrode} = 1/\rho_{electrode}$ , showing the strong dependence of the time constant to the electrodes resistivity in Formula 4.2.

$$\tau_{RPC} = (\epsilon_r + 1)\epsilon_0 \times \rho_{electrode} \quad (4.2)$$

Very few materials with a low enough resistivity exist in nature. The resistivity targeted to build RPCs ranges from  $10^9$  to  $10^{12} \Omega \cdot \text{cm}$ . The most common RPC electrode materials are displayed in Table 4.1. When the doped glass and ceramics can offer short time constants of the order of 1 ms,

<sup>1487</sup> the developing cost of such materials is quite high due to the very low demand. Thus, High-pressure  
<sup>1488</sup> laminate (HPL) is often the choice for high rate experiments using very large RPC detection areas.  
<sup>1489</sup> Other experiments working at cosmic muon fluxes can safely operate with ordinary float glass.

Material	$\rho_{electrode}$ ( $\Omega \cdot \text{cm}$ )	$\epsilon_r$	$\tau_{RPC}$ (ms)
Float glass	$10^{12}$	$\sim 7$	$\sim 700$
High-pressure laminate	$10^{10}$ to $10^{12}$	$\sim 6$	$\sim 6$ to 600
Doped glass (LR S)	$10^9$ to $10^{11}$	$\sim 10$	$\sim 1$ to 100
Doped ceramics (SiN/SiC)	$10^9$	$\sim 8.5$	$\sim 1$
Doped ceramics (Ferrite)	$10^8$ to $10^{12}$	$\sim 20$	$\sim 0.2$ to 2000

Table 4.1: Properties of the most used electrode materials for RPCs.

### <sup>1490</sup> 4.1.1 Electron drift velocity


<sup>1491</sup> Talk about the electron drift velocity and mention the time resolution of RPCs.

## <sup>1492</sup> 4.2 Rate capability and time resolution of Resistive Plate Chambers

<sup>1494</sup> As already previously discussed, the electrode material plays a key role in the max intrinsic rate  
<sup>1495</sup> capability of RPCs. R&D is being done to develop at always cheaper costs material with lower  
<sup>1496</sup> resistivity. Nevertheless, the amount of charge released, i.e. the size of the discharge, if reduced  
<sup>1497</sup> leads to a smaller blind area in the detector, increasing the rate capability of the detector.

### <sup>1498</sup> 4.2.1 Operation modes

<sup>1499</sup> RPCs where developed early 1980s. At that time it was using an operating mode now referred to  
<sup>1500</sup> as *streamer mode*. Streamers are large discharges that develop in between the 2 electrodes enough  
<sup>1501</sup> to locally discharge the electrodes. If the electric field inside of the gas volume is strong enough,  
<sup>1502</sup> with electrons being fast compared to ions, a large and dense cloud of positive ions will develop  
<sup>1503</sup> nearby the anode and extend toward the cathode while the electrons are being collected, eventually  
<sup>1504</sup> leading to a streamer discharge due to the increase of field seen at the cathode. the field is then strong  
<sup>1505</sup> enough so that electrons are pulled out of the cathode. Electrodes, though they are a unique volume  
<sup>1506</sup> of resistive material, can be assimilated to capacitors. At the moment an electric field is applied in  
<sup>1507</sup> between their outer surfaces, the charge carriers inside of the volume will start moving leading to  
<sup>1508</sup> a situation where there is no voltage across the electrodes and a higher density of negative charges,  
<sup>1509</sup> i.e. electrons, on the inner surface of the cathode. Finally, when a streamer discharge occurs, these  
<sup>1510</sup> electrons are partially released in the gas volume contributing to increase the discharge strength until  
<sup>1511</sup> the formation of a conductive plasma, the streamer. This can be understood through Figure 4.3 [30].  
<sup>1512</sup> Streamer signals are very convenient in terms of read-out as no amplification is required with output  
<sup>1513</sup> pulses amplitudes of the order of a few tens to few hundreds of mV as can be seen on Figure 4.4.

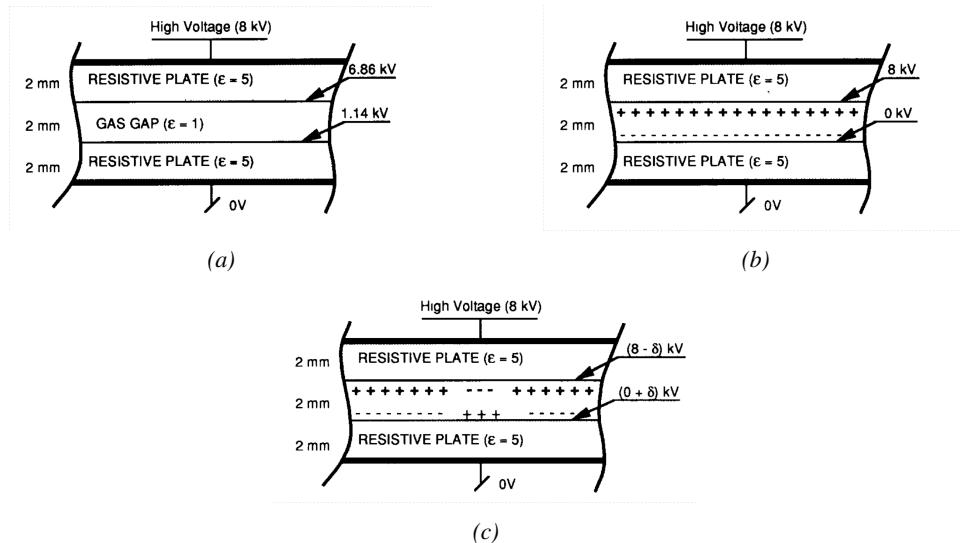

**Figure 4.3: Movement of the charge carriers in an RPC.** Figure 4.3a: Voltage across an RPC whose electrode have a relative permittivity of 5 at the moment the tension  $s$  applied. Figure 4.3b: After the charge carriers moved, the electrodes are charged and there is no voltage drop over the electrodes anymore. The full potential is applied on the gas gap only. Figure 4.3c: The streamer discharge initiated by a charged particle transports electrons and cations towards the anode and cathode respectively.

When the electric field is reduced though, the electronic gain is small until the electrons get close enough to the anode and the positive ion cloud is much smaller. The electric field cannot rise to the point a field emission of electrons on the cathode is possible. The resulting signal is weak, of the order of a few mv as shown on Figure 4.4, and requires amplification. This is the *avalanche mode* of RPC operation.

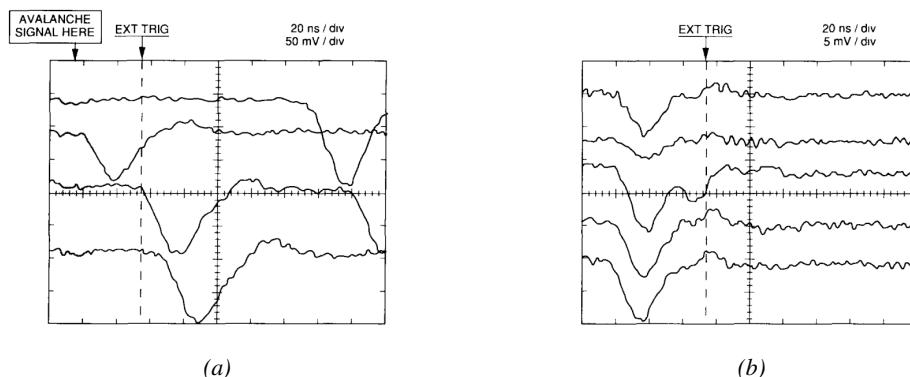


Figure 4.4: Typical oscilloscope pulses in streamer mode (Figure 4.4a) and avalanche mode (Figure 4.4b). In the case of streamer mode, the very small avalanche signal is visible.

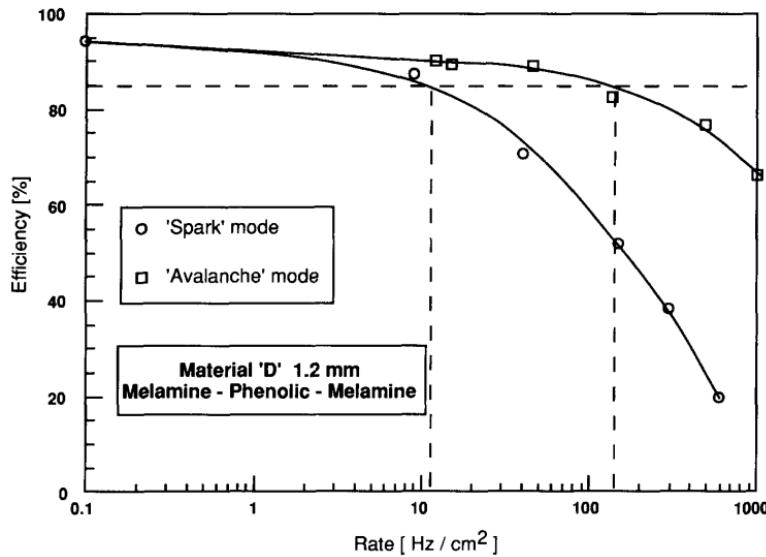


Figure 4.5: Rate capability comparison for the streamer and avalanche mode of operation. An order of magnitude in rate capability for a maximal efficiency drop of 10% is gained by using the avalanche mode over the streamer mode.

This mode offers a higher rate capability by providing smaller discharges that don't affect the electrodes charge and are more locally contained in the gas volume as was demonstrated by Crotty with Figure 4.5 [30]. The detector only stays locally blind the time the charge carriers are recombined and there is no need for electrode recharge which is a long process affecting a large portion of the detector. Another advantage of avalanche signals over streamer is the great time consistency. Figure 4.4 shows very clearly that avalanche signals have a very small time jitter. This is a natural choice for high rate experiments.

## 4.2.2 Detector designs and performance

Different RPC design have been used and each of them present its own advantages. Historically, the first type of RPC to have been developed is what is referred now to *narrow gap* RPC [27, 46]. After the avalanche mode has been discovered [30], it has been proven that increasing the width of the gas gap lead to higher rate capability, due to lower charge deposition per avalanche, and lower power dissipation [46]. Nevertheless, by increasing the gas gap width, the time resolution of the detector decreases. This is a natural result if the increase of active gas volume in the detector is taken into account. Indeed, for a given threshold, only the small fraction of gas closest to the cathode will provide enough gain to have a detectable signal. In the case of a wider gas volume, the active region is then larger and a larger time jitter is introduced with the variation of starting position of the avalanche, as discussed in [33]. To solve improve both the time resolution and the rate capability, different methods were used trying to get advantages of both narrow and wide gap RPCs.

1538 **4.2.2.1 Double-gap RPC**

1539 Double-gap RPCs are made out of 2 narrow RPC detectors. The 2 RPC gaps are stacked on top of  
 1540 each other as shown in Figure 4.6. This detector layout, popularized by the two multipurpose experiments  
 1541 CMS [21] and ATLAS [38] at LHC, can be used as an OR system in which each individual  
 1542 chamber participates in the output signal. The gain of such a detector is greatly reduced with respect  
 1543 to single-gap RPCs with an efficiency plateau reached at lower voltage, as visible on Figure 4.7.

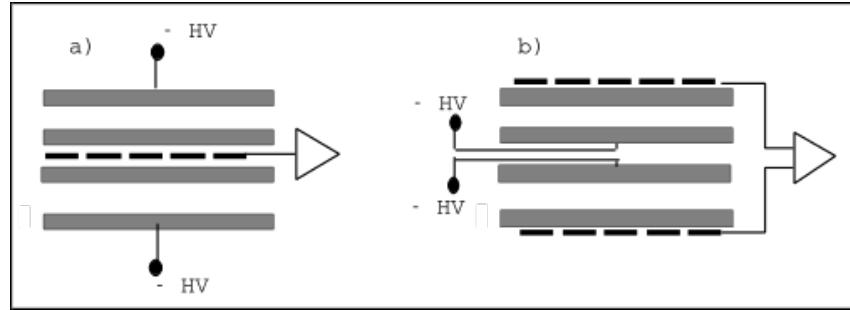


Figure 4.6: Possible double-gap RPC layouts: a) "standard" 1D double-gap RPC, as used in CMS experiment, where the anodes are facing each other and a 1D read-out plane is sandwiched in between them, b) double read-out double-gap RPC as used in ATLAS experiment, where the cathodes are facing each other and 2 read-out planes are used on the outer surfaces. This last layout can offer the possibility to use a 2D reconstruction by using orthogonal read-out planes.

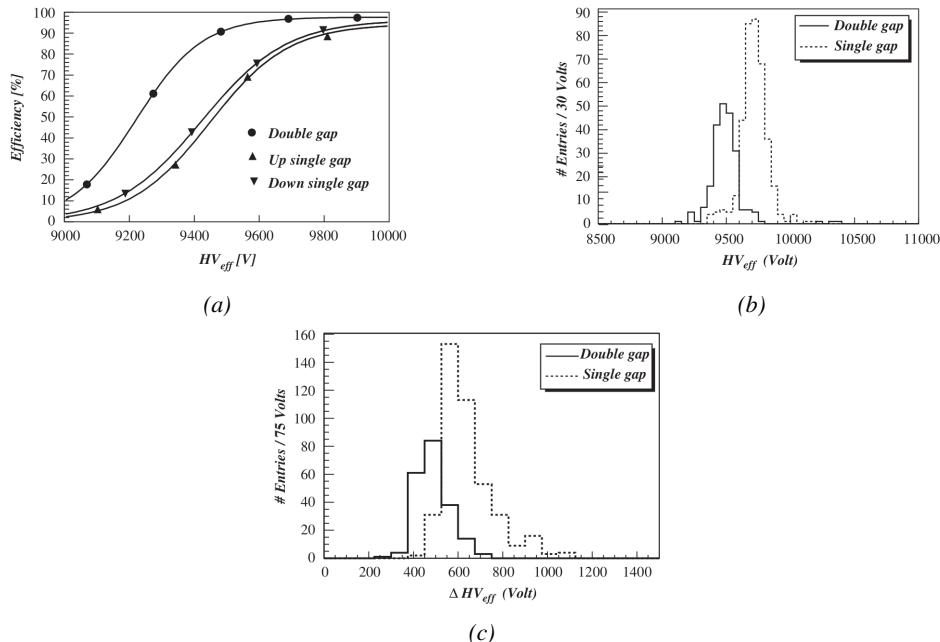


Figure 4.7: Comparison of performance of CMS double and single gap RPCs using cosmic muons [47]. Figure 4.7a: Comparison of efficiency sigmoids. Figure 4.7b: Voltage distribution at 95% of maximum efficiency. Figure 4.7c:  $\Delta_{10\%}^{90\%}$  distribution.

### 4.2.2.2 Multigap RPC (MRPC)

MRPCs are layouts in which floating sub electrode plates are placed into a wide gap RPC to divide the gas volume and create a sum of narrow gaps [33, 34]. The time resolution of such a detector can reach of few tens of ps, with gas gaps of the order of a few hundred  $\mu\text{m}$  as shown in Figure 4.8 representing ALICE Time-of-flight (ToF) MRPCs.

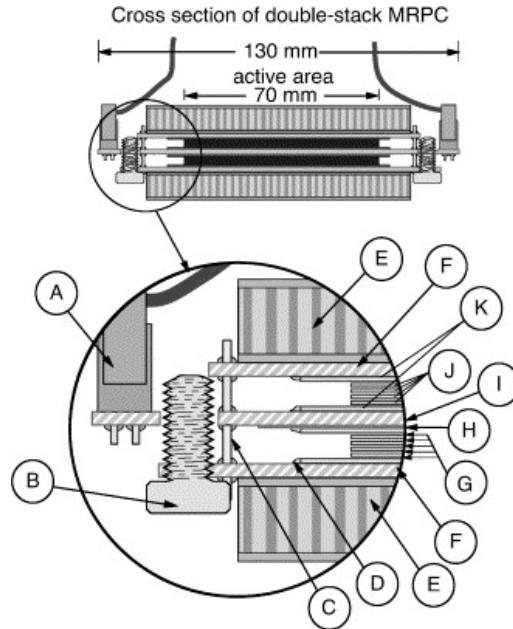


Figure 4.8: Presentation of ALICE MRPC using  $250 \mu\text{m}$  gas gaps,  $620 \mu\text{m}$  outer glass electrodes and  $550 \mu\text{m}$  inner floating electrodes. More details on the labels are given in [48].

Sometimes used as a double multigap RPC, taking advantage of the OR of double gap RPCs, the MRPC is mainly used as ToF detector [48–52] due to its excellent timing properties that allow to perform particle identification as explained by Williams in [53]. The principle of particle identification using ToF is simply the measurement of the velocity of a particle. Indeed, particles are defined by their mass (for the parameter of interest here, their electric charge being measured using the bending angle of the particles traveling through a magnetic field) and this mass can be calculated by measuring the velocity  $\beta$  and momentum of the particle:

$$\beta = \frac{p}{\sqrt{p^2 + m^2}} \quad (4.3)$$

Intuitively, it is trivial to understand that 2 different particles having the same momentum will have a different velocity due to the mass difference and thus a different flight time  $T_1$  and  $T_2$  through the detector and this is used to separate and identify particles. The better the time resolution of the ToF system used, the stronger will the separation be:

$$T = \frac{L}{v} = \frac{L}{c \cdot \beta}, \quad \Delta T = T_1 - T_2 = \frac{L}{c} \left( \sqrt{1 + m_1^2/p^2} - \sqrt{1 + m_2^2/p^2} \right) \cong (m_1^2 - m_2^2) \frac{L}{2cp^2} \quad (4.4)$$

1560 An example of particle identification is given for the case of STAR experiment in Figure 4.9.

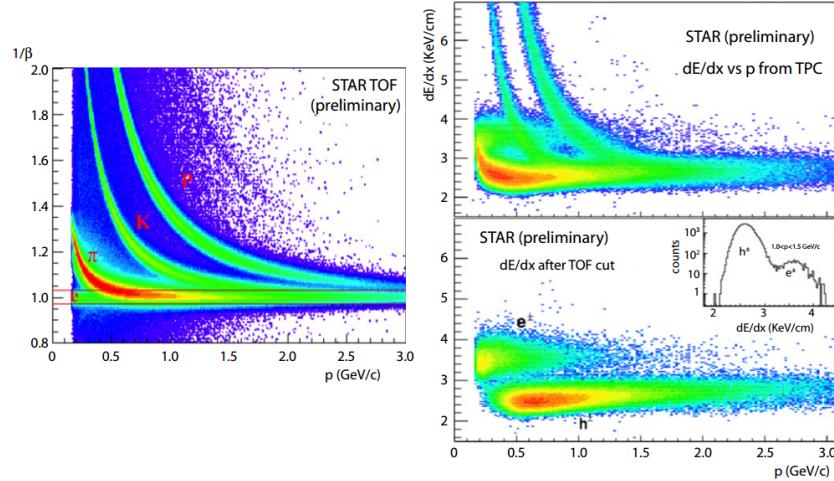


Figure 4.9: Particle identification applied to electrons in the STAR experiment. The identification is performed combining ToF and  $dE/dx$  measurements [53].

1561 Another benefice of using such small gas gaps is the strong reduction of the average avalanche  
1562 volume and thus of the blind spot on MRPCs leading to an improved rate capability. Multigaps can  
1563 sustain backgrounds of several kHz/cm<sup>2</sup> as demonstrated in Figure 4.10.

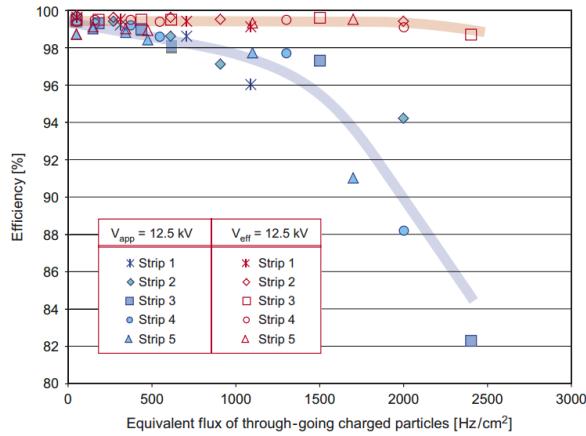


Figure 4.10: Comparison of the detector performance of ALICE ToF MRPC [54] at fixed applied voltage (in blue) and at fixed effective voltage (in red). The effective voltage is kept fixed by increasing the applied voltage accordingly to the current drawn by the detector.

#### 1564 4.2.2.3 Charge distribution and performance limitations

1565 The direct consequence of the different RPC layouts is a variation of intrinsic time resolution of the  
1566 RPC as the gap size decreases. An advantage is given to multigaps whose design use sub-millimeter  
1567 gas volumes providing very consistent signals.

1568 On the charge spectrum point of view, each layout has its own advantages. When the double-gap  
 1569 has the highest induced over drifting charge ratio, as seen in Figure 4.11, the multigap has a charge  
 1570 spectrum strongly detached from the origin, as visible in Figure 4.12. A high induced over drifting  
 1571 charge ratio means that the double gap can be safely operated at high threshold or that at similar  
 1572 threshold it can be operated with a twice smaller drifting charge, meaning a higher rate capability.  
 1573 On the other hand, the strong detachment of the charge spectrum from the origin in the MRPC case  
 1574 allows to reach a higher efficiency with increasing threshold as most of the induced charge is not low  
 1575 due to the convolution of several single gap spectra. The range of stable efficiency increases with  
 1576 the number of gap, as presented in Figure 4.13.



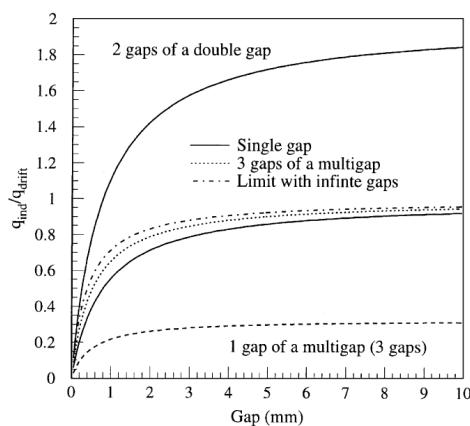


Figure 4.11: Ratio between total induced and drifting charge have been simulated for single gap, double-gap and multigap layouts [55]. The total induced charge for a double-gap RPC is a factor 2 higher than for a multigap.

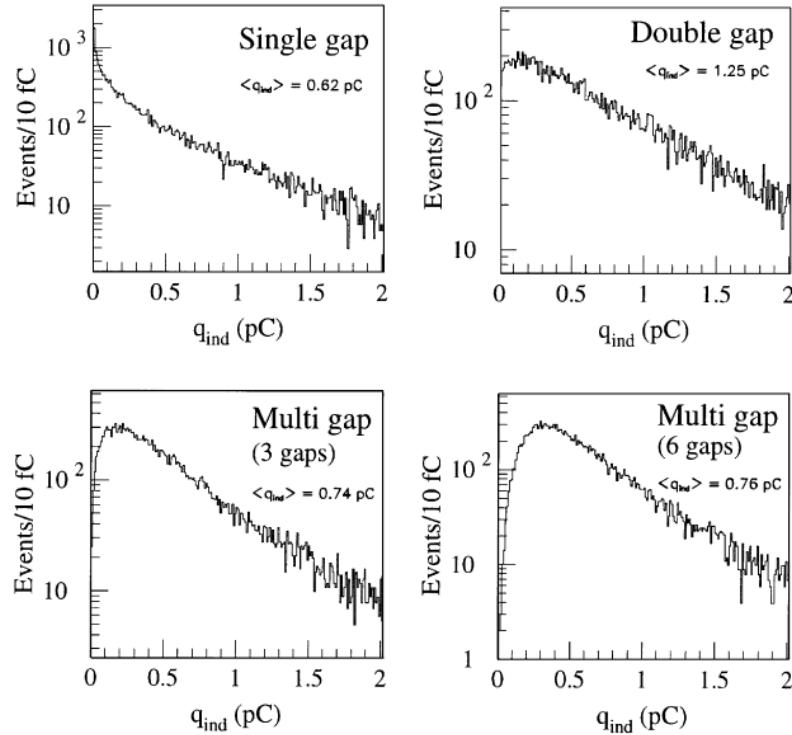

*Figure 4.12:* Charge spectra have been simulated for single gap, double-gap and multigap layouts [55]. It appears that when single gap shows a decreasing spectrum, double and multigap layouts exhibit a spectrum whose peak is detached from the origin. The detachment gets stronger as the number of gaps increases.

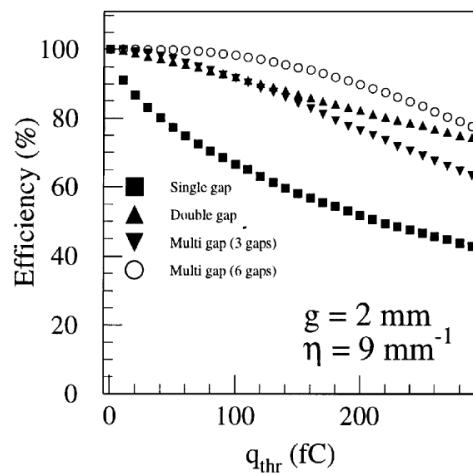

*Figure 4.13:* The maximal theoretical efficiency is simulated for single gap, double-gap and multigap layouts [55] at a constant gap thickness of 2 mm and using an effective Townsend coefficient of  $9 \text{ mm}^{-1}$ .

<sub>1577</sub> **4.3 Signal formation**

<sub>1578</sub> **4.4 Gas transport parameters**

# 5

1579

1580

1581

## Longevity studies and Consolidation of the present CMS RPC subsystem

### 1582 5.1 Resistive Plate Chambers at CMS

#### 1583 5.1.1 Overview

1584 The Resistive Plate Chambers (RPC) system, located in both barrel and endcap regions, provides a  
1585 fast, independent muon trigger with a looser  $p_T$  threshold over a large portion of the pseudorapidity  
1586 range ( $|\eta| < 1.6$ ) [add reconstruction].

1587

1588 During High-Luminosity LHC (HL-LHC) operations the expected conditions in terms of back-  
1589 ground and pile-up will make the identification and correct  $P_T$  assignment a challenge for the Muon  
1590 system. The goal of RPC upgrade is to provide additional hits to the Muon system with precise tim-  
1591 ing. All these informations will be elaborated by the trigger system in a global way enhancing the  
1592 performance of the trigger in terms of efficiency and rate control. The RPC Upgrade is based on two  
1593 projects: an improved Link Board System and the extension of the RPC coverage up to  $|\eta| = 2.4$ .  
1594 [FIXME 2.4 or 2.5?]

1595 The Link Board system, that will be described in section xxx, is responsible to process, syn-  
1596 chronize and zero-suppress the signals coming from the RPC front end boards. The Link Board  
1597 components have been produced between 2006 and 2007 and will be subjected to aging and failure  
1598 in the long term. The upgraded Link Board system will overcome the aging problems described in  
1599 section xxx and will allow for a more precise timing information to the RPC hits from 25 to 1 ns [ref  
1600 section xxx].

1601 The extension of the RPC system up to  $|\eta| = 2.1$  was already planned in the CMS TDR [ref  
1602 cmstdr] and staged because of budget limitations and expected background rates higher than the rate  
1603 capability of the present CMS RPCs in that region. An extensive R&D program has been done in  
1604 order to develop an improved RPC that fulfills the CMS requirements. Two new RPC layers in the  
1605 innermost ring of stations 3 and 4 will be added with benefits to the neutron-induced background

1606 reduction and efficiency improvement for both trigger and offline reconstruction.

### 1607 5.1.2 The present RPC system

1608 The RPC system is organized in 4 stations called RB1 to RB4 in the barrel region, and RE1 to RE4  
 1609 in the endcap region. The innermost barrel stations, RB1 and RB2, are instrumented with 2 layers  
 1610 of RPCs facing the innermost (RB1in and RB2in) and outermost (RB1out and RB2out) sides of the  
 1611 DT chambers. Every chamber is then divided from the read-out point of view into 2 or 3  $\eta$  partitions  
 1612 called “rolls”. The RPC system consist of 480 barrel chambers and 576 endcap chambers. Details  
 1613 on the geometry are discussed in the paper [ref to geo paper].

1614 The CMS RPC chamber is a double-gap, operated in avalanche mode to ensure reliable operation  
 1615 at high rates. Each RPC gap consists of two 2-mm-thick resistive High-Pressure Laminate (HPL)  
 1616 plates separated by a 2-mm-thick gas gap. The outer surface of the HPL plates is coated with a thin  
 1617 conductive graphite layer, and a voltage is applied. The RPCs are operated with a 3-component,  
 1618 non-flammable gas mixture consisting of 95.2% freon ( $C_2H_2F_4$ , known as R134a), 4.5% isobutane  
 1619 ( $i-C_4H_{10}$ ), and 0.3% sulphur hexafluoride ( $SF_6$ ) with a relative humidity of 40% - 50%. Readout  
 1620 strips are aligned in  $\eta$  between the 2 gas gaps. [\[Add a sentence on FEBs.\]](#)

1621 The discriminated signals coming from the Front End boards feed via twisted cables (10 to 20 m  
 1622 long) the Link Board System located in UXC on the balconies around the detector. The Link System  
 1623 consist of the 1376 Link Boards (LBs) and the 216 Control Boards (CBs), placed in 108 Link Boxes.  
 1624 The Link Box is a custom crate (6U high) with 20 slots (for two CBs and eighteen LBs). The Link  
 1625 Box contains custom backplane to which the cables from the chambers are connected, as well as the  
 1626 cables providing the LBs and CBs power supply and the cables for the RPC FEBs control with use  
 1627 of the I2C protocol (trough the CB). The backplane itself contains only connectors (and no any other  
 1628 electronic devices).

1629 The Link Board has 96 input channels (one channel corresponds to one RPC strip). The input  
 1630 signals are the  $\sim 100$  ns binary pulses which are synchronous to the RPC hits, but not to the LHC  
 1631 clock (which drives the entire CMS electronics). Thus the first step of the FEB signals processing  
 1632 is synchronization, i.e. assignment of the signals to the BXes (25 ns periods). Then the data are  
 1633 compressed with a simple zero-suppressing algorithm (the input channels are grouped into 8 bit  
 1634 partitions, only the partitions with at least one nonzero bit are selected for each BX). Next, the non-  
 1635 empty partitions are time-multiplexed i.e. if there are more than one such partition in a given BX,  
 1636 they are sent one-by-one in consecutive BXes. The data from 3 neighbouring LBs are concentrated  
 1637 by the middle LB which contains the optical transmitter for sending them to the USC over a fiber at  
 1638 1.6 Gbps.

1639 The Control Boards provide the communication of the control software with the LBs via the  
 1640 FEC/CCU system. The CBs are connected into token rings, each ring consists of 12 CBs of one  
 1641 detector tower and a FEC mezzanine board placed on the CCS board located in the VME crate in  
 1642 the USC. In total, there are 18 rings in the entire Link System. The CBs also perform automatic  
 1643 reloading of the LB's firmware which is needed in order to avoid accumulation of the radiation  
 1644 induced SEUs in the LBs firmware.

1645 Both LBs and CB are based on the Xilinx Spartan III FPGAs, the CB additionally contains  
 1646 radiation-tolerant (FLASH based) FPGA Actel ProAsicPlus.

1647 The High Voltage power system is located in USC, not exposed to radiation and easily accessible  
 1648 for any reparation. A single HV channel powers 2 RPC chambers both in the barrel and endcap  
 1649 regions. The Low Voltage boards are located in UXC on the balconies and provide the voltage to the

front end electronics.

### 5.1.3 Pulse processing of CMS RPCs

Signals induced by cosmic particle in the RPC strips are shaped by standard CMS RPC Front-End Electronics (FEE) following the scheme of Figure 5.1. On a first stage, analogic signals are amplified and then sent to the Constant Fraction Discriminator (CFD) described in Figure 5.2. At the end of the chain, 100 ns long pulses are sent in the LVDS output. These output signal are sent on one side to a V1190A Time-to-Digital Converter (TDC) module from CAEN and on the other to an OR module to count the number of detected signals. Trigger and hit coïncidences are monitored using scalers. The TDC is used to store the data into ROOT files. These files are thus analysed to understand the detectors performance.

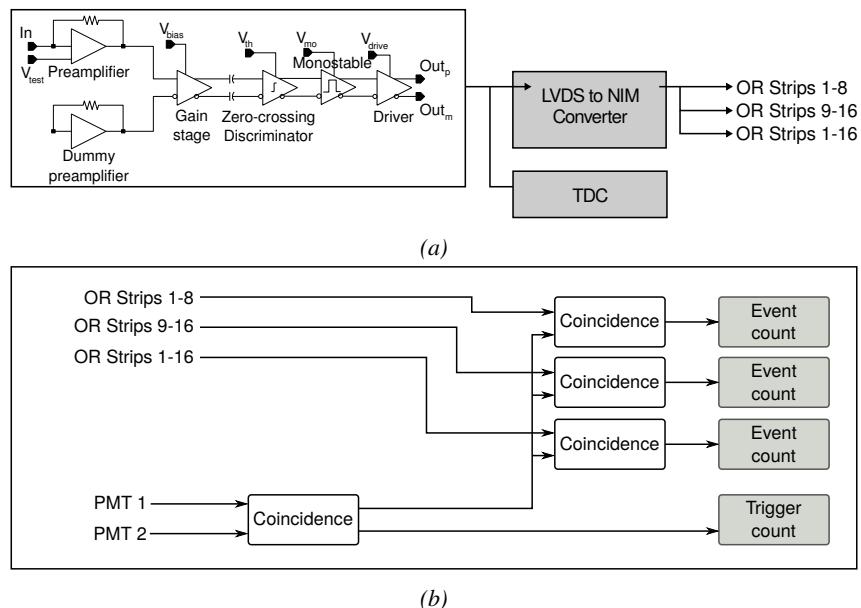


Figure 5.1: Signals from the RPC strips are shaped by the FEE described on Figure 5.1a. Output LVDS signals are then read-out by a TDC module connected to a computer or converted into NIM and sent to scalers. Figure 5.1b describes how these converted signals are put in coincidence with the trigger.

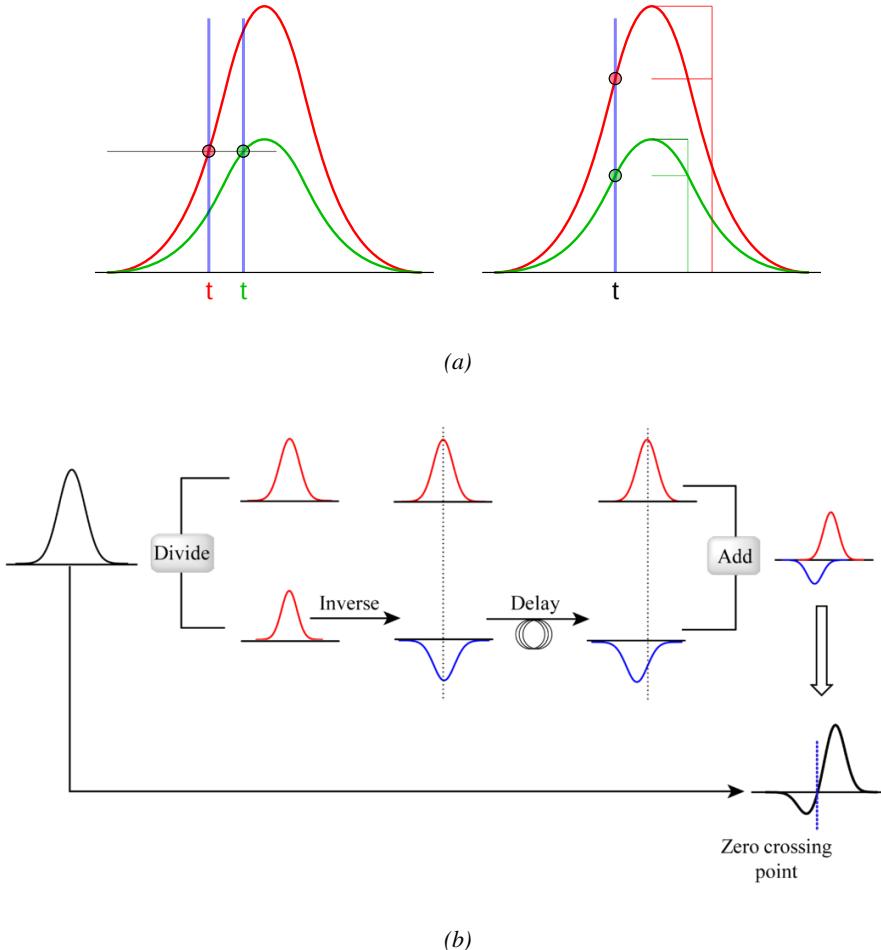


Figure 5.2: Description of the principle of a CFD. A comparison of threshold triggering (left) and constant fraction triggering (right) is shown in Figure 5.2a. Constant fraction triggering is obtained thanks to zero-crossing technique as explained in Figure 5.2b. The signal arriving at the input of the CFD is split into three components. A first one is delayed and connected to the inverting input of a first comparator. A second component is connected to the noninverting input of this first comparator. A third component is connected to the noninverting input of another comparator along with a threshold value connected to the inverting input. Finally, the output of both comparators is fed through an AND gate.


## 1660 5.2 Testing detectors under extreme conditions

1661 The upgrade from LHC to HL-LHC will increase the peak luminosity from  $10^{34} \text{ cm}^{-2} \text{ s}^{-1}$  to reach  
 1662  $5 \times 10^{34} \text{ cm}^{-2} \text{ s}^{-1}$ , increasing in the same way the total expected background to which the RPC  
 1663 system will be subjected to. Composed of low energy gammas and neutrons from  $p\text{-}p$  collisions, low  
 1664 momentum primary and secondary muons, puch-through hadrons from calorimeters, and particles  
 1665 produced in the interaction of the beams with collimators, the background will mostly affect the  
 1666 regions of CMS that are the closest to the beam line, i.e. the RPC detectors located in the endcaps.  
 1667 [To update.]


1668

1669        The 2016 data allowed to study the values of the background rate in all RPC system. In Fig-  
1670        ure 5.3, the distribution of the chamber background hit rate per unit area is shown at a luminosity  
1671        of  $5 \times 10^{34} cm^{-2}.s^{-1}$  linearly extrapolating from data collected in 2016 [ref mentioning the linear  
1672        dependency of rate vs lumi]. The maximum rate per unit area at HL-LHC conditions is expected to  
1673        be of the order of  $600 Hz/cm^2$  (including a safety factor 3). Nevertheless, Fluka simulations have  
1674        conducted in order to understand the background at HL-LHC conditions. The comparison to the  
1675        data has shown, in Figure 5.4, a discrepancy of a factor 2 even though the order of magnitude is  
1676        consistent. [Understand mismatch.]

1677

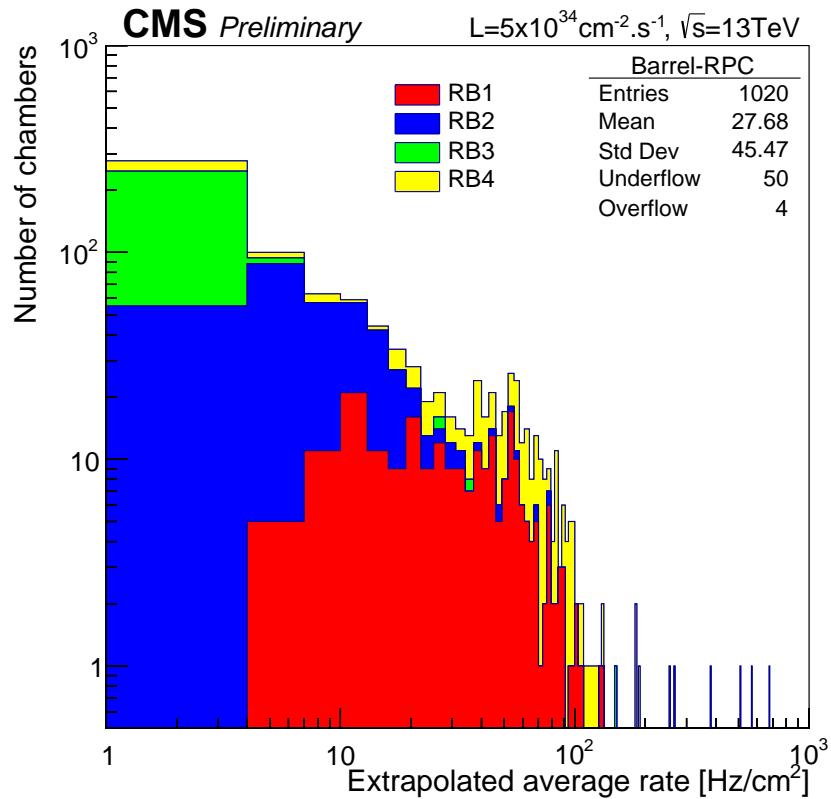

(a)

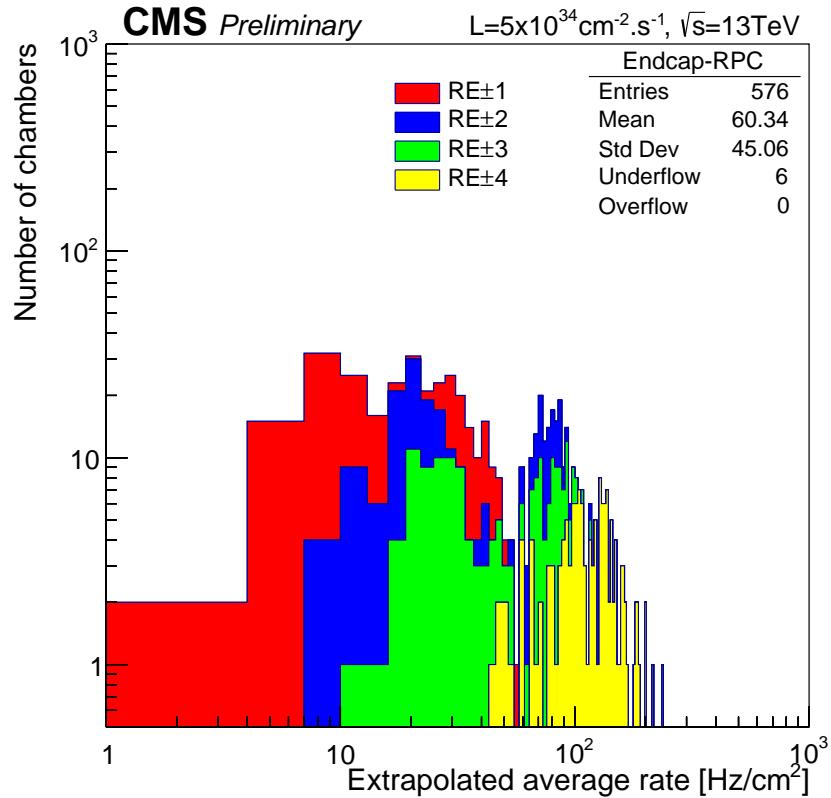

(b)

Figure 5.3: (5.3a) Extrapolation from 2016 data of single hit rate per unit area in the barrel region. (5.3b) Extrapolation from 2016 data of single hit rate per unit area in the endcap region.

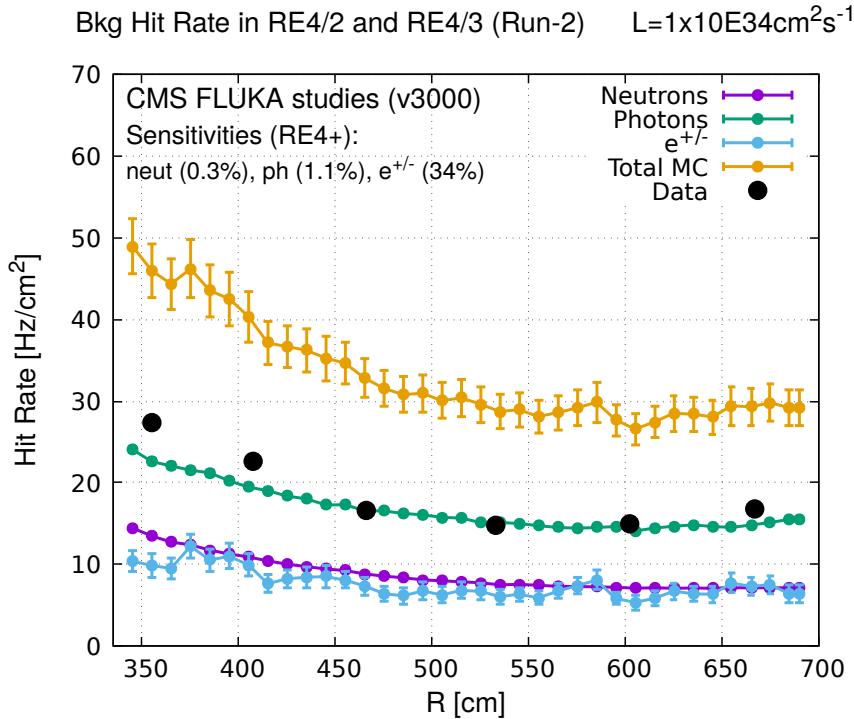


Figure 5.4: Background Fluka simulation compared to 2016 Data at  $L = 10^{34} \text{ cm}^{-2} \cdot \text{s}^{-1}$  in the fourth endcap disk region. A mismatch in between simulation and data can be observed. [\[To be understood.\]](#)

In the past, extensive long-term tests were carried out at several gamma and neutron facilities certifying the detector performance. Both full size and small prototype RPCs have been irradiated with photons up to an integrated charge of  $\sim 0.05 \text{ C}/\text{cm}^2$  and  $\sim 0.4 \text{ C}/\text{cm}^2$ , respectively [56, 57]. During Run-I, the RPC system provided stable operation and excellent performance and did not show any aging effects for integrated charge of the order of  $0.01 \text{ C}/\text{cm}^2$ . Projections on currents from 2016 Data, has allowed to determine that the total integrated charge, by the end of HL-LHC, would be of the order of  $1 \text{ C}/\text{cm}^2$  (including a safety factor 3). [\[Corresponding figure needed.\]](#)

1685


## 1686 5.2.1 The Gamma Irradiation Facilities

### 1687 5.2.1.1 GIF

1688 Located in the SPS West Area at the downstream end of the X5 test beam, the Gamma Irradiation  
 1689 Facility (GIF) was a test area in which particle detectors were exposed to a particle beam in presence  
 1690 of an adjustable gamma background [58]. Its goal was to reproduce background conditions these  
 1691 detectors would suffer in their operating environment at LHC. GIF layout is shown in Figure 5.5.  
 1692 Gamma photons are produced by a strong  $^{137}\text{Cs}$  source installed in the upstream part of the zone  
 1693 inside a lead container. The source container includes a collimator, designed to irradiate a  $6 \times 6 \text{ m}^2$   
 1694 area at 5 m maximum to the source. A thin lens-shaped lead filter helps providing with a uniform  
 1695 outcoming flux in a vertical plane, orthogonal to the beam direction. The principal collimator hole  
 1696 provides a pyramidal aperture of  $74^\circ \times 74^\circ$  solid angle and provides a photon flux in a pyramidal vol-

ume along the beam axis. The photon rate is controled by further lead filters allowing the maximum rate to be limited and to vary within a range of four orders of magnitude. Particle detectors under test are then placed within the pyramidal volume in front of the source, perpendicularly to the beam line in order to profit from the homogeneous photon flux. Adjusting the background flux of photons can then be done by using the filters and choosing the position of the detectors with respect to the source.

1702

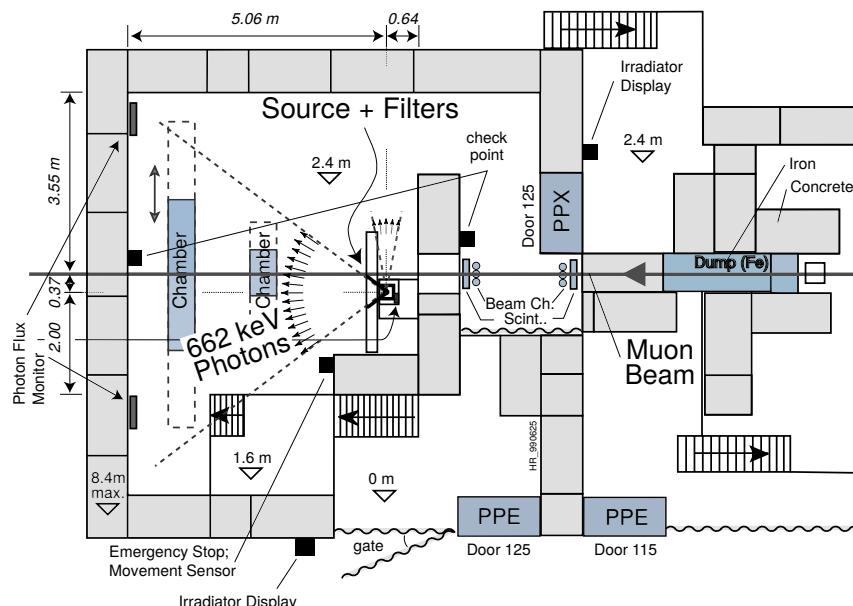

*Figure 5.5: Layout of the test beam zone called X5c GIF at CERN. Photons from the radioactive source produce a sustained high rate of random hits over the whole area. The zone is surrounded by 8 m high and 80 cm thick concrete walls. Access is possible through three entry points. Two access doors for personnel and one large gate for material. A crane allows installation of heavy equipment in the area.*

As described on Figure 5.6, the  $^{137}\text{Cs}$  source emits a 662 keV photon in 85% of the decays. An activity of 740 GBq was measured on the 5<sup>th</sup> March 1997. To estimate the strength of the flux in 2014, it is necessary to consider the nuclear decay through time assiciated to the Cesium source whose half-life is well known ( $t_{1/2} = (30.05 \pm 0.08)$  y). The GIF tests where done in between the 20<sup>th</sup> and the 31<sup>st</sup> of August 2014, i.e. at a time  $t = (17.47 \pm 0.02)$  y resulting in an attenuation of the activity from 740 GBq in 1997 to 494 GBq in 2014.

1709

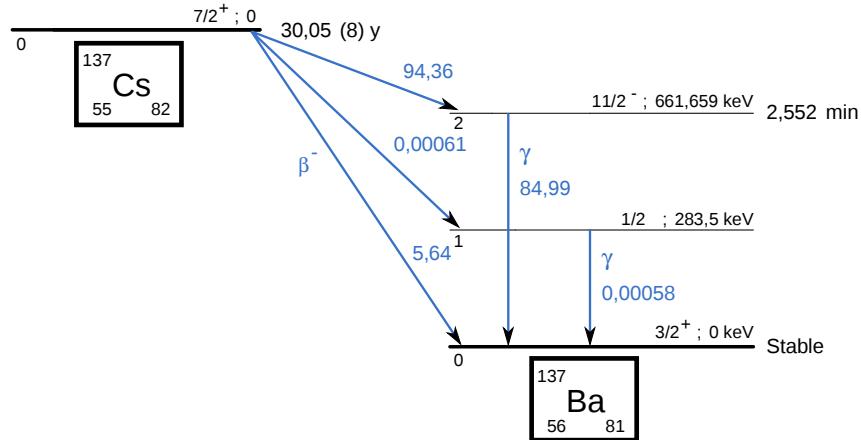


Figure 5.6:  $^{137}\text{Cs}$  decays by  $\beta^-$  emission to the ground state of  $^{137}\text{Ba}$  ( $\text{BR} = 5.64\%$ ) and via the 662 keV isomeric level of  $^{137}\text{Ba}$  ( $\text{BR} = 94.36\%$ ) whose half-life is 2.55 min.

### 5.2.1.2 GIF++

The new Gamma Irradiation Facility (GIF++), located in the SPS North Area at the downstream end of the H4 test beam, has replaced its predecessor during LS1 and has been operational since spring 2015 [59]. Like GIF, GIF++ features a  $^{137}\text{Cs}$  source of 662 keV gamma photons, their fluence being controlled with a set of filters of various attenuation factors. The source provides two separated large irradiation areas for testing several full-size muon detectors with continuous homogeneous irradiation, as presented in Figure 5.7.

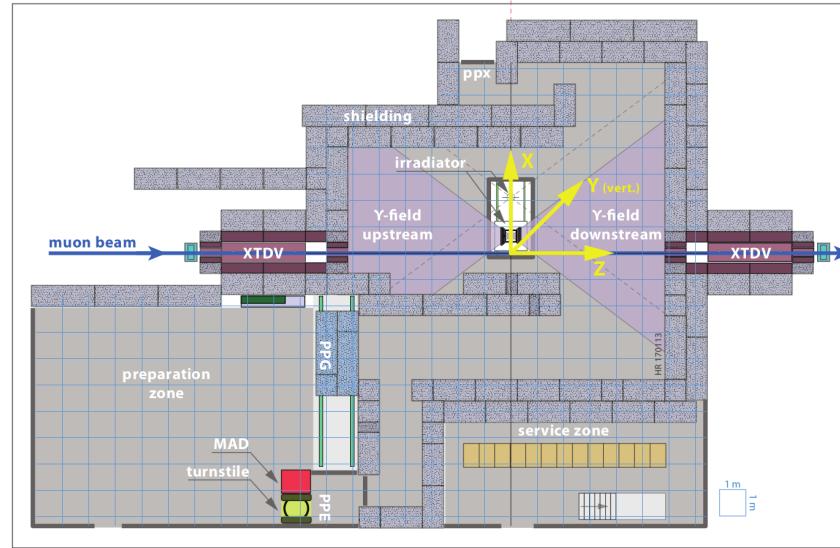


Figure 5.7: Floor plan of the GIF++ facility. When the facility downstream of the GIF++ takes electron beam, a beam pipe is installed along the beam line ( $z$ -axis). The irradiator can be displaced laterally (its center moves from  $x = 0.65 \text{ m}$  to  $2.15 \text{ m}$ ), to increase the distance to the beam pipe.

1718 The source activity was measured to be about 13.5 TBq in March 2016. The photon flux being  
 1719 far greater than HL-LHC expectations, GIF++ provides an excellent facility for accelerated aging  
 1720 tests of muon detectors.

1721

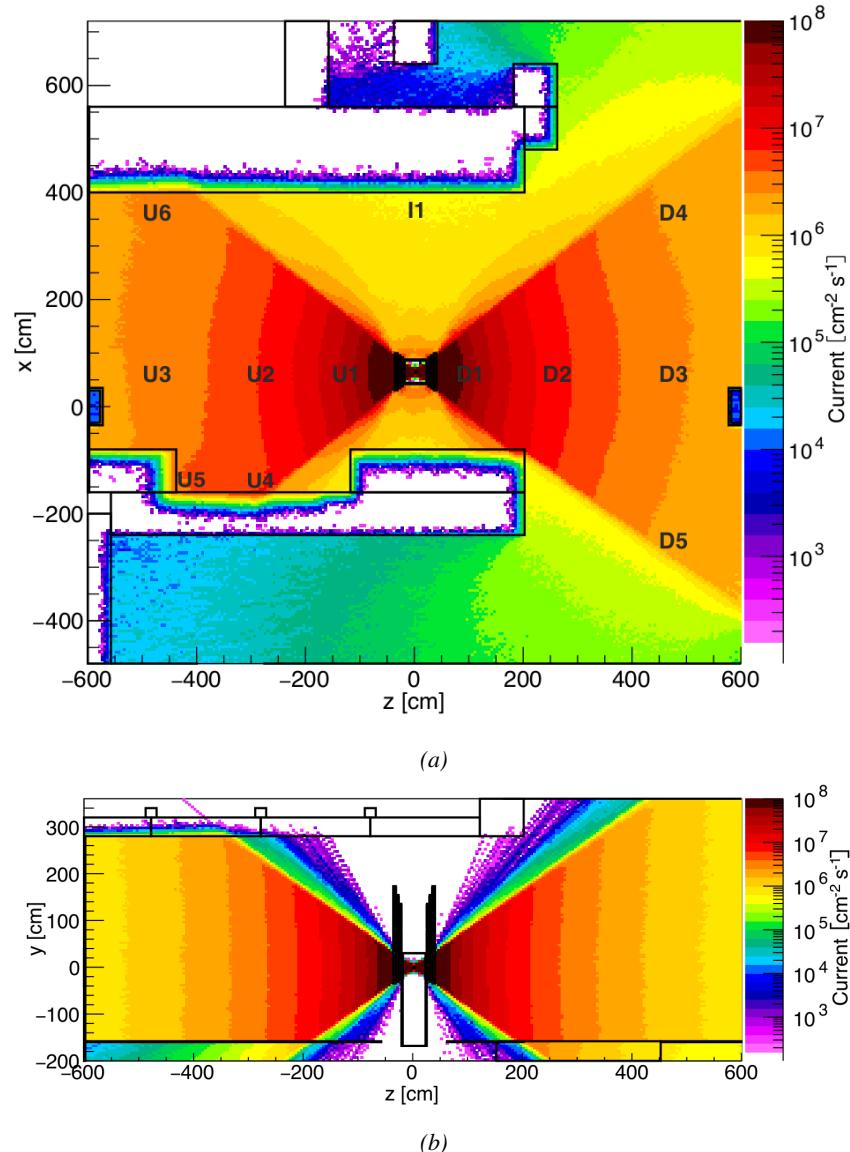


Figure 5.8: Simulated unattenuated current of photons in the xz plane (Figure 5.8a) and yz plane (Figure 5.8b) through the source at  $x = 0.65$  m and  $y = 0$  m. With angular correction filters, the current of 662 keV photons is made uniform in xy planes.

1722 The source is situated in the muon beam line with the muon beam being available a few times a  
 1723 year. The H4 beam, composed of muons with a momentum of about 150 GeV/c, passes through the  
 1724 GIF++ zone and is used to study the performance of the detectors. Its flux is of 104 particles/ $\text{s cm}^2$

1725 focused in an area similar to  $10 \times 10 \text{ cm}^2$ . Therefore, with properly adjusted filters, one can imitate  
 1726 the HL-LHC background and study the performance of muon detectors with their trigger/readout  
 1727 electronics in HL-LHC environment.

1728

## 1729 5.3 Preliminary tests at GIF

### 1730 5.3.1 Resistive Plate Chamber test setup

1731 During summer 2014, preliminary tests have been conducted in the GIF area on a newly produced  
 1732 RE4/2 chamber labelled RE-4-2-BARC-161. This chamber has been placed into a trolley covered  
 1733 with a tent. The position of the RPC inside the tent and of the tent related to the source is described  
 1734 in Figure 5.9. To test this CMS RPC, three different absorber settings were used. First of all,  
 1735 measurements were done with fully opened source. Then, to complete this preliminary study, the  
 1736 gamma flux has been attenuated from a factor 2 and a factor 5. The expected gamma flux at the level  
 1737 of our detector will be discussed in subsection ??.


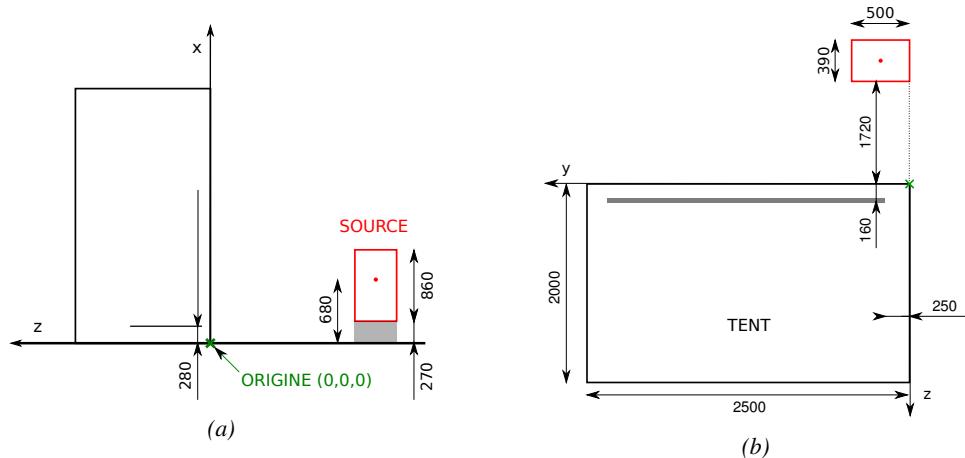


Figure 5.9: Description of the RPC setup. Dimensions are given in mm. A tent containing RPCs is placed at 1720 mm from the source container. The source is situated in the center of the container. RE-4-2-BARC-161 chamber is 160 mm inside the tent. This way, the distance between the source and the chambers plan is 2060 mm. Figure 5.9a provides a side view of the setup in the xz plane while Figure 5.9b shows a top view in the yz plane.



*Figure 5.10: RE-4-2-BARC-I61 chamber is inside the tent as described in Figure 5.9. In the top right, the two scintillators used as trigger can be seen. This trigger system has an inclination of 10° relative to horizontal and is placed above half-partition B2 of the RPCs. PMT electronics are shielded thanks to lead blocks placed in order to protect them without stopping photons from going through the scintillators and the chamber.*

1738 At the time of the tests, the beam not being operationnal anymore, a trigger composed of 2 plastic  
 1739 scintillators has been placed in front of the setup with an inclination of 10 deg with respect to the  
 1740 detector plane in order to look at cosmic muons. Using this particular trigger layout, shown on Fig-  
 1741 ure 5.10, leads to a cosmic muon hit distribution into the chamber similar to the one in Figure 5.11.  
 1742 Measured without gamma irradiation, two peaks can be seen on the profil of partition B, centered  
 1743 on strips 52 and 59. Section ?? will help us understand that these two peaks are due respectively to  
 1744 forward and backward coming cosmic particles where forward coming particles are first detected by  
 1745 the scintillators and then the RPC while the backward coming muons are first detected in the RPC.

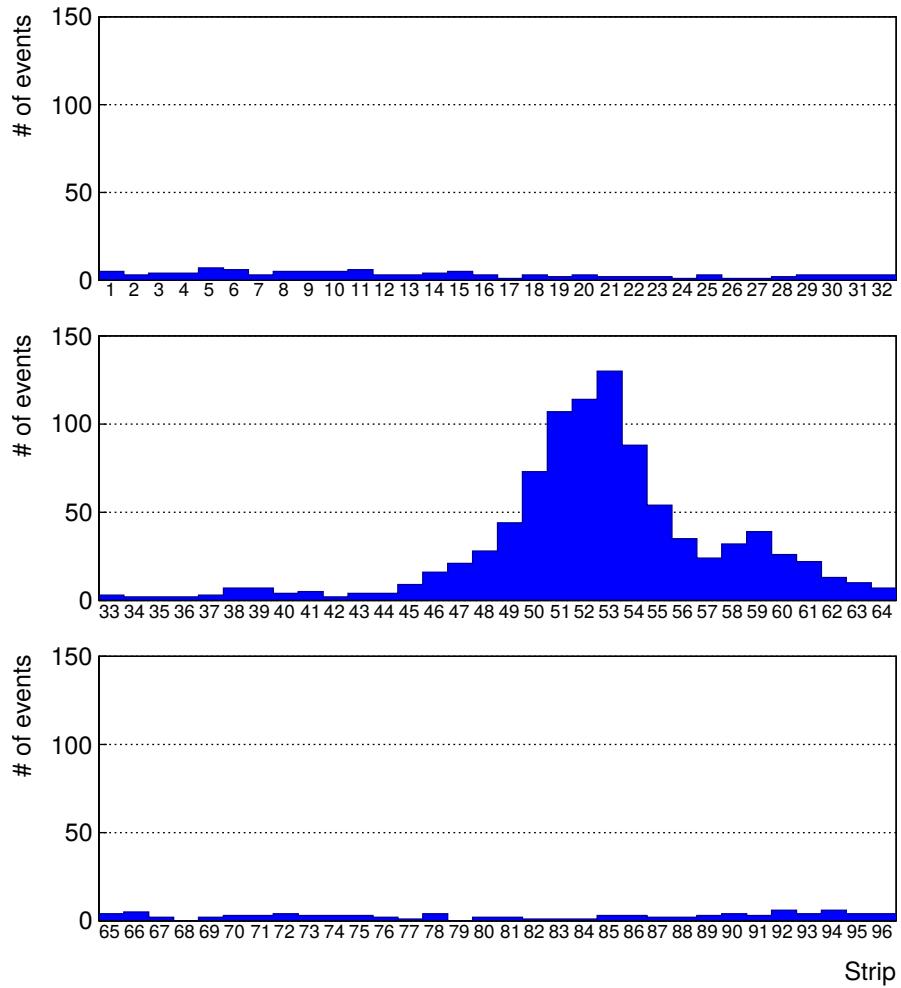

*Figure 5.11: Hit distributions over all 3 partitions of RE-4-2-BARC-161 chamber is showed on these plots. Top, middle and bottom figures respectively correspond to partitions A, B, and C. These plots show that some events still occur in other half-partitions than B2, which corresponds to strips 49 to 64, in front of which the trigger is placed, contributing to the inefficiency of detection of cosmic muons. In the case of partitions A and C, the very low amount of data can be interpreted as noise. On the other hand, it is clear that a little portion of muons reach the half-partition B1, corresponding to strips 33 to 48.*

### 1746 5.3.2 Data Acquisition

### 1747 5.3.3 Geometrical acceptance of the setup layout to cosmic muons

1748 In order to profit from a constant gamma irradiation, the detectors inside of the GIF bunker need  
 1749 to be placed in a plane orthogonal to the beam line. The muon beam that used to be available was  
 1750 meant to test the performance of detectors under test. This beam not being active anymore, another  
 1751 solution to test detector performance had to be used. Thus, it has been decided to use cosmic muons  
 1752 detected through a telescope composed of two scintillators. Lead blocks were used as shielding to

protect the photomultipliers from gammas as can be seen from Figure 5.10.

An inclination has been given to the cosmic telescope to maximize the muon flux. A good compromise had to be found between good enough muon flux and narrow enough hit distribution to be sure to contain all the events into only one half partitions as required from the limited available readout hardware. Nevertheless, a consequence of the misplaced trigger, that can be seen as a loss of events in half-partition B1 in Figure 5.11, is an inefficiency. Nevertheless, the inefficiency of approximately 20 % highlighted in Figure 5.12 by comparing the performance of chamber BARC-161 in 904 and at GIF without irradiation seems too important to be explained only by the geometrical acceptance of the setup itself. Simulations have been conducted to show how the setup brings inefficiency.


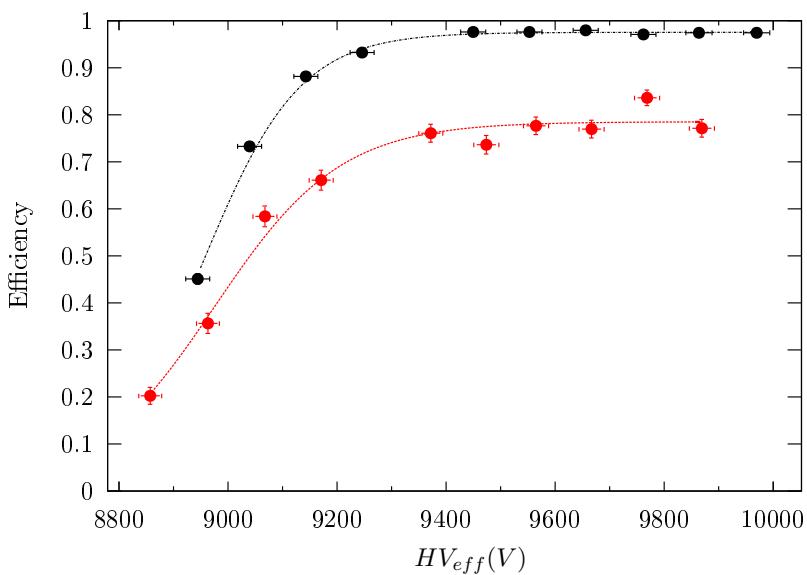


Figure 5.12: Results are derived from data taken on half-partition B2 only. On the 18<sup>th</sup> of June 2014, data has been taken on chamber RE-2-BARC-161 at building 904 (Prevessin Site) with cosmic muons providing us a reference efficiency plateau of  $(97.54 \pm 0.15)\%$  represented by a black curve. A similar measurement has been done at GIF on the 21<sup>st</sup> of July with the same chamber giving a plateau of  $(78.52 \pm 0.94)\%$  represented by a red curve.

### 5.3.3.1 Description of the simulation layout

The layout of GIF setup has been reproduced and incorporated into a Monte Carlo (MC) simulation to study the influence of the disposition of the telescope on the final distribution measured by the RPC. A 3D view of the simulated layout is given into Figure 5.13. Muons are generated randomly in a horizontal plane located at a height corresponding to the lowest point of the PMTs. This way, the needed size of the plane in order to simulate events happening at very big azimuthal angles (i.e.  $\theta \approx \pi$ ) can be kept relatively small. The muon flux is designed to follow the usual  $\cos^2\theta$  distribution for cosmic particle. The goal of the simulation is to look at muons that pass through the muon telescope composed of the two scintillators and define their distribution onto the RPC plane. During the reconstruction, the RPC plane is then divided into its strips and each muon track is assigned to a strip.

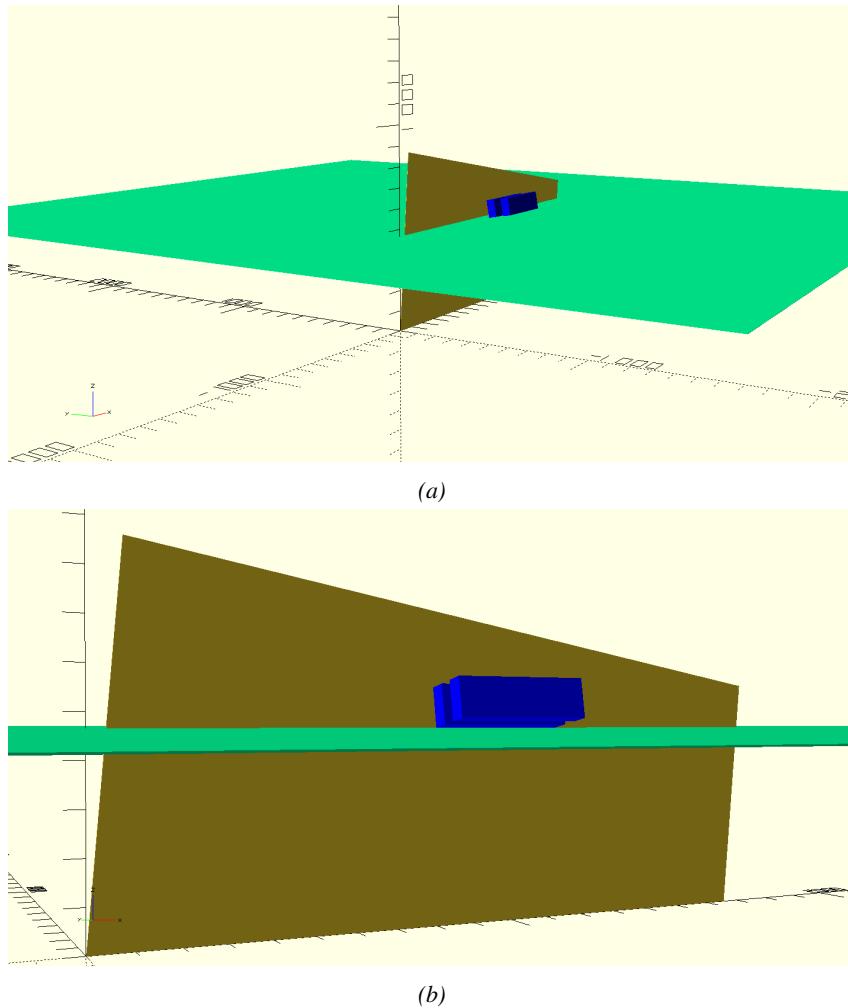

*Figure 5.13: Representation of the layout used for the simulations of the test setup. The RPC is represented as a yellow trapezoid while the two scintillators as blue cuboids looking at the sky. A green plane corresponds to the muon generation plane within the simulation. Figure 5.9a shows a global view of the simulated setup. Figure 5.9b shows a zoomed view that allows to see the 2 scintillators as well as the full RPC plane.*

1774 In order to further refine the quality of the simulation and understand deeper the results the  
 1775 dependance of the distribution has been studied for a range of telescope inclinations. Moreover,  
 1776 the threshold applied on the PMT signals has been included into the simulation in the form of a  
 1777 cut. In the approximation of uniform scintillators, it has been considered that the threshold can be  
 1778 understood as the minimum distance particles need to travel through the scintillating material to give  
 1779 a strong enough signal. Particles that travel a distance smaller than the set "threshold" are thus not  
 1780 detected by the telescope and cannot trigger the data taking. Finally, the FEE threshold also has  
 1781 been considered in a similar way. The mean momentum of horizontal cosmic rays is higher than  
 1782 those of vertical ones but the stopping power of matter for momenta ranging from 1 GeV to 1 TeV  
 1783 stays comparable. It is then possible to assume that the mean number of primary  $e^-$ /ion pairs per  
 1784 unit length will stay similar and thus, depending on the applied discriminator threshold, muons with

1785 the shortest path through the gas volume will deposit less charge and induce a smaller signal on the  
 1786 pick-up strips that could eventually not be detected. These two thresholds also restrain the overall  
 1787 geometrical acceptance of the system.

1788 **5.3.3.2 Simulation procedure**

1789 The simulation software has been designed using C++ and the output data is saved into ROOT  
 1790 histograms. Simulations start for a threshold  $T_{scint}$  varying in a range from 0 to 45 mm in steps  
 1791 of 5 mm, where  $T_{scint} = 0$  mm corresponds to the case where there isn't any threshold apply on  
 1792 the input signal while  $T_{scint} = 45$  mm, which is the scintillator thickness, is the case where muons  
 1793 cannot arrive orthogonally onto the scintillator surface. For a given  $T_{scint}$ , a set of RPC thresholds  
 1794 are considered. The RPC threshold,  $T_{RPC}$  varies from 2 mm, the thickness of the gas volume, to  
 1795 3 mm in steps of 0.25 mm. For each  $(T_{scint}; T_{RPC})$  pair,  $N_\mu = 10^8$  muons are randomly generated  
 1796 inside the muon plane described in the previous paragraph with an azimuthal angle  $\theta$  chosen to follow  
 1797 a  $\cos^2\theta$  distribution.

1798 Planes are associated to each surface of the scintillators. Knowing muon position into the muon  
 1799 plane and its direction allows us, by assuming that muons travel in a straight line, to compute the  
 1800 intersection of the muon track with these planes. Applying conditions to the limits of the surfaces  
 1801 of the scintillator faces then gives us an answer to whether or not the muon passed through the  
 1802 scintillators. In the case the muon has indeed passed through the telescope, the path through each  
 1803 scintillator is computed and muons whose path was shorter than  $T_{scint}$  are rejected and are thus  
 1804 considered as having not interacted with the setup.

1805 On the contrary, if the muon is labeled as good, its position within the RPC plane is computed  
 1806 and the corresponding strip, determined by geometrical tests in the case the distance through the  
 1807 gas volume was enough not to be rejected because of  $T_{RPC}$ , gets a hit and several histograms  
 1808 are filled in order to keep track of the generation point on the muon plane, the intersection points  
 1809 of the reconstructed muons within the telescope, or on the RPC plane, the path traveled through  
 1810 each individual scintillator or the gas volume, as well as other histograms. Moreover, muons fill  
 1811 different histograms whether they are forward or backward coming muons. They are discriminated  
 1812 according to their direction components. When a muon is generated, an  $(x, y, z)$  position is assigned  
 1813 into the muon plane as well as a  $(\theta; \phi)$  pair that gives us the direction it's coming from. This way,  
 1814 muons satisfying the condition  $0 \leq \phi < \pi$  are designated as backward coming muons while muons  
 1815 satisfying  $\pi \leq \phi < 2\pi$  as forward coming muons.

1816 This simulation is then repeated for different telescope inclinations ranging in between 4 and  $20^\circ$   
 1817 and varying in steps of  $2^\circ$ . Due to this inclination and to the vertical position of the detector under  
 1818 test, the muon distribution reconstructed in the detector plane is asymmetrical. The choice as been  
 1819 made to chose a skew distribution formula to fit the data built as the multiplication of gaussian and  
 1820 sigmoidal curves together. A typical gaussian formula is given as 5.1 and has three free parameters  
 1821 as  $A_g$ , its amplitude,  $\bar{x}$ , its mean value and  $\sigma$ , its root mean square. Sigmoidal curves as given by  
 1822 formula 5.2 are functions converging to 0 and  $A_s$  as  $x$  diverges. The inflection point is given as  $x_i$   
 1823 and  $\lambda$  is proportional to the slope at  $x = x_i$ . In the limit where  $\lambda \rightarrow \infty$ , the sigmoid becomes a  
 1824 step function.

$$g(x) = A_g e^{-\frac{(x-\bar{x})^2}{2\sigma^2}} \quad (5.1)$$

$$s(x) = \frac{A_s}{1 + e^{-\lambda(x-x_i)}} \quad (5.2)$$

Finally, a possible representation of a skew distribution is given by formula 5.3 and is the product of 5.1 and 5.2. Naturally, here  $A_{sk} = A_g \times A_s$  and represents the theoretical maximum in the limit where the skew tends to a gaussian function.

$$sk(x) = g(x) \times s(x) = A_{sk} \frac{e^{\frac{-(x-\bar{x})^2}{2\sigma^2}}}{1 + e^{-\lambda(x-x_i)}} \quad (5.3)$$

### 5.3.3.3 Results

#### Influence of $T_{scint}$ on the muon distribution

#### Influence of $T_{RPC}$ on the muon distribution

#### Influence of the telescope inclination on the muon distribution

#### Comparison to data taken at GIF without irradiation

### 5.3.4 Photon flux at GIF

#### 5.3.4.1 Expectations from simulations

In order to understand and evaluate the  $\gamma$  flux in the GIF area, simulations had been conducted in 1999 and published by S. Agosteo et al [58]. Table 5.1 presented in this article gives us the  $\gamma$  flux for different distances  $D$  to the source. This simulation was done using GEANT and a Monte Carlo N-Particle (MCNP) transport code, and the flux  $F$  is given in number of  $\gamma$  per unit area and unit time along with the estimated error from these packages expressed in %.

Nominal ABS	Photon flux $F$ [ $s^{-1}cm^{-2}$ ]			
	at $D = 50$ cm	at $D = 155$ cm	at $D = 300$ cm	at $D = 400$ cm
1	$0.12 \cdot 10^8 \pm 0.2\%$	$0.14 \cdot 10^7 \pm 0.5\%$	$0.45 \cdot 10^6 \pm 0.5\%$	$0.28 \cdot 10^6 \pm 0.5\%$
2	$0.68 \cdot 10^7 \pm 0.3\%$	$0.80 \cdot 10^6 \pm 0.8\%$	$0.25 \cdot 10^6 \pm 0.8\%$	$0.16 \cdot 10^6 \pm 0.6\%$
5	$0.31 \cdot 10^7 \pm 0.4\%$	$0.36 \cdot 10^6 \pm 1.2\%$	$0.11 \cdot 10^6 \pm 1.2\%$	$0.70 \cdot 10^5 \pm 0.9\%$

Table 5.1: Total photon flux ( $E\gamma \leq 662$  keV) with statistical error predicted considering a  $^{137}Cs$  activity of 740 GBq at different values of the distance  $D$  to the source along the  $x$ -axis of irradiation field [58].

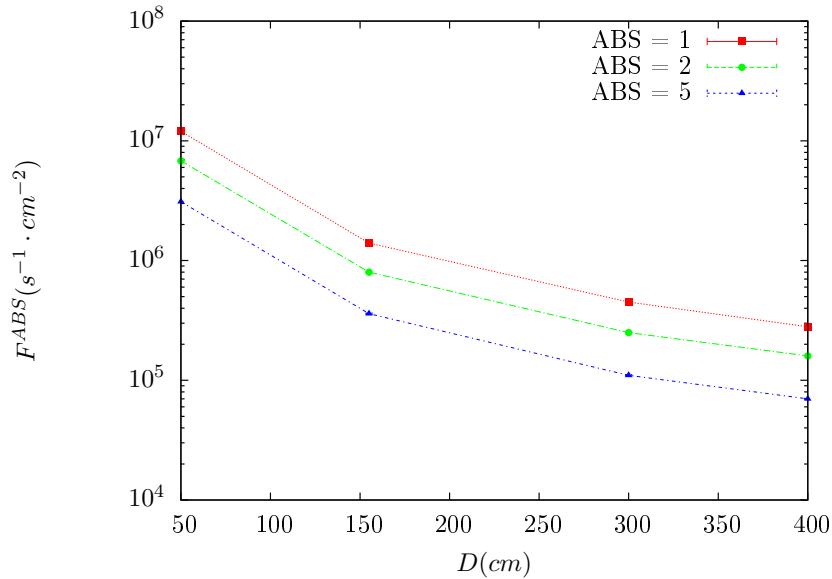


Figure 5.14:  $\gamma$  flux  $F(D)$  is plot using values from table 5.1. As expected, the plot shows similar attenuation behaviours with increasing distance for each absorption factors.

The simulation doesn't directly provides us with an estimated flux at the level of our RPC. First of all, it is needed to extract the value of the flux from the available data contained in the original paper and then to estimate the flux in 2014 at the time the experimentation took place. Figure 5.14 that contains the data from Table 5.1. In the case of a pointlike source emitting isotropic and homogeneous gamma radiations, the gamma flux  $F$  at a distance  $D$  to the source with respect to a reference point situated at  $D_0$  where a known flux  $F_0$  is measured will be expressed like in Equation 5.4, assuming that the flux decreases as  $1/D^2$ , where  $c$  is a fitting factor.

$$F^{ABS} = F_0^{ABS} \times \left( \frac{cD_0}{D} \right)^2 \quad (5.4)$$

By rewriting Equation 5.4, it comes that :

$$c = \frac{D}{D_0} \sqrt{\frac{F^{ABS}}{F_0^{ABS}}} \quad (5.5)$$

$$\Delta c = \frac{c}{2} \left( \frac{\Delta F^{ABS}}{F^{ABS}} + \frac{\Delta F_0^{ABS}}{F_0^{ABS}} \right) \quad (5.6)$$

Finally, using Equation 5.5 and the data in Table 5.1 with  $D_0 = 50$  cm as reference point, we can build Table 5.2. It is interesting to note that  $c$  for each value of  $D$  doesn't depend on the absorption factor.

Nominal ABS	Correction factor $c$		
	at $D = 155$ cm	at $D = 300$ cm	at $D = 400$ cm
1	$1.059 \pm 0.70\%$	$1.162 \pm 0.70\%$	$1.222 \pm 0.70\%$
2	$1.063 \pm 1.10\%$	$1.150 \pm 1.10\%$	$1.227 \pm 0.90\%$
5	$1.056 \pm 1.60\%$	$1.130 \pm 1.60\%$	$1.202 \pm 1.30\%$

Table 5.2: Correction factor  $c$  is computed thanks to formulae 5.5 taking as reference  $D_0 = 50$  cm and the associated flux  $F_0^{ABS}$  for each absorption factor available in table 5.1.

1851 For the range of  $D/D_0$  values available, it is possible to use a simple linear fit to get the evolution  
 1852 of  $c$ . The linear fit will then use only 2 free parameters,  $a$  and  $b$ , as written in Equation 5.7. This gives  
 1853 us the results showed in Figure 5.15. Figure 5.15b confirms that using only a linear fit to extract  $c$  is  
 1854 enough as the evolution of the rate that can be obtained superimposes well on the simulation points.

$$c \left( \frac{D}{D_0} \right) = a \frac{D}{D_0} + b \quad (5.7)$$

$$F^{ABS} = F_0^{ABS} \left( a + \frac{b D_0}{D} \right)^2 \quad (5.8)$$

$$\Delta F^{ABS} = F^{ABS} \left[ \frac{\Delta F_0^{ABS}}{F_0^{ABS}} + 2 \frac{\Delta a + \Delta b \frac{D_0}{D}}{a + \frac{b D_0}{D}} \right] \quad (5.9)$$

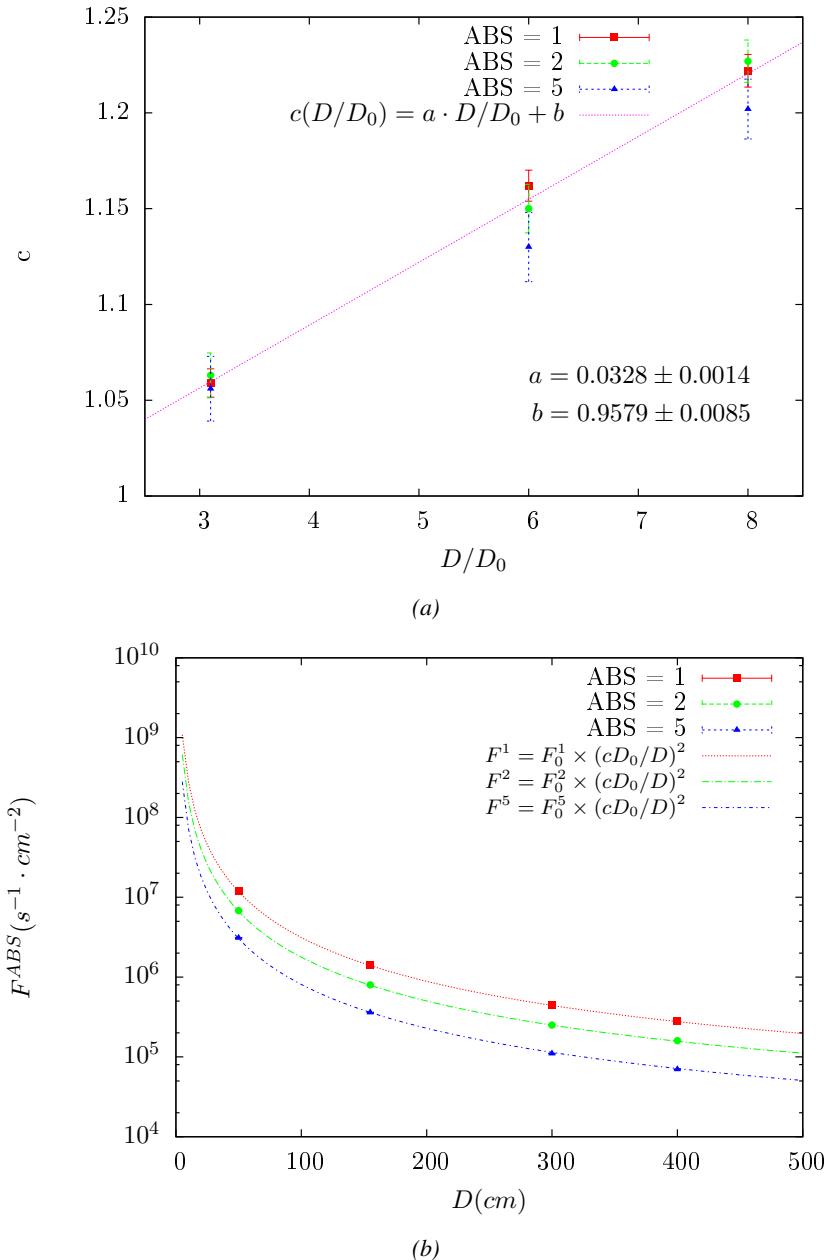


Figure 5.15: Figure 5.15a shows the linear approximation fit done via formulae 5.7 on data from table 5.2. Figure 5.15b shows a comparison of this model with the simulated flux using  $a$  and  $b$  given in figure 5.15a in formulae 5.4 and the reference value  $D_0 = 50\text{cm}$  and the associated flux for each absorption factor  $F_0^{ABS}$  from table 5.1

In the case of the 2014 GIF tests, the RPC plane is located at a distance  $D = 206\text{ cm}$  to the source. Moreover, to estimate the strength of the flux in 2014, it is necessary to consider the nuclear decay through time associated to the Cesium source whose half-life is well known ( $t_{1/2} = (30.05 \pm 0.08)\text{ y}$ ). The very first source activity measurement has been done on the 5<sup>th</sup> of March 1997 while the GIF

1859 tests where done in between the 20<sup>th</sup> and the 31<sup>st</sup> of August 2014, i.e. at a time  $t = (17.47 \pm 0.02)$  y  
 1860 resulting in an attenuation of the activity from 740 GBq in 1997 to 494 GBq in 2014. All the needed  
 1861 information to extrapolate the flux through our detector in 2014 has now been assembled, leading  
 1862 to the Table 5.3. It is interesting to note that for a common RPC sensitivity to  $\gamma$  of  $2 \cdot 10^{-3}$ , the  
 1863 order of magnitude of the estimated hit rate per unit area is of the order of the kHz for the fully  
 1864 opened source. Moreover, taking profit of the two working absorbers, it will be possible to scan  
 1865 background rates at 0 Hz,  $\sim 300$  Hz as well as  $\sim 600$  Hz. Without source, a good estimate of the  
 1866 intrinsic performance will be available. Then at 300 Hz, the goal will be to show that the detectors  
 1867 fulfill the performance certification of CMS RPCs. Then a first idea of the performance of the  
 1868 detectors at higher background will be provided with absorption factors 2 ( $\sim 600$  Hz) and 1 (no  
 1869 absorption). [Here I will also put a reference to the plot showing the estimated background rate at  
 1870 the level of RE3/1 in the case of HL-LHC but this one being in another chapter, I will do it later.]

Nominal ABS	Photon flux $F$ [ $s^{-1}cm^{-2}$ ]			Hit rate/unit area [ $Hz cm^{-2}$ ] at $D^{2014} = 206$ cm
	at $D_0^{1997} = 50$ cm	at $D^{1997} = 206$ cm	at $D^{2014} = 206$ cm	
1	$0.12 \cdot 10^8 \pm 0.2\%$	$0.84 \cdot 10^6 \pm 0.3\%$	$0.56 \cdot 10^6 \pm 0.3\%$	$1129 \pm 32$
2	$0.68 \cdot 10^7 \pm 0.3\%$	$0.48 \cdot 10^6 \pm 0.3\%$	$0.32 \cdot 10^6 \pm 0.3\%$	$640 \pm 19$
5	$0.31 \cdot 10^7 \pm 0.4\%$	$0.22 \cdot 10^6 \pm 0.3\%$	$0.15 \cdot 10^6 \pm 0.3\%$	$292 \pm 9$

Table 5.3: The data at  $D_0$  in 1997 is taken from [58]. In a second step, using Equations 5.8 and 5.9, the flux at  $D$  can be estimated in 1997. Then, taking into account the attenuation of the source activity, the flux at  $D$  can be estimated at the time of the tests in GIF in 2014. Finally, assuming a sensitivity of the RPC to  $\gamma$   $s = 2 \cdot 10^{-3}$ , an estimation of the hit rate per unit area is obtained.

1871 **5.3.4.2 Dose measurements**

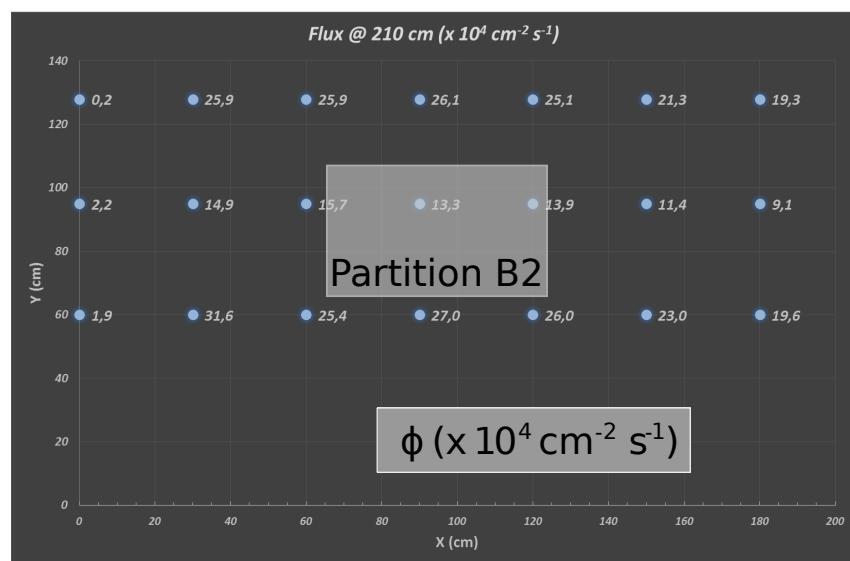


Figure 5.16: Dose measurements has been done in a plane corresponding to the tents front side. This plan is 1900 mm away from the source. As explained in the first chapter, a lens-shaped lead filter provides a uniform photon flux in the vertical plan orthogonal to the beam direction. If the second line of measured fluxes is not taken into account because of lower values due to experimental equipments in the way between the source and the tent, the uniformity of the flux is well showed by the results.

<sup>1872</sup> **5.3.5 Results and discussions**

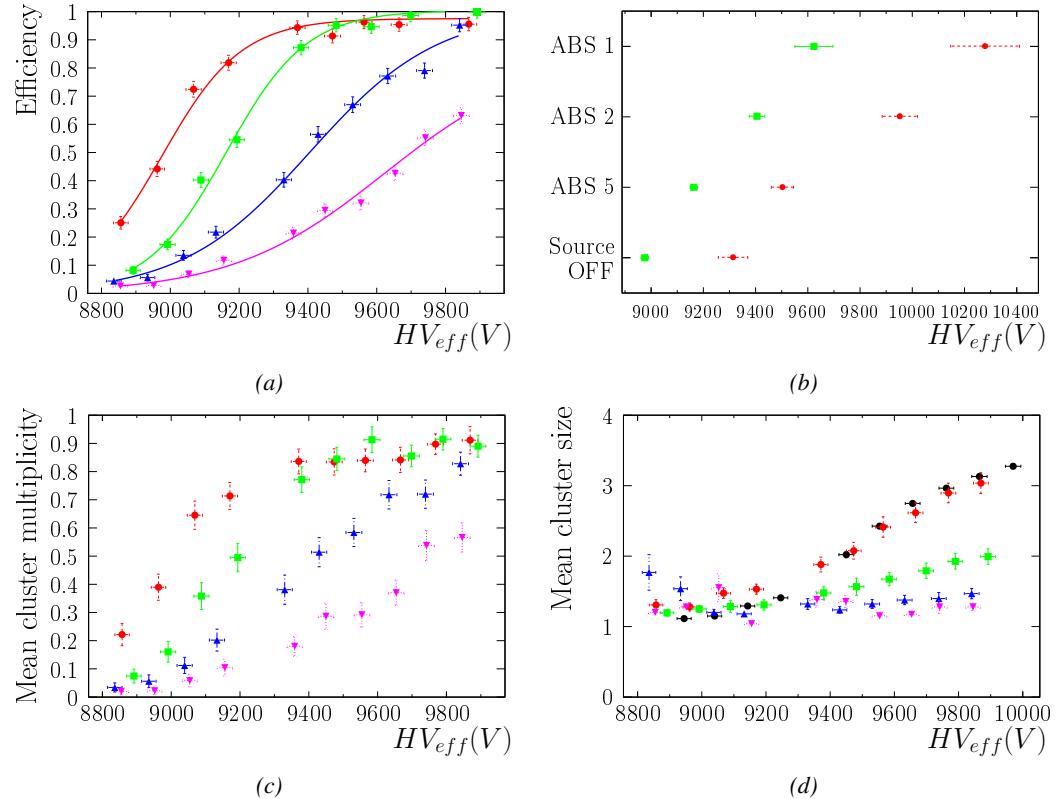


Figure 5.17

## 1873 5.4 Longevity tests at GIF++

1874 Longevity studies imply a monitoring of the performance of the detectors probed using a high inten-  
1875 sity muon beam in a irradiated environment by periodically measuring their rate capability, the dark  
1876 current running through them and the bulk resistivity of the Bakelite composing their electrodes.  
1877 GIF++, with its very intense  $^{137}\text{Cs}$  source, provides the perfect environment to perform such kind  
1878 of tests. Assuming a maximum acceleration factor of 3, it is expected to accumulate the equivalent  
1879 charge in 1.7 years.

1880 As the maximum background is found in the endcap, the choice naturally was made to focus the  
1881 GIF++ longevity studies on endcap chambers. Most of the RPC system was installed in 2007. Nev-  
1882 ertheless, the large chambers in the fourth endcap (RE4/2 and RE4/3) have been installed during  
1883 LS1 in 2014. The Bakelite of these two different productions having different properties, four spare  
1884 chambers of the present system were selected, two RE2,3/2 spares and two RE4/2 spares. Having  
1885 two chambers of each type allows to always keep one of them non irradiated as reference, the per-  
1886 formance evolution of the irradiated chamber being then compared through time to the performance  
1887 of the non irradiated one.

1888 The performance of the detectors under different level of irradiation is measured periodically dur-  
1889 ing dedicated test beam periods using the H4 muon beam. In between these test beam periods, the  
1890 two RE2,3/2 and RE4/2 chambers selected for this study are irradiated by the  $^{137}\text{Cs}$  source in order  
1891 to accumulate charge and the gamma background is monitored, as well as the currents. The two  
1892 remaining chambers are kept non-irradiated as reference detectors. Due to the limited gas flow in  
1893 GIF++, the RE4 chamber remained non-irradiated until end of November 2016 where a new mass  
1894 flow controller has been installed allowing for bigger volumes of gas to flow in the system.

1895 Figures 5.18 and 5.19 give us for different test beam periods, and thus for increasing integrated  
1896 charge through time, a comparison of the maximum efficiency, obtained using a sigmoid-like func-  
1897 tion, and of the working point of both irradiated and non irradiated chambers [47]. No aging is yet  
1898 to see from this data, the shifts in  $\gamma$  rate per unit area in between irradiated and non irradiated detec-  
1899 tors and RE2 and RE4 types being easily explained by a difference of sensitivity due to the various  
1900 Bakelite resistivities of the HPL electrodes used for the electrode production.

1901 Collecting performance data at each test beam period allows us to extrapolate the maximum effi-  
1902 ciency for a background hit rate of  $300\text{ Hz}/\text{cm}^2$  corresponding to the expected HL-LHC conditions.  
1903 Aging effects could emerge from a loss of efficiency with increasing integrated charge over time,  
1904 thus Figure 5.20 helps us understand such degradation of the performance of irradiated detectors in  
1905 comparison with non irradiated ones. The final answer for an eventual loss of efficiency is given in  
1906 Figure 5.21 by comparing for both irradiated and non irradiated detectors the efficiency sigmoids  
1907 before and after the longevity study. Moreover, to complete the performance information, the Bake-  
1908 lite resistivity is regularly measured thanks to  $Ag$  scans (Figure 5.22) and the noise rate is monitored  
1909 weekly during irradiation periods (Figure 5.23). At the end of 2016, no signs of aging were observed  
1910 and further investigation is needed to get closer to the final integrated charge requirements proposed  
1911 for the longevity study of the present CMS RPC sub-system.

1912

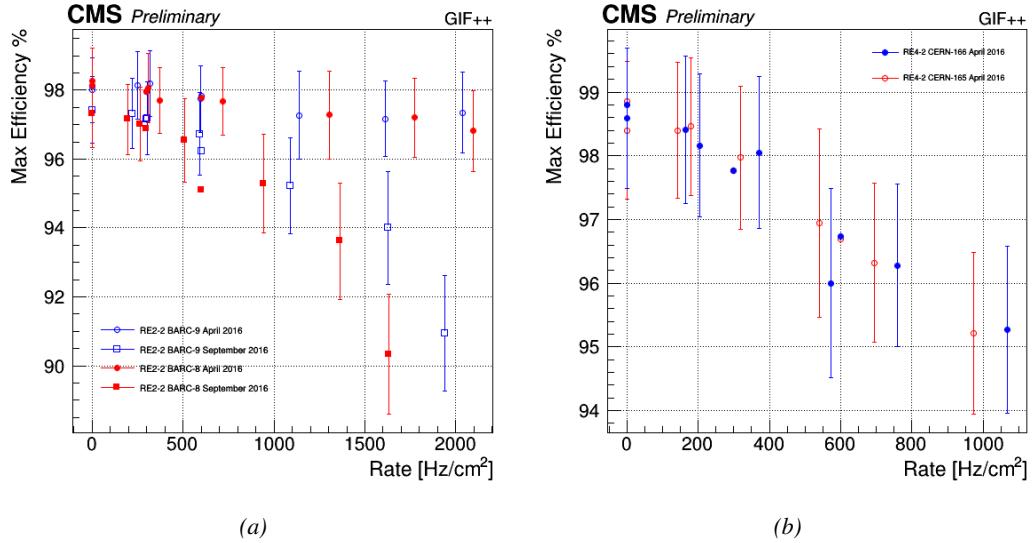


Figure 5.18: Evolution of the maximum efficiency for RE2 (5.18a) and RE4 (5.18b) chambers with increasing extrapolated  $\gamma$  rate per unit area at working point. Both irradiated (blue) and non irradiated (red) chambers are shown.



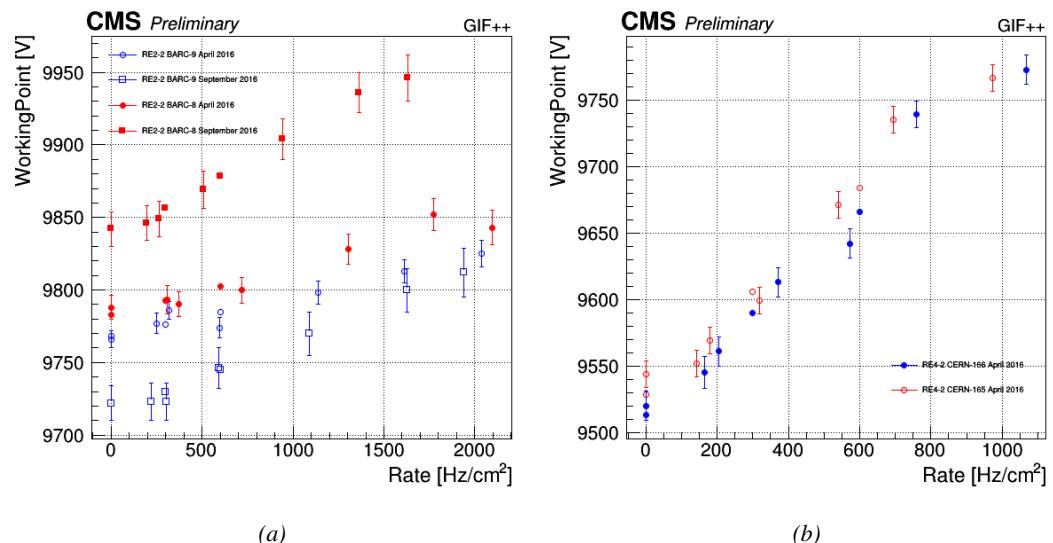


Figure 5.19: Evolution of the working point for RE2 (5.19a) and RE4 (5.19b) with increasing extrapolated  $\gamma$  rate per unit area at working point. Both irradiated (blue) and non irradiated (red) chambers are shown.

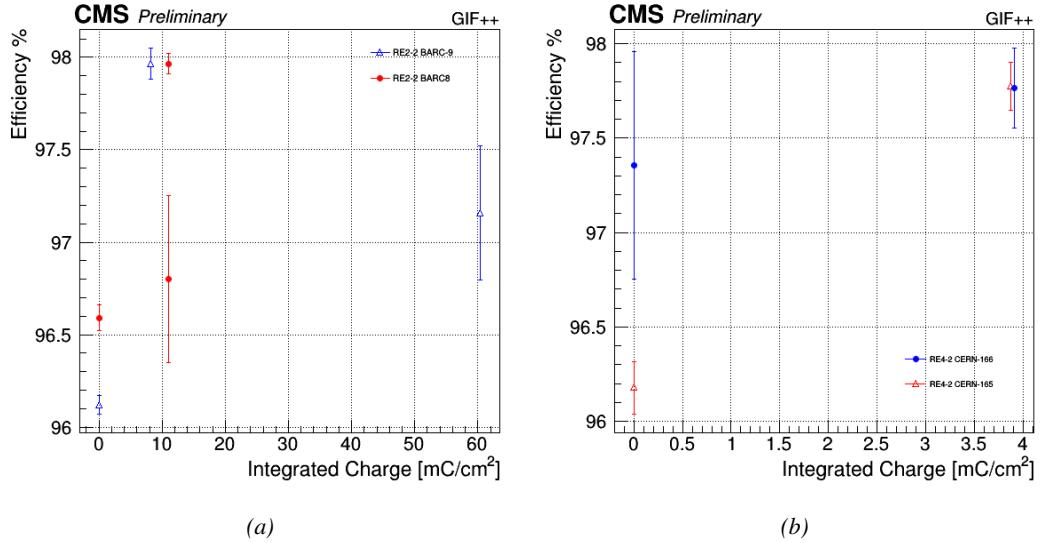

*Figure 5.20: Evolution of the maximum efficiency at HL-LHC conditions, i.e. a background hit rate per unit area of 300 Hz/cm<sup>2</sup>, with increasing integrated charge for RE2 (5.20a) and RE4 (5.20b) detectors. Both irradiated (blue) and non irradiated (red) chambers are shown. The integrated charge for non irradiated detectors is recorded during test beam periods and stays small with respect to the charge accumulated in irradiated chambers.*

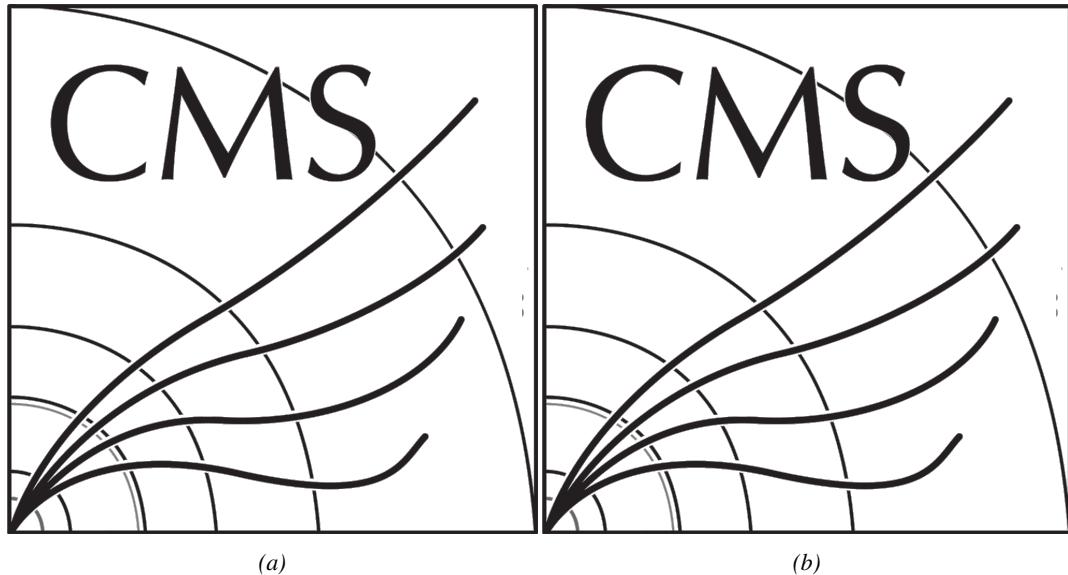

*Figure 5.21: Comparison of the efficiency sigmoid before (triangles) and after (circles) irradiation for RE2 (5.21a) and RE4 (5.21b) detectors. Both irradiated (blue) and non irradiated (red) chambers are shown.*

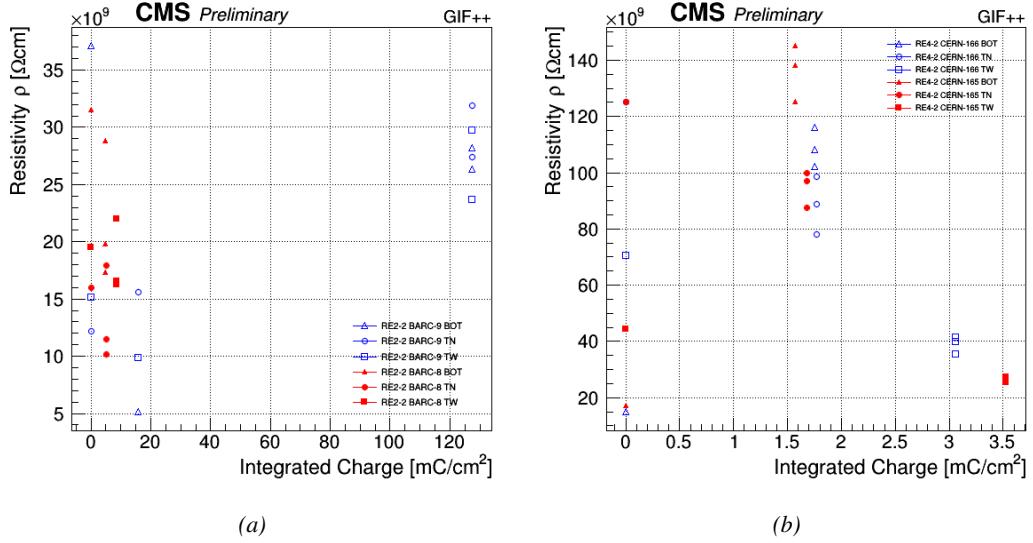


Figure 5.22: Evolution of the Bakelite resistivity for RE2 (5.22a) and RE4 (5.22b) detectors. Both irradiated (blue) and non-irradiated (red) chambers are shown.

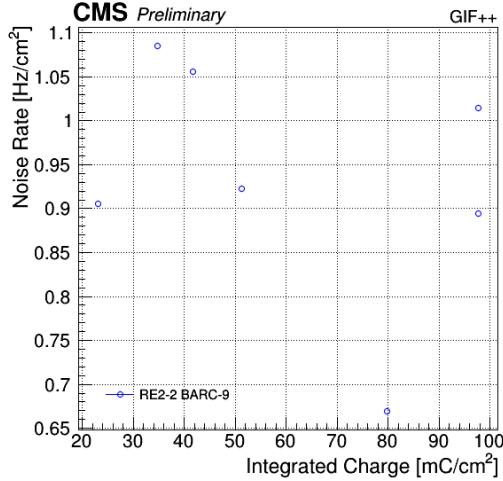


Figure 5.23: Evolution of the noise rate per unit area for the irradiated chamber RE2-2-BARC-9 only.

#### 5.4.1 Description of the Data Acquisition

For the longevity studies, four spare chambers of the present system are used. Two spare RPCs of the RE2,3 stations as well as two spare RPCs from the new RE4 stations have been mounted in a Trolley. Six RE4 gaps are also placed in the trolley. The trolley is placed inside the GIFT++ in the upstream region of the bunker, taking the cesium source as a reference. The trolley is oriented for the detection surface of the chambers to be orthogonal to the beam line. The system can be moved along the orthogonal plane in order to have the beam in all  $\eta$ -partitions. For the aging the trolley is

1920 moved outside the beam line and is placed in a distance of 5.2 m to the source, which irradiates the  
 1921 bunker using an attenuation filter of 2.2 which corresponds to a fluence of  $10^7 \text{ gamma/cm}^2$ .

1922 During GIF++ operation, the data collected can be divided into different categories as several  
 1923 parameters are monitored in addition to the usual RPC performance data. On one hand, to know  
 1924 the performance of a chamber, it is need to measure its efficiency and to know the background  
 1925 conditions in which it is operated. To do this, the hit signals from the chamber are recorded and  
 1926 stored in a ROOT file via a Data Acquisition (DAQ) software. On the other hand, it is also very  
 1927 important to monitor parameters such as environmental pressure and temperature, gas temperature  
 1928 and humidity, RPC HV, LV, and currents, or even source and beam status. This is done through the  
 1929 GIF++ web Detector Control Software (DCS) that stores this information in a database.

1930 Two different types of tests are conducted on RPCs via the DAQ. Indeed, the performance of the  
 1931 detectors is measured periodically during dedicated test beam periods using the H4 muon beam. In  
 1932 between these test beam periods, when the beam is not available, the chambers are irradiated by the  
 1933  $^{137}\text{Cs}$  in order to accumulate deposited charge and the gamma background is measured.

1934 RPCs under test are connected through LVDS cables to V1190A Time-to-Digital Converter  
 1935 (TDC) modules manufactured by CAEN. These modules, located in the rack area outside of the  
 1936 bunker, get the logic signals sent by the chambers and save them into their buffers. Due to the  
 1937 limited size of the buffers, the collected data is regularly erased and replaced. A trigger signal is  
 1938 needed for the TDC modules to send the useful data to the DAQ computer via a V1718 CAEN USB  
 1939 communication module.

1940 In the case of performance test, the trigger signal used for data acquisition is generated by the  
 1941 coincidence of three scintillators. A first one is placed upstream outside of the bunker, a second one  
 1942 is placed downstream outside of the bunker, while a third one is placed in front of the trolley, close by  
 1943 the chambers. Every time a trigger is sent to the TDCs, i.e. every time a muon is detected, knowing  
 1944 the time delay in between the trigger and the RPC signals, signals located in the right time window  
 1945 are extracted from the buffers and saved for later analysis. Signals are taken in a time window of  
 1946 400 ns centered on the muon peak (here we could show a time spectrum). On the other hand, in the  
 1947 case of background rate measurement, the trigger signal needs to be "random" not to measure muons  
 1948 but to look at gamma background. A trigger pulse is continuously generated at a rate of 300 Hz using  
 1949 a dual timer. To integrate an as great as possible time, all signals contained within a time window of  
 1950 10us prior to the random trigger signal are extracted form the buffers and saved for further analysis  
 1951 (here another time spectrum to illustrate could be useful, maybe even place both spectrum together  
 1952 as a single Figure).

1953 The signals sent to the TDCs correspond to hit collections in the RPCs. When a particle hits  
 1954 a RPC, it induce a signal in the pickup strips of the RPC readout. If this signal is higher than the  
 1955 detection threshold, a LVDS signal is sent to the TDCs. The data is then organised into 4 branches  
 1956 keeping track of the event number, the hit multiplicity for the whole setup, and the time and channel  
 1957 profile of the hits in the TDCs.

#### 1958 **5.4.2 RPC current, environmental and operation parameter monitoring**

1959 In order to take into account the variation of pressure and temperature between different data taking  
 1960 periods the applied voltage is corrected following the relationship :

$$1961 \quad HV_{eff} = HV_{app} \times \left( 0.2 + 0.8 \cdot \frac{P_0}{P} \times \frac{T}{T_0} \right) \quad (5.10)$$

<sup>1961</sup> where  $T_0$  (=293 K) and  $P_0$  (=990 mbar) are the reference values.

<sup>1962</sup> **5.4.3 Measurement procedure**

<sup>1963</sup> Insert a short description of the online tools (DAQ, DCS, DQM).

<sup>1964</sup> Insert a short description of the offline tools : tracking and efficiency algorithm.

<sup>1965</sup> Identify long term aging effects we are monitoring the rates per strip.

<sup>1966</sup> **5.4.4 Longevity studies results**



# 6

1967

1968

## Investigation on high rate RPCs

1969 **6.1 Rate limitations and ageing of RPCs**

1970 **6.1.1 Low resistivity electrodes**

1971 **6.1.2 Low noise front-end electronics**

1972 **6.2 Construction of prototypes**

1973 **6.3 Results and discussions**



# 7

1974

1975

## Conclusions and outlooks

1976 **7.1 Conclusions**

1977 **7.2 Outlooks**



# A

1978

1979

1980

## A data acquisition software for CAEN VME TDCs

1981 Certifying detectors in the perspective of HL-LHC required to develop tools for the GIF++ experiment.  
1982 Among them was the C++ Data Acquisition (DAQ) software that allows to make the communications  
1983 in between a computer and TDC modules in order to retrieve the RPC data [60]. In this  
1984 appendix, details about this software, as of how the software was written, how it functions and how  
1985 it can be exported to another similar setup, will be given.

### 1986 A.1 GIF++ DAQ file tree

1987 GIF++ DAQ source code is fully available on github at [https://github.com/afagot/GIF\\_DAQ](https://github.com/afagot/GIF_DAQ). The software requires 3 non-optional dependencies:


- 1989 • CAEN USB Driver, to mount the VME hardware,
- 1990 • CAEN VME Library, to communicate with the VME hardware, and
- 1991 • ROOT, to organize the collected data into a TTree.

1992 The CAEN VME library will not be packaged by distributions and will need to be installed man-  
1993 ually. To compile the GIF++ DAQ project via a terminal, from the DAQ folder use the command:

1994      `make`

1996 The source code tree is provided below along with comments to give an overview of the files' con-  
1997 tent. The different objects created for this project (`v1718`, `v1190a`, `IniFile` & `DataReader`) will be  
1998 described in details in the following sections.

1999

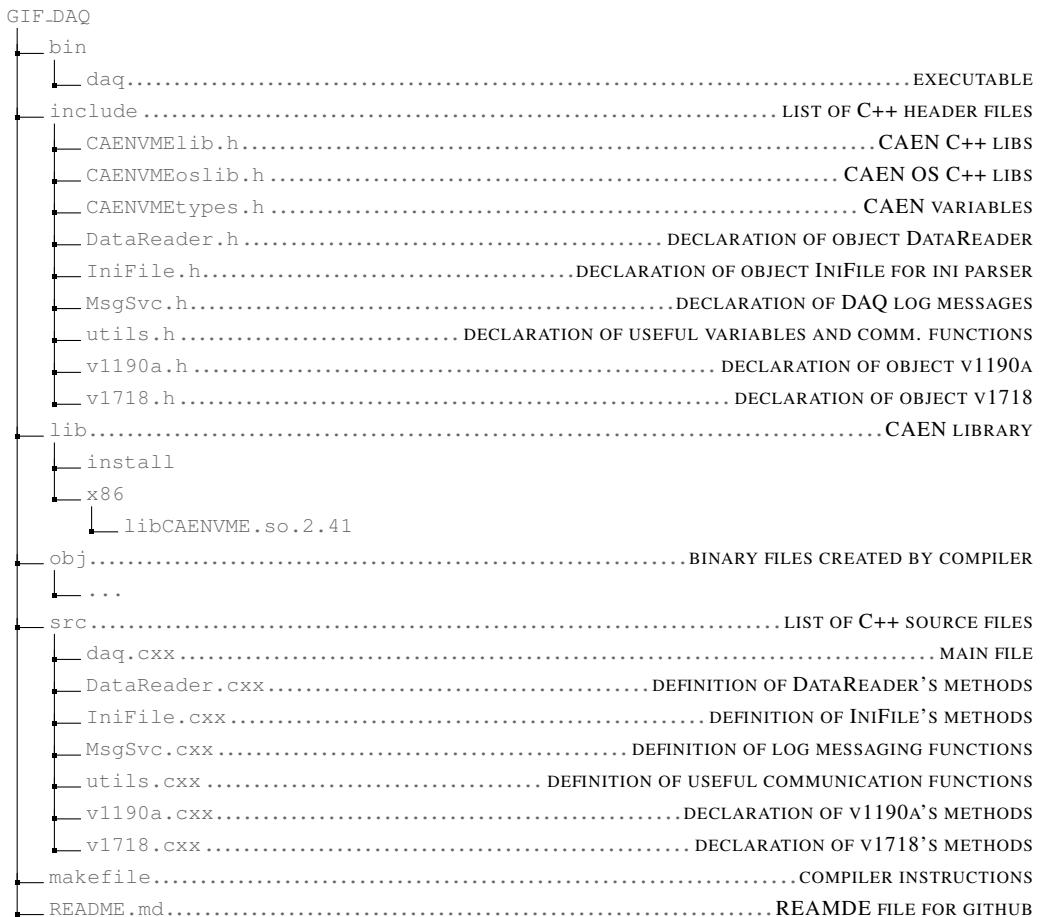

## 2000 A.2 Usage of the DAQ

2001 GIF++ DAQ, as used in GIF++, is not a standalone software. Indeed, the system being more complexe,  
 2002 the DAQ only is a sub-layer of the software architecture developped to control and monitor  
 2003 the RPCs that are placed into the bunker for performance study in an irradiated environment. The top  
 2004 layer of GIF++ is a Web Detector Control System (webDCS) application. The DAQ is only called  
 2005 by the webDCS when data needs to be acquired. The webDCS operates the DAQ through command  
 2006 line. To start the DAQ, the webDCS calls:

2007

2008    bin/daq /path/to/the/log/file/in/the/output/data/folder

2009 where /path/to/the/log/file/in/the/output/data/folder is the only argument required. This  
 2010 log file is important for the webDCS as this file contains all the content of the communication of the  
 2011 webDCS and the different systems monitored by the webDCS. Its content is constantly displayed  
 2012 during data taking for the users to be able to follow the operations. The communication messages  
 2013 are normally sent to the webDCS log file via the functions declared in file MsgSvc.h, typically  
 2014 MSG\_INFO(string message).

2015

### 2016 A.3 Description of the readout setup

2017 The CMS RPC setup at GIF++ counts 5 V1190A Time-to-Digital Converter (TDC) manufactured  
 2018 by CAEN [61]. V1190A are VME units accepting 128 independent Multi-Hit/Multi-Event TDC  
 2019 channels whose signals are treated by 4 100 ps high performance TDC chips developed by CERN  
 2020 / ECP-MIC Division. The communication between the computer and the TDCs to transfer data is  
 2021 done via a V1718 VME master module also manufactured by CAEN and operated from a USB  
 2022 port [62]. These VME modules are all hosted into a 6U VME 6021 powered crate manufactured by  
 2023 W-Ie-Ne-R than can accommodate up to 21 VME bus cards [63]. These 3 components of the DAQ  
 2024 setup are shown in Figure A.1.

2025

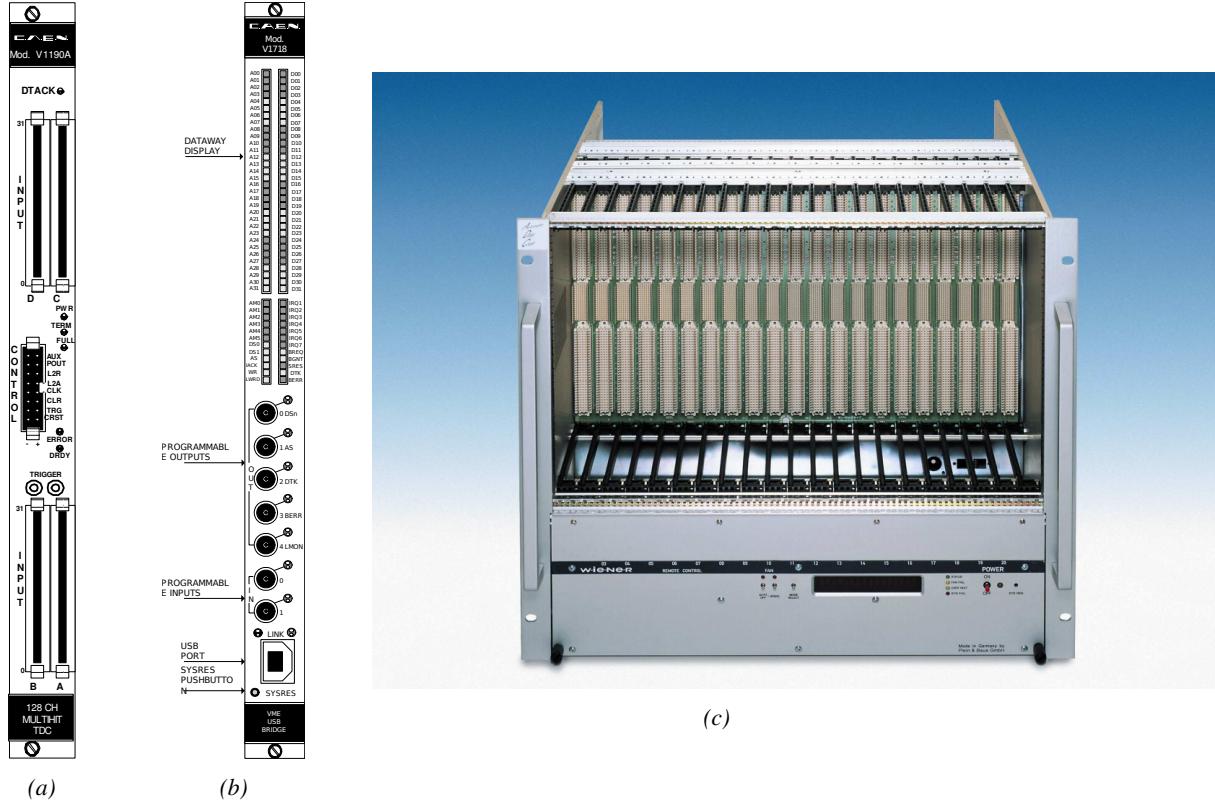


Figure A.1: (A.1a) View of the front panel of a V1190A TDC module [61]. (A.1b) View of the front panel of a VI718 Bridge module [62]. (A.1c) View of the front panel of a 6U 6021 VME crate [63].

2026

### A.4 Data read-out

2027 To efficiently perform a data readout algorithm, C++ objects to handle the VME modules (TDCs  
 2028 and VME bridge) have been created along with objects to store data and read the configuration file

2029 that comes as an input of the DAQ software.

2030

### 2031 A.4.1 V1190A TDCs

2032 The DAQ used at GIF takes profit of the *Trigger Matching Mode* offered by V1190A modules.  
 2033 This setting is enabled through the method `v1190a::SetTrigMatching (int ntdcs)` where `ntdcs`  
 2034 is the total number of TDCs in the setup this setting needs to be enabled for (Source Code A.1). A  
 2035 trigger matching is performed in between a trigger time tag, a trigger signal sent into the TRIGGER  
 2036 input of the TDC visible on Figure A.1a, and the channel time measurements, signals recorded from  
 2037 the detectors under test in our case. Control over this data acquisition mode, explained through  
 2038 Figure A.2, is offered via 4 programmable parameters:

- 2039 • **match window:** the matching between a trigger and a hit is done within a programmable time  
 2040 window. This is set via the method

2041   `void v1190a::SetTrigWindowWidth(Uint windowHeight, int ntdcs)`

- 2042 • **window offset:** temporal distance between the trigger tag and the start of the trigger matching  
 2043 window. This is set via the method

2044   `void v1190a::SetTrigWindowWidth(Uint windowHeight, int ntdcs)`

- 2045 • **extra search margin:** an extended time window is used to ensure that all matching hits are  
 2046 found. This is set via the method

2047   `void v1190a::SetTrigSearchMargin(Uint searchMargin, int ntdcs)`

- 2048 • **reject margin:** older hits are automatically rejected to prevent buffer overflows and to speed  
 2049 up the search time. This is set via the method

2050   `void v1190a::SetTrigRejectionMargin(Uint rejectMargin, int ntdcs)`

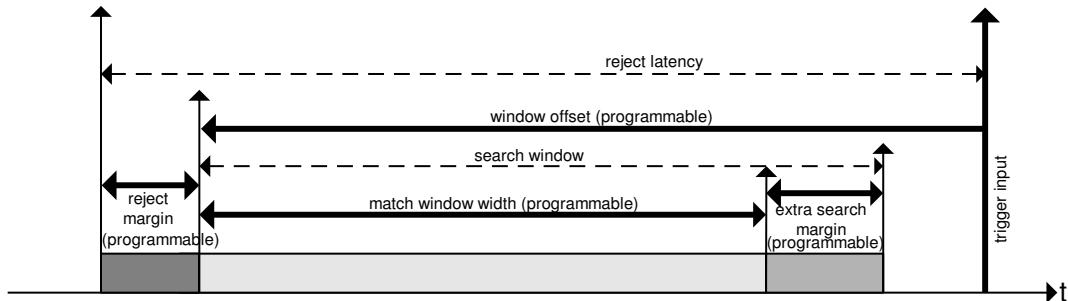


Figure A.2: Module V1190A Trigger Matching Mode timing diagram [61].

2051 Each of these 4 parameters are given in number of clocks, 1 clock being 25 ns long. It is easy to  
 2052 understand at this level that there are 3 possible functioning settings:

- 2053 • **1:** the match window is entirely contained after the trigger signal,

- 2054 • **2:** the match window overlaps the trigger signal, or

- 2055 • **3:** the match window is entirely contained before the trigger signal as displayed on Figure A.2.

2056 In both the first and second cases, the sum of the window width and of the offset can be set to  
2057 a maximum of 40 clocks, which corresponds to 1  $\mu$ s. Evidently, the offset can be negative, allowing  
2058 for a longer match window, with the constraint of having the window ending at most 1  $\mu$ s after the  
2059 trigger signal. In the third case, the maximum negative offset allowed is of 2048 clocks (12 bit) cor-  
2060 responding to 51.2  $\mu$ s, the match window being strictly smaller than the offset. In the case of GIF++,  
2061 the choice has been made to use this last setting by delaying the trigger signal. During the studies  
2062 performed in GIF++, both the efficiency of the RPCs, probed using a muon beam, and the noise or  
2063 gamma background rate are monitored. The extra search and reject margins are left unused.  
2064 To probe the efficiency of RPC detectors, the trigger time tag is provided by the coïncidence of  
2065 scintillators when a bunch of muons passes through GIF++ area is used to trigger the data acquisi-  
2066 tion. For this measurement, it is useful to reduce the match window width only to contain the muon  
2067 information. Indeed, the delay in between a trigger signal and the detection of the corresponding  
2068 muon in the RPC being very contant (typically a few tens of ns due to jitter and cable length), the  
2069 muon signals are very localised in time. Thus, due to a delay of approximalety 325 ns in between  
2070 the muons and the trigger, the settings where chosen to have a window width of 24 clocks (600 ns)  
2071 centered on the muon peak thanks to a negative offset of 29 clocks (725 ns).  
2072 On the otherhand, monitoring the rates don't require for the DAQ to look at a specific time window.  
2073 It is important to integrate enough time to have a robust measurement of the rate as the number of  
2074 hits per time unit. The triggerring signal is provided by a pulse generator at a frequency of 300 Hz  
2075 to ensure that the data taking occurs in a random way, with respect to beam physics, to probe only  
2076 the irradiation spectrum on the detectors. The match window is set to 400 clocks (10  $\mu$ s) and the  
2077 negative offset to 401 clocks as it needs to exceed the value of the match window.

```

2078
class v1190a
{
    private :
        long Handle;
        vector<Data32> Address;
        CVDataWidth DataWidth;
        CVAAddressModifier AddressModifier;

    public:

        v1190a(long handle, IniFile *inifile, int ntdcs);
        ~v1190a();
        Data16 write_op_reg(Data32 address, int code, string error);
        Data16 read_op_reg(Data32 address, string error);
        void Reset(int ntdcs);
        void Clear(int ntdcs);
        void TestWR(Data16 value,int ntdcs);
        void CheckTDCStatus(int ntdcs);
        void CheckCommunication(int ntdcs);
        void SetTDCTestMode(Data16 mode,int ntdcs);
        void SetTrigMatching(int ntdcs);
        void SetTrigTimeSubtraction(Data16 mode,int ntdcs);
        void SetTrigWindowWidth(Uint windowHeight,int ntdcs);
        void SetTrigWindowOffset(Uint windowOffset,int ntdcs);
        void SetTrigSearchMargin(Uint searchMargin,int ntdcs);
        void SetTrigRejectionMargin(Uint rejectMargin,int ntdcs);
        void GetTrigConfiguration(int ntdcs);
        void SetTrigConfiguration(IniFile *inifile,int ntdcs);
        void SetTDCDetectionMode(Data16 mode,int ntdcs);
        void SetTDCResolution(Data16 lsb,int ntdcs);
        void SetTDCDeadTime(Data16 time,int ntdcs);
        void SetTDCHeadTrailer(Data16 mode,int ntdcs);
        void SetTDCEventSize(Data16 size,int ntdcs);
        void SwitchChannels(IniFile *inifile,int ntdcs);
        void SetIRQ(Data32 level, Data32 count,int ntdcs);
        void SetBlockTransferMode(Data16 mode,int ntdcs);
        void Set(IniFile *inifile,int ntdcs);
        void CheckStatus(CVErrorCodes status) const;
        int ReadBlockD32(Uint tdc, const Data16 address,
                           Data32 *data, const Uint words, bool ignore_berr);
        Uint Read(RAWData *DataList,int ntdcs);
};

2079

```

2080       *Source Code A.1: Description of C++ object v1190a.*

2081       The v1190a object, defined in the DAQ software as in Source Code A.1, offers the possibility to  
 2082       concatenate all TDCs in the readout setup into a single object containing a list of hardware addresses  
 2083       (addresses to access the TDCs' buffer through the VME crate) and each constructor and method acts  
 2084       on the list of TDCs.  
 2085

#### 2086     A.4.2 DataReader

2087       Enabled thanks to v1190a::SetBlockTransferMode(Data16 mode, **int** ntdcs), the data transfer  
 2088       is done via Block Transfer (BLT). Using BLT allows to tranfer a fixed number of events called a  
 2089       *block*. This is used together with an Almost Full Level (AFL) of the TDCs' output buffers, defined

2090 through `v1190a::SetIRQ(Data32 level, Data32 count, int ntdcs)`. This AFL gives the maxi-  
 2091 mum amount of 32735 words (16 bits, corresponding to the depth of a TDC output buffer) that can  
 2092 writen in a buffer before an Interrupt Request (IRQ) is generated and seen by the VME Bridge,  
 2093 stopping the data acquisition to transfer the content of each TDC buffers before resuming. For each  
 2094 trigger, 6 words or more are written into the TDC buffer:

- 2095     • a **global header** providing information of the event number since the beginning of the data  
       acquisition,
- 2097     • a **TDC header**,
- 2098     • the **TDC data** (*if any*), 1 for each hit recorded during the event, providing the channel and the  
       time stamp associated to the hit,
- 2100     • a **TDC error** providing error flags,
- 2101     • a **TDC trailer**,
- 2102     • a **global trigger time tag** that provides the absolute trigger time relatively to the last reset,  
       and
- 2104     • a **global trailer** providing the total word count in the event.

2105     As previously described in Section ??, CMS RPC FEEs provide us with 100 ns long LVDS out-  
 2106 put signals that are injected into the TDCs' input. Any avalanche signal that gives a signal above the  
 2107 FEEs threshold is thus recorded by the TDCs as a hit within the match window. Each hit is assigned  
 2108 to a specific TDC channel with a time stamp, with a precision of 100 ps. The reference time,  $t_0 = 0$ ,  
 2109 is provided by the beginning of the match window. Thus for each trigger, coming from a scintillator  
 2110 coïncidence or the pulse generator, a list of hits is stored into the TDCs' buffers and will then be  
 2111 transferred into a ROOT Tree.

2112     When the BLT is used, it is easy to understand that the maximum number of words that have  
 2113 been set as ALF will not be a finite number of events or, at least, the number of events that would  
 2114 be recorded into the TDC buffers will not be a multiple of the block size. In the last BLT cycle to  
 2115 tranfer data, the number of events to transfer will most propably be lower than the block size. In that  
 2116 case, the TDC can add fillers at the end of the block but this option requires to send more data to the  
 2117 computer and is thus a little slower. Another solution is to finish the transfer after the last event by  
 2118 sending a bus error that states that the BLT reached the last event in the pile. This method has been  
 2119 chosen in GIF++.

2121     Due to irradiation, an event in GIF++ can count up to 300 words per TDC. A limit of 4096 words  
 2122 (12 bits) has been set to generate IRQ which represent from 14 to almost 700 events depending on  
 2123 the average of hits collected per event. Then the block size has been set to 100 events with enabled  
 2124 bus errors. When an AFL is reached for one of the TDCs, the VME bridge stops the acquisition by  
 2125 sending a BUSY signal.

2127

2128     The data is then transferred one TDC at a time into a structure called `RAWData` (Source Code A.2).

```
2129
2130 struct RAWData{
2131     vector<int>           *EventList;
2132     vector<int>           *NHitsList;
2133     vector<int>           *QFlagList;
2134     vector<vector<int>>   *Channellist;
2135     vector<vector<float>>  *TimeStampList;
2136 };
2137
```

2131                 *Source Code A.2: Description of data holding C++ structure `RAWData`.*

2132     In order to organize the data transfer and the data storage, an object called `DataReader` was  
 2133     created (Source Code A.3). On one hand, it has `v1718` and `v1190a` objects as private members for  
 2134     communication purposes, such as VME modules settings via the configuration file `*iniFile` or data  
 2135     read-out through `v1190a::Read()` and on the other hand, it contains the structure `RAWData` that allows  
 2136     to organise the data in vectors reproducing the tree structure of a ROOT file.

```
2137
2138 class DataReader
2139 {
2140     private:
2141     bool      StopFlag;
2142     IniFile  *iniFile;
2143     Data32    MaxTriggers;
2144     v1718    *VME;
2145     int       nTDCs;
2146     v1190a   *TDCs;
2147     RAWData  TDCData;
2148
2149     public:
2150     DataReader();
2151     virtual ~DataReader();
2152     void      SetIniFile(string inifilename);
2153     void      SetMaxTriggers();
2154     Data32    GetMaxTriggers();
2155     void      SetVME();
2156     void      SetTDC();
2157     int       GetQFlag(Uint it);
2158     void      Init(string inifilename);
2159     void      FlushBuffer();
2160     void      Update();
2161     string   GetFileName();
2162     void      WriteRunRegistry(string filename);
2163     void      Run();
2164 };
2165
```

2139                 *Source Code A.3: Description of C++ object `DataReader`.*

2140     Each event is transferred from `TDCData` and saved into branches of a ROOT `TTree` as 3 integers  
 2141     that represent the event ID (`EventCount`), the number of hits read from the TDCs (`nHits`), and the  
 2142     quality flag that provides information for any problem in the data transfer (`qflag`), and 2 lists of  
 2143     `nHits` elements containing the fired TDC channels (`TDCCh`) and their respective time stamps (`TDCTS`),  
 2144     as presented in Source Code A.4. The ROOT file file is named using information contained into  
 2145     the configuration file, presented in section A.5.2. The needed information is extracted using method  
 2146     `DataReader::GetFileName()` and allow to build the output filename format `ScanXXXXXX_HVX_DAQ.root`

2147 where ScanXXXXXX is a 6 digit number representing the scan number into GIFT++ database and HVX  
 2148 the HV step within the scan that can be more than a single digit. An example of ROOT data file is  
 2149 provided with Figure A.3.

```
2150
RAWData TDCData;
TFile *outputFile = new TFile(outputFileName.c_str(),"recreate");
TTree *RAWDataTree = new TTree("RAWData","RAWData");


int EventCount = -9;
int nHits = -8;
int qflag = -7;
vector<int> TDCCh;
vector<float> TDCTS;

RAWDataTree->Branch("EventNumber",&EventCount, "EventNumber/I");
RAWDataTree->Branch("number_of_hits",&nHits,"number_of_hits/I");
RAWDataTree->Branch("Quality_flag",&qflag,"Quality_flag/I");
RAWDataTree->Branch("TDC_channel",&TDCCh);
RAWDataTree->Branch("TDC_TimeStamp",&TDCTS);

2151
//...
//Here read the TDC data using v1190a::Read() and place it into
//TDCData for as long as you didn't collect the requested amount
//of data.
//...

for(Uint i=0; i<TDCData.EventList->size(); i++){
    EventCount = TDCData.EventList->at(i);
    nHits = TDCData.NHitsList->at(i);
    qflag = TDCData.QFlagList->at(i);
    TDCCh = TDCData.ChannelList->at(i);
    TDCTS = TDCData.TimeStampList->at(i);
    RAWDataTree->Fill();
}
```

2152 *Source Code A.4: Highlight of the data transfer and organisation within DataReader::Run() after the data has been collected into TDCData.*

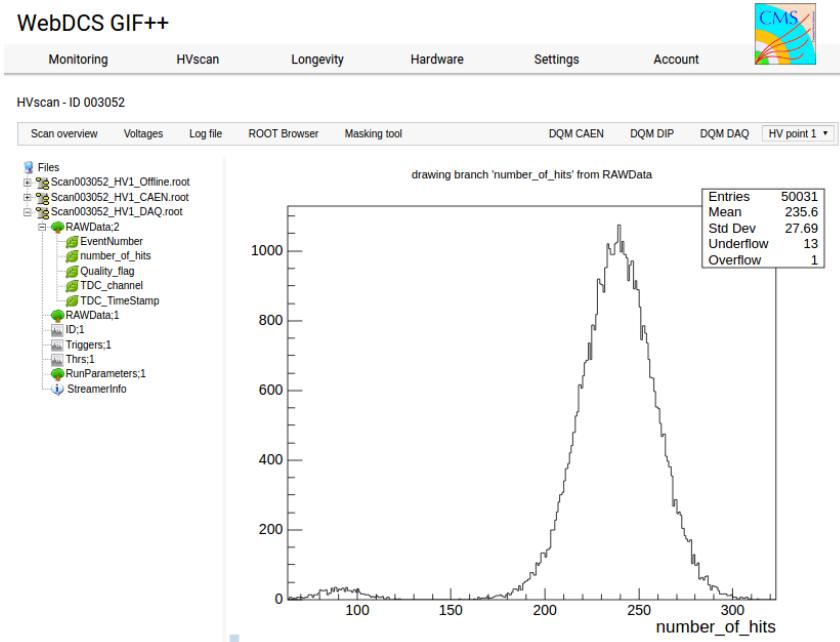

*Figure A.3: Structure of the ROOT output file generated by the DAQ. The 5 branches (EventNumber, number\_of\_hits, Quality\_flag, TDC\_channel and TDC\_TimeStamp) are visible on the left panel of the ROOT browser. On the right panel is visible the histogram corresponding to the variable nHits. In this specific example, there were approximately 50k events recorded to measure the gamma irradiation rate on the detectors. Each event is stored as a single entry in the TTree.*

#### 2153    A.4.3 Data quality flag

2154    Among the parameters that are recorded for each event, the quality flag, defined in Source Code A.5,  
 2155    is determined on the fly by checking the data recorded by every single TDC. From method `v1190a::Read()`,  
 2156    it can be understood that the content of each TDC buffer is readout one TDC at a time. Entries are  
 2157    created in the data list for the first TDC and then, when the second buffer is readout, events corre-  
 2158    sponding to entries that have already been created to store data for the previous TDC are added to  
 2159    the existing list element. On the contrary, when an event entry has not been yet created in the data  
 2160    list, a new entry is created.

```
2161
 2162   typedef enum _QualityFlag {
 2163     GOOD      = 1,
 2164     CORRUPTED = 0
 2165   } QualityFlag;
```

2163    *Source Code A.5: Definition of the quality flag `enum`.*

2164    It is possible that each TDC buffer contains a different number of events. In cases where the first  
 2165    element in the buffer list is an event for corresponds to a new entry, the difference in between the  
 2166    entry from the buffer and the last entry in the data list is recorded and checked. If it is greater than 1,  
 2167    what should never be the case, the quality flag is set to CORRUPTED for this TDC and an empty entry  
 2168    is created in the place of the missing ones. Missing entries are believe to be the result of a bad hold

2169 on the TDC buffers at the moment of the readout. Indeed, the software hold is effective only on 1  
 2170 TDC at a time and no solution as been found yet to completely block the writting in the buffers when  
 2171 an IRQ is received.

2172 At the end of each BLT cycle, the ID of the last entry stored for each TDC buffer is not recorded.  
 2173 When starting the next cycle, if the first entry in the pile corresponds to an event already existing  
 2174 in the list, the readout will start from this list element and will not be able to check the difference  
 2175 in between this entry's ID and the one of the last entry that was recorded for this TDC buffer in  
 2176 the previous cycle. In the case events were missing, the flag stays at its initial value of 0, which is  
 2177 similar to CORRUPTED and it is assumed that then this TDC will not contribute to `number_of_hits`,  
 2178 `TDC_channel` or `TDC_TimeStamp`.

2179 Finally, since there will be 1 `RAWData` entry per TDC for each event (meaning `nTDCs` entries,  
 2180 referring to `DataReader` private attribute), the individual flags of each TDC will be added together.  
 2181 The final format is an integer composed `nTDCs` digits where each digit is the flag of a specific TDC.  
 2182 This is constructed using powers of 10 like follows:

```
2183 TDC 0: QFlag = 100 × _QualityFlag
2184 TDC 1: QFlag = 101 × _QualityFlag
2185 ...
2186 TDC N: QFlag = 10N × _QualityFlag
```

2187 and the final flag to be with N digits:

```
2188 QFlag = n....3210
```

2189 each digit being 1 or 0. Below is given an example with a 4 TDCs setup.

2190 If all TDCs were good : `QFlag = 1111`,


2191 but if TDC 2 was corrupted : `QFlag = 1011`.

2192 When data taking is over and the data contained in the dynamical `RAWData` structure is transferred  
 2193 to the ROOT file, all the 0s are changed into 2s by calling the method `DataReader::GetQFlag()`.  
 2194 This will help translating the flag without knowing the number of TDCs beforehand. Indeed, a flag  
 2195 111 could be due to a 3 TDC setup with 3 good individual TDC flags or to a more than 3 TDC setup  
 2196 with TDCs those ID is greater than 2 being CORRUPTED, thus giving a 0.


2197 The quality flag has been introduced quite late, in October 2017 only, to the list of GIFT++ DAQ  
 2198 parameters to be recorded into the output ROOT file. Before this addition, the missing data, corrupting  
 2199 the quality for the offline analysis, was contributing to artificially fill data with lower multiplicity.  
 2200 Looking at `TBranch number_of_hits` provides an information about the data of the full GIFT++  
 2201 setup. When a TDC is not able to transfer data for a specific event, the effect is a reduction of the  
 2202 total number of hits recorded in the full setup, this is what can be seen from Figure A.4. After offline  
 2203 reconstruction detector by detector, the effect of missing events can be seen in the artificially filled  
 2204 bin at multiplicity 0 shown in Figure A.5. Nonetheless, for data with high irradiation levels, as it is  
 2205 the case for Figure A.5a, discarding the fake multiplicity 0 data can be done easily during the offline  
 2206 analysis. At lower radiation, the missing events contribution becomes more problematic as the mul-  
 2207 tiplicity distribution overlaps the multiplicity 0 and that in the same time the proportion of missing

2208 events decreases. Attempts to fit the distribution with a Poisson or skew distribution function were  
 2209 not conclusive and this very problem has been at the origin of the quality flag that allows to give a  
 2210 non ambiguous information about each event quality.

2211

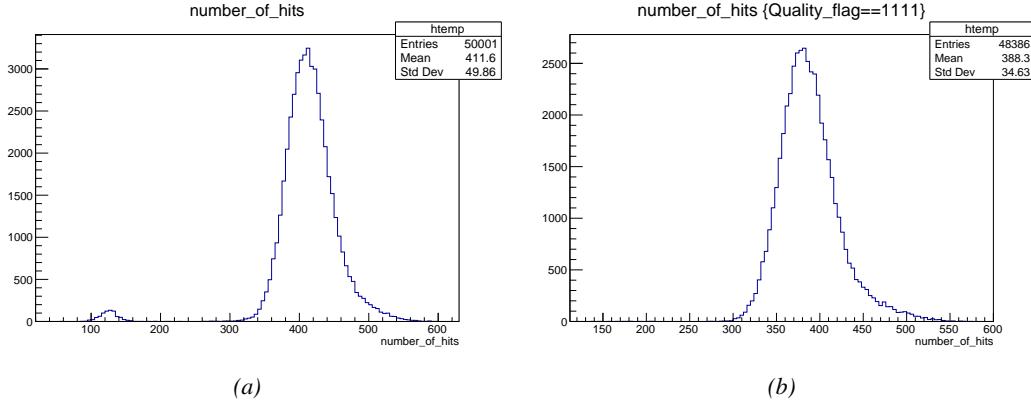

*Figure A.4: The effect of the quality flag is explained by presenting the content of TBranch `number_of_hits` of a data file without `Quality_flag` in Figure A.4a and the content of the same TBranch for data corresponding to a `Quality_flag` where all TDCs were labelled as `GOOD` in Figure A.4b taken with similar conditions. It can be noted that the number of entries in Figure A.4b is slightly lower than in Figure A.4a due to the excluded events.*

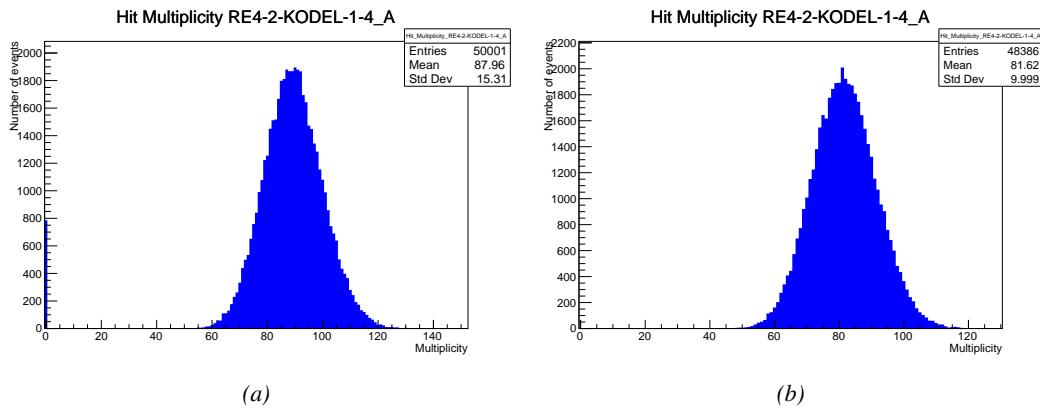

*Figure A.5: Using the same data as previously showed in Figure A.4, the effect of the quality flag is explained by presenting the reconstructed hit multiplicity of a data file without `Quality_flag` in Figure A.5a and the reconstructed content of the same RPC partition for data corresponding to a `Quality_flag` where all TDCs were labelled as `GOOD` in Figure A.5b taken with similar conditions. The artificial high content of bin 0 is completely suppressed.*

## A.5 Communications

2212 To ensure data readout and dialog in between the machine and the TDCs or in between the webDCS  
 2213 and the DAQ, different communication solutions were used. First of all, it is important to have a

2214

2215 module to allow the communication in between the TDCs and the computer from which the DAQ  
 2216 operates. When this communication is effective, shifters using the webDCS to control data taking  
 2217 can thus send instructions to the DAQ.

2218

### 2219 A.5.1 V1718 USB Bridge

2220 In the previous section, the data transfer has been discussed. The importance of the `v1718` object  
 2221 (Source Code A.6), used as private member of `DataReader`, was not explicated. VME master  
 2222 modules are used for communication purposes as they host the USB port that connects the pow-  
 2223 ered crate buffer to the computer where the DAQ is installed. From the source code point of view,  
 2224 this object is used to control the communication status, by reading the returned error codes with  
 2225 `v1718::CheckStatus()`, or to check for IRQs coming from the TDCs through `v1718::CheckIRQ()`.  
 2226 Finally, to ensure that triggers are blocked at the hardware level, a NIM pulse is sent out of one of the  
 2227 5 programmable outputs (`v1718::SendBUSY()`) to the VETO of the coincidence module where the  
 2228 trigger signals originate from. As long as this signal is ON, no trigger can reach the TDCs anymore.  
 2229

```
2230
2231
2232
2233
2234
2235
2236
2237
2238
2239
2240
2241
2242
2243
2244
2245
2246
2247
2248
2249
2250
2251
2252
2253
2254
2255
2256
2257
2258
2259
2260
2261
2262
2263
2264
2265
2266
2267
2268
2269
2270
2271
2272
2273
2274
2275
2276
2277
2278
2279
2280
2281
2282
2283
2284
2285
2286
2287
2288
2289
2290
2291
2292
2293
2294
2295
2296
2297
2298
2299
2300
2301
2302
2303
2304
2305
2306
2307
2308
2309
2310
2311
2312
2313
2314
2315
2316
2317
2318
2319
2320
2321
2322
2323
2324
2325
2326
2327
2328
2329
2330
2331
2332
2333
2334
2335
2336
2337
2338
2339
2340
2341
2342
2343
2344
2345
2346
2347
2348
2349
2350
2351
2352
2353
2354
2355
2356
2357
2358
2359
2360
2361
2362
2363
2364
2365
2366
2367
2368
2369
2370
2371
2372
2373
2374
2375
2376
2377
2378
2379
2380
2381
2382
2383
2384
2385
2386
2387
2388
2389
2390
2391
2392
2393
2394
2395
2396
2397
2398
2399
2400
2401
2402
2403
2404
2405
2406
2407
2408
2409
2410
2411
2412
2413
2414
2415
2416
2417
2418
2419
2420
2421
2422
2423
2424
2425
2426
2427
2428
2429
2430
2431
2432
2433
2434
2435
2436
2437
2438
2439
2440
2441
2442
2443
2444
2445
2446
2447
2448
2449
2450
2451
2452
2453
2454
2455
2456
2457
2458
2459
2460
2461
2462
2463
2464
2465
2466
2467
2468
2469
2470
2471
2472
2473
2474
2475
2476
2477
2478
2479
2480
2481
2482
2483
2484
2485
2486
2487
2488
2489
2490
2491
2492
2493
2494
2495
2496
2497
2498
2499
2500
2501
2502
2503
2504
2505
2506
2507
2508
2509
2510
2511
2512
2513
2514
2515
2516
2517
2518
2519
2520
2521
2522
2523
2524
2525
2526
2527
2528
2529
2530
2531
2532
2533
2534
2535
2536
2537
2538
2539
2540
2541
2542
2543
2544
2545
2546
2547
2548
2549
2550
2551
2552
2553
2554
2555
2556
2557
2558
2559
2560
2561
2562
2563
2564
2565
2566
2567
2568
2569
2570
2571
2572
2573
2574
2575
2576
2577
2578
2579
2580
2581
2582
2583
2584
2585
2586
2587
2588
2589
2590
2591
2592
2593
2594
2595
2596
2597
2598
2599
2600
2601
2602
2603
2604
2605
2606
2607
2608
2609
2610
2611
2612
2613
2614
2615
2616
2617
2618
2619
2620
2621
2622
2623
2624
2625
2626
2627
2628
2629
2630
2631
2632
2633
2634
2635
2636
2637
2638
2639
2640
2641
2642
2643
2644
2645
2646
2647
2648
2649
2650
2651
2652
2653
2654
2655
2656
2657
2658
2659
2660
2661
2662
2663
2664
2665
2666
2667
2668
2669
2670
2671
2672
2673
2674
2675
2676
2677
2678
2679
2680
2681
2682
2683
2684
2685
2686
2687
2688
2689
2690
2691
2692
2693
2694
2695
2696
2697
2698
2699
2700
2701
2702
2703
2704
2705
2706
2707
2708
2709
2710
2711
2712
2713
2714
2715
2716
2717
2718
2719
2720
2721
2722
2723
2724
2725
2726
2727
2728
2729
2730
2731
2732
2733
2734
2735
2736
2737
2738
2739
2740
2741
2742
2743
2744
2745
2746
2747
2748
2749
2750
2751
2752
2753
2754
2755
2756
2757
2758
2759
2760
2761
2762
2763
2764
2765
2766
2767
2768
2769
2770
2771
2772
2773
2774
2775
2776
2777
2778
2779
2780
2781
2782
2783
2784
2785
2786
2787
2788
2789
2790
2791
2792
2793
2794
2795
2796
2797
2798
2799
2800
2801
2802
2803
2804
2805
2806
2807
2808
2809
2810
2811
2812
2813
2814
2815
2816
2817
2818
2819
2820
2821
2822
2823
2824
2825
2826
2827
2828
2829
2830
2831
2832
2833
2834
2835
2836
2837
2838
2839
2840
2841
2842
2843
2844
2845
2846
2847
2848
2849
2850
2851
2852
2853
2854
2855
2856
2857
2858
2859
2860
2861
2862
2863
2864
2865
2866
2867
2868
2869
2870
2871
2872
2873
2874
2875
2876
2877
2878
2879
2880
2881
2882
2883
2884
2885
2886
2887
2888
2889
2890
2891
2892
2893
2894
2895
2896
2897
2898
2899
2900
2901
2902
2903
2904
2905
2906
2907
2908
2909
2910
2911
2912
2913
2914
2915
2916
2917
2918
2919
2920
2921
2922
2923
2924
2925
2926
2927
2928
2929
2930
2931
2932
2933
2934
2935
2936
2937
2938
2939
2940
2941
2942
2943
2944
2945
2946
2947
2948
2949
2950
2951
2952
2953
2954
2955
2956
2957
2958
2959
2960
2961
2962
2963
2964
2965
2966
2967
2968
2969
2970
2971
2972
2973
2974
2975
2976
2977
2978
2979
2980
2981
2982
2983
2984
2985
2986
2987
2988
2989
2990
2991
2992
2993
2994
2995
2996
2997
2998
2999
3000
3001
3002
3003
3004
3005
3006
3007
3008
3009
3010
3011
3012
3013
3014
3015
3016
3017
3018
3019
3020
3021
3022
3023
3024
3025
3026
3027
3028
3029
3030
3031
3032
3033
3034
3035
3036
3037
3038
3039
3040
3041
3042
3043
3044
3045
3046
3047
3048
3049
3050
3051
3052
3053
3054
3055
3056
3057
3058
3059
3060
3061
3062
3063
3064
3065
3066
3067
3068
3069
3070
3071
3072
3073
3074
3075
3076
3077
3078
3079
3080
3081
3082
3083
3084
3085
3086
3087
3088
3089
3090
3091
3092
3093
3094
3095
3096
3097
3098
3099
3100
3101
3102
3103
3104
3105
3106
3107
3108
3109
3110
3111
3112
3113
3114
3115
3116
3117
3118
3119
3120
3121
3122
3123
3124
3125
3126
3127
3128
3129
3130
3131
3132
3133
3134
3135
3136
3137
3138
3139
3140
3141
3142
3143
3144
3145
3146
3147
3148
3149
3150
3151
3152
3153
3154
3155
3156
3157
3158
3159
3160
3161
3162
3163
3164
3165
3166
3167
3168
3169
3170
3171
3172
3173
3174
3175
3176
3177
3178
3179
3180
3181
3182
3183
3184
3185
3186
3187
3188
3189
3190
3191
3192
3193
3194
3195
3196
3197
3198
3199
3200
3201
3202
3203
3204
3205
3206
3207
3208
3209
3210
3211
3212
3213
3214
3215
3216
3217
3218
3219
3220
3221
3222
3223
3224
3225
3226
3227
3228
3229
3230
3231
3232
3233
3234
3235
3236
3237
3238
3239
3240
3241
3242
3243
3244
3245
3246
3247
3248
3249
3250
3251
3252
3253
3254
3255
3256
3257
3258
3259
3260
3261
3262
3263
3264
3265
3266
3267
3268
3269
3270
3271
3272
3273
3274
3275
3276
3277
3278
3279
3280
3281
3282
3283
3284
3285
3286
3287
3288
3289
3290
3291
3292
3293
3294
3295
3296
3297
3298
3299
3300
3301
3302
3303
3304
3305
3306
3307
3308
3309
3310
3311
3312
3313
3314
3315
3316
3317
3318
3319
3320
3321
3322
3323
3324
3325
3326
3327
3328
3329
3330
3331
3332
3333
3334
3335
3336
3337
3338
3339
3340
3341
3342
3343
3344
3345
3346
3347
3348
3349
3350
3351
3352
3353
3354
3355
3356
3357
3358
3359
3360
3361
3362
3363
3364
3365
3366
3367
3368
3369
3370
3371
3372
3373
3374
3375
3376
3377
3378
3379
3380
3381
3382
3383
3384
3385
3386
3387
3388
3389
3390
3391
3392
3393
3394
3395
3396
3397
3398
3399
3399
3400
3401
3402
3403
3404
3405
3406
3407
3408
3409
3410
3411
3412
3413
3414
3415
3416
3417
3418
3419
3420
3421
3422
3423
3424
3425
3426
3427
3428
3429
3429
3430
3431
3432
3433
3434
3435
3436
3437
3438
3439
3439
3440
3441
3442
3443
3444
3445
3446
3447
3448
3449
3449
3450
3451
3452
3453
3454
3455
3456
3457
3458
3459
3459
3460
3461
3462
3463
3464
3465
3466
3467
3468
3469
3469
3470
3471
3472
3473
3474
3475
3476
3477
3478
3479
3479
3480
3481
3482
3483
3484
3485
3486
3487
3488
3489
3489
3490
3491
3492
3493
3494
3495
3496
3497
3498
3499
3499
3500
3501
3502
3503
3504
3505
3506
3507
3508
3509
3509
3510
3511
3512
3513
3514
3515
3516
3517
3518
3519
3519
3520
3521
3522
3523
3524
3525
3526
3527
3528
3529
3529
3530
3531
3532
3533
3534
3535
3536
3537
3538
3539
3539
3540
3541
3542
3543
3544
3545
3546
3547
3548
3549
3549
3550
3551
3552
3553
3554
3555
3556
3557
3558
3559
3559
3560
3561
3562
3563
3564
3565
3566
3567
3568
3569
3569
3570
3571
3572
3573
3574
3575
3576
3577
3578
3579
3579
3580
3581
3582
3583
3584
3585
3586
3587
3588
3589
3589
3590
3591
3592
3593
3594
3595
3596
3597
3598
3598
3599
3599
3600
3601
3602
3603
3604
3605
3606
3607
3608
3609
3609
3610
3611
3612
3613
3614
3615
3616
3617
3618
3619
3619
3620
3621
3622
3623
3624
3625
3626
3627
3628
3629
3629
3630
3631
3632
3633
3634
3635
3636
3637
3638
3639
3639
3640
3641
3642
3643
3644
3645
3646
3647
3648
3649
3649
3650
3651
3652
3653
3654
3655
3656
3657
3658
3659
3659
3660
3661
3662
3663
3664
3665
3666
3667
3668
3669
3669
3670
3671
3672
3673
3674
3675
3676
3677
3678
3679
3679
3680
3681
3682
3683
3684
3685
3686
3687
3688
3689
3689
3690
3691
3692
3693
3694
3695
3696
3697
3698
3698
3699
3699
3700
3701
3702
3703
3704
3705
3706
3707
3708
3709
3709
3710
3711
3712
3713
3714
3715
3716
3717
3718
3719
3719
3720
3721
3722
3723
3724
3725
3726
3727
3728
3729
3729
3730
3731
3732
3733
3734
3735
3736
3737
3738
3739
3739
3740
3741
3742
3743
3744
3745
3746
3747
3748
3749
3749
3750
3751
3752
3753
3754
3755
3756
3757
3758
3759
3759
3760
3761
3762
3763
3764
3765
3766
3767
3768
3769
3769
3770
3771
3772
3773
3774
3775
3776
3777
3778
3778
3779
3779
3780
3781
3782
3783
3784
3785
3786
3787
3788
3789
3789
3790
3791
3792
3793
3794
3795
3796
3797
3798
3798
3799
3799
3800
3801
3802
3803
3804
3805
3806
3807
3808
3809
3809
3810
3811
3812
3813
3814
3815
3816
3817
3818
3819
3819
3820
3821
3822
3823
3824
3825
3826
3827
3828
3829
3829
3830
3831
3832
3833
3834
3835
3836
3837
3838
3839
3839
3840
3841
3842
3843
3844
3845
3846
3847
3848
3849
3849
3850
3851
3852
3853
3854
3855
3856
3857
3858
3859
3859
3860
3861
3862
3863
3864
3865
3866
3867
3868
3869
3869
3870
3871
3872
3873
3874
3875
3876
3877
3878
3878
3879
3879
3880
3881
3882
3883
3884
3885
3886
3887
3888
3889
3889
3890
3891
3892
3893
3894
3895
3896
3897
3898
3898
3899
3899
3900
3901
3902
3903
3904
3905
3906
3907
3908
3909
3909
3910
3911
3912
3913
3914
3915
3916
3917
3918
3919
3919
3920
3921
3922
3923
3924
3925
3926
3927
3928
3929
3929
3930
3931
3932
3933
3934
3935
3936
3937
3938
3939
3939
3940
3941
3942
3943
3944
3945
3946
3947
3948
3949
3949
3950
3951
3952
3953
3954
3955
3956
3957
3958
3959
3959
3960
3961
3962
3963
3964
3965
3966
3967
3968
3969
3969
3970
3971
3972
3973
3974
3975
3976
3977
3978
3979
3979
3980
3981
3982
3983
3984
3985
3986
3987
3988
3989
3989
3990
3991
3992
3993
3994
3995
3996
3997
3998
3998
3999
3999
4000
4001
4002
4003
4004
4005
4006
4007
4008
4009
4009
4010
4011
4012
4013
4014
4015
4016
4017
4018
4019
4019
4020
4021
4022
4023
4024
4025
4026
4027
4028
4029
4029
4030
4031
4032
4033
4034
4035
4036
4037
4038
4039
4039
4040
4041
4042
4043
4044
4045
4046
4047
4048
4049
4049
4050
4051
4052
4053
4054
4055
4056
4057
4058
4059
4059
4060
4061
4062
4063
4064
4065
4066
4067
4068
4069
4069
4070
4071
4072
4073
4074
4075
4076
4077
4078
4078
4079
4079
4080
4081
4082
4083
4084
4085
4086
4087
4088
4089
4089
4090
4091
4092
4093
4094
4095
4096
4097
4098
4098
4099
4099
4100
4101
4102
4103
4104
4105
4106
4107
4108
4109
4109
4110
4111
4112
4113
4114
4115
4116
4117
4118
4119
4119
4120
4121
4122
4123
4124
4125
4126
4127
4128
4129
4129
4130
4131
4132
4133
4134
4135
4136
4137
4138
4139
4139
4140
4141
4142
4143
4144
4145
4146
4147
4148
4149
4149
4150
4151
4152
4153
4154
4155
4156
4157
4158
4159
4159
4160
4161
4162
4163
4164
4165
4166
4167
4168
4169
4169
4170
4171
4172
4173
4174
4175
4176
4177
4178
4179
4179
4180
4181
4182
4183
4184
4185
4186
4187
4188
4189
4189
4190
4191
4192
4193
4194
4195
4196
4197
4198
4198
4199
4199
4200
4201
4202
4203
4204
4205
4206
4207
4208
4209
4209
4210
4211
4212
4213
4214
4215
4216
4217
4218
4219
4219
4220
4221
4222
4223
4224
4225
4226
4227
4228
4229
4230
4231
4232
4233
4234
4235
4236
4237
4238
4239
4240
4241
4242
4243
4244
4245
4246
4247
```

2236 be stored in the ROOT file that contains the DAQ data as can be seen from Figure A.3. Indeed,  
 2237 another `TTree` called `RunParameters` as well as the 2 histograms `ID`, containing the scan number,  
 2238 start and stop time stamps, and `Triggers`, containing the number of triggers requested by the shifter,  
 2239 are available in the data files. Moreover, `ScanID` and `HV` are then used to construct the file name  
 2240 thanks to the method `DataReader::GetFileName()`.

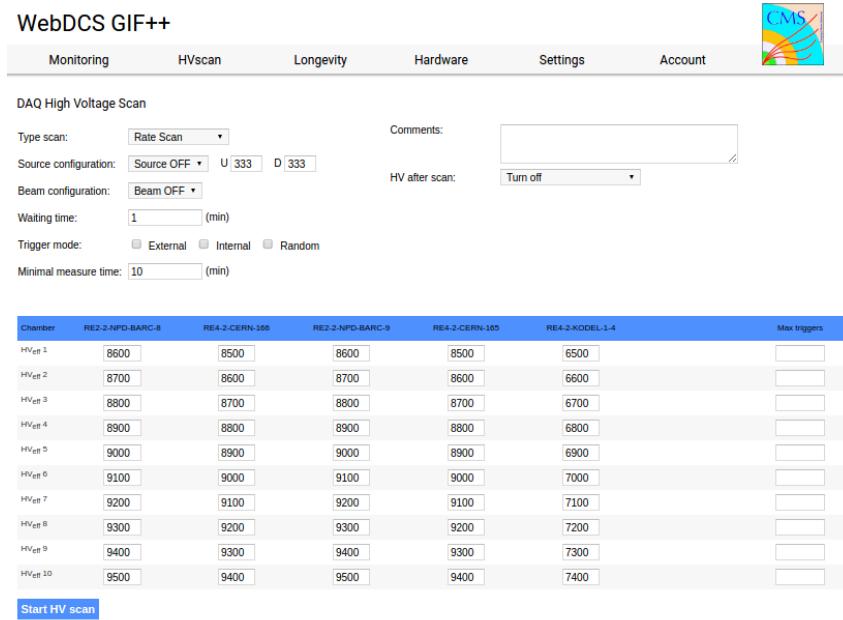


Figure A.6: WebDCS DAQ scan page. On this page, shifters need to choose the type of scan (Rate, Efficiency or Noise Reference scan), the gamma source configuration at the moment of data taking, the beam configuration, and the trigger mode. These information will be stored in the DAQ ROOT output. Are also given the minimal measurement time and waiting time after ramping up of the detectors is over before starting the data acquisition. Then, the list of HV points to scan and the number of triggers for each run of the scan are given in the table underneath.

2241 The rest of the information is written beforehand in the configuration file template, as explicated  
 2242 in Source Code A.7, and contains the hardware addresses to the different VME modules in the  
 2243 setup as well as settings for the TDCs. As the TDC settings available in the configuration file are not  
 2244 supposed to be modified, an improvement would be to remove them from the configuration file and  
 2245 to hardcode them inside of the DAQ code itself or to place them into a different INI file that would  
 2246 host only the TDC settings to lower the probability for a bad manipulation of the configuration file  
 2247 that can be modified from one of webDCS' menus.

2248

```
[General]
Tdcs=4
ScanID=$scanid
HV=$HV
RunType=$runtype
MaxTriggers=$maxtriggers
Beam=$beam
[VMEInterface]
Type=V1718
BaseAddress=0xFF0000
Name=VmeInterface
[TDC0]
Type=V1190A
BaseAddress=0x00000000
Name=Tdc0
StatusA00-15=1
StatusA16-31=1
StatusB00-15=1
StatusB16-31=1
StatusC00-15=1
StatusC16-31=1
StatusD00-15=1
StatusD16-31=1
[TDC1]
Type=V1190A
BaseAddress=0x11110000
Name=Tdc1
StatusA00-15=1
StatusA16-31=1
StatusB00-15=1
StatusB16-31=1
StatusC00-15=1
StatusC16-31=1
StatusD00-15=1
StatusD16-31=1
[TDC2]
Type=V1190A
BaseAddress=0x22220000
Name=Tdc2
StatusA00-15=1
StatusA16-31=1
StatusB00-15=1
StatusB16-31=1
StatusC00-15=1
StatusC16-31=1
StatusD00-15=1
StatusD16-31=1
[TDC3]
Type=V1190A
BaseAddress=0x44440000
Name=Tdc3
StatusA00-15=1
StatusA16-31=1
StatusB00-15=1
StatusB16-31=1
StatusC00-15=1
StatusC16-31=1
StatusD00-15=1
StatusD16-31=1
[TDCSettings]
TriggerExtraSearchMargin=0
TriggerRejectMargin=0
TriggerTimeSubstraction=0b1
TdcDetectionMode=0b01
TdcResolution=0b10
TdcDeadTime=0b00
TdcHeadTrailer=0b1
TdcEventSize=0b1001
TdcTestMode=0b0
BLTMode=1
```

*Source Code A.7: INI configuration file template for 4 TDCs. In section [General], the number of TDCs is explicitated and information about the ongoing run is given. Then, there are sections for each and every VME modules. There buffer addresses are given and for the TDCs, the list of channels to enable is given. Finally, in section [TDCSettings], a part of the TDC settings are given.*

2251     In order to retrieve the information of the configuration file, the object `IniFile` has been developed  
 2252     to provide an INI parser, presented in Source Code A.8. It contains private methods returning a  
 2253     boolean to check the type of line written in the file, whether a comment, a group header or a key line  
 2254     (`IniFile::CheckIfComment()`, `IniFile::CheckIfGroup()` and `IniFile::CheckIfToken()`). The  
 2255     key may sometimes be referred to as *token* in the source code. Moreover, the private element  
 2256     `FileData` is a map of `const string` to `string` that allows to store the data contained inside the  
 2257     configuration file via the public method `IniFile::GetFileData()` following the formatting (see  
 2258     method `IniFile::Read()`):

```
2259
  2260     string group, token, value;
  // Get the field values for the 3 strings.
  // Then concatenate group and token together as a single string
  // with a dot separation.
  token = group + "." + token;
  FileData[token] = value;
```

2261     More methods have been written to translate the different keys into the right variable format  
 2262     when used by the DAQ. For example, to get a `float` value out of the configuration file data, knowing  
 2263     the group and the key needed, the method `IniFile::floatType()` can be used. It takes 3 arguments  
 2264     being the group name and key name (both `string`), and a default `float` value used as exception in  
 2265     the case the expected combination of group and key cannot be found in the configuration file. This  
 2266     default value is then used and the DAQ continues on working after sending an alert in the log file for  
 2267     further debugging.

```

2268 typedef map< const string, string > IniFileData;
2269
class IniFile{
    private:
        bool          CheckIfComment (string line);
        bool          CheckIfGroup(string line, string& group);
        bool          CheckIfToken(string line, string& key, string& value);
        string         FileName;
        IniFileData   FileData;
        int           Error;

    public:
        IniFile();
        IniFile(string filename);
        virtual      ~IniFile();

        // Basic file operations
        void          SetFileName(string filename);
        int           Read();
        int           Write();
        IniFileData GetFileData();

        // Data readout methods
        Data32         addressType (string groupname, string keyname, Data32
→     defaultvalue);
        long          intType     (string groupname, string keyname, long
→     defaultvalue);
        long long    longType    (string groupname, string keyname, long long
→     defaultvalue );
        string         stringType  (string groupname, string keyname, string
→     defaultvalue );
        float         floatType   (string groupname, string keyname, float
→     defaultvalue );

        // Error methods
        string         GetErrorMsg();
    };

```

2270       *Source Code A.8: Description of C++ object `IniFile` used as a parser for INI file format.*

### 2271   A.5.3 WebDCS/DAQ intercommunication

2272   When shifters send instructions to the DAQ via the configuration file, it is the webDCS itself that  
 2273   gives the start command to the DAQ and then the 2 softwares use inter-process communication  
 2274   through file to synchronise themselves. This communication file is represented by the variable **const**  
 2275   **string** \_\_runstatuspath.

2276   On one side, the webDCS sends commands or status that are readout by the DAQ:

- 2277     ● INIT, status sent when launching a scan and read via function `CtrlRunStatus(...)`,
- 2278     ● START, command to start data taking and read via function `CheckSTART()`,
- 2279     ● STOP, command to stop data taking at the end of the scan and read via function `CheckSTOP()`,  
 2280       and
- 2281     ● KILL, command to kill data taking sent by user and read via function `CheckKILL()`

2282 and on the other, the DAQ sends status that are controled by the webDCS:

- 2283     ● `DAQ_RDY`, sent with `SendDAQReady()` to signify that the DAQ is ready to receive commands  
2284       from the webDCS,
- 2285     ● `RUNNING`, sent with `SendDAQRunning()` to signify that the DAQ is taking data,
- 2286     ● `DAQ_ERR`, sent with `SendDAQError()` to signify that the DAQ didn't receive the expected com-  
2287       mand from the webDCS or that the launch command didn't have the right number of argu-  
2288       ments,
- 2289     ● `RD_ERR`, sent when the DAQ wasn't able to read the communication file, and
- 2290     ● `WR_ERR`, sent when the DAQ wasn't able to write into the communication file.

2291 **A.5.4 Example of inter-process communication cycle**

2292 Under normal conditions, the webDCS and the DAQ processes exchange commands and status via  
2293 the file hosted at the address `__runstatuspath`, as explained in subsection A.5.3. An example of  
2294 cycle is given in Table A.1. In this example, the steps 3 to 5 are repeated as long as the webDCS tells  
2295 the DAQ to take data. A data taking cycle is the equivalent as what is called a *Scan* in GIFT++ jargon,  
2296 referring to a set a runs with several HV steps. Each repetition of steps 3 to 5 is then equivalent to a  
2297 single *Run*.

2298

2299 At any moment during the data taking, for any reason, the shifter can decide that the data taking  
2300 needs to be stopped before it reached the end of the scheduled cycle. Thus at any moment on the  
2301 cycle, the content of the inter-process communication file will be changed to `KILL` and the DAQ will  
2302 shut down right away. The DAQ checks for `KILL` signals every 5s after the TDCs configuration is  
2303 over. So far, the function `CheckKILL()` has been used only inside of the data taking loop of method  
2304 `DataReader::Run()` and thus, if the shifter decides to KILL the data taking during the TDC con-  
2305 figuration phase or the HV ramping in between 2 HV steps, the DAQ will not be stopped smoothly  
2306 and a *force kill* command will be sent to stop the DAQ process that is still awake on the computer.  
2307 Improvements can be brought on this part of the software to make sure that the DAQ can safely  
2308 shutdown at any moment.

2309

2310 **A.6 Software export**

2311 In section A.2 was discussed the fact that the DAQ as written in its last version is not a standalone  
2312 software. It is possible to make it a standalone program that could be adapted to any VME setup  
2313 using V1190A and V1718 modules by creating a GUI for the software or by printing the log mes-  
2314 sages that are normally printed in the webDCS through the log file, directly into the terminal. This  
2315 method was used by the DAQ up to version 3.0 moment where the webDCS was completed. Also, it  
2316 is possible to check branches of DAQ v2.X to have example of communication through a terminal.

2317

2318 DAQ v2.X is nonetheless limited in it's possibilities and requires a lot of offline manual interven-  
2319 tions from the users. Indeed, there is no communication of the software with the detectors' power  
2320 supply system that would allow for a user a predefine a list of voltages to operate the detectors at

step	actions of webDCS	status of DAQ	__runstatuspath
1	launch DAQ ramp voltages ramping over wait for currents stabilization	readout of IniFile configuration of TDCs	INIT
2		configuration done send DAQ ready wait for START signal	DAQ_RDY
3	waiting time over send START		START
4	wait for run to end monitor DAQ run status	data taking ongoing check for KILL signal	RUNNING
5		run over send DAQ_RDY wait for next DCS signal	DAQ_RDY
6	ramp voltages ramping over wait for currents stabilization		DAQ_RDY
3	waiting time over send START		START
4	wait for run to end monitor DAQ run status	update IniFile information data taking ongoing check for KILL signal	RUNNING
5		run over send DAQ_RDY wait for next DCS signal	DAQ_RDY
7	send command STOP	DAQ shuts down	STOP

Table A.1: Inter-process communication cycles in between the webDCS and the DAQ through file string signals.

2321 and loop over to take data without any further manual intervention. In v2.X, the data is taken for a  
2322 single detector setting and at the end of each run, the softwares asks the user if he intends on taking  
2323 more runs. If so, the software invites the user to set the operating voltages accordingly to what is  
2324 necessary and to manual update the configuration file in consequence. This working mode can be a  
2325 very first approach before an evolution and has been successfully used by colleagues from different  
2326 collaborations.

2327  
2328 For a more robust operation, it is recommended to develop a GUI or a web application to inter-  
2329 face the DAQ. Moreover, to limit the amount of manual interventions, and thus the probability to  
2330 make mistakes, it is also recommended to add an extra feature into the DAQ by installing the HV  
2331 Wrapper library provided by CAEN of which an example of use in a similar DAQ software devel-  
2332 opped by a master student of UGent, and called TinyDAQ, is provided on UGent's github. Then, this  
2333 HV Wrapper will help you communicating with and give instructions to a CAEN HV powered crate  
2334 and can be added into the DAQ at the same level where the communication with the user was made  
2335 in DAQ v2.X. In case you are using another kind of power system for your detectors, it is stringly  
2336 adviced to use HV modules or crates that can be remotely controled via a using C++ libraries.

2337

# B

2338

2339

## Details on the offline analysis package

2340 The data collected in GIF++ thanks to the DAQ described in Appendix A is difficult to interpret by  
2341 a human user that doesn't have a clear idea of the raw data architecture of the ROOT data files. In  
2342 order to render the data human readable, a C++ offline analysis tool was designed to provide users  
2343 with detector by detector histograms that give a clear overview of the parameters monitored during  
2344 the data acquisition [65]. In this appendix, details about this software in the context of GIF++, as of  
2345 how the software was written and how it functions will be given.

### 2346 B.1 GIF++ Offline Analysis file tree

2347 GIF++ Offline Analysis source code is fully available on github at [https://github.com/afagot/GIF\\_OfflineAnalysis](https://github.com/afagot/GIF_OfflineAnalysis). The software requires ROOT as non-optionnal dependency  
2348 as it takes ROOT files in input and write an output ROOT file containing histograms. To compile the  
2349 GIF++ Offline Analysis project is compiled with cmake. To compile, first a build/ directory must  
2350 be created to compile from there:

```
2352 mkdir build  
2353 cd build  
2354 cmake ..  
2355 make  
2356 make install
```

2354 To clean the directory and create a new build directory, the bash script cleandir.sh can be used:

```
2355  
2356 ./cleandir.sh
```

2357 The source code tree is provided below along with comments to give an overview of the files' con-  
2358 tent. The different objects created for this project (`Infrastructure`, `Trolley`, `RPC`, `Mapping`, `RPCHit`,  
2359 `RPCCluster` and `Inifile`) will be described in details in the following sections.

2360

```

GIF_OfflineAnalysis
├── bin
│   └── offlineanalysis ..... EXECUTABLE
├── build..... CMAKE COMPILATION DIRECTORY
└── ...
    ├── include..... LIST OF C++ HEADER FILES
    │   ├── Cluster.h..... DECLARATION OF OBJECT RPCCLUSTER
    │   ├── Current.h..... DECLARATION OF GETCURRENT ANALYSIS MACRO
    │   ├── GIFTrolley.h..... DECLARATION OF OBJECT TROLLEY
    │   ├── Infrastructure.h..... DECLARATION OF OBJECT INFRASTRUCTURE
    │   ├── IniFile.h..... DECLARATION OF OBJECT INI FILE FORINI PARSER
    │   ├── Mapping.h..... DECLARATION OF OBJECT MAPPING
    │   ├── MsgSvc.h..... DECLARATION OF OFFLINE LOG MESSAGES
    │   ├── OfflineAnalysis.h..... DECLARATION OF DATA ANALYSIS MACRO
    │   ├── RPCDetector.h..... DECLARATION OF OBJECT RPC
    │   ├── RPCHit.h..... DECLARARION OF OBJECT RPCHIT
    │   ├── types.h..... DEFINITION OF USEFUL VARIABLE TYPES
    │   └── utils.h..... DECLARATION OF USEFUL FUNCTIONS
    ├── obj..... BINARY FILES CREATED BY COMPILER
    └── ...
        ├── src..... LIST OF C++ SOURCE FILES
        │   ├── Cluster.cc..... DEFINITION OF OBJECT RPCCLUSTER
        │   ├── Current.cc ..... DEFINITION OF GETCURRENT ANALYSIS MACRO
        │   ├── GIFTrolley.cc..... DEFINITION OF OBJECT TROLLEY
        │   ├── Infrastructure.cc..... DEFINITION OF OBJECT INFRASTRUCTURE
        │   ├── IniFile.cc..... DEFINITION OF OBJECT INI FILE FORINI PARSER
        │   ├── main.cc..... MAIN FILE
        │   ├── Mapping.cc..... DEFINITION OF OBJECT MAPPING
        │   ├── MsgSvc.cc..... DEFINITION OF OFFLINE LOG MESSAGES
        │   ├── OfflineAnalysis.cc..... DEFINITION OF DATA ANALYSIS MACRO
        │   ├── RPCDetector.cc..... DEFINITION OF OBJECT RPC
        │   ├── RPCHit.cc..... DEFINITION OF OBJECT RPCHIT
        │   └── utils.cc..... DEFINITION OF USEFUL FUNCTIONS
        ├── cleandir.sh..... BASH SCRIPT TO CLEAN BUILD DIRECTORY
        ├── CMakeLists.txt..... SET OF INSTRUCTIONS FOR CMAKE
        ├── config.h.in..... DEFINITION OF VERSION NUMBER
        └── README.md..... REAMDE FILE FOR GITHUB

```

2361

## B.2 Usage of the Offline Analysis

2362

In order to use the Offline Analysis tool, it is necessary to know the Scan number and the HV Step of the run that needs to be analysed. This information needs to be written in the following format:

2364

2365

```
Scan00XXXX_HVY
```

2366

2367

where XXXX is the scan ID and Y is the high voltage step (in case of a high voltage scan, data will be taken for several HV steps). This format corresponds to the base name of data files in the database

2368 of the Gif++ webDCS. Usually, the offline analysis tool is automatically called by the webDCS at  
 2369 the end of data taking or by a user from the webDCS panel if an update of the tool was brought.  
 2370 Nonetheless, an expert can locally launch the analysis for tests on the Gif++ computer, or a user can  
 2371 get the code on its local machine from github and download data from the webDCS for its own anal-  
 2372 ysis. To launch the code, the following command can be used from the `GIF_OfflineAnalysis` folder:

2373

```
2374 bin/offlineanalysis /path/to/Scan00XXXX_HVY
```

2375 where, `/path/to/Scan00XXXX_HVY` refers to the local data files. Then, the offline tool will by itself  
 2376 take care of finding all available ROOT data files present in the folder, as listed below:

2377

- `Scan00XXXX_HVY_DAQ.root` containing the TDC data as described in Appendix ?? (events, hit  
 2378 and timestamp lists), and
- `Scan00XXXX_HVY_CAEN.root` containing the CAEN mainframe data recorded by the monitor-  
 2380 ing tool webDCS during data taking (HVs and currents of every HV channels). This file is  
 2381 created independently of the DAQ.

## 2382 B.2.1 Output of the offline tool

### 2383 B.2.1.1 ROOT file

2384 The analysis gives in output ROOT datafiles that are saved into the data folder and called using the  
 2385 naming convention `Scan00XXXX_HVY_Offline.root`. Inside those, a list of `TH1` histograms can be  
 2386 found. Its size will vary as a function of the number of detectors in the setup as each set of histograms  
 2387 is produced detector by detector. For each partition of each chamber, can be found:

2388


- `Time_Profile_Tt_Sc_p` shows the time profile of all recorded events (number of events per  
 2389 time bin),
- `Hit_Profile_Tt_Sc_p` shows the hit profile of all recorded events (number of events per chan-  
 2391 nel),
- `Hit_Multiplicity_Tt_Sc_p` shows the hit multiplicity (number of hits per event) of all recorded  
 2393 events (number of occurrences per multiplicity bin),
- `Strip_Mean_Noise_Tt_Sc_p` shows noise/gamma rate per unit area for each strip in a se-  
 2395 lected time range. After filters are applied on `Time_Profile_Tt_Sc_p`, the filtered version  
 2396 of `Hit_Profile_Tt_Sc_p` is normalised to the total integrated time and active detection area  
 2397 of a single channel,
- `Strip_Activity_Tt_Sc_p` shows noise/gamma activity for each strip (normalised version of  
 2399 previous histogram - strip activity = strip rate / average partition rate),
- `Strip_Homogeneity_Tt_Sc_p` shows the *homogeneity* of a given partition ( $\text{homogeneity} = \exp(-\text{strip rates standard deviation(strip rates in partition/average partition rate)})$ ),
- `mask_Strip_Mean_Noise_Tt_Sc_p` shows noise/gamma rate per unit area for each masked  
 2403 strip in a selected time range. Offline, the user can control the noise/gamma rate and decide to  
 2404 mask the strips that are judged to be noisy or dead. This is done via the *Masking Tool* provided  
 2405 by the webDCS,

- 2406     ● `mask_Strip_Activity_Tt_Sc_p` shows noise/gamma activity per unit area for each masked  
2407       strip with respect to the average rate of active strips,
- 2408     ● `NoiseCSize_H_Tt_Sc_p` shows noise/gamma cluster size, a cluster being constructed out of  
2409       adjacent strips giving a signal at the *same time* (hits within a time window of 25 ns),
- 2410     ● `NoiseCMult_H_Tt_Sc_p` shows noise/gamma cluster multiplicity (number of reconstructed  
2411       clusters per event),
- 2412     ● `Chip_Mean_Noise_Tt_Sc_p` shows the same information than `Strip_Mean_Noise_Tt_Scp` us-  
2413       ing a different binning (1 chip corresponds to 8 strips),
- 2414     ● `Chip_Activity_Tt_Sc_p` shows the same information than `Strip_Activity_Tt_Scp` using  
2415       chip binning,
- 2416     ● `Chip_Homogeneity_Tt_Sc_p` shows the homogeneity of a given partition using chip binning,
- 2417     ● `Beam_Profile_Tt_Sc_p` shows the estimated beam profile when taking efficiency scan. This  
2418       is obtained by filtering `Time_Profile_Tt_Sc_p` to only consider the muon peak where the  
2419       noise/gamma background has been subtracted. The resulting hit profile corresponds to the  
2420       beam profile on the detector channels,
- 2421     ● `L0_Efficiency_Tt_Sc_p` shows the level 0 efficiency that was estimated **without** muon track-  
2422       ing,
- 2423     ● `MuonCSize_H_Tt_Sc_p` shows the level 0 muon cluster size that was estimated **without** muon  
2424       tracking, and
- 2425     ● `MuonCMult_H_Tt_Sc_p` shows the level 0 muon cluster multiplicity that was estimated **without**  
2426       muon tracking.

2427     In the histogram labels,  $t$  stands for the trolley number (1 or 3),  $c$  for the chamber slot label in  
2428     trolley  $t$  and  $p$  for the partition label (A, B, C or D depending on the chamber layout) as explained  
2429     in Chapter 5.4.

2430     In the context of GIF++, an extra script called by the webDCS is called to extract the histograms  
2431     from the ROOT files. The histograms are then stored in PNG and PDF formats into the correspond-  
2432     ing folder (a single folder per HV step, so per ROOT file). the goal is to then display the histograms  
2433     on the Data Quality Monitoring (DQM) page of the webDCS in order for the users to control the  
2434     quality of the data taking at the end of data taking. An example of histogram organisation is given  
2435     below:

2436

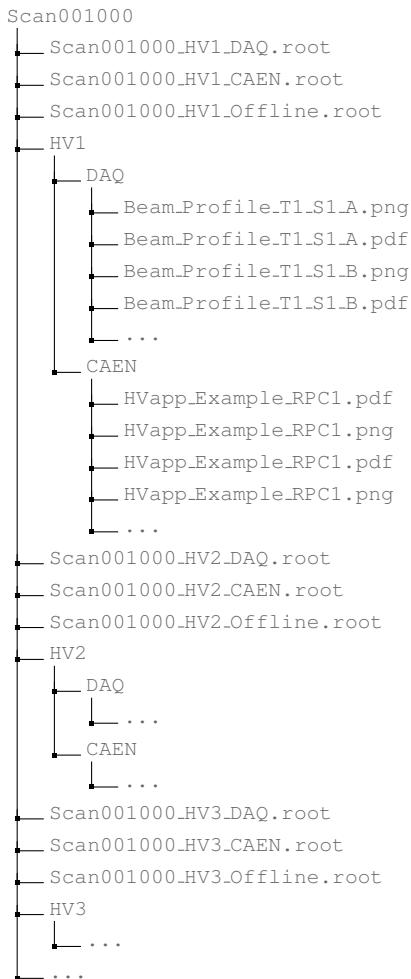

**2438      Here can put some screens from the webDCS to show the DQM and the plots available to users.**

**2439**

### **2440      B.2.1.2 CSV files**

**2441      Moreover, up to 3 CSV files can be created depending on which ones of the 3 input files were in the**

**2442      data folder:**

- 2443      • Offline-Corrupted.csv , is used to keep track of the amount of data that was corrupted and**
- 2444      removed from old data format files that don't contain any data quality flag.**
- 2445      • Offline-Current.csv , contains the summary of the currents and voltages applied on each**
- 2446      RPC HV channel.**
- 2447      • Offline-L0-EffC1.csv , is used to write the efficiencies, cluster size and cluster multiplicity**
- 2448      of efficiency runs. Note that L0 refers here to *Level 0* and means that the results of efficiency and**
- 2449      clusterization are a first approximation calculated without performing any muon tracking in**

2450 between the different detectors. This offline tool provides the user with a preliminar calculation  
 2451 of the efficiency and of the muon event parameters. Another analysis software especially  
 2452 dedicated to muon tracking is called on selected data to retrieve the results of efficiency and  
 2453 muon clusterization using a tracking algorithm to discriminate noise or gamma from muons  
 2454 as muons are the only particles that pass through the full setup, leaving hits than can be used  
 2455 to reconstruct their tracks.

- 2456 • `Offline-Rate.csv`, is used to write the noise or gamma rates measured in the detector readout  
 2457 partitions.

2458 Note that these 4 CSV files are created along with their *headers* (`Offline-[...]-Header.csv`  
 2459 containing the names of each data columns) and are automatically merged together when the offline  
 2460 analysis tool is called from the webDCS, contrary to the case where the tool is runned locally from  
 2461 the terminal as the merging bash script is then not called. Thus, the resulting files, used to make  
 2462 official plots, are:

- 2463 • `Corrupted.csv`,  
 2464 • `Current.csv`,  
 2465 • `L0-EffCl.csv`.  
 2466 • `Rate.csv`.

## B.3 Analysis inputs and information handling

2468 The usage of the Offline Analysis tool as well as its output have been presented in the previous section.  
 2469 It is now important to dig further and start looking at the source code and the inputs necessary  
 2470 for the tool to work. Indeed, other than the raw ROOT data files that are analysed, more information  
 2471 needs to be imported inside of the program to perform the analysis such as the description of the  
 2472 setup inside of GIFT++ at the time of data taking (number of trolleys, of RPCs, dimensions of the  
 2473 detectors, etc...) or the mapping that links the TDC channels to the coresponding RPC channels in  
 2474 order to translate the TDC information into human readable data. 2 files are used to transmit all this  
 2475 information:  
 2476

- 2477 • `Dimensions.ini`, that provides the necessary setup and RPC information, and  
 2478 • `ChannelsMapping.csv`, that gives the link between the TDC and RPC channels as well as the  
 2479 *mask* for each channel (masked or not?).

### B.3.1 Dimensions file and InFile parser

2481 This input file, present in every data folder, allows the analysis tool to know of the number of active  
 2482 trolleys, the number of active RPCs in those trolleys, and the details about each RPCs such as  
 2483 the number of RPC gaps, the number of pseudo-rapidity partitions (for CMS-like prototypes), the  
 2484 number of strips per partion or the dimensions. To do so, there are 3 types of groups in the INI file  
 2485 architecture. A first general group, appearing only once at the head of the document, gives information  
 2486 about the number of active trolleys as well as their IDs, as presented in Source Code B.1. For

2487 each active trolley, a group similar to Source Code B.2 can be found containing information about  
 2488 the number of active detectors in the trolley and their IDs. Each trolley group as a `Tt` name format,  
 2489 where `t` is the trolley ID. Finally, for each detector stored in slots of an active trolley, there is a group  
 2490 providing information about their names and dimensions, as shown in Source Code B.3. Each slot  
 2491 group as a `TtSs` name format, where `s` is the slot ID of trolley `t` where the active RPC is hosted.

```
2492 [General]
2493 nTrolleys=2
2494 TrolleysID=13
```

2494 *Source Code B.1: Example of `[General]` group as might be found in `Dimensions.ini`. In Gif++, only 2 trolleys are available to hold RPCs and place them inside of the bunker for irradiation. The IDs of the trolleys are written in a single string as "13" and then read character by character by the program.*

```
2495 [T1]
2496 nSlots=4
2497 SlotsID=1234
```

2496 *Source Code B.2: Example of trolley group as might be found in `Dimensions.ini`. In this example, the file tells that there are 4 detectors placed in the holding slots of the trolley `T1` and that their IDs, written as a single string variable, are 1, 2, 3 and 4.*

```
2497 [T1S1]
2498 Name=RE2-2-NPD-BARC-8
2499 Partitions=3
2500 Gaps=3
2501 Gap1=BOT
2502 Gap2=TN
2503 Gap3=TW
2504 AreaGap1=11694.25
2505 AreaGap2=6432
2506 AreaGap3=4582.82
2507 Strips=32
2508 ActiveArea-A=157.8
2509 ActiveArea-B=121.69
2510 ActiveArea-C=93.03
```

2508 *Source Code B.3: Example of slot group as might be found in `Dimensions.ini`. In this example, the file provides information about a detector named `RE2-2-NPD-BARC-8`, having 3 pseudo-rapidity readout partitions and stored in slot `S1` of trolley `T1`. This is a CMS RE2-2 type of detector. This information will then be used for example to compute the rate per unit area calculation.*

2509 This information is readout and stored in a C++ object called `IniFile`, that parses the information  
 2510 in the INI input file and stores it into a local buffer for later use. This INI parser is the exact same  
 2511 one that was previously developed for the Gif++ DAQ and described in Appendix A.5.2.

### 2502 B.3.2 TDC to RPC link file and Mapping

2503 The same way the INI dimension file information is stored using `map`, the channel mapping and mask  
 2504 information is stored and accessed through `map`. First of all, the mapping CSV file is organised into  
 2505 3 columns separated by tabulations (and not by commas, as expected for CSV files as it is easier using  
 2506 streams to read tab or space separated data using C++):

2507

2508       RPC\_channel           TDC\_channel           mask

2509       using as formatting for each field:

2510

2511	TSCCC	TCCC	M
------	-------	------	---

2512 TSCCC is a 5-digit integer where  $\tau$  is the trolley ID,  $s$  the slot ID in which the RPC is held insite  
 2513       the trolley  $\tau$  and ccc is the RPC channel number, or *strip* number, that can take values up to  
 2514       3-digits depending on the detector,

2515 TCCC is a 4 digit integer where  $\tau$  is the TDC ID, ccc is the TDC channel number that can take values  
 2516       in between 0 and 127, and

2517 M is a 1-digit integer indicating if the channel should be considered ( $M = 1$ ) or discarded ( $M = 0$ )  
 2518       during analysis.

2519       This mapping and masking information is readout and stored thanks to the object `Mapping`, pre-  
 2520       sented in Source Code B.4. Similarly to `IniFile` objects, this class has private methods. The first  
 2521       one, `Mapping::CheckIfNewLine()` is used to find the newline character '`\n`' or return character  
 2522       '`\r`' (depending on which kind of operating system interacted with the file). This is used for the  
 2523       simple reason that the masking information has been introduced only during the year 2017 but the  
 2524       channel mapping files exist since 2015 and the very beginning of data taking at GIF++. This means  
 2525       that in the older data folders, before the upgrade, the channel mapping file only had 2 columns, the  
 2526       RPC channel and the TDC channel. For compatibility reasons, this method helps controling the  
 2527       character following the readout of the 2 first fields of a line. In case any end of line character is  
 2528       found, no mask information is present in the file and the default  $M = 1$  is used. On the contrary, if  
 2529       the next character was a tabulation or a space, the mask information is present.

2530       Once the 3 fields have been readout, the second private method `Mapping::CheckIfTDCCh()` is  
 2531       used to control that the TDC channel is an existing TDC channel. Finally, the information is stored  
 2532       into 3 different maps (`Link`, `ReverseLink` and `Mask`) thanks to the public method `Mapping::Read()`.  
 2533       `Link` allows to get the RPC channel by knowing the TDC channel while `ReverseLink` does the op-  
 2534       posite by returning the TDC channel by knowing the RPC channel. Finally, `Mask` returns the mask  
 2535       associated to a given RPC channel.

```

2536 typedef map<Uint,Uint> MappingData;

2537 class Mapping {
2538     private:
2539         bool          CheckIfNewLine(char next);
2540         bool          CheckIfTDCCh(Uint channel);
2541         string        FileName;
2542         MappingData  Link;
2543         MappingData  ReverseLink;
2544         MappingData  Mask;
2545         int           Error;
2546
2547     public:
2548         Mapping();
2549         Mapping(string baseName);
2550         ~Mapping();
2551
2552         void SetFileName(const string filename);
2553         int  Read();
2554         Uint GetLink(Uint tdcchannel);
2555         Uint GetReverse(Uint rpcchannel);
2556         Uint GetMask(Uint rpcchannel);
2557     };

```

2538 *Source Code B.4: Description of C++ object Mapping used as a parser for the channel mapping and mask file.*

## 2539 B.4 Description of GIF++ setup within the Offline Analysis tool

2540 In the previous section, the tool input files have been discussed. The dimension file information is  
 2541 stored in a map hosted by the `IniFile` object. But this information is then used to create a series of  
 2542 new objects that helps defining the GIF++ infrastructure directly into the Offline Analysis. Indeed,  
 2543 from the `RPC`, to the more general `Infrastructure`, every element of the GIF++ infrastrucutre is  
 2544 recreated for each data analysis based on the information provided in input. All this information  
 2545 about the infrastructure will be used to assign each hit signal to a specific strip channel of a specific  
 2546 detector, and having a specific active area. This way, rate per unit area calculation is possible.  
 2547

### 2548 B.4.1 RPC objects

2549 `RPC` objects have been developped to represent physical active detectors in GIF++ at the moment  
 2550 of data taking. Thus, there are as many `RPC` objects created during the analysis than there were  
 2551 active `RPCs` tested during a run. Each `RPC` hosts the information present in the corresponding INI  
 2552 slot group, as shown in B.3, and organises it using a similar architecture. This can be seen from  
 2553 *Source Code B.5*.

2554 To make the object more compact, the lists of gap labels, of gap active areas and strip active  
 2555 areas are stored into `vector` dynamical containers. `RPC` objects are always contructed thanks to the  
 2556 dimension file information stored into the `IniFILE` and their ID, using the format `TtSs`. Using the  
 2557 `RPC` ID, the constructor calls the methods of `IniFILE` to initialise the `RPC`. The other constructors  
 2558 are not used but exist in case of need. Finally, some getters have been written to access the different  
 2559 private parameters storing the detector information.

```

2560
class RPC{
    private:
        string      name;           //RPC name as in webDCS database
        Uint        nGaps;          //Number of gaps in the RPC
        Uint        nPartitions;    //Number of partitions in the RPC
        Uint        nStrips;         //Number of strips per partition
        vector<string> gaps;       //List of gap labels (BOT, TOP, etc...)
        vector<float>  gapGeo;        //List of gap active areas
        vector<float>  stripGeo;      //List of strip active areas

    public:
        RPC();
        RPC(string ID, IniFile* geofile);
        RPC(const RPC& other);
        ~RPC();
        RPC& operator=(const RPC& other);

        string GetName();
        Uint GetNGaps();
        Uint GetNPartitions();
        Uint GetNStrips();
        string GetGap(Uint g);
        float GetGapGeo(Uint g);
        float GetStripGeo(Uint p);
};

2561

```

2562 *Source Code B.5: Description of C++ objects RPC that describe each active detectors used during data taking.*

## 2563 B.4.2 Trolley objects

2564 Trolley objects have been developped to represent physical active trolleys in GIFT++ at the moment  
 2565 of data taking. Thus, there are as many trolley objects created during the analysis than there were  
 2566 active trolleys hosting tested RPCs during a run. Each Trolley hosts the information present in the  
 2567 corresponding INI trolley group, as shown in B.2, and organises it using a similar architecture. In  
 2568 addition to the information hosted in the INI file, these object have a dynamical container of RPC  
 2569 objects, representing the active detectors the active trolley was hosting at the time of data taking.  
 2570 This can been seen from Source Code B.6.

2571 Trolley objects are always contructed thanks to the dimension file information stored into the  
 2572 IniFILE and their ID, using the format Tt. Using the Trolley ID, the constructor calls the methods  
 2573 of IniFILE to initialise the Trolley. Retrieving the information of the RPC IDs via SlotsID, a new  
 2574 RPC is constructed and added to the container RPCs for each character in the ID string. The other  
 2575 constructors are not used but exist in case of need. Finally, some getters have been written to access  
 2576 the different private parameters storing the trolley and detectors information.

```

2577
class Trolley{
    private:
        Uint          nSlots; //Number of active RPCs in the considered trolley
        string        SlotsID; //Active RPC IDs written into a string
        vector<RPC*> RPCs;   //List of active RPCs

    public:
        //Constructors, destructor and operator =
        Trolley();
        Trolley(string ID, IniFile* geofile);
        Trolley(const Trolley& other);
        ~Trolley();
        Trolley& operator=(const Trolley& other);

        //Get GIFTrolley members
        Uint  GetNSlots();
        string GetSlotsID();
        Uint   GetSlotID(Uint s);

        //Manage RPC list
        RPC*  GetRPC(Uint r);
        void  DeleteRPC(Uint r);

        //Methods to get members of RPC objects stored in RPCs
        string GetName(Uint r);
        Uint   GetNGaps(Uint r);
        Uint   GetNPartitions(Uint r);
        Uint   GetNStrips(Uint r);
        string GetGap(Uint r, Uint g);
        float  GetGapGeo(Uint r, Uint g);
        float  GetStripGeo(Uint r, Uint p);
    };

```

Source Code B.6: Description of C++ objects `Trolley` that describe each active trolley used during data taking.

### 2580 B.4.3 Infrastructure object

2581 The `Infrastructure` object has been developped to represent the GIFT++ bunker area dedicated to  
 2582 CMS RPC experiments. With this very specific object, all the information about the CMS RPC  
 2583 setup within GIFT++ at the moment of data taking is stored. It hosts the information present in the  
 2584 corresponding INI general group, as shown in B.1, and organises it using a similar architecture. In  
 2585 addition to the information hosted in the INI file, this object have a dynamical container of `Trolley`  
 2586 objects, representing the active tolleys in GIFT++ area. This can be seen from Source Code B.7.

2587 The `Infrastructure` object is always contructed thanks to the dimension file information stored  
 2588 into the `IniFILE`. Retrieving the information of the trolley IDs via `TrolleysID`, a new `Trolley` is  
 2589 constructed and added to the container `Trolleys` for each character in the ID `string`. By extension,  
 2590 it is easy to understand that the process described in Section B.4.2 for the construction of RPCs  
 2591 takes place when a trolley is constructed. The other constructors are not used but exist in case of  
 2592 need. Finally, some getters have been written to access the different private parameters storing the  
 2593 infrastructure, tolleys and detectors information.

```

2594
class Infrastructure {
    private:
        Uint             nTrolleys;   //Number of active Trolleys in the run
        string          TrolleysID;  //Active trolley IDs written into a string
        vector<Trolley*> Trolleys;  //List of active Trolleys (struct)

    public:
        //Constructors and destructor
        Infrastructure();
        Infrastructure(IniFile* geofile);
        Infrastructure(const Infrastructure& other);
        ~Infrastructure();
        Infrastructure& operator=(const Infrastructure& other);

        //Get Infrastructure members
        Uint  GetNTrolleys();
        string GetTrolleysID();
        Uint   GetTrolleyID(Uint t);

2595
        //Manage Trolleys
        Trolley* GetTrolley(Uint t);
        void     DeleteTrolley(Uint t);

        //Methods to get members of GIFTrolley objects stored in Trolleys
        Uint  GetNSlots(Uint t);
        string GetSlotsID(Uint t);
        Uint   GetSlotID(Uint t, Uint s);
        RPC*  GetRPC(Uint t, Uint r);

        //Methods to get members of RPC objects stored in RPCs
        string GetName(Uint t, Uint r);
        Uint   GetNGaps(Uint t, Uint r);
        Uint   GetNPartitions(Uint t, Uint r);
        Uint   GetNStrips(Uint t, Uint r);
        string GetGap(Uint t, Uint r, Uint g);
        float  GetGapGeo(Uint t, Uint r, Uint g);
        float  GetStripGeo(Uint t, Uint r, Uint p);
    };

```

*Source Code B.7: Description of C++ object Infrastructure that contains the full information about CMS RPC experiment in GIF++.*

## 2597 B.5 Handeling of data

2598 As discussed in Appendix A.4.2, the raw data as a `TTree` architecture where every entry is related to  
 2599 a trigger signal provided by a muon or a random pulse, whether the goal of the data taking was to  
 2600 measure the performance of the detector or the noise/gamma background respectively. Each of these  
 2601 entries, referred also as events, contain a more or less full list of hits in the TDC channels to which  
 2602 the detectors are connected. To this list of hits corresponds a list of time stamps, marking the arrival  
 2603 of the hits within the TDC channel.

2604 The infrastructure of the CMS RPC experiment within `GIF++` being defined, combining the  
 2605 information about the raw data with the information provided by both the mapping/mask file and the  
 2606 dimension file allows to build new physical objects that will help in computing efficiency or rates.

### 2607 B.5.1 RPC hits

2608 The raw data stored in the ROOT file as output of the GIFT++ DAQ, is readout by the analysis tool  
 2609 using the structure `RAWData` presented in Source Code B.9 that differs from the structure presented  
 2610 in Appendix A.4.2 as it is not meant to hold all of the data contained in the ROOT file. In this sense,  
 2611 this structure is in the case of the offline analysis tool not a dynamical object and will only be storing  
 2612 a single event contained in a single entry of the `TTree`.

```
2613
  class RPCHit {
    private:
      Uint Channel;      //RPC channel according to mapping (5 digits)
      Uint Trolley;     //0, 1 or 3 (1st digit of the RPC channel)
      Uint Station;     //Slot where is held the RPC in Trolley (2nd digit)
      Uint Strip;       //Physical RPC strip where the hit occurred (last 3
→   digits)
      Uint Partition;   //Readout partition along eta segmentation
      float TimeStamp; //Time stamp of the arrival in TDC

    public:
      //Constructors, destructor & operator =
      RPCHit();
      RPCHit(Uint channel, float time, Infrastructure* Infra);
      RPCHit(const RPCHit& other);
      ~RPCHit();
      RPCHit& operator=(const RPCHit& other);

      //Get RPCHit members
      Uint GetChannel();
      Uint GetTrolley();
      Uint GetStation();
      Uint GetStrip();
      Uint GetPartition();
      float GetTime();
    };

    typedef vector<RPCHit> HitList;
    typedef struct GIFHitList { HitList rpc[NTROLLEYS][NSLOTS][NPARTITIONS]; }
→   GIFHitList;

    bool SortHitbyStrip(RPCHit h1, RPCHit h2);
    bool SortHitbyTime(RPCHit h1, RPCHit h2);
  
```

2615 *Source Code B.8: Description of C++ object `RPCHit`.*

```
2616
  struct RAWData{
    int iEvent;        //Event i
    int TDCNHits;    //Number of hits in event i
    int QFlag;         //Quality flag list (1 flag digit per TDC)
    vector<Uint> *TDCCh; //List of channels giving hits per event
    vector<float> *TDCTS; //List of the corresponding time stamps
  };

```

2617 *Source Code B.9: Description of C++ structure `RAWData`.*

2618 Each member of the structure is then linked to the corresponding branch of the ROOT data tree,  
 2619 as shown in the example of Source Code B.10, and using the method `GetEntry(int i)` of the ROOT  
 2620 class `TTree` will update the state of the members of `RAWData`.

```

2621 TTree* dataTree = (TTree*)dataFile.Get("RAWData");
2622 RAWData data;
2623
2624 dataTree->SetBranchAddress("EventNumber", &data.iEvent);
2625 dataTree->SetBranchAddress("number_of_hits", &data.TDCNHits);
2626 dataTree->SetBranchAddress("Quality_flag", &data.QFlag);
2627 dataTree->SetBranchAddress("TDC_channel", &data.TDCCh);
2628 dataTree->SetBranchAddress("TDC_TimeStamp", &data.TDCTS);

```

2623       *Source Code B.10: Example of link in between RAWData and TTree.*

2624       The data is then analysed entry by entry and to each element of the TDC channel list, a `RPCHit` is  
 2625       constructed by linking each TDC channel to the corresponding RPC channel thanks to the `Mapping`  
 2626       object. The information carried by the RPC channel format allows to easily retrieve the trolley and  
 2627       slot from which the hit was recorded (see section B.3.2). Using these 2 values, the readout partition  
 2628       can be found by knowing the strip channel and comparing it with the number of partitions and strips  
 2629       per partition stored into the `Infrastructure` object.

2630       Thus `RPCHit` objects are then stored into 3D dynamical list called `GIFHitList` (Source Code B.9)  
 2631       where the 3 dimensions refer to the 3 layers of the readout in `GIF++` : in the bunker there are *trolleys*  
 2632       ( $\tau$ ) holding detectors in *slots* ( $s$ ) and each detector readout is divided into 1 or more pseudo-rapidity  
 2633       *partitions* ( $p$ ). Using these 3 information allows to assign an address to each readout partition and  
 2634       this address will point to a specific hit list.

2635

## 2636     B.5.2 Clusters of hits

2637       All the hits contained in the ROOT file have been sorted into the different hit lists through the  
 2638       `GIFHitList`. At this point, it is possible to start looking for clusters. A cluster is a group of adjacent  
 2639       strips getting hits within a time window of 25 ns. These strips are then assumed to be part of the same  
 2640       physical avalanche signal generated by a muon passing through the chamber or by the interaction of  
 2641       a gamma stopping into the electrodes of the RPCs.

2642       To keep the cluster information, `RPCCluster` objects have been defined as shown in Source  
 2643       Code B.11. Using the information of each individual `RPCHit` taken out of the hit list, it stores  
 2644       the cluster size (number of adjacent strips composing the cluster), the first and last hit, the center for  
 2645       spatial reconstruction and finally the start and stop time stamps as well as te time spread in between  
 2646       the first and last hit.

```

2647
class RPCCluster{
    private:
        Uint ClusterSize; //Size of cluster #ID
        Uint FirstStrip; //First strip of cluster #ID
        Uint LastStrip; //Last strip of cluster #ID
        float Center; //Center of cluster #ID ((first+last)/2)
        float StartStamp; //Time stamp of the earliest hit of cluster #ID
        float StopStamp; //Time stamp of the latest hit of cluster #ID
        float TimeSpread; //Time difference between earliest and latest hits
                           //of cluster #ID
    public:
        //Constructors, destructor & operator =
        RPCCluster();
        RPCCluster(HitList List, Uint cID, Uint cSize, Uint first, Uint firstID);
        RPCCluster(const RPCCluster& other);
        ~RPCCluster();
        RPCCluster& operator=(const RPCCluster& other);

        //Get Cluster members
        Uint GetID();
        Uint GetSize();
        Uint GetFirstStrip();
        Uint GetLastStrip();
        float GetCenter();
        float GetStart();
        float GetStop();
        float GetSpread();
    };

typedef vector<RPCCluster> ClusterList;

//Other functions to build cluster lists out of hit lists
void BuildClusters(HitList &cluster, ClusterList &clusterList);
void Clusterization(HitList &hits, TH1 *hcSize, TH1 *hcMult);

```

2649                   *Source Code B.11: Description of C++ object Cluster.*

2650       To investigate the hit list of a given detector partition, the function `Clusterization()` defined  
 2651       in `include/Cluster.h` needs the hits in the list to be time sorted. This is achieved by calling func-  
 2652       tion `sort()` of library `<algorithm>` using the comparator `SortHitbyTime(RPCHit h1, RPCHit h2)`  
 2653       defined in `include/RPCHit.h` that returns `true` if the time stamp of hit `h1` is lower than that of `h2`.  
 2654       A first isolation of strips is made only based on time information. All the hits within the 25 ns win-  
 2655       dow are taken separately from the rest. Then, this sub-list of hits is sorted this time by ascending  
 2656       strip number, using this time the comparator `SortHitbyStrip(RPCHit h1, RPCHit h2)`. Finally, the  
 2657       groups of adjacent strips are used to construct `RPCCluster` objects that are then stored in a temporary  
 2658       list of clusters that is at the end of the process used to know how many clusters were reconstructed  
 2659       and to fill their sizes into an histogram that will allows to know the mean size of muon or gamma  
 2660       clusters.

2661

## 2662     B.6 DAQ data Analysis

2663     All the ingredients to analyse GIF++ data have been defined. This section will focus on the different  
 2664     part of the analysis performed on the data, from determining the type of data the tool is dealing with


2665 to calculating the rate in each detector or reconstructing muon or gamma clusters.

### 2666 B.6.1 Determination of the run type

2667 In GIF++, both the performance of the detectors in detecting muons in an irradiated environment and  
 2668 the gamma background can be independantly measured. These corresponds to different run types  
 2669 and thus, to different TDC settings giving different data to look at.

2670       In the case of performance measurements, the trigger for data taking is provided by the coïncidence  
 2671 of several scintillators when muons from the beam passing through the area are detected. Data  
 2672 is collected in a 600 ns wide window around the arrival of muons in the RPCs. The expected time  
 2674 distribution of hits is shown in Figure B.1a. The muon peak is clearly visible in the center of the  
 2675 distribution and is to be extracted from the gamma background that composes the flat part of the  
 2676 distribution.

2677       On the other hand, gamma background or noise measurements are focussed on the non muon  
 2678 related physics and the trigger needs to be independant from the muons to give a good measurement  
 2679 of the gamma/noise distribution as seen by the detectors. The trigger is then provided by a pulse  
 2680 generator at a frequency of 300 Hz whose pulse is not likely to be on time with a muon. In order  
 2681 to increase the integrated time without increasing the acquisition time too much, the width of the  
 2682 acquisition windows are increased to 10  $\mu$ s. The time distribution of the hits is expected to be flat, as  
 2683 shown by Figure B.1b.

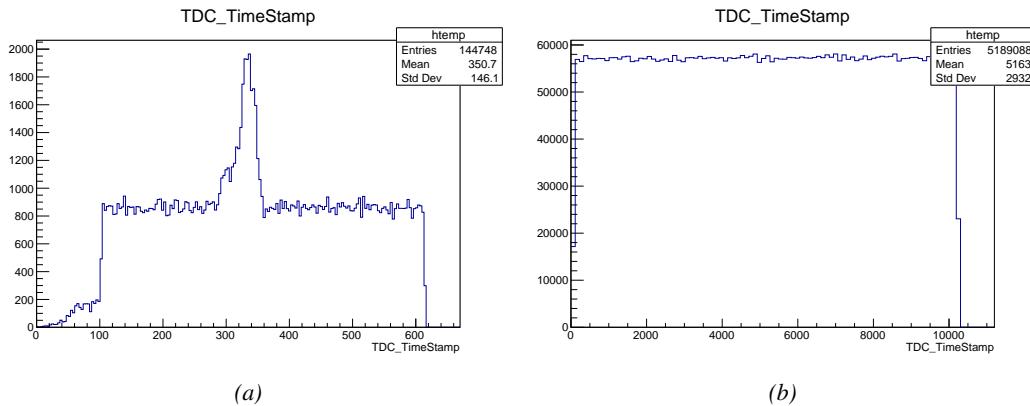

*Figure B.1: Example of expected hit time distributions in the cases of efficiency (Figure B.1a) and noise/gamma rate per unit area (Figure B.1b) measurements as extracted from the raw ROOT files. The unit along the x-axis corresponds to ns. The fact that "the" muon peak is not well defined in Figure B.1a is due to the contribution of all the RPCs being tested at the same time that don't necessarily have the same signal arrival time. Each individual peak can have an offset with the ones of other detectors. The inconsistency in the first 100 ns of both time distributions is an artefact of the TDCs and are systematically rejected during the analysis.*

2684       The ROOT files include a TTree called RunParameters containing, among other things, the in-  
 2685 formation related to the type of run. The run type can then be accessed as described by Source  
 2686 Code B.12 and the function IsEfficiencyRun() is then used to determine if the run file is an effi-  
 2687 ciency run or, on the contrary, another type of run (noise or gamma measurement).

```

2688
2689     TTree* RunParameters = (TTree*)dataFile.Get("RunParameters");
2690     TString* RunType = new TString();
2691     RunParameters->SetBranchAddress("RunType", &RunType);
2692     RunParameters->GetEntry(0);

```

2690       *Source Code B.12: Access to the run type contained in TTree\* RunParameters.*

2691       Finally, the data files will have a slightly different content whether it was collected before or after  
2692       October 2017 and the upgrade of the DAQ software that brought a new information into the ROOT  
2693       output. This is discussed in Appendix A.4.3 and implies that the analysis will differ a little depending  
2694       on the data format. Indeed, as no information on the data quality is stored, in older data files, the cor-  
2695       rections for missing events has to be done at the end of the analysis. The information about the type  
2696       of data format is stored in the variable **bool** `isNewFormat` by checking the list of branches contained  
2697       in the data tree via the methods `TTree::GetListOfBranches()` and `TCollection::Contains()`.

## 2698     **B.6.2 Beam time window calculation for efficiency runs**

2699       Knowing the run type is important first of all to know the width of the acquisition window to be used  
2700       for the rate calculation and finally to be able to seek for muons. Indeed, the peak that appears in the  
2701       time distribution for each detectors is then fitted to extract the most probable time window in which  
2702       the tool should look for muon hits. The data outside of this time window is then used to evaluate the  
2703       noise or gamma background the detector was subjected to during the data taking. Computing the  
2704       position of the peak is done calling the function `SetBeamWindow()` defined in file `src/RPCHit.cc` that  
2705       loops a first time on the data. The data is first sorted in a 3D array of 1D histograms (`GIFH1Array`, see  
2706       `include/types.h`). Then the location of the highest bin is determined using `TH1::GetMaximumBin()`  
2707       and is used to define a window in which a gaussian fit will be applied to compute the peak width.  
2708       This window is a 80 ns defined by Formula B.1 around the central bin.

$$t_{center}(ns) = bin \times width_{bin}(ns) \quad (\text{B.1a})$$

$$[t_{low}; t_{high}] = [t_{center} - 40; t_{center} + 40] \quad (\text{B.1b})$$

2709       Before the fit is performed, the average number of noise/gamma hits per bin is evaluated using  
2710       the data outside of the fit window. Excluding the first 100 ns, the average number of hits per bin  
2711       due to the noise or gamma is defined by Formula B.2 after extracting the amount of hits in the time  
2712       windows  $[100; t_{low}]$  and  $[t_{high}; 600]$  thanks to the method `TH1::Integral()`. This average number  
2713       of hits is then subtracted to every bin of the 1D histogram, in order to *clean* it from the noise or  
2714       gamma contribution as much as possible to improve the fit quality. Bins where  $\langle n_{hits} \rangle$  is greater  
2715       than the actual bin content are set to 0.

$$\Delta t_{noise}(ns) = 600 \overbrace{-t_{high} + t_{low}}^{-80ns} - 100 = 420ns \quad (\text{B.2a})$$

$$\langle n_{hits} \rangle = width_{bin}(ns) \times \frac{\sum_{t=100}^{t_{low}} + \sum_{t=t_{high}}^{600}}{\Delta t_{noise}(ns)} \quad (\text{B.2b})$$

2716       Finally, the fit parameters are extracted and saved for each detector in 3D arrays of **float**  
2717       (`muonPeak`, see `include/types.h`), a first one for the mean arrival time of the muons, `PeakTime`,

2718 and a second one for the width of the peak, `PeakWidth`. The width is defined as  $6\sigma$  of the gaussian  
 2719 fit. The same settings are applied to every partitions of the same detector. To determine which one  
 2720 of the detector's partitions is directly illuminated by the beam, the peak height of each partition is  
 2721 compared and the highest one is then used to define the peak settings.

### 2722 B.6.3 Data loop and histogram filling

2723 3D arrays of histogram are created to store the data and display it on the DQM of G4F++ webDCS  
 2724 for the use of shifters. These histograms, presented in section B.2.1.1, are filled while looping on  
 2725 the data. Before starting the analysis loop, it is necessary to control the entry quality for the new  
 2726 file formats featuring `QFlag`. If the `QFlag` value for this entry shows that 1 TDC or more have a  
 2727 `CORRUPTED` flag, then this event is discarded. The loss of statistics is low enough to be neglected.  
 2728 `QFlag` is controlled using the function `IsCorruptedEvent()` defined in `src/utils.cc`. As explained  
 2729 in Appendix A.4.3, each digit of this integer represent a TDC flag that can be 1 or 2. Each 2 is  
 2730 the sign of a `CORRUPTED` state. Then, the data is accessed entry by entry in the ROOT `TTree` using  
 2731 `RAWData` and each hit in the hit list is assigned to a detector channel and saved in the corresponding  
 2732 histograms. In the first part of the analysis, in which the loop over the ROOT file's content is  
 2733 performed, the different steps are:

2734 **1- RPC channel assignment and control:** a check is done on the RPC channel extracted thanks  
 2735 to the mapping via the method `Mapping::GetLink()`. If the channel is not initialised and is 0, or if  
 2736 the TDC channel was greater than 5127, the hit is discarded. This means there was a problem in the  
 2737 mapping. Often a mapping problem leads to the crash of the offline tool.

2738 **2- Creation of a `RPCHit` object:** to easily get the trolley, slot and partition in which the hit has  
 2739 been assigned, this object is particularly helpful.

2740 **3- General histograms are filled:** the hit is filled into the time distribution and the general hit  
 2741 distribution histograms, and if the arrival time is within the first 100 ns, it is discarded and nothing  
 2742 else happens and the loop proceeds with the next hit in the list.

2743 **4- Multiplicity counter:** the hit multiplicity counter of the corresponding detectors incremented.

2744 **5-a- Efficiency runs - Is the hit within the peak window? :** if the peak is contained in the peak  
 2745 window previously defined in section B.6.2, the hit is filled into the beam hit profile histogram of  
 2746 the corresponding chamber, added into the list of muon hits and increments the counter of *in time*  
 2747 hits. The term *in time* here refers to the hits that are likely to be muons by arriving in the expected  
 2748 time window. If the hit is outside of the peak window, it is filled into the noise profile histogram  
 2749 of the corresponding detector, added into the list of noise/gamma hits and increments the counter of  
 2750 noise/gamma hits.

2751 **5-b- Noise/gamma rate runs - Noise histograms are filled:** the hit is filled into the noise profile  
 2752 histogram of the corresponding detector, added into the list of noise/gamma hits and increments the  
 2753 counter of noise/gamma hits.

2754

2755 After the loop on the hit list of the entry is over, the next step is to clusterize the 3D lists filled  
 2756 in the previous steps. A 3D loop is then started over the active trolley, slot and RPC partitions to  
 2757 access these objects. Each `NoiseHitList` and `MuonHitList`, in case of efficiency run, are clusterized  
 2758 as described in section B.5.2. There corresponding cluster size and multiplicity histograms are filled  
 2759 at the end of the clustering process. Then, the efficiency histogram is filled in case of efficiency run.  
 2760 The selection is simply made by checking whether the RPC detected signals in the peak window  
 2761 during this event. Nevertheless, it is useful to highlight that at this level, it is not possible yet to  
 2762 discriminate in between a muon hit and noise or gamma hit. Thus, `MuonCSize_H`, `MuonCMult_H`  
 2763 and `Efficiency0_H` are subjected to noise and gamma contamination. This contamination will be  
 2764 estimated and corrected at the moment the results will be written into output CSV files. Finally, the  
 2765 loop ends on the filling of the general hit multiplicity histogram.

#### 2766 **B.6.4 Results calculation**

2767 As mentioned in section B.2.1, the analysis of DAQ data provides the user with 3 CSV files and  
 2768 a ROOT file associated to each and every ROOT data file. The fourth CSV file is provided by the  
 2769 extraction of the CEAN main frame data monitored during data taking and will be discussed later.  
 2770 After looping on the data in the previous part of the analysis macro, the output files are created and a  
 2771 3D loop on each RPC readout partitions is started to extract the histograms parameters and compute  
 2772 the final results.

2773

##### 2774 **B.6.4.1 Rate normalisation**

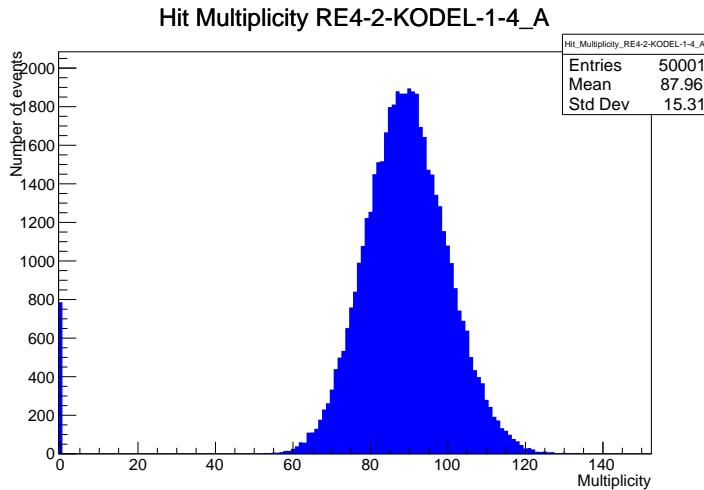


Figure B.2: The effect of the quality flag is explained by presenting the reconstructed hit multiplicity of a data file without `Quality_flag`. The artificial high content of bin 0 is the effect of corrupted data.

2775 To analyse old data format files, not containing any quality flag, it is needed to estimate the amount  
 2776 of corrupted data via a fit as the corrupted data will always fill events with a fake "0 multiplicity".  
 2777 Indeed, as no hits were stored in the DAQ ROOT files, these events artificially contribute to fill  
 2778 the bin corresponding to a null multiplicity, as shown in Figure B.2. In the case the mean of the

hit multiplicity distribution is high, the contribution of the corrupted data can easily be evaluated for later correction by comparing the level of the bin at multiplicity 0 and of a skew fit curve that should indicate a value consistent with 0. A skew fit has been chosen over a Poisson fit as it was giving better results for lower mean multiplicity values. Nevertheless, for low irradiation cases, as explained in Appendix A.4.3, the hit multiplicity distribution mean is, on the contrary, rather small and the probability to record events without hits can't be considered small anymore, leading to a difficult and non-reliable estimation of the corruption. As can be seen in Source Code B.13, conditions have been applied to prevent bad fits and wrong corruption estimation in cases where :

- The difference in between the data for multiplicity 1 and the corresponding fit value should be lower than 1% of the total amount of data :  $\frac{|n_{m=1} - sk(1)|}{N_{tot}} < 0.01$  where  $n_{m=1}$  is the number of entries with multiplicity 1,  $sk(1)$  the value of the skew fit, as defined by Formula 5.3, for multiplicity 1 and  $N_{tot}$  the total number of entries.

- The amount of data contained in the multiplicity 0 bin should not exceed 40% :  $\frac{n_{m=0}}{N_{tot}} \leq 0.4$  where  $n_{m=0}$  is the number of entries with multiplicity 0. This number has been determined to be the maximum to be able to separate the excess of data due to corruption from the hit multiplicity distribution.

Those 2 conditions need to be fulfilled to estimate the corruption of old data format files. If the fit was successful, the level of corruption is written in `Offline-Corrupted.csv` and the number of corrupted entries, refered as the integer `nEmptyEvent`, is subtracted from the total number of entries when the rate normalisation factor is computed as explicit in Source Code B.13. Note that for new data format files, the number of corrupted entries being set to 0, the definition of `rate_norm` stays valid.

```

2801
if(!isNewFormat){
    TF1* GaussFit = new TF1("gaussfit","[0]*exp(-0.5*((x-[1])/[2])**2)",0,Xmax);
    GaussFit->SetParameter(0,100);
    GaussFit->SetParameter(1,10);
    GaussFit->SetParameter(2,1);
    HitMultiplicity_H.rpc[T][S][p]->Fit(GaussFit,"LIQR","",0.5,Xmax);

    TF1* SkewFit = new TF1("skewfit","[0]*exp(-0.5*((x-[1])/[2])**2) / (1 +
→ exp(-[3]*(x-[4])))",0,Xmax);
    SkewFit->SetParameter(0,GaussFit->GetParameter(0));
    SkewFit->SetParameter(1,GaussFit->GetParameter(1));
    SkewFit->SetParameter(2,GaussFit->GetParameter(2));
    SkewFit->SetParameter(3,1);
    SkewFit->SetParameter(4,1);
    HitMultiplicity_H.rpc[T][S][p]->Fit(SkewFit,"LIQR","",0.5,Xmax);

    double fitValue = SkewFit->Eval(1,0,0,0);
    double dataValue = (double)HitMultiplicity_H.rpc[T][S][p]->GetBinContent(2);
    double difference = TMath::Abs(dataValue - fitValue);
    double fitTOdataVSentries_ratio = difference / (double)nEntries;
    bool isFitGOOD = fitTOdataVSentries_ratio < 0.01;

2802
    double nSinglehit = (double)HitMultiplicity_H.rpc[T][S][p]->GetBinContent(1);
    double lowMultRatio = nSinglehit / (double)nEntries;
    bool isMultLOW = lowMultRatio > 0.4;

    if(isFitGOOD && !isMultLOW){
        nEmptyEvent = HitMultiplicity_H.rpc[T][S][p]->GetBinContent(1);
        nPhysics = (int)SkewFit->Eval(0,0,0,0);
        if(nPhysics < nEmptyEvent)
            nEmptyEvent = nEmptyEvent-nPhysics;
    }
}

double corrupt_ratio = 100.*(double)nEmptyEvent / (double)nEntries;
outputCorrCSV << corrupt_ratio << '\t';

float rate_norm = 0.;
float stripArea = GIFIInfra->GetStripGeo(tr,sl,p);

if(IsEfficiencyRun(RunType)){
    float noiseWindow = BMTDCWINDOW - TIMEREJECT - 2*PeakWidth.rpc[T][S][p];
    rate_norm = (nEntries-nEmptyEvent)*noiseWindow*1e-9*stripArea;
} else
    rate_norm = (nEntries-nEmptyEvent)*RDMNOISEWDW*1e-9*stripArea;

```

*Source Code B.13: Definition of the rate normalisation variable. It takes into account the number of non corrupted entries and the time window used for noise calculation, to estimate the total integrated time, and the strip active area to express the result as rate per unit area.*

#### 2804 B.6.4.2 Rate and activity

2805 At this point, the strip rate histograms, StripNoiseProfile\_H.rpc[T][S][p], only contain an in-  
2806 formation about the total number of noise or rate hits each channel received during the data taking.  
2807 As described in Source Code B.14, a loop on the strip channels will be used to normalise the content  
2808 of the rate distribution histogram for each detector partitions. The initial number of hits recorded for  
2809 a given bin will be extracted and 2 values will be computed:

- 2810     ● the strip rate, defined as the number of hits recorded in the bin normalised like described in  
 2811           the previous section, using the variable `rate_norm`, and

- 2812     ● the strip activity, defined as the number of hits recorded in the bin normalised to the average  
 2813           number of hits per bin contained in the partition histogram, using the variable `averageNhit`.  
 2814           This value provides an information on the homogeneity of the detector response to the gamma  
 2815           background or of the detector noise. An activity of 1 corresponds to an average response.  
 2816           Above 1, the channel is more active than the average and bellow 1, the channel is less active.

```

int nNoise = StripNoiseProfile_H.rpc[T][S][p]->GetEntries();
float averageNhit = (nNoise>0) ? (float)(nNoise/nStripsPart) : 1.;

for(Uint st = 1; st <= nStripsPart; st++) {
    float stripRate =
        StripNoiseProfile_H.rpc[T][S][p]->GetBinContent(st)/rate_norm;
    float stripAct =
        StripNoiseProfile_H.rpc[T][S][p]->GetBinContent(st)/averageNhit;

    StripNoiseProfile_H.rpc[T][S][p]->SetBinContent(st,stripRate);
    StripActivity_H.rpc[T][S][p]->SetBinContent(st,stripAct);
}

```

2818     *Source Code B.14: Description of the loop that allows to set the content of each strip rate and strip activity  
 channel for each detector partition.*

2819     On each detector partitions, which are readout by a single FEE, all the channels are not processed  
 2820     by the same chip. Each chip can give a different noise response and thus, histograms using a chip  
 2821     binning are used to investigate chip related noise behaviours. The average values of the strip rate  
 2822     or activity grouped into a given chip are extracted using the using the function `GetChipBin()` and  
 2823     stored in dedicated histograms as described in Source Codes B.15 and B.16 respectively.

```

float GetChipBin(TH1* H, Uint chip){
    Uint start = 1 + chip*NSTRIPSCHIP;
    int nActive = NSTRIPSCHIP;
    float mean = 0.;

    for(Uint b = start; b <= (chip+1)*NSTRIPSCHIP; b++) {
        float value = H->GetBinContent(b);
        mean += value;
        if(value == 0.) nActive--;
    }

    if(nActive != 0) mean /= (float)nActive;
    else mean = 0.;

    return mean;
}

```

2826     *Source Code B.15: Function used to compute the content of a bin for an histogram using chip binning.*

```

2827   for(UInt ch = 0; ch < (nStripsPart/NSTRIPSCHIP); ch++) {
      ChipMeanNoiseProf_H.rpc[T][S][p]->
          SetBinContent(ch+1,GetChipBin(StripNoiseProfile_H.rpc[T][S][p],ch));
      ChipActivity_H.rpc[T][S][p]->
          SetBinContent(ch+1,GetChipBin(StripActivity_H.rpc[T][S][p],ch));
}

```

*Source Code B.16: Description of the loop that allows to set the content of each chip rate and chip activity bins for each detector partition knowing the information contained in the corresponding strip distribution histograms.*

The activity variable is used to evaluate the homogeneity of the detector response to background or of the detector noise. The homogeneity  $h_p$  of each detector partition can be evaluated using the formula  $h_p = \exp(-\sigma_p^R / \langle R \rangle_p)$ , where  $\langle R \rangle_p$  is the partition mean rate and  $\sigma_p^R$  is the rate standard deviation calculated over the partition channels. The more homogeneously the rates are distributed and the smaller will  $\sigma_p^R$  be, and the closer to 1 will  $h_p$  get. On the contrary, if the standard deviation of the channel's rates is large,  $h_p$  will rapidly get to 0. This value is saved into histograms as shown in Source Code B.17 and could in the future be used to monitor through time, once extracted, the evolution of every partition homogeneity. This could be of great help to understand the apparition of eventual hot spots due to ageing of the chambers subjected to high radiation levels. The monitored homogeneity information could then be combined with a monitoring of the activity of each individual channel in order to have a finer information. Monitoring tools have been suggested and need to be developed for this purpose.

```

2841   float MeanPartSDev = GetTH1StdDev(StripNoiseProfile_H.rpc[T][S][p]);
   float strip_homog = (MeanPartRate==0)
     ? 0.
     : exp(-MeanPartSDev/MeanPartRate);
   StripHomogeneity_H.rpc[T][S][p]->Fill("exp -#left(#frac{\#sigma_{Strip
     \rightarrow Rate}}{\#mu_{Strip Rate}}\#right)",strip_homog);
   StripHomogeneity_H.rpc[T][S][p]->GetYaxis()->SetRangeUser(0.,1.);


2842   float ChipStDevMean = GetTH1StdDev(ChipMeanNoiseProf_H.rpc[T][S][p]);
   float chip_homog = (MeanPartRate==0)
     ? 0.
     : exp(-ChipStDevMean/MeanPartRate);
   ChipHomogeneity_H.rpc[T][S][p]->Fill("exp -#left(#frac{\#sigma_{Chip
     \rightarrow Rate}}{\#mu_{Chip Rate}}\#right)",chip_homog);
   ChipHomogeneity_H.rpc[T][S][p]->GetYaxis()->SetRangeUser(0.,1.);


```

*Source Code B.17: Storage of the homogeneity into dedicated histograms.*

#### 2844 B.6.4.3 Strip masking tool

The offline tool is automatically called at the end of each data taking to analyse the data and offer the shifter DQM histograms to control the data quality. After the histograms have been published online in the DQM page, the shifter can decide to mask noisy or dead channels that will contribute to bias the final rate calculation by editing the mask column of `ChannelsMapping.csv` as can be seen in Figure B.3.

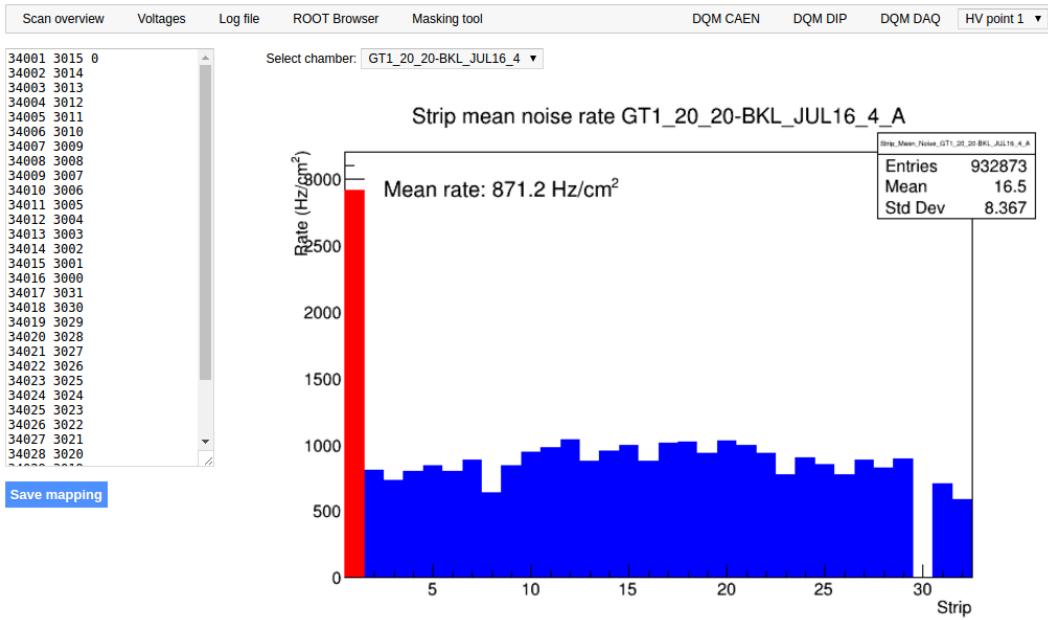

*Figure B.3: Display of the masking tool page on the webDCS. The window on the left allows the shifter to edit ChannelsMapping.csv. To mask a channel, it only is needed to set the 3rd field corresponding to the strip to mask to 0. It is not necessary for older mapping file formats to add a 1 for each strip that is not masked as the code is versatile and the default behaviour is to consider missing mask fields as active strips. The effect of the mask is directly visible for noisy channels as the corresponding bin turns red. The global effect of masking strips will be an update of the rate value showed on the histogram that will take into consideration the rejected channels.*

2850        From the code point of view, the function `GetTH1Mean()` is used to retrieve the mean rate par-  
 2851        tition by partition after the rates have been calculated strip by strip and filled into the histograms  
 2852        `StripNoiseProfile_H.rpc[T][S][p]`, as described through Source Code B.18.

2853        Once the mask for each rejected channel has been updated, the shifter can manually run the of-  
 2854        fline tool again to update the DQM plots, now including the masked strips, as well the rate results  
 2855        written in the output CSV file `Offline-Rate.csv`. If not done during the shifts, the strip masking  
 2856        procedure needs to be carefully done by the person in charge of data analysis on the scans that were  
 2857        selected to produce the final results.

```

2858
float GetTH1Mean(TH1* H) {
    int nBins = H->GetNbinsX();
    int nActive = nBins;
    float mean = 0.;

    for(int b = 1; b <= nBins; b++) {
        float value = H->GetBinContent(b);
        mean += value;
        if(value == 0.) nActive--;
    }

    if(nActive != 0) mean /= (float)nActive;
    else mean = 0.;

    return mean;
}

```

*Source Code B.18: The function `GetTH1Mean()` is used to return the mean along the y-axis of TH1 histograms containing rate information. In order to take into account masked strips whose rate is set to 0, the function looks for masked channels and decrement the number of active channels for each null value found.*

#### 2861 B.6.4.4 Output CSV files filling

2862 All the histograms have been filled. Parameters will then be extracted from them to compute the  
 2863 final results that will later be used to produce plots. Once the results have been computed, the very  
 2864 last step of the offline macro is to write these values into the corresponding CSV outputs. Aside of  
 2865 the file `Offline-Corrupted.csv`, 2 CSV files are being written by the macro `offlineAnalysis()`,  
 2866 `Offline-Rates.csv` and `Offline-L0-EffCl.csv` that respectively contain information about noise  
 2867 or gamma rates, cluster size and multiplicity, and about level 0 reconstruction of the detector effi-  
 2868 ciency, muon cluster size and multiplicity. Details on the computation and file writing are respec-  
 2869 tively given in Sources Codes B.19 and B.20.

2870 **Noise/gamma background variables** are computed and written in the output file for each detector  
 2871 partitions. A detector average of the hit and cluster rate is also provided, as shown through Sources  
 2872 Code B.19. The variables that are written for each partition are:

- 2873 • The mean partition hit rate per unit area, `MeanPartRate`, that is extracted from the histogram  
   2874   `StripNoiseProfile_H` as the mean value along the y-axis, as described in section B.6.4.3. No  
   2875   error is recorded for the hit rate as this is considered a single measurement. No statistical error  
   2876   can be associated to it and the systematics are unknown.
- 2877 • The mean cluster size, `cSizePart`, is extracted from the histogram `NoiseCSize_H` and it's  
   2878   statistical error, `cSizePartErr`, is taken to be  $2\sigma$  of the total distribution.
- 2879 • The mean cluster multiplicity per trigger, `cMultPart`, is extracted from the histogram `NoiseCMult_H`  
   2880   and it's statistical error, `cMultPartErr`, is taken to be  $2\sigma$  of the total distribution. It is impor-  
   2881   tant to point to the fact that this variable gives an information that is dependent on the buffer  
   2882   window width used for each trigger for the calculation.
- 2883 • The mean cluster rate per unit area, `ClustPartRate`, is defined as the mean hit rate normalised

2884 to the mean cluster size and it's statistical error, `ClustPartRateErr`, is then obtained using the  
 2885 relative statistical error on the mean cluster size.

```

for (UInt tr = 0; tr < GIFInfra->GetNTrolleys(); tr++) {
  UInt T = GIFInfra->GetTrolleyID(tr);

  for (UInt sl = 0; sl < GIFInfra->GetNSlots(tr); sl++) {
    UInt S = GIFInfra->GetSlotID(tr,sl) - 1;

    float MeanNoiseRate = 0.;
    float ClusterRate = 0.;
    float ClusterSDev = 0.;

    for (UInt p = 0; p < GIFInfra->GetNPartitions(tr,sl); p++) {
      float MeanPartRate = GetTH1Mean(StripNoiseProfile_H.rpc[T][S][p]);
      float cSizePart = NoiseCSIZE_H.rpc[T][S][p]->GetMean();
      float cSizePartErr = (NoiseCSIZE_H.rpc[T][S][p]->GetEntries()==0)
        ? 0.
        : 2*NoiseCSIZE_H.rpc[T][S][p]->GetStdDev() /
          sqrt(NoiseCSIZE_H.rpc[T][S][p]->GetEntries());
      float cMultPart = NoiseCMult_H.rpc[T][S][p]->GetMean();
      float cMultPartErr = (NoiseCMult_H.rpc[T][S][p]->GetEntries()==0)
        ? 0.
        : 2*NoiseCMult_H.rpc[T][S][p]->GetStdDev() /
          sqrt(NoiseCMult_H.rpc[T][S][p]->GetEntries());
      float ClustPartRate = (cSizePart==0) ? 0.
        : MeanPartRate/cSizePart;
      float ClustPartRateErr = (cSizePart==0) ? 0.
        : ClustPartRate * cSizePartErr/cSizePart;

      outputRateCSV << MeanPartRate << '\t'
        << cSizePart << '\t' << cSizePartErr << '\t'
        << cMultPart << '\t' << cMultPartErr << '\t'
        << ClustPartRate << '\t' << ClustPartRateErr << '\t';

      RPCarea += stripArea * nStripsPart;
      MeanNoiseRate += MeanPartRate * stripArea * nStripsPart;
      ClusterRate += ClustPartRate * stripArea * nStripsPart;
      ClusterSDev += (cSizePart==0)
        ? 0.
        : ClusterRate*cSizePartErr/cSizePart;
    }

    MeanNoiseRate /= RPCarea;
    ClusterRate /= RPCarea;
    ClusterSDev /= RPCarea;

    outputRateCSV << MeanNoiseRate << '\t'
      << ClusterRate << '\t' << ClusterSDev << '\t';
  }
}

```

Source Code B.19: Description of rate result calculation and writing into the CSV output `Offline-Rate.csv`. Are saved into the file for each detector, the mean partition rate, cluster size and cluster mutiplicity, along with their errors, for each partition and as well as a detector average.

2888 **Muon performance variables** are computed and written in the output file for each detector partitions as shown through Sources Code B.20. The variables that are written for each partition are:

2890     ● The muon efficiency, `eff`, extracted from the histogram `Efficiency0_H`. It is reminded that  
2891       this offline tool doesn't include any tracking algorithm to identify muons from the beam and  
2892       only relies on the hits arriving in the time window corresponding to the beam time. The con-  
2893       tent of the efficiency histogram is thus biased by the noise/gamma background contribution  
2894       into this window and is thus corrected by estimating the muon data content in the peak re-  
2895       gion knowing the noise/gamma content in the rate calculation region. Both time windows  
2896       being different, the choice was made to normalise the noise/gamma background calculation  
2897       window to it's equivalent beam window in order to have comparable values using the variable  
2898       `windowRatio`. Finally, to estimate the data ratio in the peak region, the variable `DataRatio`  
2899       is defined as the ratio in between the estimated mean cluster multiplicity of the muons in the  
2900       peak region, `MuonCM`, and of the total mean cluster multiplicity in the peak region, `PeakCM`.  
2901       `MuonCM` is itself defined as the difference in between the total mean cluster multiplicity in the  
2902       peak region and the normalised mean noise/gamma cluster multiplicity calculated outside of  
2903       the peak region. The statistical error related to the efficiency, `eff_err`, is computed using a  
2904       binomial distribution, as the efficiency measure the probability of "success" and "failure" to  
2905       detect muons.

2906     ● The mean muon cluster size, `MuonCS`, is calculated using the total mean cluster size and multi-  
2907       plicity in the peak region, respectively extracted from histograms `MuonCSize_H` and `MuonCMult_H`,  
2908       the noise/gamma background mean cluster size and normalised multiplicity, extracted from  
2909       `NoiseCSize_H` and `NoiseCMult_H`, and of the estimated muon cluster multiplicity `MuonCM` pre-  
2910       viously explicated. The associated statistical error, `MuonCM_err`, is calculated using the propa-  
2911       gation of errors of the mentioned variables.

2912     ● The mean muon cluster multiplicity in the peak region, `MuonCM`, explicated above whose sta-  
2913       tistical error, `MuonCM_err`, is the sum of statistical error associated to the total mean clus-  
2914       ter multiplicity in the peak reagion, `PeakCM_err`, and of the mean noise/gamma cluster size,  
2915       `NoiseCM_err`.

2916       In addition to these 2 CSV files, the histograms are saved in ROOT file `Scan00XXXX_HVY_Offline.root`  
2917       as explained in section B.2.1.1.

2918

```

for (UInt tr = 0; tr < GIFInfra->GetNTrolleys(); tr++) {
    UInt T = GIFInfra->GetTrolleyID(tr);
    for (UInt sl = 0; sl < GIFInfra->GetNSlots(tr); sl++) {
        UInt S = GIFInfra->GetSlotID(tr,sl) - 1;
        for (UInt p = 0; p < GIFInfra->GetNPartitions(tr,sl); p++) {
            float noiseWindow =
                BMTDCWINDOW - TIMEREJECT - 2*PeakWidth.rpc[T][S][p];
            float peakWindow = 2*PeakWidth.rpc[T][S][p];
            float windowRatio = peakWindow/noiseWindow;

            float PeakCM = MuonCMult_H.rpc[T][S][p]->GetMean();
            float PeakCS = MuonCSize_H.rpc[T][S][p]->GetMean();
            float NoiseCM = NoiseCMult_H.rpc[T][S][p]->GetMean() *windowRatio;
            float NoiseCS = NoiseCSize_H.rpc[T][S][p]->GetMean();
            float MuonCM = (PeakCM<NoiseCM) ? 0. : PeakCM-NoiseCM;
            float MuonCS = (MuonCM==0 || PeakCM*PeakCS<NoiseCM*NoiseCS)
                ? 0.
                : (PeakCM*PeakCS-NoiseCM*NoiseCS) / MuonCM;
            float PeakCM_err = (MuonCMult_H.rpc[T][S][p]->GetEntries()==0.)
                ? 0.
                : 2*MuonCMult_H.rpc[T][S][p]->GetStdDev() /
                    sqrt(MuonCMult_H.rpc[T][S][p]->GetEntries());
            float PeakCS_err = (MuonCSize_H.rpc[T][S][p]->GetEntries()==0.)
                ? 0.
                : 2*MuonCSize_H.rpc[T][S][p]->GetStdDev() /
                    sqrt(MuonCSize_H.rpc[T][S][p]->GetEntries());
            float NoiseCM_err = (NoiseCMult_H.rpc[T][S][p]->GetEntries()==0.)
                ? 0.
                : windowRatio*2*NoiseCMult_H.rpc[T][S][p]->GetStdDev() /
                    sqrt(NoiseCMult_H.rpc[T][S][p]->GetEntries());
            float NoiseCS_err = (NoiseCSize_H.rpc[T][S][p]->GetEntries()==0.)
                ? 0.
                : 2*NoiseCSize_H.rpc[T][S][p]->GetStdDev() /
                    sqrt(NoiseCSize_H.rpc[T][S][p]->GetEntries());
            float MuonCM_err = (MuonCM==0) ? 0. : PeakCM_err+NoiseCM_err;
            float MuonCS_err = (MuonCS==0 || MuonCM==0) ? 0.
                : (PeakCS*PeakCM_err + PeakCM*PeakCS_err +
                    NoiseCS*NoiseCM_err + NoiseCM*NoiseCS_err +
                    MuonCS*MuonCM_err) / MuonCM;

            float DataRatio = MuonCM/PeakCM;
            float DataRatio_err = (MuonCM==0) ? 0.
                : DataRatio*(MuonCM_err/MuonCM + PeakCM_err/PeakCM);
            float eff = DataRatio*Efficiency0_H.rpc[T][S][p]->GetMean();
            float eff_err = DataRatio*2*Efficiency0_H.rpc[T][S][p]->GetStdDev() /
                sqrt(Efficiency0_H.rpc[T][S][p]->GetEntries()) +
                Efficiency0_H.rpc[T][S][p]->GetMean()*DataRatio_err;

            outputEffCSV << eff << '\t' << eff_err << '\t'
                << MuonCS << '\t' << MuonCS_err << '\t'
                << MuonCM << '\t' << MuonCM_err << '\t';
        }
    }
}

```

2919

*Source Code B.20: Description of efficiency result calculation and writing into the CSV output Offline-L0-EffCl.csv. Are saved into the file for each detector, the efficiency, corrected taking into account the background in the peak window of the time profile, muon cluster size and muon cluster multiplicity, along with their errors, for each partition and as well as a detector average.*

2920

## 2921 B.7 Current data Analysis

2922 Detectors under test at GIF++ are connected both to a CAEN HV power supply and to a CAEN  
2923 ADC that reads the currents inside of the RPC gaps bypassing the supply cable. During data tak-  
2924 ing, the webDCS records into a ROOT file called `Scan00XXXX_HVY_CAEN.root` histograms with the  
2925 monitored parameters of both CAEN devices. Are recorded for each RPC channels (in most cases,  
2926 a channel corresponds to an RPC gap):

- 2927 • the effective voltage,  $HV_{eff}$ , set by the webDCS using the PT correction on the CAEN power  
2928 supply,
- 2929 • the applied voltage,  $HV_{app}$ , monitored by the CAEN power supply, and the statistical error  
2930 related to the variations of this value through time to follow the variation of the environmental  
2931 parameters defined as the RMS of the histogram divided by the square root of the number of  
2932 recorded points,
- 2933 • the monitored current,  $I_{mon}$ , monitored by the CAEN power supply, and the statistical error  
2934 related to the variations of this value through time to follow the variation of the environmental  
2935 parameters defined as the RMS of the histogram divided by the square root of the number of  
2936 recorded points,
- 2937 • the corresponding current density,  $J_{mon}$ , defined as the monitored current per unit area,  
2938  $J_{mon} = I_{mon}/A$ , where  $A$  is the active area of the corresponding gap,
- 2939 • the ADC current,  $I_{ADC}$ , recorded through the CAEN ADC module that monitors the dark  
2940 current in the gap itself. First of all, the resolution of such a module is better than that of  
2941 CAEN power supplies and moreover, the current is not read-out through the HV supply line  
2942 but directly at the chamber level giving the real current inside of the detector. The statistical  
2943 error is defined as the RMS of the histogram distribution divided by the square root of the  
2944 number of recorded points.

2945 Once extracted through a loop over the element of GIF++ infrastructure via the C++ macro  
2946 `GetCurrent()`, these parameters, organised in 9 columns per detector HV supply line, are written in  
2947 the output CSV file `Offline-Current.csv`. The macro can be found in the file `Current.cc`.

## References

- [1] T. Massam et al. “Experimental observation of antideuteron production”. In: *Il Nuovo Cimento A* 63 (1965), pp. 10–14.
- [2] UA1 Collaboration. “Experimental observation of isolated large transverse energy electrons with associated missing energy at  $s = 540 \text{ GeV}$ ”. In: *Physics Letters B* 122 (1983), pp. 103–116.
- [3] UA2 Collaboration. “Observation of single isolated electrons of high transverse momentum in events with missing transverse energy at the CERN pp collider”. In: *Physics Letters B* 122 (1983), pp. 476–485.
- [4] UA1 Collaboration. “Experimental observation of lepton pairs of invariant mass around  $95 \text{ GeV}/c^2$  at the CERN SPS collider”. In: *Physics Letters B* 126 (1983), pp. 398–410.
- [5] UA2 Collaboration. “Evidence for  $Z_0 \rightarrow e^+e^-$  at the CERN pp collider”. In: *Physics Letters B* 129 (1983), pp. 130–140.
- [6] ALEPH Collaboration. “Determination of the number of light neutrino species”. In: *Physics Letters B* 231 (1989), pp. 519–529.
- [7] CERN, ed. (1985).
- [8] CERN, ed. (1986).
- [9] CERN, ed. (1994).
- [10] CERN, ed. (1998).
- [11] CERN, ed. (1999).
- [12] CERN. Geneva. LHC Experiments Committee. *Letter of Intent for A Large Ion Collider Experiment [ALICE]*, note = CERN-LHCC-93-016. Tech. rep. ALICE Collaboration, 1993.
- [13] CERN. Geneva. LHC Experiments Committee. *ATLAS : technical proposal for a general-purpose pp experiment at the Large Hadron Collider at CERN*, note = CERN-LHCC-94-43. Tech. rep. ATLAS Collaboration, 1994.
- [14] CERN. Geneva. LHC Experiments Committee. *CMS : letter of intent by the CMS Collaboration for a general purpose detector at LHC*, note = CERN-LHCC-92-003. Tech. rep. CMS Collaboration, 1992.
- [15] CERN. Geneva. LHC Experiments Committee. *LHCb : letter of intent*. Tech. rep. CERN-LHCC-95-5. LHCb Collaboration, 1995.
- [16] L. Evans and P. Bryant. “LHC Machine”. In: *JINST* 3 (2008). S08001.
- [17] CMS Collaboration ATLAS Collaboration. “Combined Measurement of the Higgs Boson Mass in  $pp$  Collisions at  $\sqrt{s} = 7$  and  $8 \text{ TeV}$  with the ATLAS and CMS Experiments”. In: *Physical Review Letters* 114 (2015). 191803.
- [18] LHCb Collaboration. “Observation of  $J/\psi p$  Resonances Consistent with Pentaquark States in  $\Lambda_b^0 \rightarrow J/\psi K^- p$  Decays”. In: *Physical Review Letters* 115 (2015). 072001.

- 2984 [19] LHCb Collaboration. “Observation of  $J/\psi\phi$  Structures Consistent with Exotic States from  
2985 Amplitude Analysis of  $B^+ \rightarrow J/\psi\phi K^+$  Decays”. In: *Physical Review Letters* 118 (2017).  
2986 022003.
- 2987 [20] CERN. Geneva. *High-Luminosity Large Hadron Collider (HL-LHC) Technical Design Re-*  
2988 *port V. 0.1*. Tech. rep. CERN-2017-007-M. 2017.
- 2989 [21] CERN. Geneva. LHC Experiments Committee. *The CMS muon project : Technical Design*  
2990 *Report*. Tech. rep. CERN-LHCC-97-032. CMS Collaboration, 1997.
- 2991 [22] CERN. Geneva. LHC Experiments Committee. *CMS, the Compact Muon Solenoid : technical*  
2992 *proposal*. Tech. rep. CERN-2015-005. 2015.
- 2993 [23] CERN. Geneva. LHC Experiments Committee. *The Phase-2 Upgrade of the CMS Muon*  
2994 *Detectors*. Tech. rep. CERN-LHCC-2017-012, CMS-TDR-016. CMS Collaboration, 2017.
- 2995 [24] CERN. Geneva. LHC Experiments Committee. *The Phase-2 Upgrade of the CMS Level-1*  
2996 *Trigger - Interim Report to the LHCC*. Tech. rep. CERN-LHCC-2017-013, CMS-TDR-017.  
2997 CMS Collaboration, 2017.
- 2998 [25] CERN. Geneva. LHC Experiments Committee. *Technical Proposal for the Phase-II Upgrade*  
2999 *of the CMS Detector*. Tech. rep. CERN-LHCC-2015-010, CMS-TDR-15-02. CMS Collabo-  
3000 ration, 2015.
- 3001 [26] CERN. Geneva. LHC Experiments Committee. *High-Luminosity Large Hadron Collider*  
3002 *(HL-LHC) Preliminary Design Report*. Tech. rep. CERN-LHCC-94-38. CMS Collaboration,  
3003 1994.
- 3004 [27] R. Santonico and R. Cardarelli. “Development of resistive plate counters”. In: *Nucl. Instr.*  
3005 *Meth. Phys. Res.* 187 (1981), pp. 377–380.
- 3006 [28] Yu.N. Pestov and G.V. Fedotovich. *A picosecond time-of-flight spectrometer for the VEPP-2M*  
3007 *based on local-discharge spark counter*. Tech. rep. SLAC-TRANS-0184. SLAC, 1978.
- 3008 [29] W.W. Ash, ed. *Spark Counter With A Localized Discharge*. Vol. SLAC-R-250. 1982, pp. 127–  
3009 131.
- 3010 [30] I. Crotty et al. “The non-spark mode and high rate operation of resistive parallel plate cham-  
3011 bers”. In: *NIMA* 337 (1993), pp. 370–381.
- 3012 [31] I. Crotty et al. “Further studies of avalanche mode operation of resistive parallel plate cham-  
3013 bers”. In: *NIMA* 346 (1994), pp. 107–113.
- 3014 [32] R. Cardarelli et al. “Avalanche and streamer mode operation of resistive plate chambers”. In:  
3015 *NIMA* 382 (1996), pp. 470–474.
- 3016 [33] E. Cerron Zeballos et al. “A new type of resistive plate chamber: The multigap RPC”. In:  
3017 *NIMA* 374 (1996), pp. 132–135.
- 3018 [34] M.C.S. Williams. “The development of the multigap resistive plate chamber”. In: *Nucl. Phys.*  
3019 *B* 61 (1998), pp. 250–257.
- 3020 [35] H. Czyrkowski et al. “New developments on resistive plate chambers for high rate operation”.  
3021 In: *NIMA* 419 (1998), pp. 490–496.
- 3022 [36] P. Camarri et al. “Streamer suppression with SF<sub>6</sub> in RPCs operated in avalanche mode”. In:  
3023 *NIMA* 414 (1998), pp. 317–324.
- 3024 [37] E. Cerron Zeballos et al. “Effect of adding SF<sub>6</sub> to the gas mixture in a multigap resistive plate  
3025 chamber”. In: *NIMA* 419 (1998), pp. 475–478.
- 3026 [38] CERN. Geneva. LHC Experiments Committee. *ATLAS muon spectrometer: Technical design*  
3027 *report*. Tech. rep. CERN-LHCC-97-22. ATLAS Collaboration, 1997.

## BIBLIOGRAPHY

---

- 3028 [39] CERN. Geneva. LHC Experiments Committee. *ALICE Time-Of-Flight system (TOF) : Technical Design Report*. Tech. rep. CERN-LHCC-2000-012. ALICE Collaboration, 2000.
- 3029
- 3030 [40] The CALICE collaboration. “First results of the CALICE SDHCAL technological proto-  
3031 type”. In: *JINST* 11 (2016).
- 3032 [41] PoS, ed. *Density Imaging of Volcanoes with Atmospheric Muons using GRPCs*. International  
3033 Europhysics Conference on High Energy Physics - HEP 2011. 2011.
- 3034 [42] C. Lippmann. “Detector Physics of Resistive Plate Chambers”. PhD thesis. Johann Wolfgang  
3035 Goethe-Universität, 2003.
- 3036 [43] M. Abbrescia et al. “Properties of C2H2F4-based gas mixture for avalanche mode operation  
3037 of resistive plate chambers”. In: *NIMA* 398 (1997), pp. 173–179.
- 3038 [44] G. Battistoni et al. “Sensitivity of streamer mode to single ionization electrons”. In: *NIMA*  
3039 235 (1985), pp. 91–97.
- 3040 [45] W. Riegler. “Induced signals in resistive plate chambers”. In: *NIMA* 491 (2002), pp. 258–271.
- 3041 [46] E. Cerron Zeballos et al. “A comparison of the wide gap and narrow gap resistive plate  
3042 chamber”. In: *NIMA* 373 (1996), pp. 35–42.
- 3043 [47] M. Abbrescia et al. “Cosmic ray tests of double-gap resistive plate chambers for the CMS  
3044 experiment”. In: *NIMA* 550 (2005), pp. 116–126.
- 3045 [48] ALICE Collaboration. “A study of the multigap RPC at the gamma irradiation facility at  
3046 CERN”. In: *NIMA* 490 (2002), pp. 58–70.
- 3047 [49] B. Bonner et al. “A multigap resistive plate chamber prototype for time-of-flight for the STAR  
3048 experiment at RHIC”. In: *NIMA* 478 (2002), pp. 176–179.
- 3049 [50] S. Yang et al. “Test of high time resolution MRPC with different readout modes for the  
3050 BESIII upgrade”. In: *NIMA* 763 (2014), pp. 190–196.
- 3051 [51] A. Akindinov et al. “RPC with low-resistive phosphate glass electrodes as a candidate for  
3052 the CBM TOF”. In: *NIMA* 572 (2007), pp. 676–681.
- 3053 [52] JINST, ed. *Development of the MRPC for the TOF system of the MultiPurpose Detector*.  
3054 RPC2016: XII Workshop on Resistive Plate Chambers and Related Detectors. 2016.
- 3055 [53] M.C.S. Williams. “Particle identification using time of flight”. In: *Journal of Physics G* 39  
3056 (2012).
- 3057 [54] A. Alici et al. “Aging and rate effects of the Multigap RPC studied at the Gamma Irradiation  
3058 Facility at CERN”. In: *NIMA* 579 (2007), pp. 979–988.
- 3059 [55] M. Abbrescia et al. “The simulation of resistive plate chambers in avalanche mode: charge  
3060 spectra and efficiency”. In: *NIMA* 431 (1999), pp. 413–427.
- 3061 [56] M. Abbrescia et al. “Study of long-term performance of CMS RPC under irradiation at the  
3062 CERN GIF”. In: *NIMA* 533 (2004), pp. 102–106.
- 3063 [57] H.C. Kim et al. “Quantitative aging study with intense irradiation tests for the CMS forward  
3064 RPCs”. In: *NIMA* 602 (2009), pp. 771–774.
- 3065 [58] S. Agosteo et al. “A facility for the test of large-area muon chambers at high rates”. In: *NIMA*  
3066 452 (2000), pp. 94–104.
- 3067 [59] PoS, ed. *CERN GIF ++ : A new irradiation facility to test large-area particle detectors for*  
3068 *the high-luminosity LHC program*. Vol. TIPP2014. 2014, pp. 102–109.
- 3069 [60] A. Fagot. *GIF++ DAQ v4.0*. 2017. URL: [https://github.com/afagot/GIF\\_DAQ](https://github.com/afagot/GIF_DAQ).
- 3070 [61] CAEN. *Mod. V1190-VX1190 A/B, 128/64 Ch Multihit TDC*. 14th ed. 2016.

---

## BIBLIOGRAPHY

- 3071 [62] CAEN. *Mod. VI718 VME USB Bridge*. 9th ed. 2009.
- 3072 [63] W-Ie-Ne-R. *VME 6021-23 VXI*. 5th ed. 2016.
- 3073 [64] Wikipedia. *INI file*. 2017. URL: [https://en.wikipedia.org/wiki/INI\\_file](https://en.wikipedia.org/wiki/INI_file).
- 3074 [65] S. Carrillo A. Fagot. *GIF++ Offline Analysis v6*. 2017. URL: [https://github.com/afagot/GIF\\_OfflineAnalysis](https://github.com/afagot/GIF_OfflineAnalysis).
- 3075