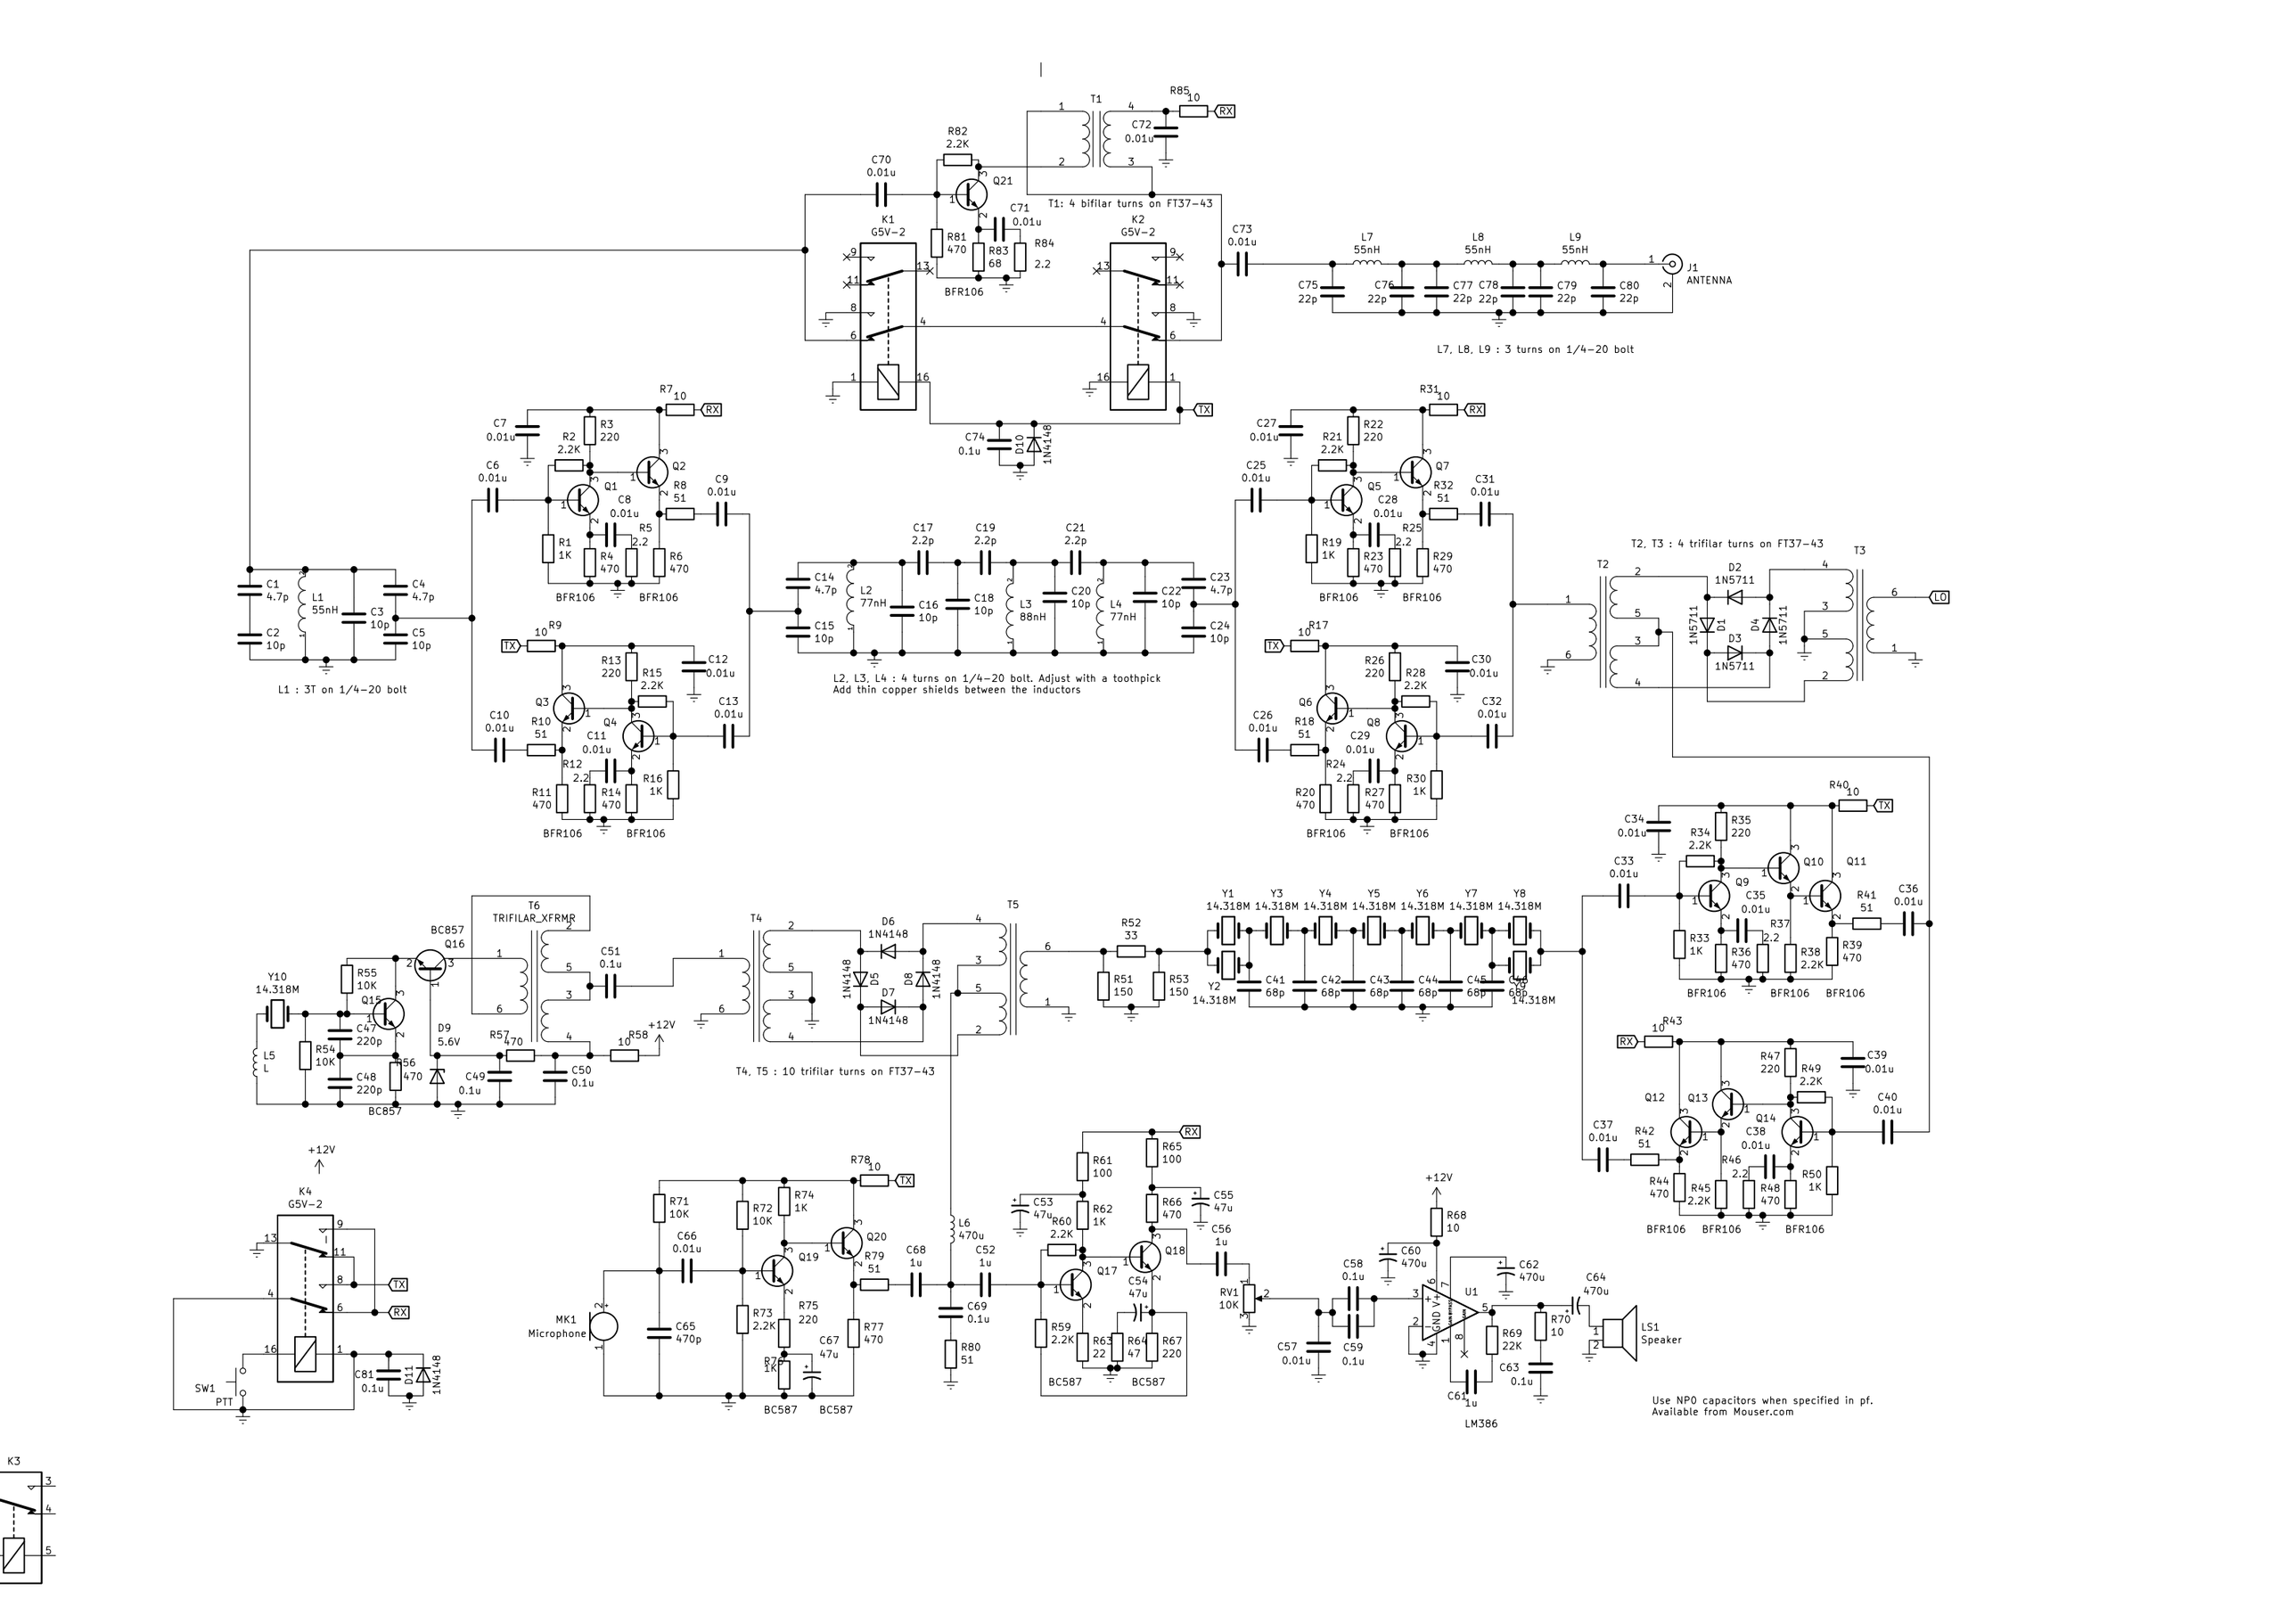
T1: 4 bifilar turns on FT37-43
L7, L8, L9 : 3 turns on 1/4-20 bolt
J1 ANTENNA
L1 : 3T on 1/4-20 bolt
L2, L3, L4 : 4 turns on 1/4-20 bolt. Adjust with a toothpick
Add thin copper shields between the inductors
T2, T3 : 4 trifilar turns on FT37-43
T4, T5 : 10 trifilar turns on FT37-43
T6 TRIFILAR_XFRMR
K1 G5V-2
K2 G5V-2
K4 G5V-2
K3
MK1 Microphone
LS1 Speaker
SW1 PTT
LM386
Use NPO capacitors when specified in pf.
Available from Mouser.com