

### 20.3mm (0.8INCH) DUAL DIGIT NUMERIC DISPLAY

Part Number: DC08-11GWA

Green

#### **Features**

- 0.8 INCH DIGIT HEIGHT.
- EXCELLENT CHARACTER APPEARANCE.
- EASY MOUNTING ON P.C. BOARDS OR SOCKETS.
- TWO DIGIT PACKAGE SIMPLIFIES ALIGNMENTS


& ASSEMBLY.

- I.C. COMPATIBLE.
- MECHANICALLY RUGGED.
- STANDARD : GRAY FACE, WHITE SEGMENT.
- RoHS COMPLIANT.

#### Description

The Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.

#### **Package Dimensions& Internal Circuit Diagram**

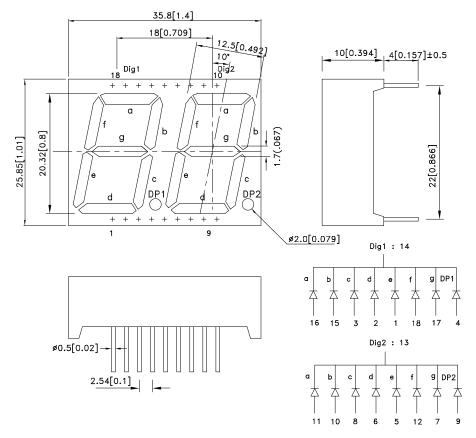

Notes

1. All dimensions are in millimeters (inches), Tolerance is ±0.25(0.01")unless otherwise noted.

2. Specifications are subject to change without notice.





 SPEC NO: DSAD2351
 REV NO: V.8
 DATE: MAY/24/2007
 PAGE: 1 OF 4

 APPROVED: WYNEC
 CHECKED: Joe Lee
 DRAWN: Y.L.LI
 ERP: 1302000327

# Kingbright

#### **Selection Guide**

Part No.	Dice	Lens Type	lv (ucd) [1] @ 10mA		Description
		,,	Min.	Тур.	•
DC08-11GWA	Green (GaP)	WHITE DIFFUSED	3000	13000	Common Cathode,Rt. Hand Decimal.

#### Note:

### Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Green	565		nm	IF=20mA
λD [1]	Dominant Wavelength	Green	568		nm	IF=20mA
Δλ1/2	Spectral Line Half-width	Green	30		nm	IF=20mA
С	Capacitance	Green	15		pF	VF=0V;f=1MHz
VF [2]	Forward Voltage	Green	2.2	2.5	V	IF=20mA
lR	Reverse Current	Green		10	uA	V <sub>R</sub> =5V

#### Notes:

### Absolute Maximum Ratings at TA=25°C

Parameter	Green	Units	
Power dissipation	62.5	mW	
DC Forward Current	25	mA	
Peak Forward Current [1]	140	mA	
Reverse Voltage	5	V	
Operating / Storage Temperature	erating / Storage Temperature -40°C To +85°C		
Lead Solder Temperature[2] 260°C For 3-5 Seconds			


1. 1/10 Duty Cycle, 0.1ms Pulse Width.
2. 2mm below package base.

SPEC NO: DSAD2351 **REV NO: V.8** DATE: MAY/24/2007 PAGE: 2 OF 4 APPROVED: WYNEC **CHECKED:** Joe Lee DRAWN: Y.L.LI ERP: 1302000327

<sup>1.</sup> Luminous intensity/ luminous Flux: +/-15%.


<sup>1.</sup>Wavelength: +/-1nm. 2. Forward Voltage: +/-0.1V.


## **Kingbright**

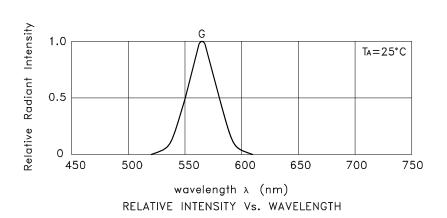



#### Green

#### **DC08-11GWA**










SPEC NO: DSAD2351 APPROVED: WYNEC REV NO: V.8 CHECKED: Joe Lee DATE: MAY/24/2007 DRAWN: Y.L.LI PAGE: 3 OF 4 ERP: 1302000327

## **Kingbright**

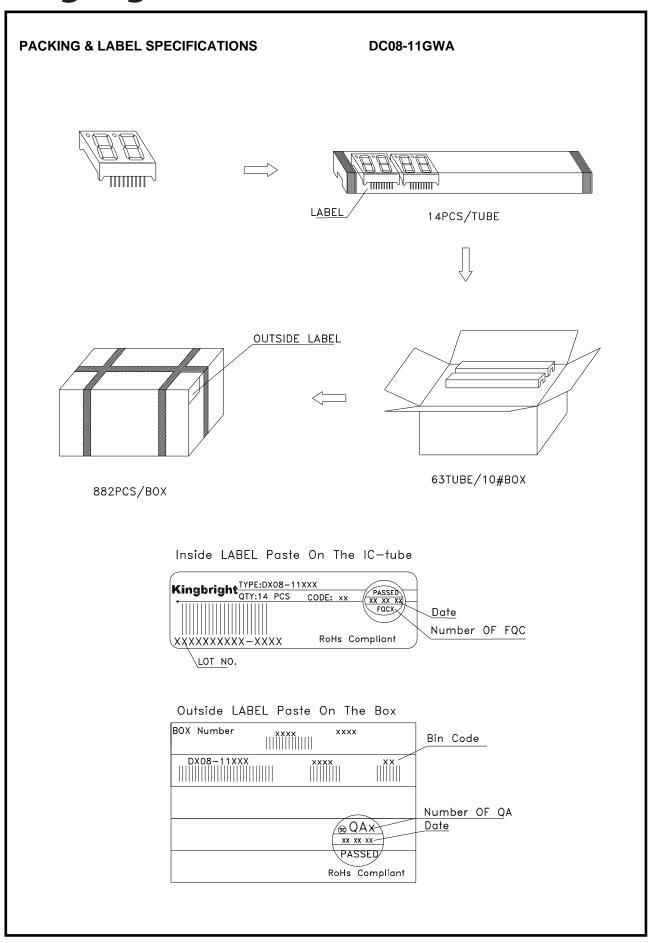

SPEC NO: DSAD2351 APPROVED: WYNEC REV NO: V.8 CHECKED: Joe Lee DATE: MAY/24/2007 DRAWN: Y.L.LI PAGE: 4 OF 4 ERP: 1302000327