Changing rho has a different effect for different stacks

Every comparison uses the current 90-step project geometry. Restricted stacks include twist steps 3 and 4 only.

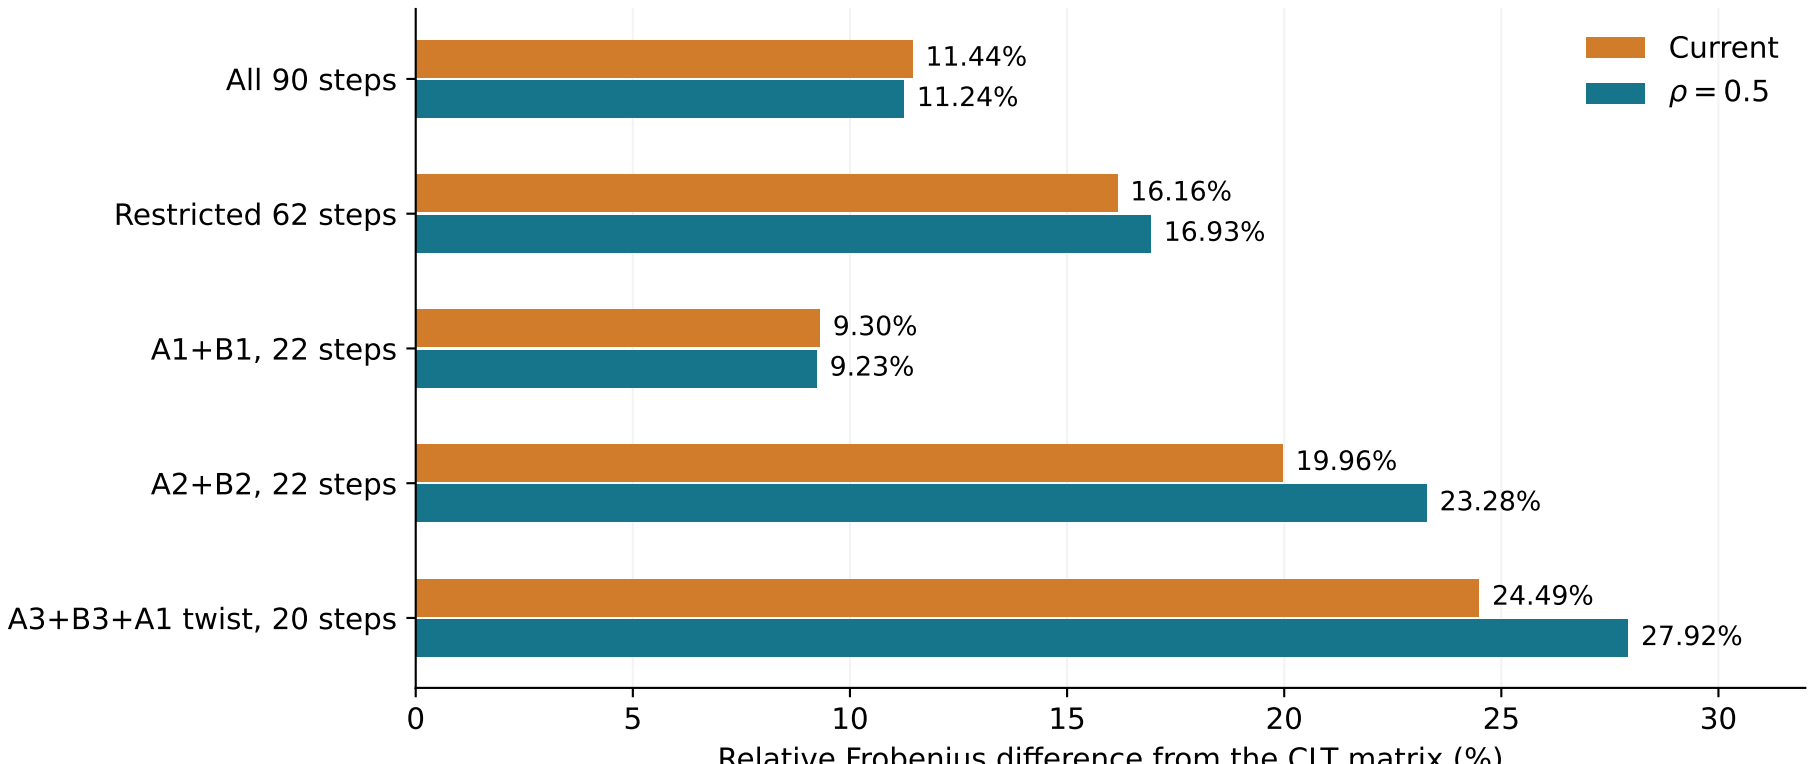

Difference = 100 ||D - D_CLT||_F / ||D_CLT||_F, in the same material frame and engineering-curvature convention.