


	AEROSPACE STANDARD	
	WRENCHING CONFIGURATION, BI-HEXAGONAL (12 POINT) DRIVE, DESIGN STANDARD FOR	
AS870 SHEET 1 OF 3		REV. E

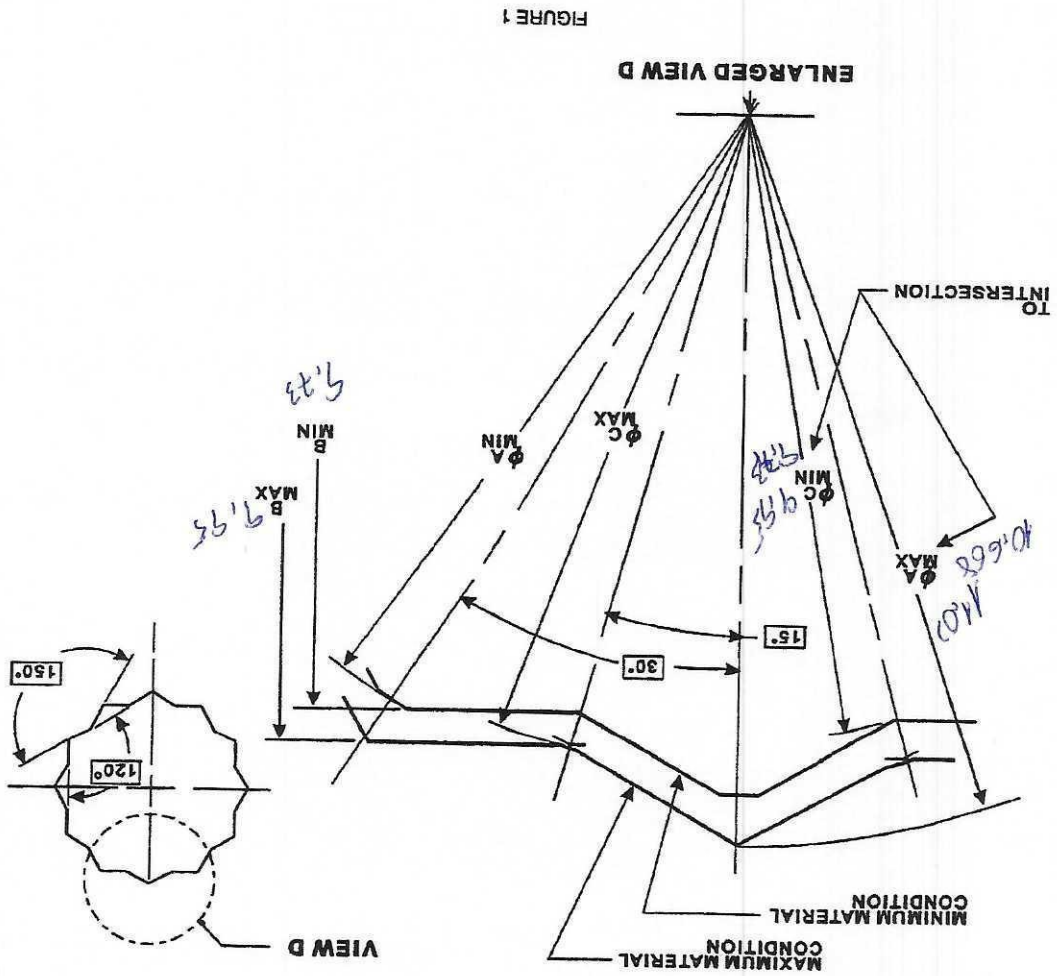

REV. E	SHEET 2 OF 3	AS870	DESIGN STANDARD FOR WRENCHING CONFIGURATION, BI-HEXAGONAL (12 POINT) DRIVE, AEROSPACE STANDARD	SAE INTERNATIONAL

NO.	WRENCHING ELEMENT SIZE	MAXIMUM MATERIAL SIZE Ø A MAX /1/	MAXIMUM MATERIAL SIZE Ø B MAX /2/	MAXIMUM MATERIAL SIZE Ø C MAX /3/	MINIMUM MATERIAL SIZE Ø A MIN /4/	MINIMUM MATERIAL SIZE Ø B MIN /5/	MINIMUM MATERIAL SIZE Ø C MIN /6/
06	.1875	.2182	.189	.197	.209	.184	.1905
07	.2188	.2540	.220	.229	.244	.215	.2226
08	.2500	.2898	.251	.262	.278	.245	.2536
09	.2812	.3256	.282	.294	.313	.276	.2857
10	.3125	.3614	.313	.326	.348	.307	.3178
11	.3438	.3984	.345	.360	.385	.339	.3510
12	.3750	.4342	.376	.392	.420	.370	.3831
14	.4375	.5069	.439	.458	.490	.432	.4472
16	.5000	.5797	.502	.524	.562	.495	.5125
18	.5625	.6513	.564	.588	.632	.557	.5766
20	.6250	.7240	.627	.654	.703	.617	.6388
22	.6875	.7967	.690	.720	.775	.680	.7040
24	.7500	.8683	.752	.784	.844	.740	.7661
25	.7812	.9041	.783	.817	.879	.771	.7982
26	.8125	.9399	.814	.849	.914	.802	.8303
28	.8750	1.0127	.877	.915	.986	.865	.8955
30	.9375	1.0854	.940	.980	1.058	.928	.9607
32	1.0000	1.1570	1.002	1.045	1.129	.990	1.0249
34	1.0625	1.2286	1.064	1.110	1.199	1.052	1.0891
36	1.1250	1.3013	1.127	1.175	1.271	1.115	1.1543
38	1.1875	1.3741	1.190	1.241	1.343	1.178	1.2196
40	1.2500	1.4467	1.252	1.306	1.409	1.236	1.2796
42	1.3125	1.5173	1.314	1.371	1.480	1.298	1.3438
44	1.3750	1.5900	1.377	1.436	1.552	1.361	1.4090
46	1.4375	1.6628	1.440	1.502	1.623	1.424	1.4742
48	1.5000	1.7344	1.502	1.567	1.694	1.486	1.5384
50	1.5625	1.8071	1.565	1.632	1.766	1.549	1.6036
52	1.6250	1.8787	1.627	1.697	1.837	1.611	1.6678
54	1.6875	1.9514	1.690	1.763	1.908	1.674	1.7331
56	1.7500	2.0230	1.752	1.828	1.979	1.736	1.7972
58	1.8125	2.0958	1.815	1.893	2.051	1.799	1.8625
60	1.8750	2.1674	1.877	1.956	2.122	1.861	1.9266
62	1.9375	2.2401	1.940	2.023	2.193	1.924	1.9919
64	2.0000	2.3117	2.002	2.088	2.262	1.984	2.0540
66	2.0625	2.3833	2.064	2.153	2.332	2.046	2.1182
68	2.1250	2.4560	2.127	2.218	2.404	2.109	2.1834
70	2.1875	2.5288	2.190	2.284	2.476	2.172	2.2486
72	2.2500	2.6004	2.252	2.349	2.547	2.234	2.3128
74	2.3125	2.6720	2.314	2.414	2.617	2.296	2.3770
76	2.3750	2.7447	2.377	2.479	2.689	2.359	2.4422

TABLE 1