


PCB (V1)

STM32CubeMX

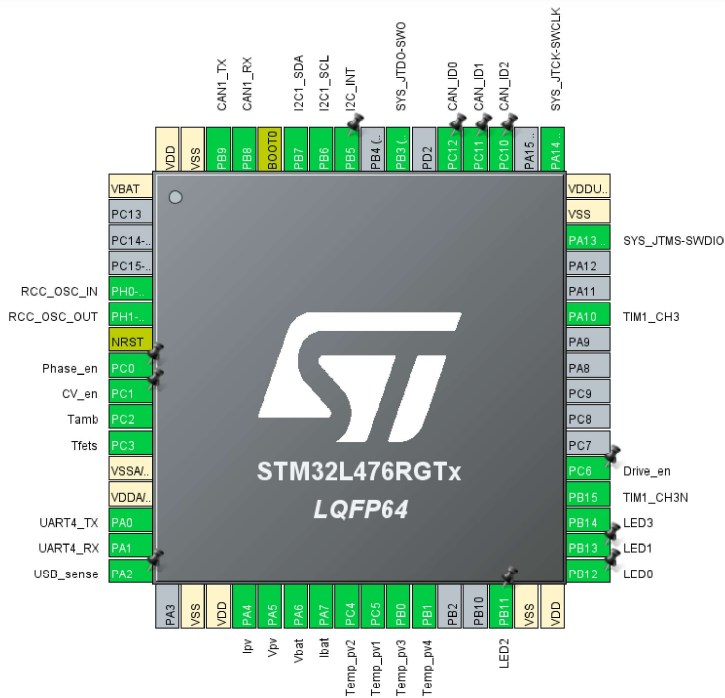

For detailed design thinking and results go to: [GitHub](#)

COMPONENT LABELS


U: ICs
J: Connectors
D: Diode/LED
Rxyy: Resistor (x=page number, yy: component number)
Cxyy: Capacitor (x=page number, yy: component number)

Differences between V1 and V1.1:

- Solved UARTH signals swapped;
- Usb working;
- 3D model correction of main connector;
- 5V in programming port;
- 5V in or gate;
- Label sizes;
- Added diodes to power electronics circuit (increased eff);
- Added diodes in DCDCs for reverse current protection;
- Reduced pcb cost;
- Added FANs connector;

Differences between V1.1 and V1.2:

- Added capacitors to filter the high frequency noise generated by the switching converter;
- Changed the placement of the filters to reduce measurements noise;
- Fixed the missing 5V label in the flash connector;
- Changed the led labels;
- 0 Ohm resistors in current sensor circuit removed;
- Added a capacitor for Tfet measurement

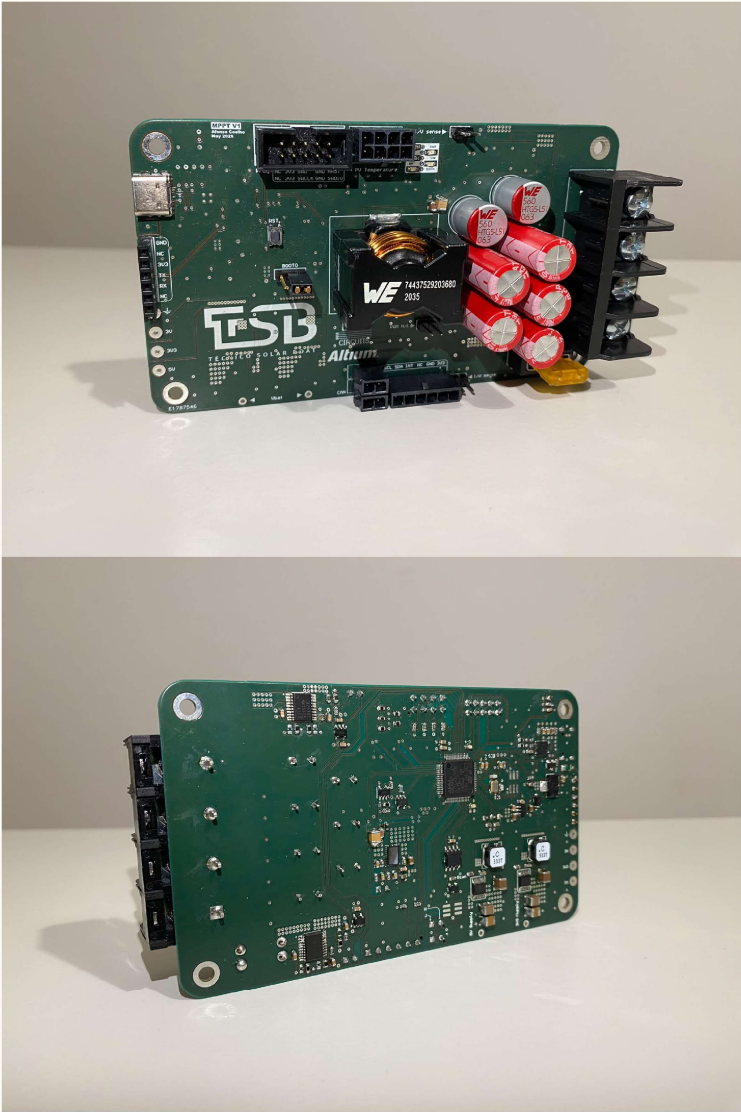

Title: Additional Information

Project: MPPT V1.2 Afonso PrjPeb Version: 3

Date: 9/26/2026 Author: Afonso Coelho

Company: Técnico Solar Boat

File: Info.SchDoc

Page: 10 of 10

