


CC-CV Charging Profile

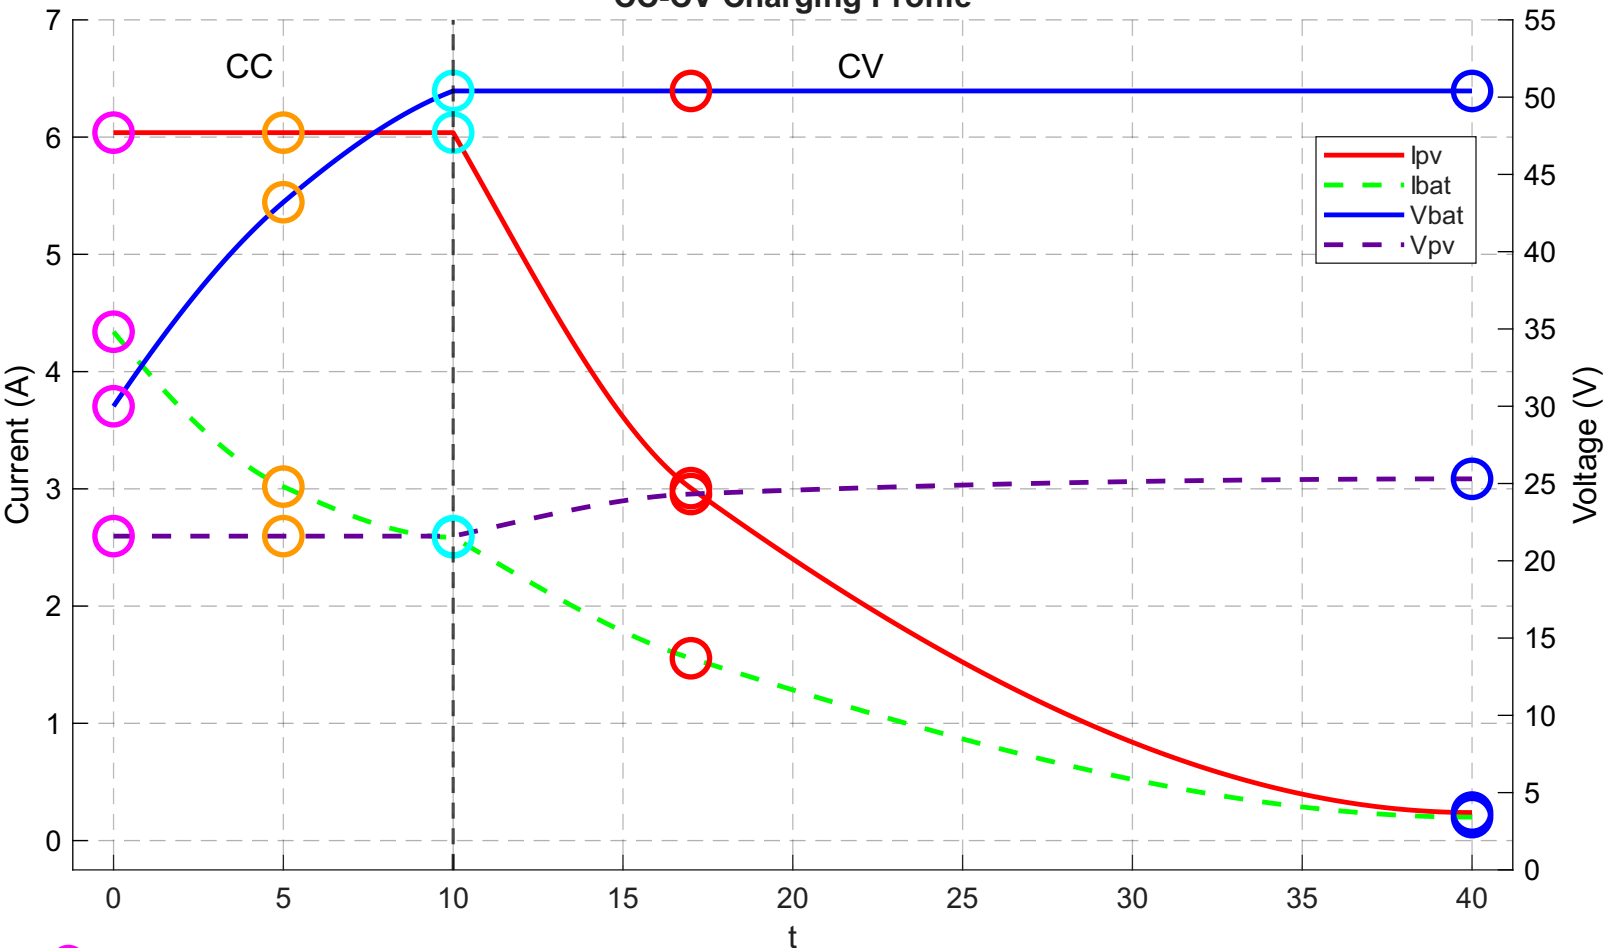

Case 1: $V_{bat} = 30$ V, $I_{bat} = 4.34$ A, $V_{pv} = 21.595$ V, $I_{pv} = 6.038$ A.

Case 2: $V_{bat} = 43.2$ V, $I_{bat} = 3.019$ A, $V_{pv} = 21.595$ V, $I_{pv} = 6.038$ A.

Case 3: $V_{bat} = 50.4$ V, $I_{bat} = 2.587$ A, $V_{pv} = 21.595$ V, $I_{pv} = 6.038$ A.

Case 4: $V_{bat} = 50.4$ V, $I_{bat} = 1.555$ A, $V_{pv} = 24.320$ V, $I_{pv} = 3.006$ A.

Case 5: $V_{bat} = 50.4$ V, $I_{bat} = 0.2$ A, $V_{pv} = 25.301$ V, $I_{pv} = 0.239$ A.