


Pout = 130.42 W | Losses = 1.98 W | Efficiency = 98.50%

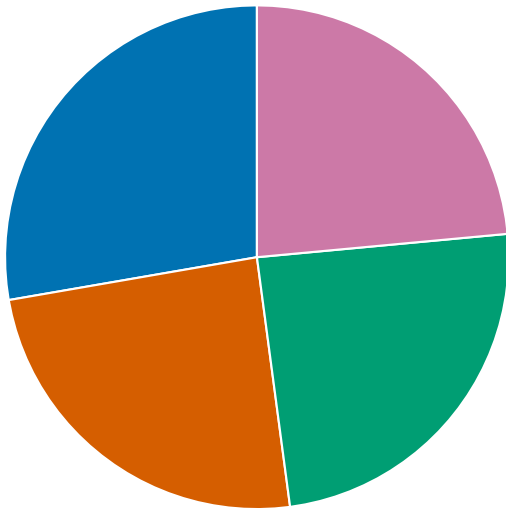

■ Inductor (AC + DC) 0.549 W (27.7%)

DC 0.378 W (19.1%)

AC 0.171 W (8.6%)

■ Auxiliary electronics 0.483 W (24.4%)

3.3 V 0.279 W (14.1%)

5 V 0.154 W (7.8%)

Gate driver 0.032 W (1.6%)

Current sensor 0.018 W (0.9%)

■ Transistors 0.483 W (24.4%)

HS conduction 0.095 W (4.8%)

LS conduction 0.095 W (4.8%)

HS switching 0.110 W (5.6%)

LS switching 0.116 W (5.9%)

Dead time 0.066 W (3.3%)

■ Capacitors 0.466 W (23.5%)

Input ESR 0.101 W (5.1%)

Output ESR 0.365 W (18.4%)