



# UNIQUE VACUUM SOLUTIONS

## IVSVP Single Stage Vacuum Pumps



### IVSVP- Series

Ultimate Vacuum: 0.1mbar to 0.08mbar


### Full Application of vacuum technology

Vacuum technology plays critical role in industrial field. We always follow closely the application of vacuum pump in different industries and know what our customers most concern: good at pumping certain condensable gas no oil exhaust or oil leakage, no emulsification of pump oil and guarantee of high reliability

### IVSVP Pump Salient Features:

- Integrated anti-sucking back valve.
- Multiple shifts design for gas ballast to meet customer demand of ultimate vacuum and capability of vapour evacuation.
- German-made oil seal effectively prevents oil leakage.
- High quality oil mist filters contribute to avoid oil exhaust and get a longer service life.
- Compact design.
- Integral exhaust filter (discharge air 99% oil free)
- Very low noise and temperature.

### Flow Rate Characteristics:

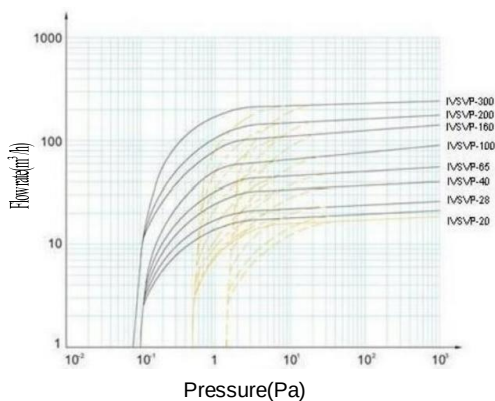

## UNIQUE VACUUM SOLUTIONS

E: nagendrautpath@uniquevacuum.co.in

M: +91 9886726920

P: 080-28367059

A: Unique Vacuum Solutions, #57 8th cross 1st b cross, Doddanna Industrial Estate, Vishwaneedam Post, Peenya 2nd stage, Bengaluru 560091

[www.uniquevacuum.co.in](http://www.uniquevacuum.co.in)



# UNIQUE VACUUM SOLUTIONS

## Technical specifications:

| MODEL                   |                     |                   | IVSVP-020        | IVSVP-028        | IVSVP-040 | IVSVP-065 | IVSVP-100 | IVSVP-160          | IVSVP-200          | IVSVP-300           |
|-------------------------|---------------------|-------------------|------------------|------------------|-----------|-----------|-----------|--------------------|--------------------|---------------------|
| Displacement Speed      |                     | m <sup>3</sup> /h | 20               | 28               | 40        | 65        | 100       | 160                | 200                | 300                 |
| Ultimate Pressure       | Without Gas Ballast | mbar              | /                | ≤0.1             | ≤0.1      | ≤0.1      | ≤0.1      | ≤8x10 <sup>2</sup> | ≤8x10 <sup>2</sup> | ≤8x10 <sup>-2</sup> |
| Ultimate Total Pressure | With Gas Ballast 1  | mbar              | ≤0.5             | ≤0.5             | ≤0.5      | ≤0.5      | ≤0.5      | ≤0.5               | ≤0.5               | ≤0.5                |
|                         | With Gas Ballast 2  | mbar              | /                | ≤1.5             | ≤1.5      | ≤1.5      | ≤1.5      | ≤1.5               | ≤1.5               | ≤1.5                |
| Water Vapour Tolerance  | With Gas Ballast 1  | mbar              | 15               | 15               | 15        | 15        | 15        | 30                 | 30                 | 30                  |
|                         | With Gas Ballast 2  | mbar              | /                | 30               | 30        | 30        | 30        | 50                 | 50                 | 50                  |
| Noise Level             |                     | dB                | ≤65              | ≤58              | ≤59       | ≤61       | ≤62       | ≤70                | ≤70                | ≤71                 |
| Power Supply            |                     |                   | Single / 3-Phase | Single / 3-Phase | 3-Phase   | 3-Phase   | 3-Phase   | 3-Phase            | 3-Phase            | 3-Phase             |
| Power Rating            |                     | KW                | 0.75             | 1.1              | 1.1       | 1.5       | 2.2       | 4                  | 4                  | 5.5                 |
| Motor Speed (50Hz)      |                     | rpm               | 3000             | 1440             | 1440      | 1440      | 1440      | 1440               | 1440               | 1440                |
| Ambient Temperature     |                     | °C                | 10~40            | 10~40            | 10~40     | 10~40     | 10~40     | 10~40              | 10~40              | 10~40               |
| Oil Capacity            |                     | L                 | 0.5              | 1                | 2         | 2         | 2         | 5~7                | 5~7                | 7~9                 |
| Level of Protection     |                     |                   | /                | IP54             | P54       | IP54      | IP54      | IP54               | IP54               | IP54                |
| Intake and Exhaust      |                     |                   | G3/4"            | G3/4"            | G1 1/4"   | G1 1/4"   | G1 1/4"   | G2"                | G2"                | G2"                 |
| Weight                  | Kg                  |                   | 19.5             | 30               | 39.2      | 42.5      | 72        | 132                | 132                | 205                 |

## UNIQUE VACUUM SOLUTIONS

E: nagendrautpath@uniquevacuum.co.in

M: +91 9886726920

P: 080-28367059

A: Unique Vacuum Solutions, #57 8th cross 1st b cross, Doddanna Industrial Estate, Vishwaneedam Post, Peenya 2nd stage, Bengaluru 560091

[www.uniquevacuum.co.in](http://www.uniquevacuum.co.in)