

IVRDP Dual stage Vacuum pumps



IVRDP-series
Ultimate Vacuum: $<4 \times 10^{-4}$ Torr


Salient Features:

- Perfect performance with high ultimate vacuum $<4 \times 10^{-4}$
- Two-Shift adjustable gas ballast valve satisfies different requirements of condensable vapour (such as water vapour) to be exhausted out of pump in different processes.
- Dual protection of oil anti-sucking back ensures vacuum system from oil flow back when pump stops running and needs to be easily restarted.
- Forced oil circulation system consisted of oil pump and constant pressure oil supply mechanism ensures stable running of the pump.
- Less components are used, easy to maintain and repair.
- Very low noise and temperature.


Technical Specification:

MODEL		IVRDP- 4	IVRDP- 8	IVRDP-16	IVRDP-24	IVRDP-30	IVRDP-48	IVRDP-65
Displacement Speed m^3/h (L/s)	50Hz	4(1.1)	8(2.2)	16(4.4)	24(6.6)	30(8.3)	48(13.3)	65(18)
Ultimate Partial Pressure Gas Ballast close (Pa)		5×10^{-2}	5×10^{-2}	4×10^{-2}	4×10^{-2}	4×10^{-2}	4×10^{-2}	4×10^{-2}
Ultimate Total Pressure Gas Ballast close (Pa)		5×10^{-1}	5×10^{-1}	4×10^{-1}	4×10^{-1}	4×10^{-1}	4×10^{-1}	4×10^{-1}
Ultimate Total Pressure Gas Ballast Open (Pa)		3	3	8×10^{-1}	8×10^{-1}	8×10^{-1}	8×10^{-1}	8×10^{-1}
Power Supply		Single / 3-Phase	Single / 3-Phase	Single / 3-Phase	Single / 3-Phase	Single / 3-Phase	3-Phase	3-Phase
Power Rating (kw)		0.4/0.37	0.4/0.37	0.75/0.55	1.1/0.75	1.1	1.5	2.2
Intake and Exhaust DN (mm)		KF16/25	KF16/25	KF25	KF25/40	KF25/40	KF40	KF40
Oil Capacity (L)		0.6~1.0	0.6~1.0	0.9~1.5	1.3~2.0	1.3~2.0	3.3~4.5	3.3~4.5
Motor Speed (rpm)	50Hz	1440	1440	1440	1440	1440	1440	1440
Ambient Temperature (°C)		5~40	5~40	5~40	5~40	5~40	5~40	5~40
Noise Level (dB)		≤ 56	≤ 56	≤ 58	≤ 58	≤ 58	≤ 62	≤ 62
Weight (kg)		19	21	30	35	43	62	65

Flow Rate Characteristics:

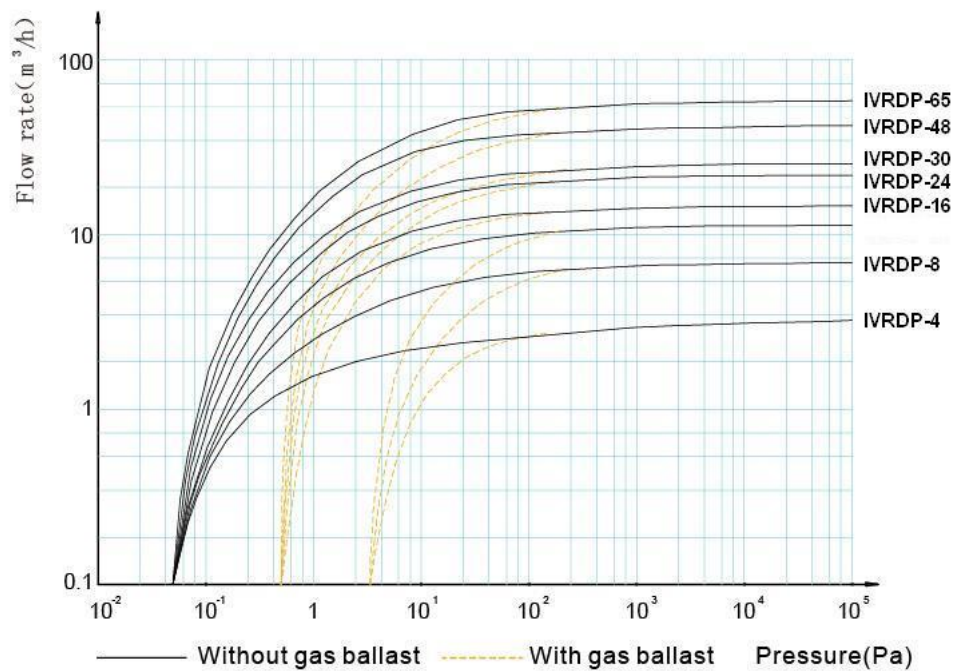

Dimensions:

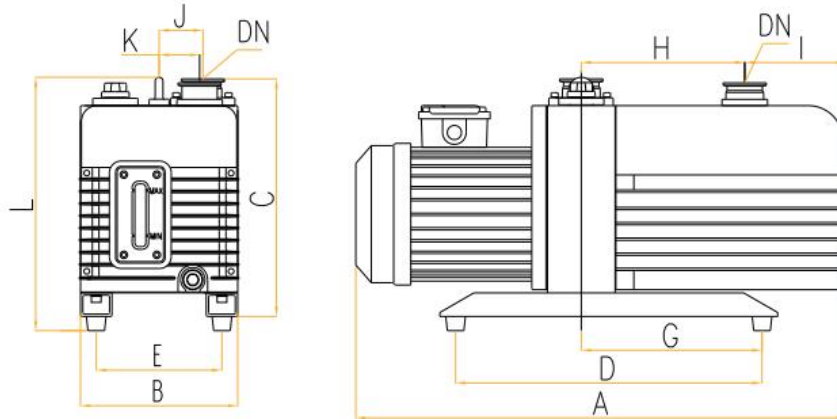

Model	A	B	C	D	E	G	H	I	J	K	L	DN
IVRDP-4	460	144	207	210	110	126	154	45	45	34	/	KF16/25
IVRDP-8	460	144	207	210	110	126	154	45	45	34	/	KF16/25
IVRDP-16	520	188	272	320	148	160	165	69	59	38	295	KF25
IVRDP-24	560	188	272	320	148	160	185	82	59	47	295	KF25/40
IVRDP-30	560	188	272	320	148	160	185	82	59	47	295	KF25/40
IVRDP-48	730	234	358	396	190	200	223	157	69	55	390	KF40
IVRDP-65	730	234	358	396	190	200	223	157	69	55	390	KF40

Contact Us:



INDO VACUUM TECHNOLOGIES PVT.LTD.

R.S. No.609/2B, & 609/2D, Machhe Industrial Area,
Machhe, Belgaum – 590014, Karnataka (India).

Tel: +91-0831-2443717 / 3776, E-mail: works@indovacuum.com