

Unique Vacuum Solutions

IVSVP Single stage Vacuum pumps



IVSVP-series

Ultimate Vacuum: ≤ 0.1 mbar to ≤ 0.08 mbar

Full Application of vacuum technology

Vacuum technology plays critical role in industrial field. We always follow closely the application of vacuum pump in different industries and know what our customers most concern: good at pumping certain condensable gas no oil exhaust or oil leakage, no emulsification of pump oil and guarantee of high reliability.


IVSVP Pump Salient Features:

- Integrated anti-sucking back valve.
- Multiple shifts design for gas ballast to meet customer demand of ultimate vacuum and capability of vapour evacuation.
- German-made oil seal effectively prevents oil leakage.
- High quality oil mist filters contribute to avoid oil exhaust and get a longer service life.
- Compact design.
- Integral exhaust filter (discharge air 99% oil free)
- Very low noise and temperature.


Technical specifications:

MODEL			IVSVP-020	IVSVP-028	IVSVP-040	IVSVP-065	IVSVP-100	IVSVP-160	IVSVP-200	IVSVP-300
Displacement Speed		m³/h	20	28	40	65	100	160	200	300
Ultimate Pressure	Without Gas Ballast	mbar	/	≤0.1	≤0.1	≤0.1	≤0.1	≤8x10 ⁻²	≤8x10 ⁻²	≤8x10 ⁻²
Ultimate Total Pressure	With Gas Ballast 1	mbar	≤0.5	≤0.5	≤0.5	≤0.5	≤0.5	≤0.5	≤0.5	≤0.5
	With Gas Ballast 2	mbar	/	≤1.5	≤1.5	≤1.5	≤1.5	≤1.5	≤1.5	≤1.5
Water Vapour Tolerance	With Gas Ballast 1	mbar	15	15	15	15	15	30	30	30
	With Gas Ballast 2	mbar	/	30	30	30	30	50	50	50
Noise Level		dB	≤65	≤58	≤59	≤61	≤62	≤70	≤70	≤71
Power Supply		--	Single / 3-Phase	Single / 3-Phase	3-Phase	3-Phase	3-Phase	3-Phase	3-Phase	3-Phase
Power Rating		KW	0.75	1.1	1.1	1.5	2.2	4	4	5.5
Motor Speed (50Hz)		rpm	3000	1440	1440	1440	1440	1440	1440	1440
Ambient Temperature		°C	10~40	10~40	10~40	10~40	10~40	10~40	10~40	10~40
Oil Capacity		L	0.5	1	2	2	2	5~7	5~7	7~9
Level of Protection			/	IP54	IP54	IP54	IP54	IP54	IP54	IP54
Intake and Exhaust			G3/4"	G3/4"	G1 1/4"	G1 1/4"	G1 1/4"	G2"	G2"	G2"
Weight		Kg	19.5	30	39.2	42.5	72	132	132	205

Flow Rate Characteristics:

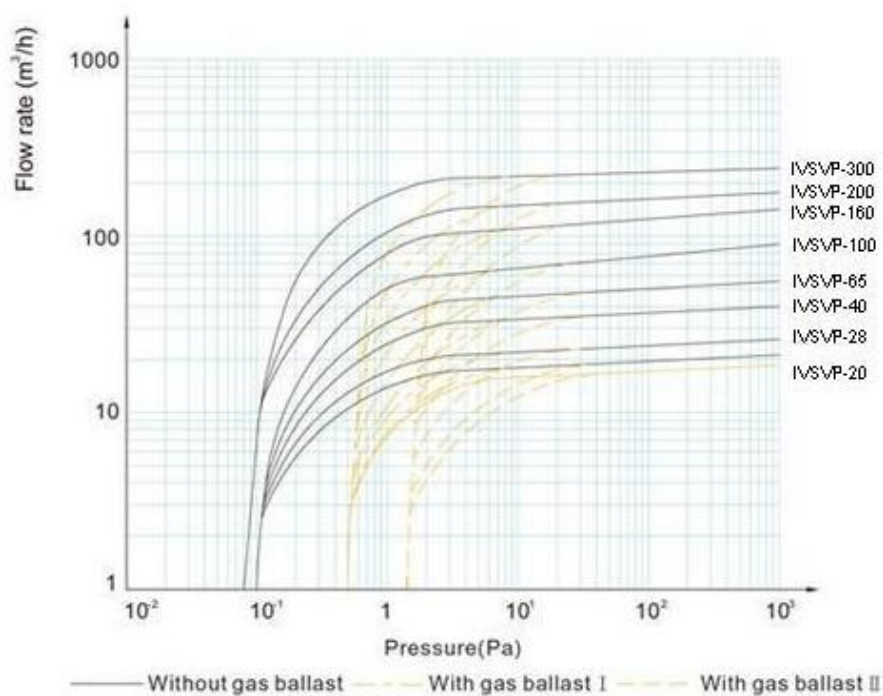

Dimensions:

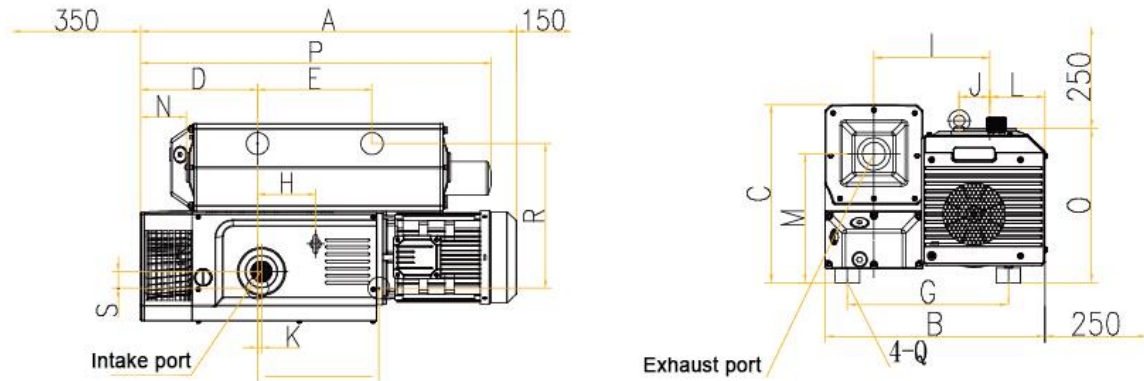

Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	Intake Port	Exhaust Port
IVSVP-020	317	249	219	72	140	110.5	131	/	127.5	/	14	72	157	17	184	303	M8	125.5	5.3	G1/2" G3/4"	/
IVSVP-028	496	268	248	112	220	300	190	108	146	25	20	80	182	27	204	392	M6	194	35	G3/4"	G3/4"
IVSVP-040	555	304	268	149	215	200	235	58	179	51	5	72	203	33	252	464	M8	235	33	G1" 1/4	G1" 1/4
IVSVP-065	555	311	268	149	215	200	254	58	189	51	5	72	203	33	252	464	M8	242	33	G1" 1/4	G1" 1/4
IVSVP-100	703	406	286	165	225	225	320	131	226	42	27	91	220	61	280	578	M10	258	41	G1" 1/4	G1" 1/4
IVSVP-160/200	930	533	436	263	252	305	394	113	298	66	32	135	305	134	382	930	M10	394	45	G2"	G2"
IVSVP-300	1035	540	434	326	313	332	394	159	284	75	11	135	314	132	377	966	M10	394	45	G2"	G2"

Contact Us:



Unique Vacuum Solutions

#57, 8th cross, 1st B cross, Doddanna industrial area, vishwaneedam post, Peenya 2nd stage, Bangalore -560091

e mail: nagendrautpath@uniquevacuum.co.in, support@uniquevacuum.co.in

Mob: +91-9886726920, 080-28367059