

Intelligent Transportation Systems ITS - II

Andres Ladino - Angelo Furno

29/11/2018

Contents

ITS for Smart Mobility	5
Context	5
Projects	5
General Objectives	6
Project information	7
Deliverables	7
Reporting	7
1 Project 1: Signalized Traffic	9
Objectives	9
Description	9
Sources	13
2 Project 2: Vehicle Platooning	15
Objectives	15
Description	15
Sources	17
3 Project 4: Density Reconstruction	19
Sources	20
Reference	20

ITS for Smart Mobility

Context

Traffic congestion on urban roads is a problem of great interest nowadays since it strongly affects security and pollution. Workforce centralization, population and economic growth alongside with continuous urbanization are the main causes of traffic congestion. As cities strive to update/expand the current infrastructures the development of Information Technologies bring new possibilities as an alternative solution for transportation systems.

The current project aims to explore some of the new technologies used in the so called Intelligent Transportation Systems (ITS). Their objective is to study to a certain level of detail some of the new traffic management systems that will conduct new ways of transportation in the XXI century. The general idea is based on the fact that information collected by sensors within traffic networks or in-vehicles sensors can collect information regarding the traffic condition, perform estimation of unknown traffic states and decide on specific actions to modify this state.

Projects

Specially, in this case the project will be focused in four main activities:

- **Traffic signal design:** This project aims to study how to optimally deal with the design of light cycles to optimize the traffic performance. Based on information collected by infrastructure



Figure 1: New connected vehicles <https://pixabay.com>.

based sensors the traffic state can be determined and specific decisions in terms on green/red light times can be dynamically adapted.

- **Vehicle Platooning:** New in-vehicle sensors create situations in which vehicles may exchange information to improve traffic conditions. This project aims to study control algorithms implemented in the V2V (Vehicle-vehicle) communication layer that can be used to design traffic decisions.
 - **Density reconstruction:** Sensors installed in traffic infrastructures provide information regarding the traffic state. Nevertheless the solution is not scalable to cover large cities due to the economical leverage required to deploy this technology. Algorithms to reconstruct traffic information may provide a promising future for accurately determine the traffic state of a city. The aim of this project is to study how multiple sources of information can be integrated to reconstruct traffic variables within a city.
-

General Objectives

- Identify new technologies implemented in the Intelligent Transportation Systems and investigate how these technologies are deployed in real systems.
- Define and determine adequate models that are suitable for deploying new ITS technologies.
- Develop specific solutions for ITS that can be tested under pre-defined scenarios.

Project information

Deliverables

The project is mainly composed in 3 phases.

1. **Problem identification & literature review:** This phases consists in:
 1. Identify particularly the problem under study, meaning the system to be controlled and the way it is assessed.
 2. Retrieve bibliographical information about the problem under study.
 3. Summarize the already proposed alternatives in the existing literature.

The main objective of this phase is to understand what are the main challenges when solving the specific project under study and to present in general ways how this problem has been solved.

2. **Setting up a suitable model:** Once the problem has been identified the main objective is to precisely describe the traffic models that are suitable for the approach. For this phase the stages are divided as:
 1. Determine a specific traffic model that can be used for the corresponding situation
 2. Define the scenario in which the solution should be tested
 3. Pre establish parameters and requirements for the solution to be implemented.
3. **Experimental results:** Finally, the main objective is to perform a validation and solution for the problem under study. Several tools are provided for this purpose like micro/macro

Reporting

In order to fullfill the requirements for each phase each group should provide a report as follows:

- *Report 1:* Summarizes the results of the 1. Problem identification & literature review and 2. Setting up a suitable model. (***Due date: January 9th, 2018***)
- *Report 2:* Summarizes the results of the phase 3.Experimental results (***Due date: January 23rd, 2019***)

Chapter 1

Project 1: Signalized Traffic

The main objective of this project is to design *traffic light signal* controls in order to optimize particular traffic conditions. Traffic signals regularly pre-establish fixed values *red* or *green* for a particular intersection. In fact the behavior can be modeled as:

The relationship between the switched green/red time in a traffic light can be represented by a pulse signal (Figure 1.1). The red line in the figure represents the *duty cycle* which represents the fraction of time the light was in green (1) with respect to the total cycle time (60s). In this case, the main objective is to study traffic models that can model signalized intersections and design control laws.

Objectives

The main objective of this project is to:

1. Study the fundamental aspects of traffic signal control strategies.
2. Obtain and simulate a macroscopic traffic model for a urban network with traffic signals
3. Create and design control strategies applied via traffic signals in urban traffic networks.
4. Compare the behavior of fixed-time traffic signal polices and dynamic-time traffic signal polices.

Description

Task 1: Modeling

Check models for macroscopic networks: (Grandinetti, Canudas-de-wit, and Garin 2015), (Grandinetti, Garin, and Canudas-de-wit 2015), (Varaiya 2013). Determine the parameters required to model a road traffic network.

Context

Before implementing a real scenario in this phase we aim to describe the context of a virtual example. Consider the following traffic urban corridor which obeys a simplified version of the real arterial scenario.

The network of Figure 1.2 represents a regular corridor in a city like. The priority for this type of corridors is to maximize the priority of green time so the traffic does not get congested along the

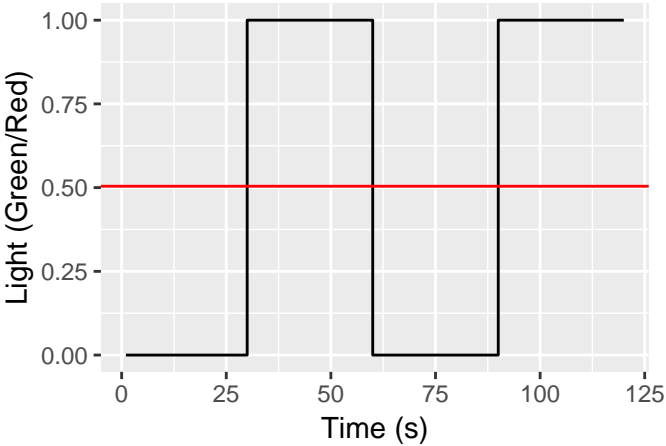


Figure 1.1: Traffic light signal example.

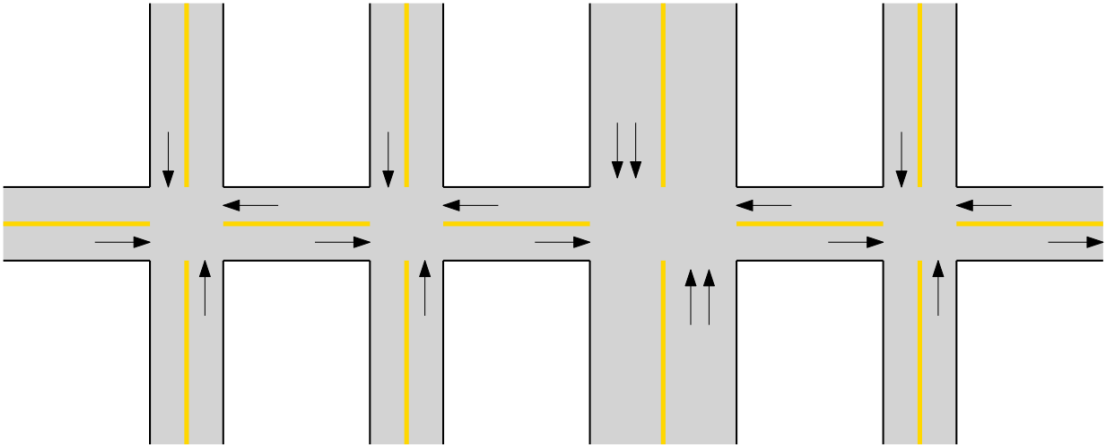


Figure 1.2: Example of traffic network.

network. It is important to highlight that for the proposed network

Questions

- Based on a literature review, determine current existing traffic models for signalized traffic networks.
- For the network in Figure 1.2, build a macroscopic signalized traffic model.
- Determine the *signalized/averaged* traffic model for the case where lights are installed along each intersection of the corridor. For those roads in which direction is not explicitly defined, consider the direction of a regular intersection.

Expected outcomes

- Present a brief summary of the existing current models for signalized traffic networks. At same time highlight the key features of these models and the remaining difficulties. Consider including references for the presented models.
 - Based on (Grandinetti, Canudas-de-wit, and Garin 2015) obtain a model for the signalized network of Figure 1.2 and the parameters required model this corridor.
 - Define the set of parameters for the traffic network, notably those related to the fundamental diagram as well as the traffic light signal timings. Consider a fixed setup of this parameters for the moment and overall explain the reason of the choice.
-

Task 2: Simulation

Dynamic simulation of open loop traffic networks. For this task be sure to review already implemented simulations available at [Link](#). Get familiar with the code here developed before you enter into details of implementation.

Context

Based on the model established in the **Task 1** and considering a family of specific parameters, perform a simulation for a constant demand value of demand in *veh/hr* as specified in the Figure 1.3.

Questions

- Simulate and obtain density plots of the dynamic the behaviour when the *duty cycle* of lights is similar for all the traffic lights. 50%
- Does the current values create a congestion in the proposed network?
- How can the performance of the network be improved? Create a second set of parameters for the traffic lights *duty cycle*
- For the existing model and according to (Grandinetti, Canudas-de-wit, and Garin 2015) obtain the two different *density* and *flow* dynamic profiles between a *switched* signalized traffic model and an *averaged* traffic model

Expected outcomes

- Present the dynamic profiles for density on each one of the roads under different setups of traffic lights. The dynamic profiles should specify density per road in time

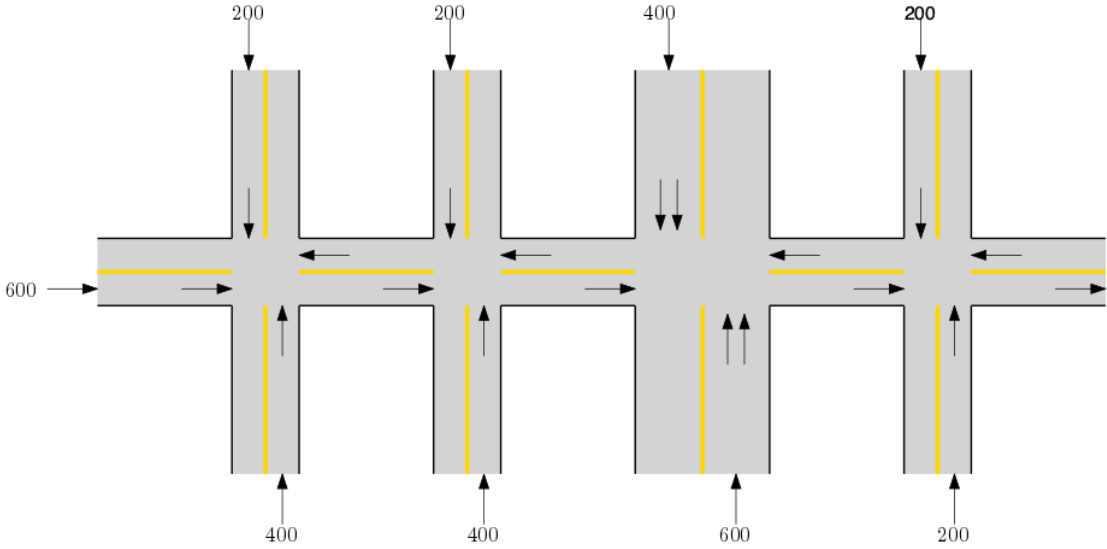


Figure 1.3: Demand profiles for a specified scenario.

- Provide comparisons between different traffic signalized models and an analysis on how this error evolves according to different values of demand.
- Specify a second set of parameters for *duty cycle* that could improve the performance of the network with respect to the 50% case. Justify the reason of your choice and verify in results the desired behavior.

Task 3: Control strategy

For this task we aim to consider the *duty cycle* as a control input variable to regulate the flow within the traffic network. In this case take into account that the decision variable needs somehow to be determined dynamically via a control algorithm.

Context

For the Figure 1.1 the average value can be found as:

$$\bar{u} = \frac{1}{T} \int_0^T u(\tau) d\tau \quad (1.1)$$

As it is illustrated in (Grandinetti, Garin, and Canudas-de-wit 2015), in Eq. (1.1) is easier to design a value for \bar{u} rather than u due to its binary character.

Questions

- Explain and construct a block diagram illustrating the control of the road traffic network via traffic signals
- Design and present an algorithm that takes decisions for the traffic signals based on the state of the network. How would you construct the value of u based on the congestion state of the network.

- Perform simulations of the system under a preestablished manual control and compare it to a situation where the control depends on the congestion state of the network.

Expected outcomes

- Present a comparison between the traffic network with signalized control and without signalized control.
 - Apply the controller over different versions of the model notably *averaged* and *switched*
 - Compare the open loop situation with the closed loop situation and provide conclusions on the control performance.
-

Task 4: Performance evaluation

Finally in order to compare it is important to determine indicators than can be designed in order to compare the effects of introducing an automated control strategy.

Context

Indicators for traffic networks are regularly expressed in terms of the state of the network, for example the *Service of Demand* (SoD) measured in terms of flow:

$$SOD = \int_0^T \sum_{r \in R} f_r(\tau) d\tau \quad (1.2)$$

Or the *Total Travel Distance* (TTD) measured in terms of the density

$$TTD = \int_0^T \sum_{r \in R} \rho_r(\tau) d\tau \quad (1.3)$$

Questions

- What does the aforementioned indicators represent?
- Measure the indicators over the traffic network with a manual setup of traffic signals *open-loop* vs a controlled setup of traffic signals *closed-loop*.

Expected outcomes

- Report indicators for both cases and conclude about the results.
- Provide recommendations on how to design u for the corridor

Sources

For more details on how to deploy traffic simulations and traffic models please check:

- [Traffic Macrosimulator - Github](#)
- For traffic models check (Grandinetti, Canudas-de-wit, and Garin 2015) available [Link](#) and (Grandinetti, Garin, and Canudas-de-wit 2015) available at [Link](#)

Chapter 2

Project 2: Vehicle Platooning

The main objective of this project is to design a controller for a platoon of vehicles in order to optimize the traffic flow and reduce the fuel consumption. A platoon of vehicles can be seen as:

The objective illustrated in 2.1 is to control the *headway space* between two single vehicles in a formation of multiple vehicles. This project is inspired in works presented on (Duret, Wang, and Ladino 2019a) but more information about platoons can be found at (Ali, Garcia, and Martinet 2015).

Objectives

The main objective of this project is to:

1. Study the fundamental problem of string stability.
2. Obtain and create a dynamic model for vehicle platoons and associate its parameters with traffic theory.
3. Create and design a control strategy for the headway space and analyze its behavior.
4. Compare and analyze the behavior of parameter setups for variations of the proposed control strategy

Description

Task 1: Platoon modeling

Consider the dynamical model presented in (Duret, Wang, and Ladino 2019a), (Turri, Besselink, and Johansson 2017) where the problem of truck platooning is detailed.

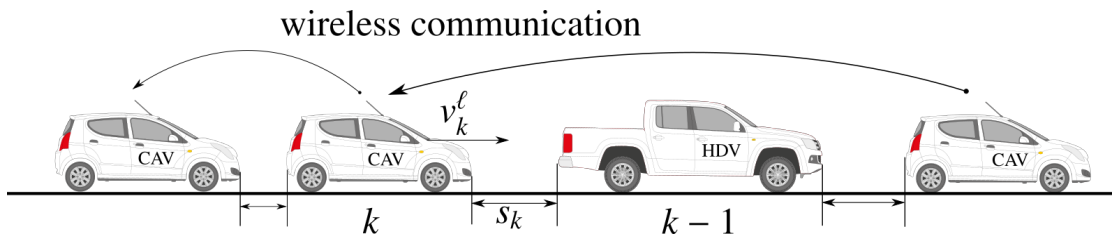


Figure 2.1: Example of a vehicle platoon.

Context

In general the platoon problem is a *dynamic control problem* where the objective is to regulate or maintain the value of a specific variable within the system at a desired level. In order to produce this regulation a *controller* is required and in most of the cases there is always a way to express the dynamical model in the following form:

$$\dot{x}(t) = f(x(t), u(t)) \quad (2.1)$$

where $x(t), u(t)$ correspond to the state vector, and the control vector of the system. In general a system describing this

Questions

- What are the main goals of platoon strategies, and how they can improve the traffic in future?
- Create a model for a platoon of 6 vehicles that considers a simple dynamic model of 2nd order.
Note: Consider for this case a model in which no drag is present within the model. This model can be written as in (2.1) where the stability can be analyzed.
- Which could be the traffic parameters in this kind of models?

Expected outcomes

- Present a brief summary on the motivations to create vehicle platoons and the main existing models that can be developed for this purpose.
 - Based on the work of (Duret, Wang, and Ladino 2019a), (Wang et al. 2014) determine and write down the state equation for a platoon model of 4 vehicles.
 - Determine the stability properties of the model. Stability properties are associated to the location of zeros and poles of the transfer function of the model or eigen values of the matrix [See more](#)
-

Task 2: Open loop simulation

Context

Questions

Expected outcomes

- Obtain the trajectories for a platoon of 4 vehicles

Task 3: Vehicle platoon control

Context

Questions

Expected outcomes

Task 4: Performance evaluation

Context

Questions


Expected outcomes

Sources

- [Simulation results - Github](#)
- Check (Duret, Wang, and Ladino 2019b) available [Link](#)

Chapter 3

Project 4: Density Reconstruction

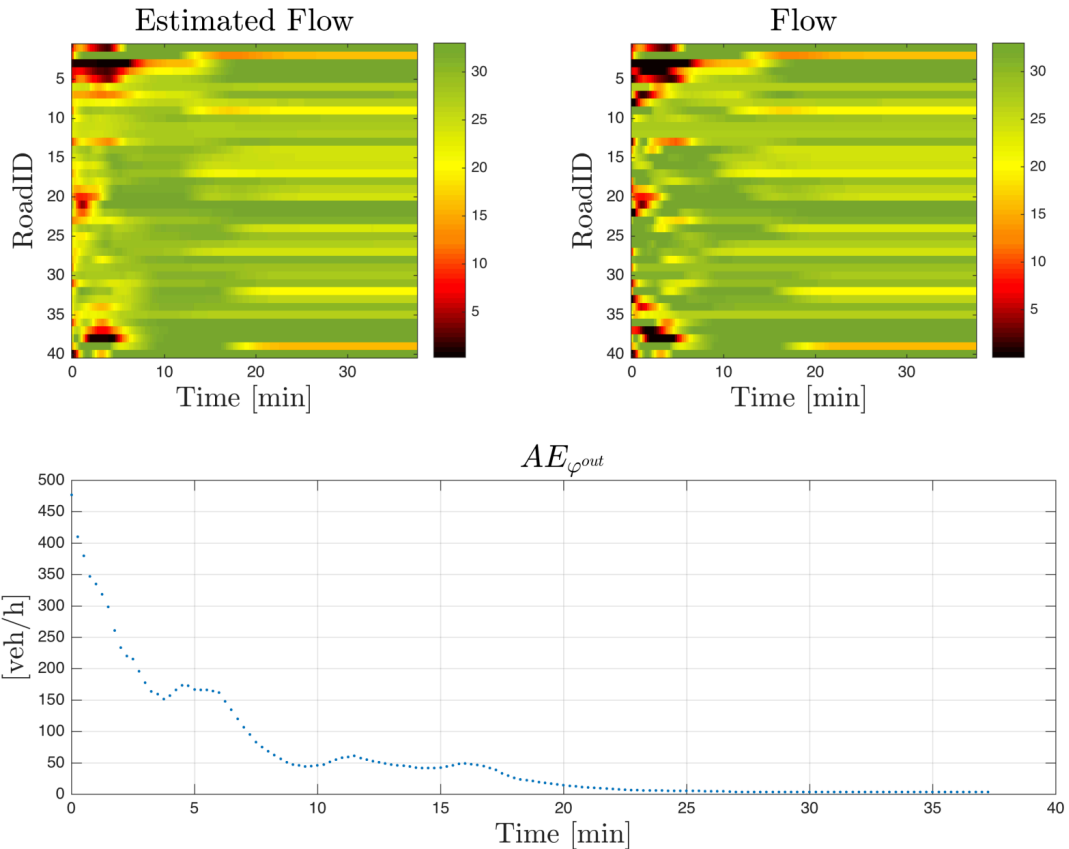

```
plot(cars) # a scatterplot
```

$$f(k) = \binom{n}{k} p^k (1-p)^{n-k} \quad (3.1)$$

In (3.1)

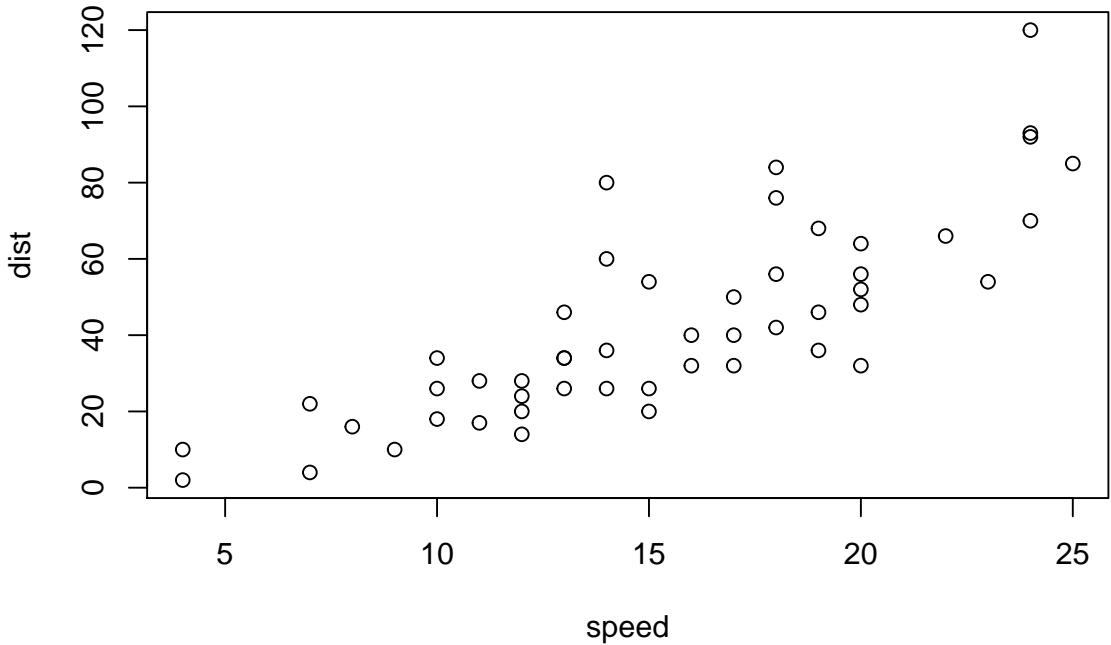


Figure 3.1: A scatterplot of the data cars using **base** R graphics.

Below is an align environment (3.3):

```
\begin{align}
g(X_n) &= g(\theta) + g'(\tilde{\theta})(X_n - \theta) \quad \text{notag} \\
\sqrt{n}[g(X_n) - g(\theta)] &= g'(\tilde{\theta})\sqrt{n}[X_n - \theta] \quad (\#eq:align)
\end{align}
```

$$g(X_n) = g(\theta) + g'(\tilde{\theta})(X_n - \theta) \quad (3.2)$$

$$\sqrt{n}[g(X_n) - g(\theta)] = g'(\tilde{\theta})\sqrt{n}[X_n - \theta] \quad (3.3)$$

Sources

For more details on the project please check:

- [Simulation results - Github](#)
- Check (Ladino et al. 2018) available [Link](#) and (Lovisari, Canudas-de-wit, and Kibangou 2016) [Link](#)

Reference

The main reference for this project is (Ladino et al. 2018)

Ali, Alan, Gaetan Garcia, and Philippe Martinet. 2015. “The flatbed platoon towing model for safe and dense platooning on highways.” *IEEE Intelligent Transportation Systems Magazine* 7 (1): 58–68. <https://doi.org/10.1109/MITS.2014.2328670>.

- Duret, Aurelien, Meng Wang, and Andres Ladino. 2019a. "A Hierarchical Approach for Splitting Truck Platoons Near Network Discontinuities," no. July: Submitted.
- . 2019b. "A Hierarchical Approach for Splitting Truck Platoons Near Network Discontinuities." *Submitted to 23rd International Symposium on Transportation and Traffic Theory*.
- Grandinetti, Pietro, Carlos Canudas-de-wit, and Federica Garin. 2015. "An efficient one-step-ahead optimal control for urban signalized traffic networks based on an averaged Cell-Transmission Model." In *2015 European Control Conference (Ecc)*, 3478–83. Vienna, Austria: IEEE. <https://doi.org/10.1109/ECC.2015.7331072>.
- Grandinetti, Pietro, Federica Garin, and Carlos Canudas-de-wit. 2015. "Towards scalable optimal traffic control." In *54th IEEE Conference on Decision and Control (CDC 2015)*. Osaka, Japan. <https://hal.archives-ouvertes.fr/hal-01188811>.
- Ladino, Andres, Carlos Canudas-de-wit, Alain Kibangou, Hassen Fourati, and Martin Rodriguez. 2018. "Density and flow reconstruction in urban traffic networks using heterogeneous data sources." In *2018 European Control Conference, Ecc 2018*, edited by IEEE. Limasol, Chyprus.
- Lovisari, E., Carlos Canudas-de-wit, and Alain Y Kibangou. 2016. "Density/Flow reconstruction via heterogeneous sources and Optimal Sensor Placement in road networks." *Transportation Research Part C: Emerging Technologies* 69: 451–76. <https://doi.org/10.1016/j.trc.2016.06.019>.
- Turri, Valerio, Bart Besselink, and Karl H. Johansson. 2017. "Cooperative Look-Ahead Control for Fuel-Efficient and Safe Heavy-Duty Vehicle Platooning." *IEEE Transactions on Control Systems Technology* 25 (1): 12–28. <https://doi.org/10.1109/TCST.2016.2542044>.
- Varaiya, Pravin. 2013. "Max pressure control of a network of signalized intersections." *Transportation Research Part C: Emerging Technologies* 36 (2): 177–95. <https://doi.org/10.1016/j.trc.2013.08.014>.
- Wang, Meng, Winnie Daamen, Serge P. Hoogendoorn, and Bart van Arem. 2014. "Rolling horizon control framework for driver assistance systems. Part II: Cooperative sensing and cooperative control." *Transportation Research Part C* 40: 290–311. <https://doi.org/10.1016/j.trc.2013.11.024>.