

SUMMARY LOAD CHART FOR HV POST SHORE #1, #2, #3, #4, #5, XL 350 AND XL 625										Updated 1/10/2022	
TITAN formwork systems				Post Shore Heights include Drop Head (Safety Factor 3:1 All loads are in pounds (lbs)).				MCC VERSION 3:1 SF			
Shore Height	#1 Shore	#2 Shore	#3 Shore	#4 Shore	#5 Shore	XL 350		XL 625		Shore Height	
	HV Load Chart	HV Load Chart	HV Load Chart	HV Load Chart	HV Load Chart	HV Load Chart	Plate to Plate Per SSFI	HV Load Chart	Plate to Plate Per SSFI		
3'-2"										3'-2"	
3'-8"										3'-8"	
3'-10"										3'-10"	
4'-0"										4'-0"	
4'-1"	10,750									4'-1"	
4'-2"	10,750									4'-2"	
4'-4"	10,750									4'-4"	
4'-5"	9,833									4'-5"	
4'-8"	9,750									4'-8"	
4'-10"	9,500									4'-10"	
5'-0"	9,250									5'-0"	
5'-4"	7,891									5'-4"	
5'-6"	7,725									5'-6"	
5'-8"	7,583									5'-8"	
6'-0"	7,550									6'-0"	
6'-4"	7,383									6'-4"	
6'-6"	7,249									6'-6"	
6'-7"	7,208	5,583					25,333			6'-7"	
7'-0"	5,166	5,166					25,333			7'-0"	
7'-4"	8,916	8,916				10,750	20,916			7'-4"	
7'-8"	8,583	8,583				10,750	20,900			7'-8"	
7'-10"	8,416	8,416	8416			10,750	20,333			7'-10"	
8'-0"	8,291	8,291	8291			10,750	20,083			8'-0"	
8'-2"	8,125	8,125	8125			10,750	20,916			8'-2"	
8'-4"	7,958	7,958	7958			10,750	23,666			8'-4"	
8'-6"	7,916	7,916	7916			10,750	23,500			8'-6"	
8'-8"	7,916	7,916	7916			10,750	23,333			8'-8"	
8'-10"	7,950	7,950	7950			10,750	23,166			8'-10"	
9'-0"	7,583	7,583	7583			10,750	23,083			9'-0"	
9'-2"	7,375	7,375	7375			10,750	22,833			9'-2"	
9'-4"	7,166	7,166	7166			10,750	22,833			9'-4"	
9'-5"	7,200	7,200	7200			10,750	22,500			9'-5"	
9'-6"	6,875	6,875	6875			10,750	22,333			9'-6"	
9'-8"	6,583	6,583	6583	10,750		10,750	22,083			9'-8"	
9'-10"	6,375	6,375	6375	10,488		10,750	21,833			9'-10"	
10'-0"	6,166	6,166	6166	10,166		10,750	21,583			10'-0"	
10'-2"	5,875	5,875	5875	9,833		10,750	21,416			10'-2"	
10'-4"	5,583	5,583	5583	9,583		10,750	21,166			10'-4"	
10'-6"	5,291	5,291	5291	9,250		10,750	20,916			10'-6"	
10'-7"	5,145	5,145	5145	9,166		10,750	20,750			10'-7"	
10'-8"	5,000	5,000	5000	9,000		10,750	20,666			10'-8"	
10'-10"	4,950	4,950	4950	8,950	10,083	10,750	20,416			10'-10"	
11'-0"	4,416	4,416	4416	8,416	10,000	10,750	20,166			11'-0"	
11'-2"	4,166	4,166	4166	8,166	9,833	10,750	19,916			11'-2"	
11'-4"	3,916	3,916	3916	7,916	9,750	10,750	19,666			11'-4"	
11'-6"	3,625	3,625	3625	7,583	9,666	10,750	19,416			11'-6"	
11'-7"	3,500	3,500	3500	7,416	9,583	10,750	19,333			11'-7"	
11'-8"				7,333	9,500	10,750	19,166			11'-8"	
11'-10"				7,250	9,416	10,750	18,916			11'-10"	
12'-0"				7,166	9,333	10,750	18,750			12'-0"	
12'-2"				7,041	9,208	10,750	18,500			12'-2"	
12'-4"				6,916	9,083	10,750	18,250			12'-4"	
12'-6"				6,750	8,916	10,750	18,083			12'-6"	
12'-8"				6,583	8,833	10,750	17,833			12'-8"	
12'-10"				6,416	8,666	10,750	17,583			12'-10"	
13'-0"				6,250	8,519	10,750	17,333			13'-0"	
13'-2"				6,083	8,350	10,750	17,166			13'-2"	
13'-4"				5,916	8,183	10,750	16,916			13'-4"	
13'-6"				5,750	8,000	10,750	16,666			13'-6"	
13'-8"				5,583	8,166	10,750	16,416			13'-8"	
13'-10"				5,458	8,000	10,750	16,250			13'-10"	
14'-0"				5,333	7,846	10,750	16,000			14'-0"	
14'-2"				5,166	7,616	10,750	15,750			14'-2"	
14'-4"				5,000	7,519	10,750	15,500			14'-4"	
14'-6"					7,416	10,750	15,333	18,541		14'-6"	
14'-8"					7,316	10,750	15,166	18,333		14'-8"	
14'-10"					7,216	10,750	15,000	18,125		14'-10"	
15'-0"					7,116	10,750	14,833	17,916		15'-0"	
15'-2"					7,008	10,750	14,666	17,666		15'-2"	
15'-4"					6,875	10,750	14,500	17,416		15'-4"	
15'-5"					6,750	10,750	14,333	17,166	18,541	15'-5"	
15'-6"					6,625	10,750	14,166	17,083	18,333	15'-6"	
15'-8"					6,500	10,750	14,000	16,958	18,125	15'-8"	
15'-10"					6,375	10,750	13,833	16,666	17,916	15'-10"	
16'-0"					6,250	10,750	13,666	16,416	17,666	16'-0"	
16'-2"					6,166	10,750	13,500	16,250	17,416	16'-2"	
16'-4"					6,083	10,750	13,333	16,000	17,166	16'-4"	
16'-6"					6,000	10,750	13,166	15,750	16,916	16'-6"	
16'-8"					5,916	10,750	13,000	15,500	16,666	16'-8"	
16'-10"					5,833	10,750	12,833	15,250	16,416	16'-10"	
17'-0"					5,750	10,750	12,666	15,000	16,166	17'-0"	
17'-2"					5,666	10,750	12,500	14,750	15,916	17'-2"	
17'-4"					5,583	10,750	12,333	14,500	15,666	17'-4"	
17'-6"					5,500	10,750	12,166	14,250	15,416	17'-6"	
17'-8"					5,416	10,750	12,000	14,000	15,166	17'-8"	
17'-10"					5,333	10,750	11,833	13,750	14,916	17'-10"	
18'-0"					5,250	10,750	11,666	13,500	14,666	18'-0"	
18'-2"					5,166	10,750	11,500	13,250	14,416	18'-2"	
18'-4"					5,083	10,750	11,333	13,000	14,166	18'-4"	
18'-6"					5,000	10,750	11,166	12,750	13,916	18'-6"	
18'-8"					4,916	10,750	11,000	12,500	13,666	18'-8"	
18'-10"					4,833	10,750	10,833	12,250	13,416	18'-10"	
19'-0"					4,750	10,750	10,666	12,000	13,166	19'-0"	
19'-2"					4,666	10,750	10,500	11,750	12,916	19'-2"	
19'-4"					4,583	10,750	10,333	11,500	12,666	19'-4"	
19'-6"					4,500	10,750	10,166	11,250	12,416	19'-6"	
19'-8"					4,416	10,750	10,000	11,000	12,166	19'-8"	
19'-10"					4,333	10,750	9,833	10,750	11,916	19'-10"	
20'-0"					4,250	10,750	9,666	10,500	11,666	20'-0"	
20'-2"					4,166	10,750	9,500	10,250	11,416	20'-2"	
20'-4"					4,083	10,750	9,333	10,000	11,166	20'-4"	
20'-6"					4,000	10,750	9,166	9,750	10,916	20'-6"	
20'-8"					3,916	10,750	9,000	9,500	10,666	20'-8"	
20'-10"					3,833	10,750	8,833	9,250	10,416	20'-10"	
21'-0"					3,750	10,750	8,666	9,000	10,166	21'-0"	
21'-2"					3,666	10,750	8,500	8,750	9,916	21'-2"	
21'-4"					3,583	10,750	8,333	8,500	9,666	21'-4"	
21'-6"					3,500	10,750	8,166	8,250	9,416	21'-6"	
21'-8"					3,416	10,750	8,000	8,000	9,166	21'-8"	
21'-10"					3,333	10,750	7,833	7,750	8,916	21'-10"	
22'-0"					3,250	10,750	7,666	7,500	8,666	22'-0"	
22'-2"					3,166	10,750	7,500	7,250	8,416	22'-2"	
22'-4"					3,083	10,750	7,333	7,000	8,166	22'-4"	
22'-6"					3,000	10,750	7,166	6,750	7,916	22'-6"	
22'-7"					2,916	10,750	7,000	6,500	7,666	22'-7"	
22'-8"					2,833	10,750	6,833	6,250	7,416	22'-8"	
22'-10"					2,750	10,750	6,666	6,000	7,166	22'-10"	
23'-0"					2,666	10,750	6,500	5,750	6,916	23'-0"	
23'-2"					2,583	10,750	6,333	5,500	6,666	23'-2"	
23'-4"					2,500	10,750	6,166	5,250	6,416	23'-4"	
23'-6"					2,416	10,750	6,000	5,000	6,166	23'-6"	
23'-8"					2,333	10,750	5,833	4,750	5,916	23'-8"	
23'-10"					2,250	10,750	5,666	4,500	5,666	23'-10"	
24'-0"					2,166	10,750	5,500	4,250	5,416	24'-0"	
24'-2"					2,083	10,750	5,333	4,000	5,166	24'-2"	
24'-4"					2,000	10,750	5,166	3,750	4,916	24'-4"	
24'-6"					1,916	10,750	5,000	3,500	4,666	24'-6"	
24'-8"					1,833	10,750	4,833	3,250	4,416	24'-8"	
24'-10"					1,750	10,750	4,666	3,000	4,166	24'-10"	
25'-0"					1,666	10,750	4,500	2,750	3,916	25'-0"	
25'-2"					1,583	10,750	4,333	2,500	3,666	25'-2"	
25'-4"					1,500	10,750	4,166	2,250	3,416	25'-4"	
25'-6"					1,416	10,750	4,000	2,000	3,166	25'-6"	
25'-8"					1,333	10,750	3,833	1,750	2,916	25'-8"	
25'-10"					1,250	10,750	3,666	1,500	2,666	25'-10"	
26'-0"					1,166	10,750	3,500				

RESULTS OF LABORATORY TESTS ON ELLIS SHORES


Note: 90% of values for No. 2 lumber

RESULTS:

Load per Shore	Deflection in Inches 2 Clamps per shore
1,000 lbs.	0.000 inches
2,000 "	0.005 "
3,000 "	0.021 "
4,000 "	0.063 "
4,500 "	0.092 "
5,000 "	0.127 "
6,000 "	0.172 "
7,000 "	0.213 "
8,000 "	0.249 "
9,000 "	0.319 "
10,000 "	0.449 "

The above tests were made with ELLIS Clamps on No. 1 Douglas Fir ELLIS Sticks. Clamps were driven down with a carpenter's hammer before the load came on.

The ELLIS Jack, as is, will lift 1400 lbs. With a 3' piece of pipe slipped on the handle, the Jack will lift 3000 lbs.

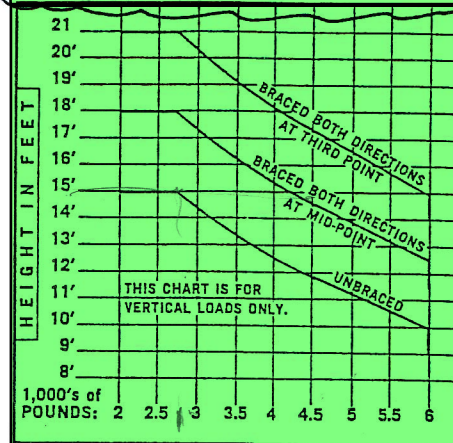

Allowable Load Chart

Allowable maximum value of 6,000 lbs. per shore is based upon a safety factor of 3, against failure of the mechanical mechanism of splice joint.

ALLOWABLE LOAD: Table based upon allowable unit stresses of 1,500 lbs. per sq. in. for wood members of fir or yellow pine, free of knots. This table is based upon approved engineering standards, but does not compensate for unusual conditions.

ALLOWABLE LOAD FOR ELLIS 4x4 SHORES

*Tested Under Loads from
3,000 to More than 20,000 lbs.*

ELLIS SHORES

Only Deflected -- Never Broke!

6,000 lbs.



To establish the fact that Ellis Shores would withstand loads recommended on forming jobs, Ellis Manufacturing Co. had a series of load tests run under extreme overload conditions. Using the same kind of select 4x4's Ellis recommends to contractors and Ellis Clamps, an 11'-0" Ellis Shore was erected. Increasing amounts of pressure were applied until the load was more than 20,000 lbs.—but still the Ellis Shore did not break! There was very slight deflection at 6,000 lbs., and progressive deflection up to 20,000 lbs. (See test results, upper left.) These tests proved once again what contractors already know . . . ELLIS SHORES ARE EXTRA SAFE!

SEAS

SAFETY! Ellis methods assure a 3:1 safety factor. Shores are double-strong in the middle to prevent buckling; for adequate bracing, nail at any point.

ECONOMY! Low initial cost, hundreds of re-uses, great time savings, less waste . . . combine in Ellis Methods for new economy in concrete forming. Save up to 50%!

ADAPTABILITY! Use the same Ellis Equipment on different types of jobs in quick succession . . . suspended floor slabs, columns, beams, overpasses, dams, culverts, ramps, bridges, etc.

SPEED! Ellis "Up & Down" Faster Method is a job-proven speed advantage. Fewer skilled men required . . . most shores are slip-ins — a big timesaver!

20,000 lbs. +

