PRIMASOUND LTD
INNOVATIVE PROCESS TECHNOLOGY
IMPORT – EXPORT – TRADE OF MACHINES
1-3 Afroditis & Karpathou str.

Piraeus - Athens

18539 Greece

Phone: 0030 210 4519608

Fax: 0030 210 4519721

info@primasound.com

www.primasound.com - www.primaweld.com

INSTALLATION PROCEDURE FOR ACOUSTIC CLEANERS:

TYPES '230' & '360' FOR GAS BOILERS AND TYPE '360' FOR AIR COOLERS

PIRAEUS 04th FEBRUARY 2014.

PRIMASOUND LTD
INNOVATIVE PROCESS TECHNOLOGY
IMPORT – EXPORT – TRADE OF MACHINES
1-3 Afroditis & Karpathou str.
Piraeus - Athens
18539 Greece
Phone: 0030 210 4519608
Fax: 0030 210 4519721
info@primasound.com
www.primasound.com - www.primaweld.com

INSTALLATION PROCEDURE FOR ACOUSTIC CLEANER '230'.

(STEP 1): Cut an opening hole with diameter d 105 mm on the gas boiler manhole (see DETAIL A).

(STEP 2): Drill four (4) holes with diameter d 12 mm around the opening hole of STEP 1, distance of centers 145 mm (see DETAIL B).

(STEP 3): Fit PART A, to the inner side of manhole (STEP 1) and tighten the included four (4) M10 bolts around.

(STEP 4) Assembly PART B on to PART A by using the three (3) included M8 bolts.

(STEP 5) Connect the solenoid valve (included) to filter regulation (also included).

(STEP 6) Connect the system with Air Supply 6-7 bar by flexible air hose.

Note 1: For the STEP 1 we suggest the use of gasket compound between aluminum flange and manhole plate.

Note 2: Support is to be fitted, including ANGLE BAR stiffener and appropriate U-BOLT. We suggest angle bar 80x80x8 mm (weight 9.66 kg/m) (see DETAIL C) and U-BOLT for pipe diameter 60 mm (see DETAIL D).

TYPE "230" FOR GAS BOILER

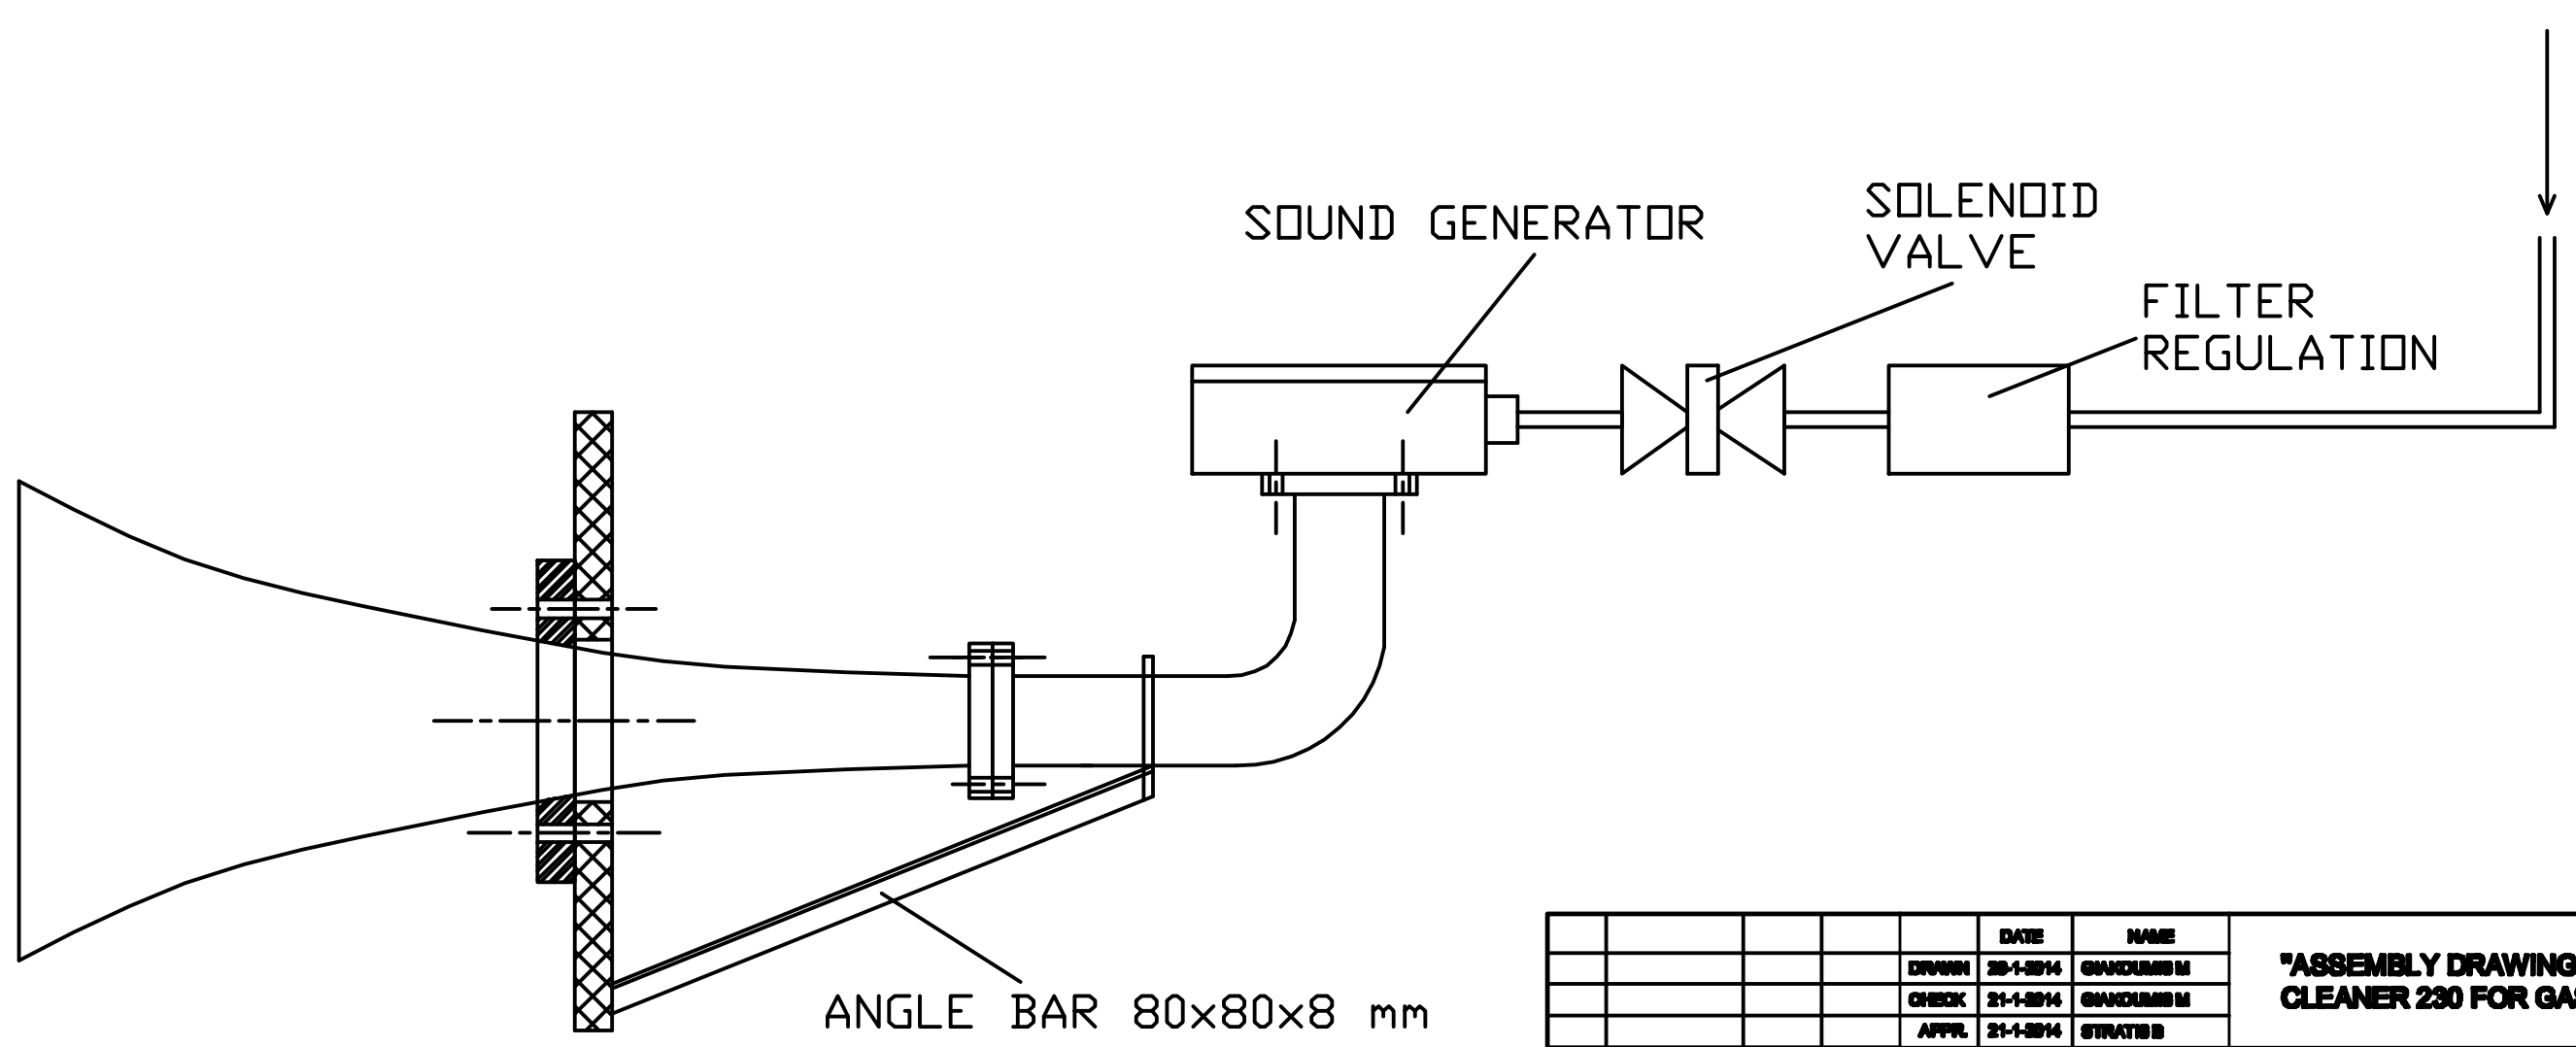

	DATE	NAME		
DRAWN	20-1-2014	GIAKOUMIS M	"ASSEMBLY DRAWING FOR ACOUSTIC CLEANER 230 FOR GAS BOILERS"	SCALE: No scale
CHECK	21-1-2014	GIAKOUMIS M		
APPR.	21-1-2014	STRATIS B		
PRIMASOUND LTD ACOUSTIC CLEANERS			DRW NO 'PS_ASS_230_GasBoiler'	FILE: PS DRAWINGS

No	REVISION	DATE	NAME

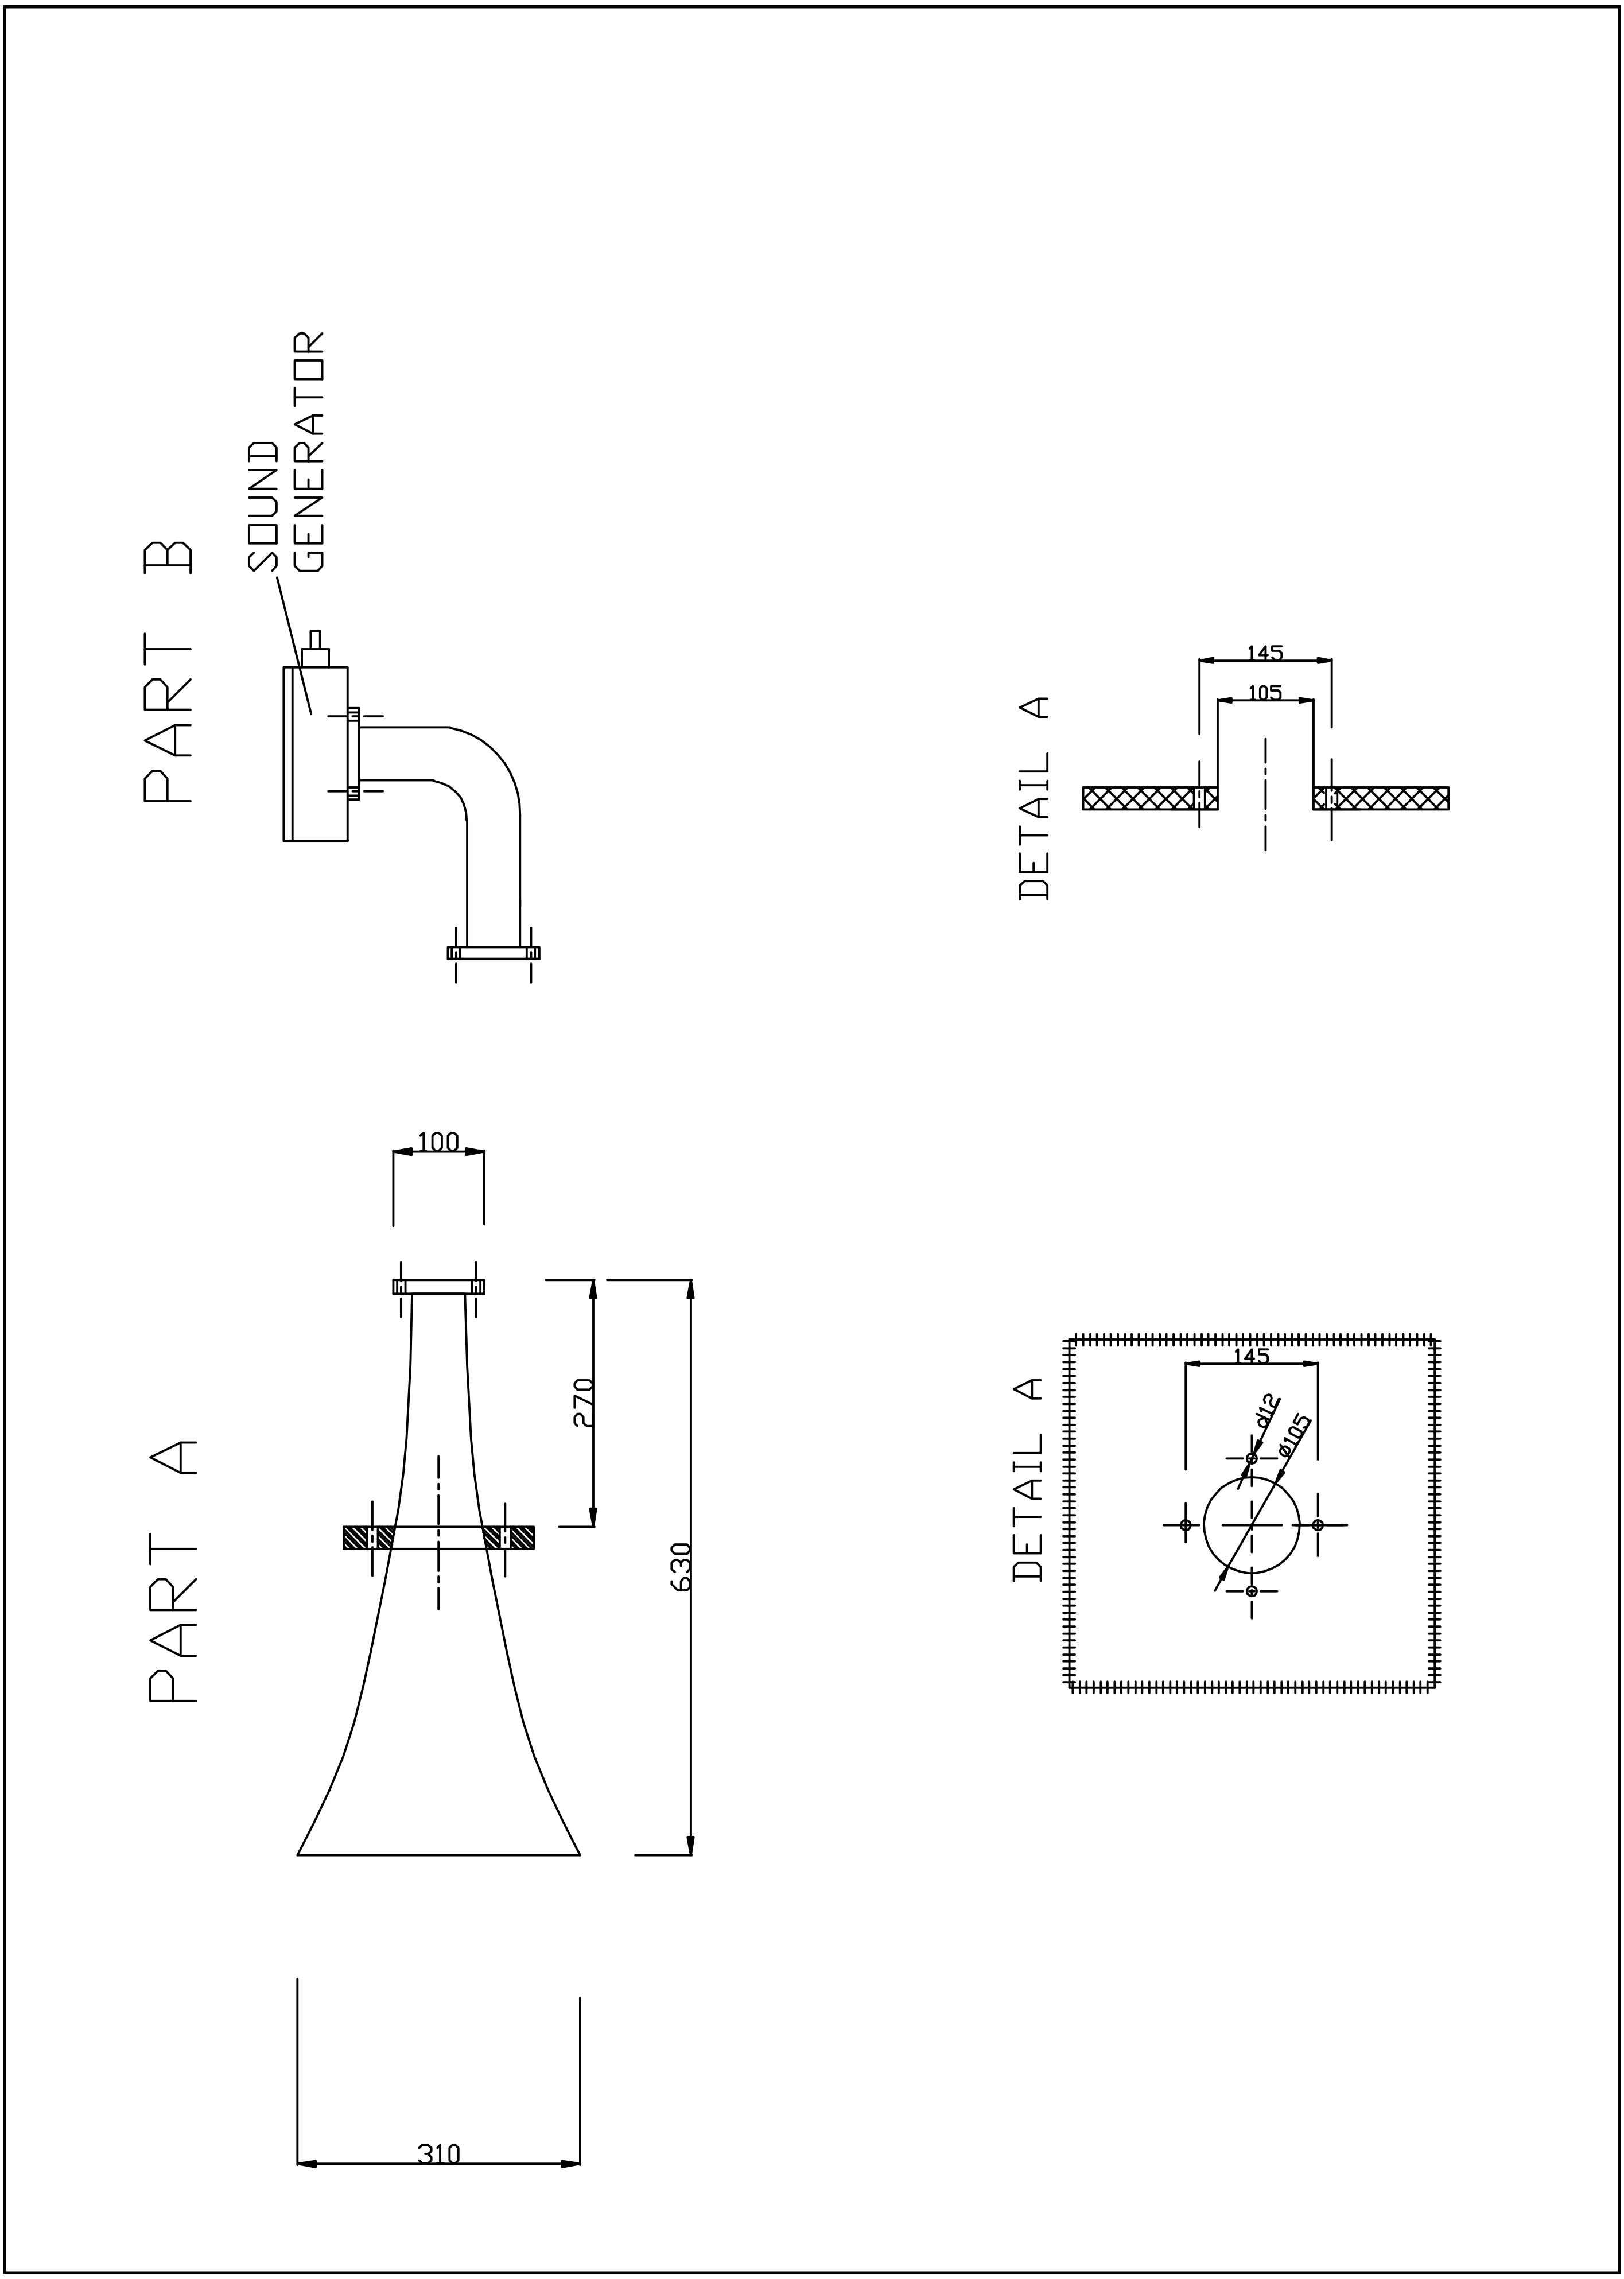
PART B
SOUND GENERATOR
DETAIL A
145
105
PART A
100
270
630
310
DETAIL A
145
ø12
ø105

DETAIL B

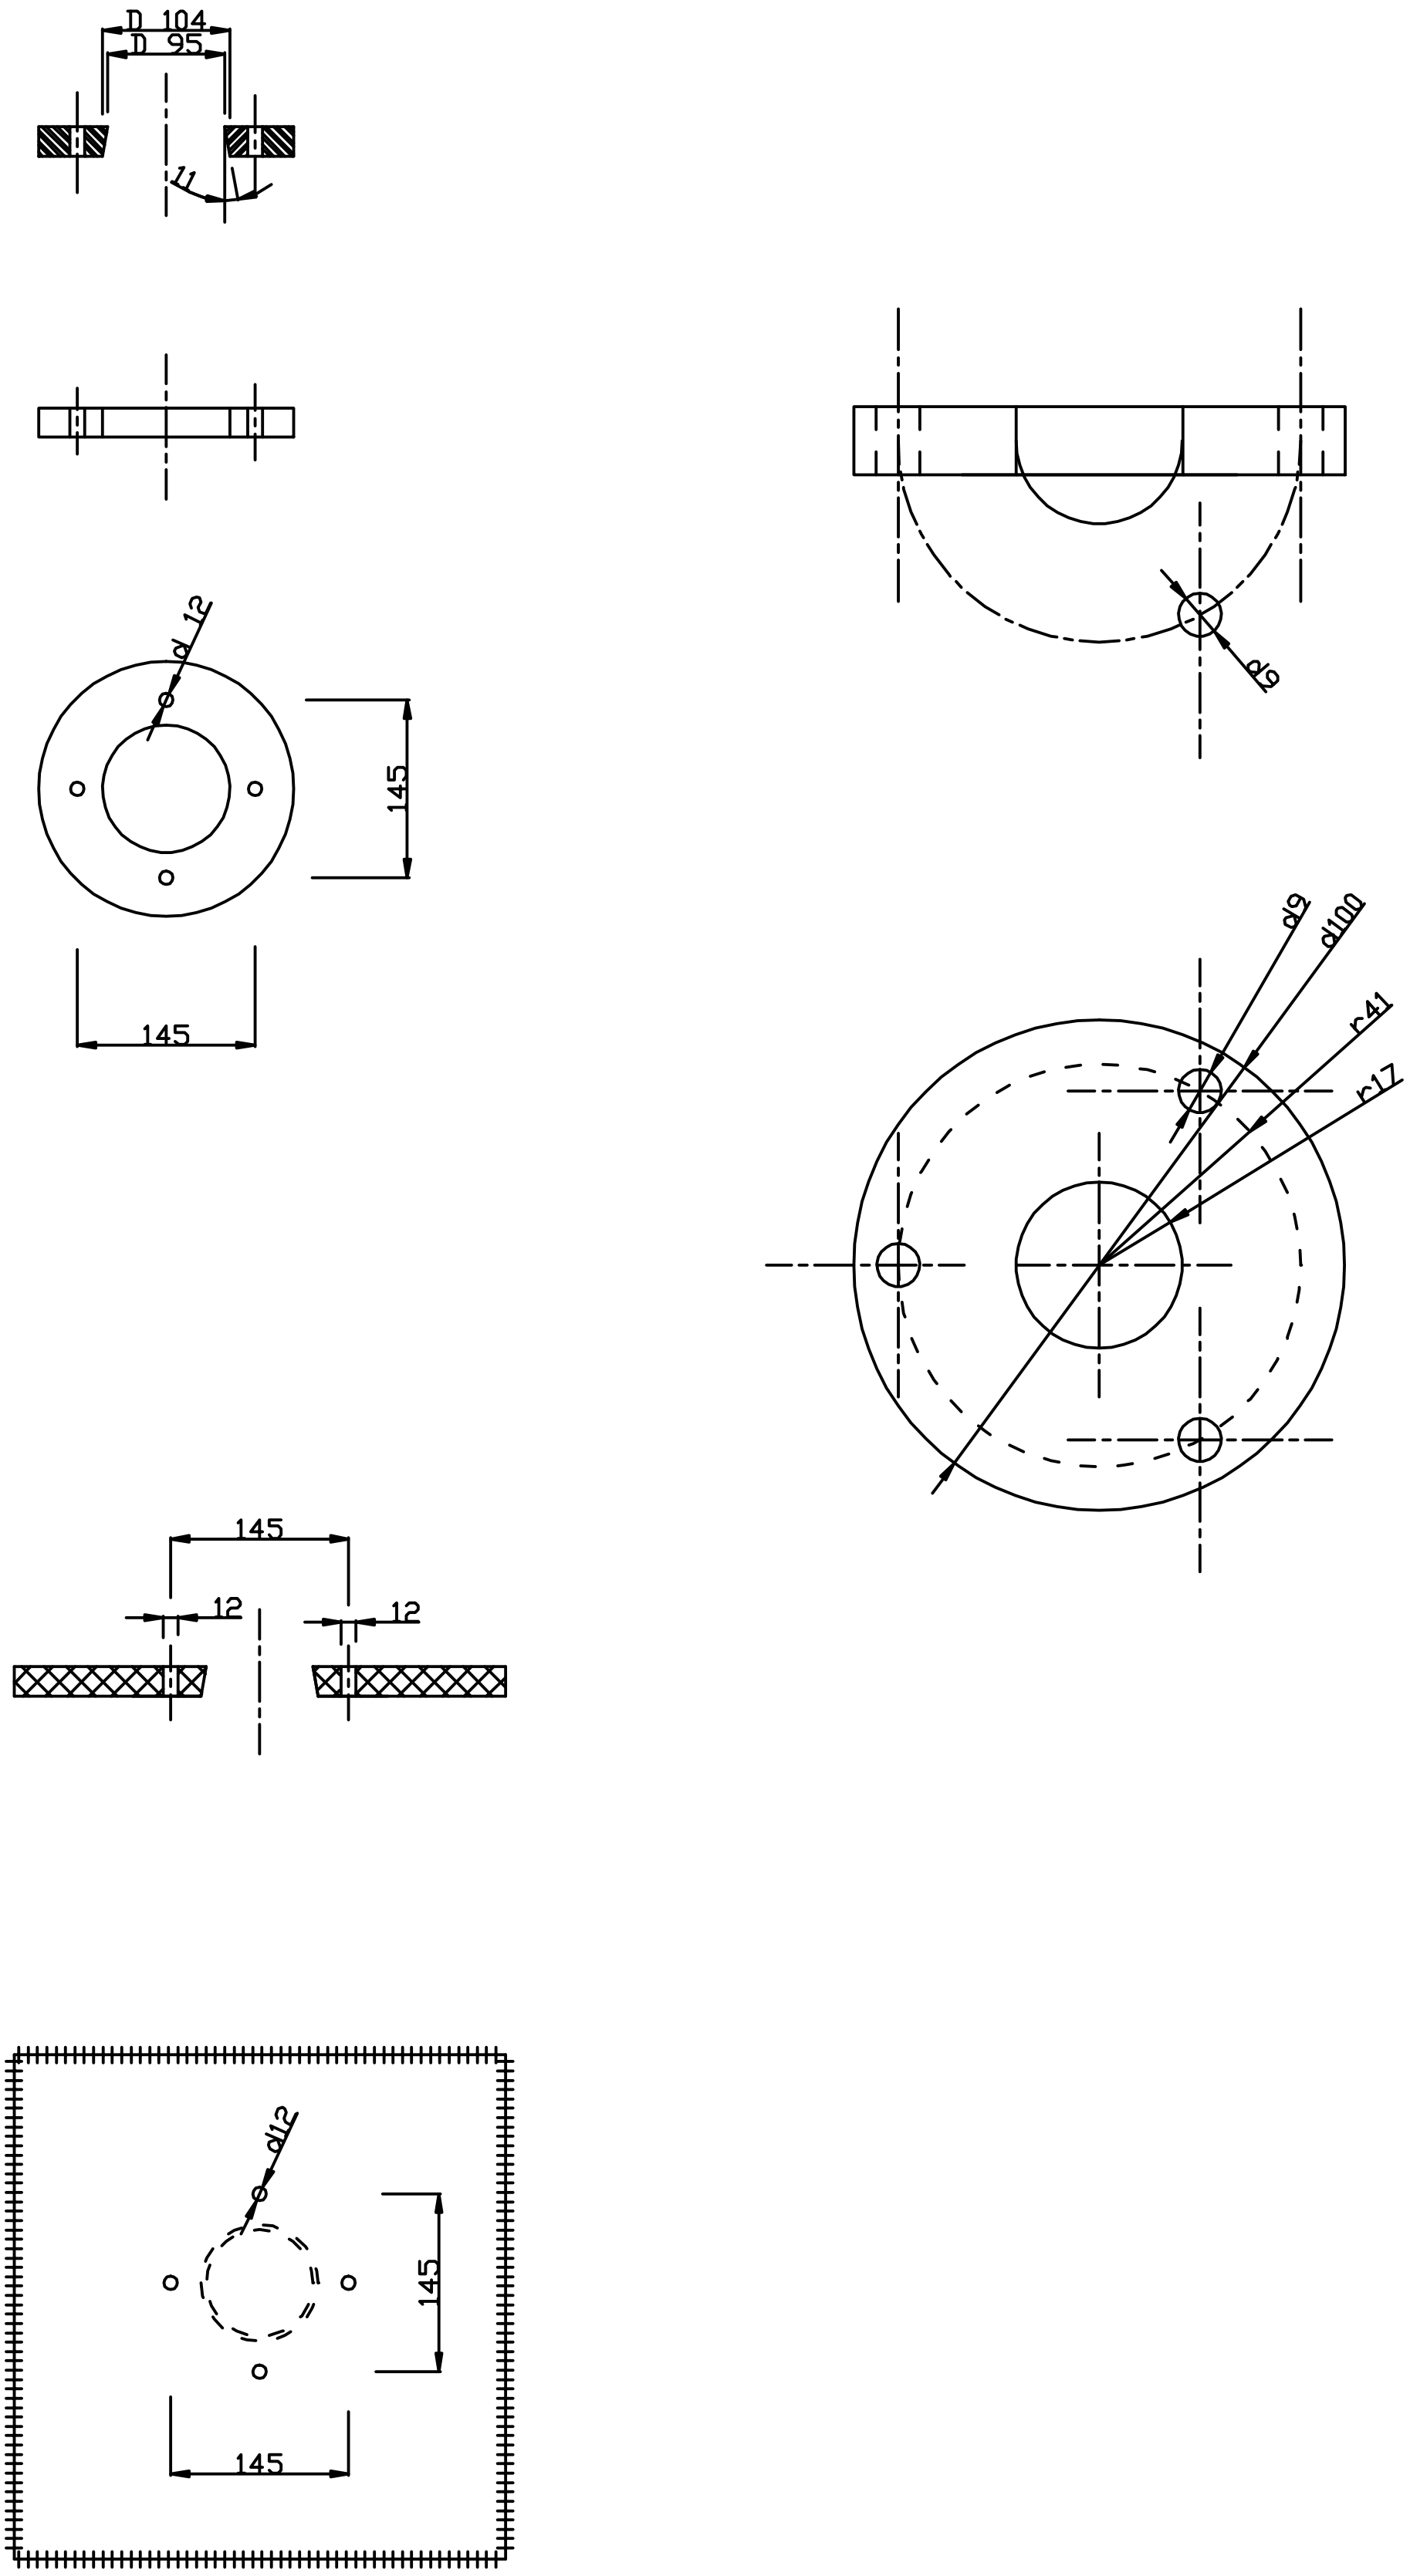

DETAIL C

ANGLE BAR 80x80x8 mm

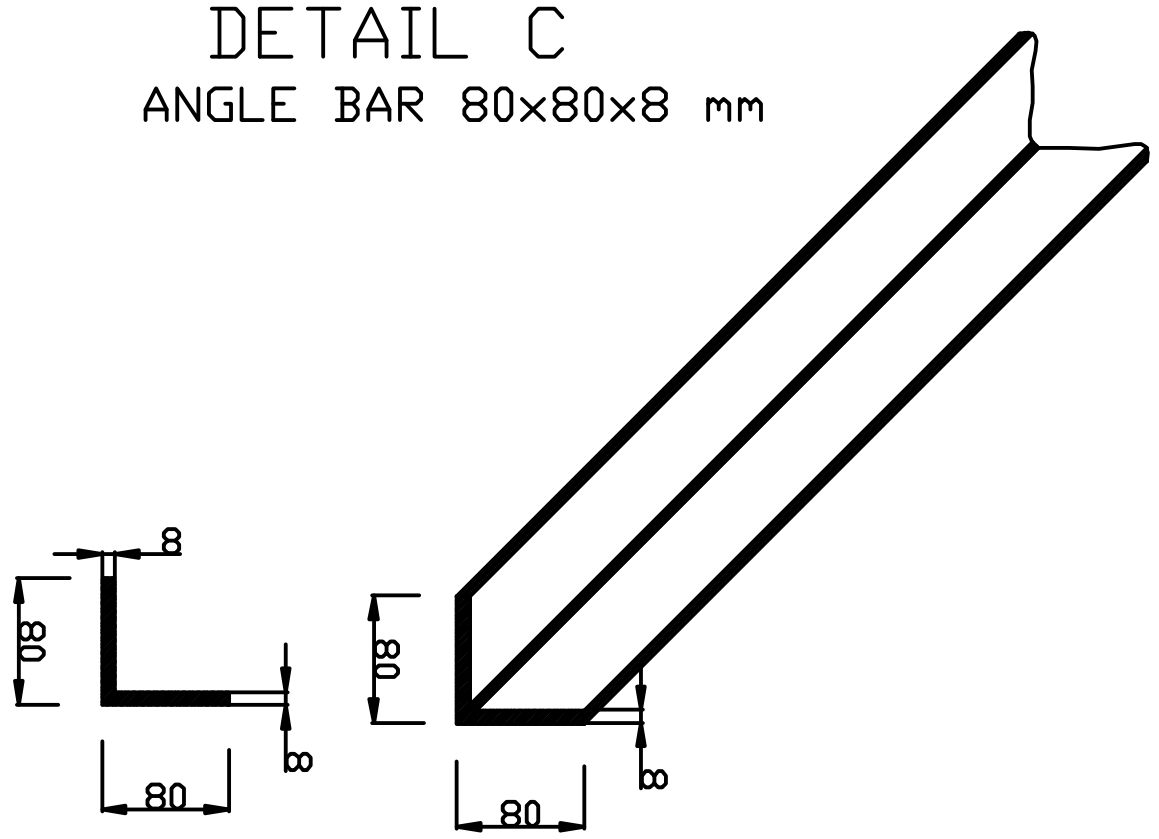

DETAIL D

'U' BOLT



A=PIPE DIAMETER=60mm

B=BOLT DIAMETER 10mm

C=THREAD LENGTH=50mm

D=INTERNAL DEPTH=110mm

PRIMASOUND LTD
INNOVATIVE PROCESS TECHNOLOGY
IMPORT – EXPORT – TRADE OF MACHINES
1-3 Afroditis & Karpathou str.

Piraeus - Athens

18539 Greece

Phone: 0030 210 4519608

Fax: 0030 210 4519721

info@primasound.com

www.primasound.com - www.primaweld.com

INSTALLATION PROCEDURE FOR ACOUSTIC CLEANER ‘360’, (AIR COOLER).

(STEP 1): Cut an opening hole diameter d 34 mm on the air cooler manhole (see DETAIL A).

(STEP 2): Drill three (3) holes with diameter d 9 mm around opening hole of STEP 1, at a radius of 41 mm, at 120 degrees distance between the 3 holes (see DETAIL A).

(STEP 3): Fit manhole (STEP 1), between PART A and PART B and tighten with the included three (3) M8 bolts around. (see DETAIL B).

(STEP 4) Assembly PART C on to PART B by using the three (3) included M8 bolts.

(STEP 5) Connect the solenoid valve (included) to filter regulation (also included).

(STEP 6) Connect the system with Air Supply 6-7 bar by flexible air hose.

Note 1: PART A is manufactured 110 mm in length, suppose that it is well seated, not in touch with the air cooler fins.

Note 2: Support is to be fitted, including ANGLE BAR stiffener and appropriate U-BOLT. We suggest angle bar 80x80x8 mm (weight 9.66

kg/m) (see DETAIL C) and U-BOLT for pipe diameter 60 mm (see DETAIL D).

TYPE "360" FOR AIR COOLER

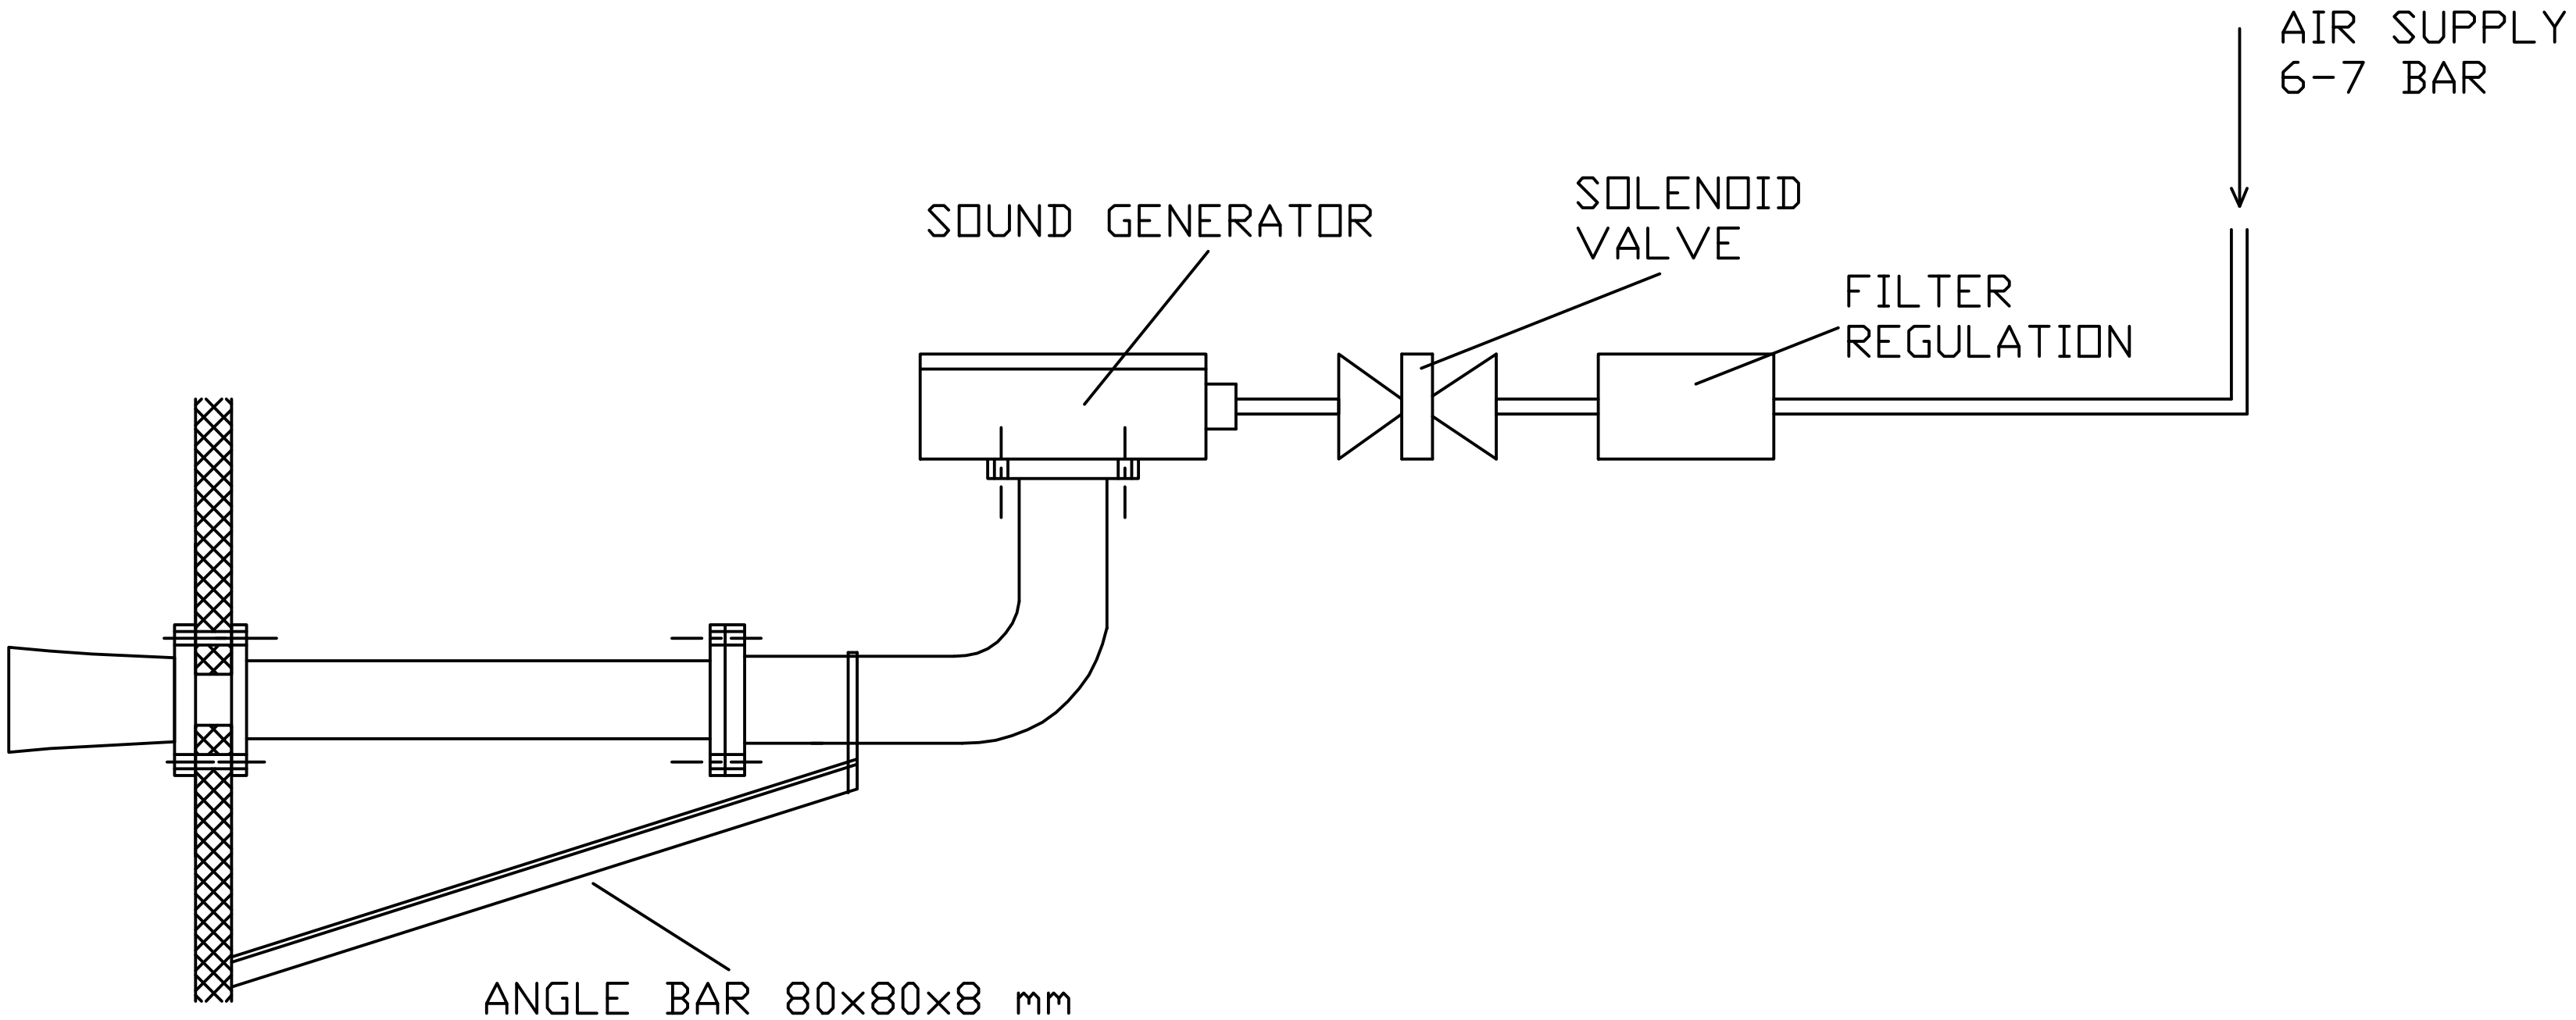

					DATE	NAME		
				DRAWN	20-1-2014	GIAKOUMIS M	"ASSEMBLY DRAWING FOR ACOUSTIC CLEANER 360 FOR AIR COOLER"	SCALE No scale
				CHECK	21-1-2014	GIAKOUMIS M		
				APPR.	21-1-2014	STRATIS B		
				PRIMASOUND LTD ACOUSTIC CLEANERS			DRW NO "PS_ASS_360_AirCooler"	FILE PS DRAWINGS
No	REVISION	DATE	NAME					

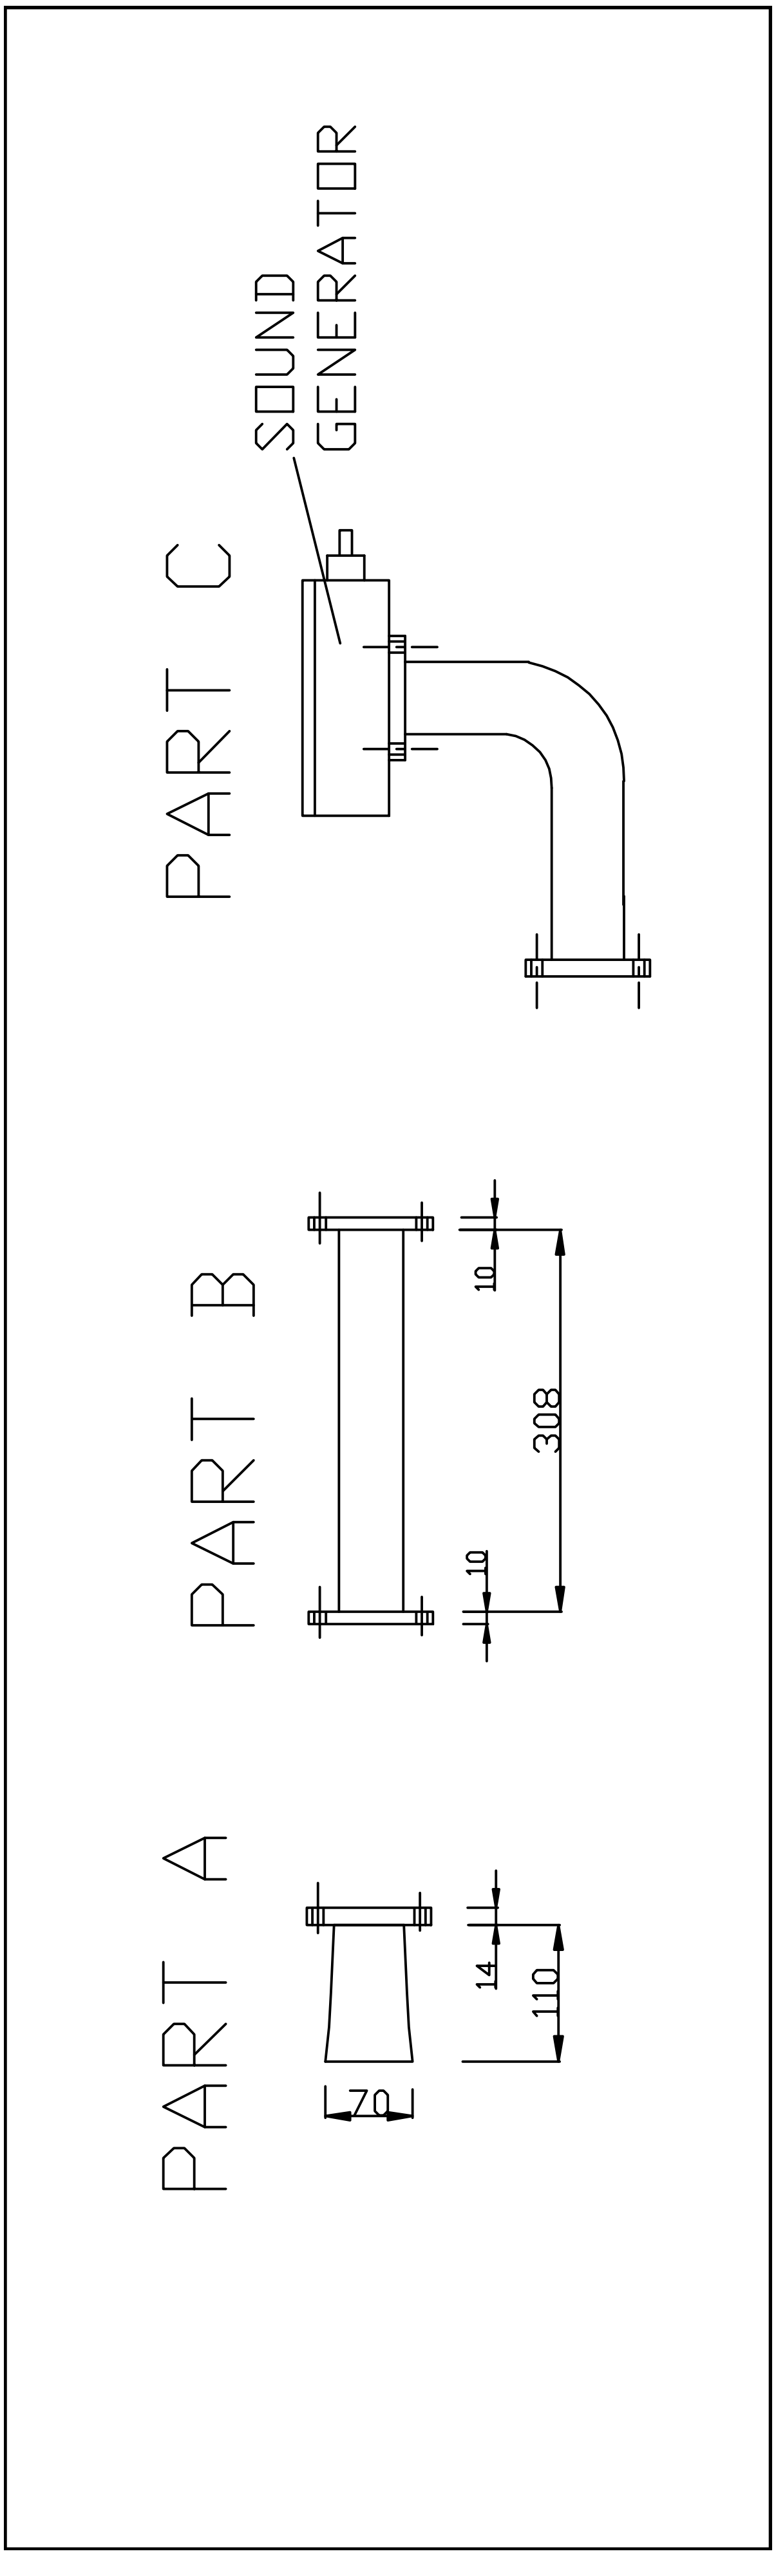

PART A
70
14
110
PART B
10
308
10
PART C
SOUND GENERATOR

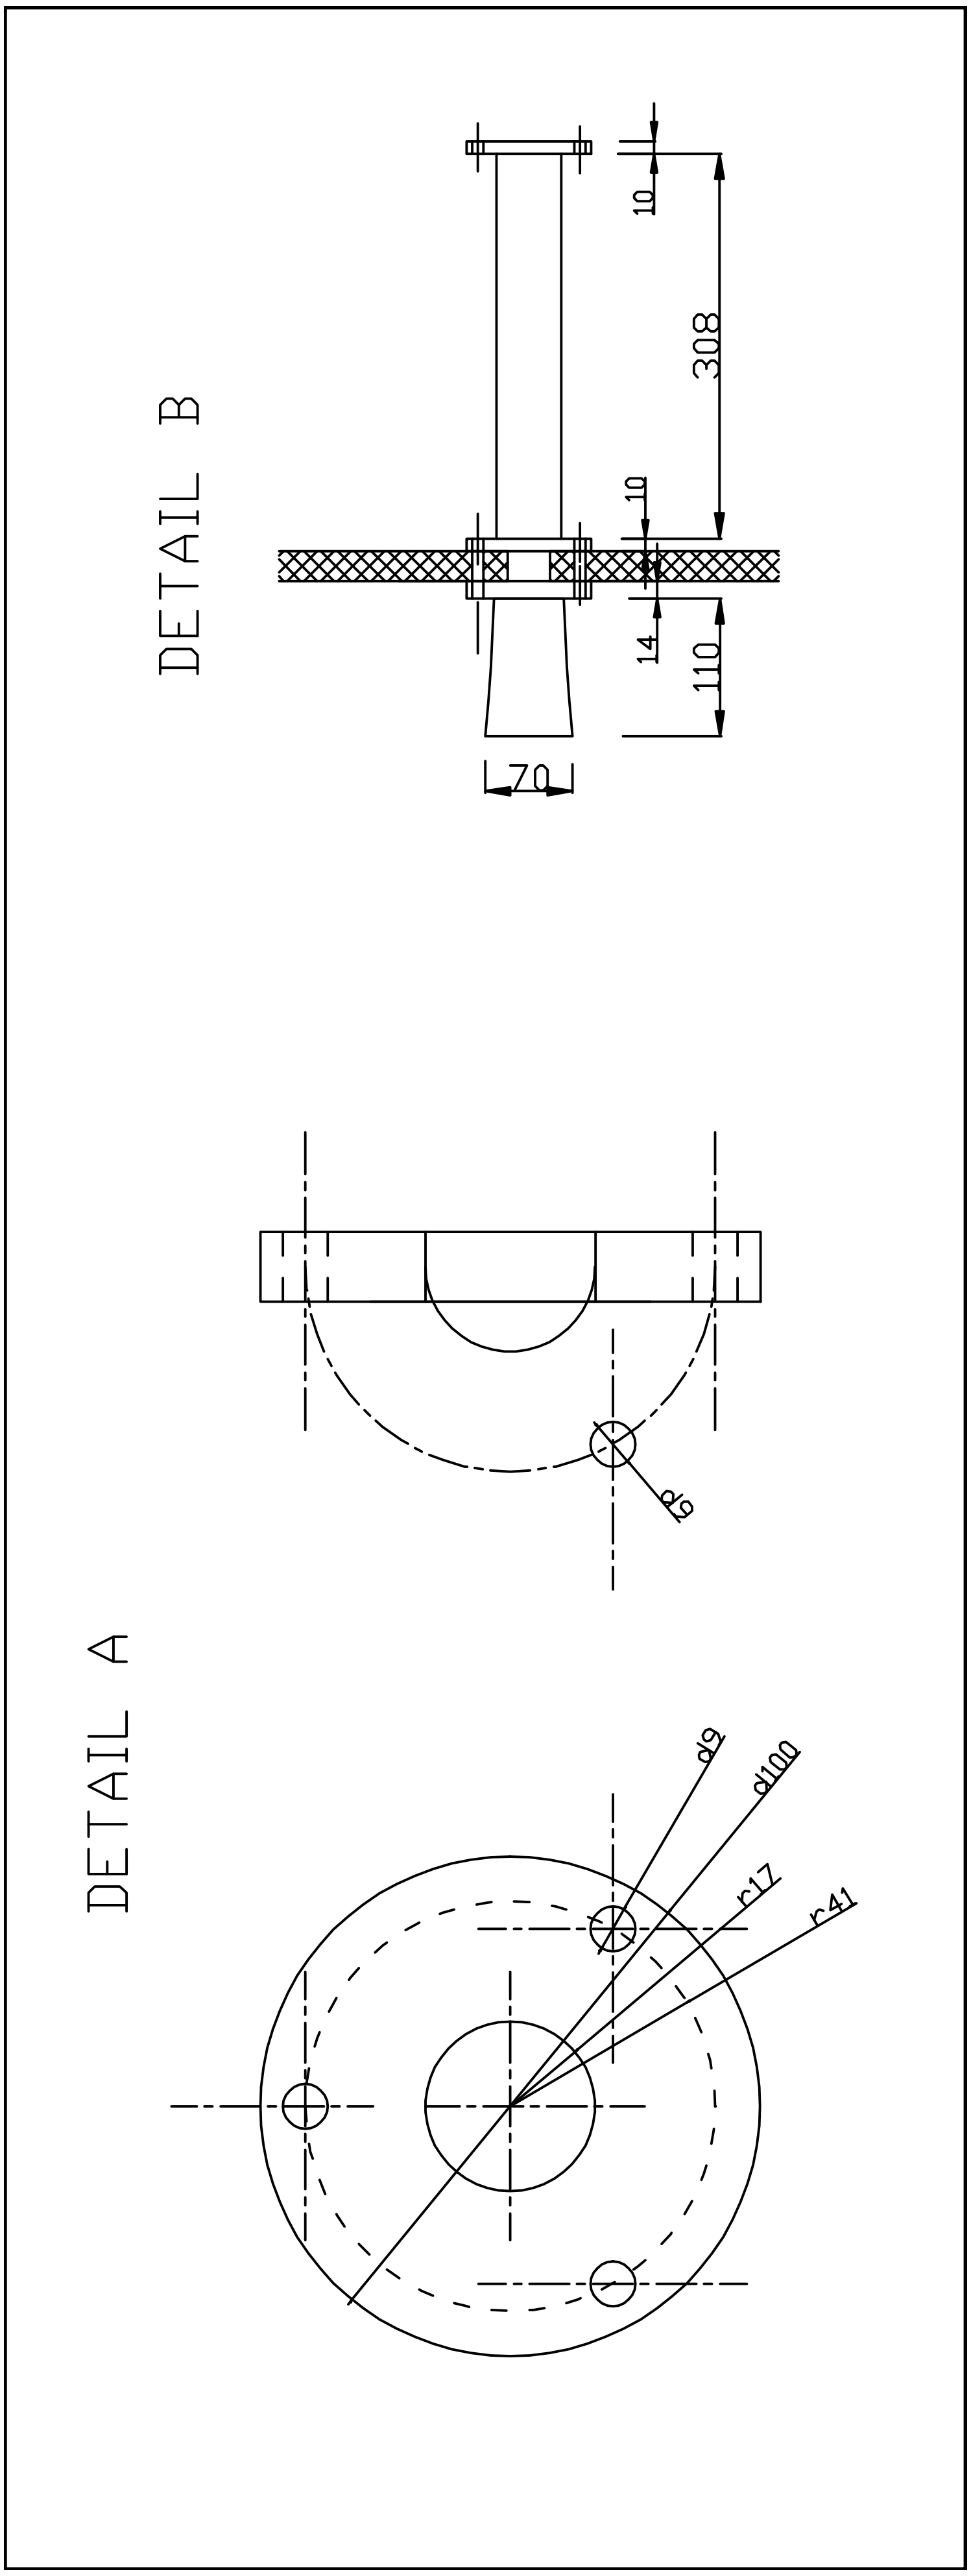
DETAIL A
d9
d100
r17
r41
d9
DETAIL B
10
308
10
14
110
70

DETAIL C
ANGLE BAR 80x80x8 mm

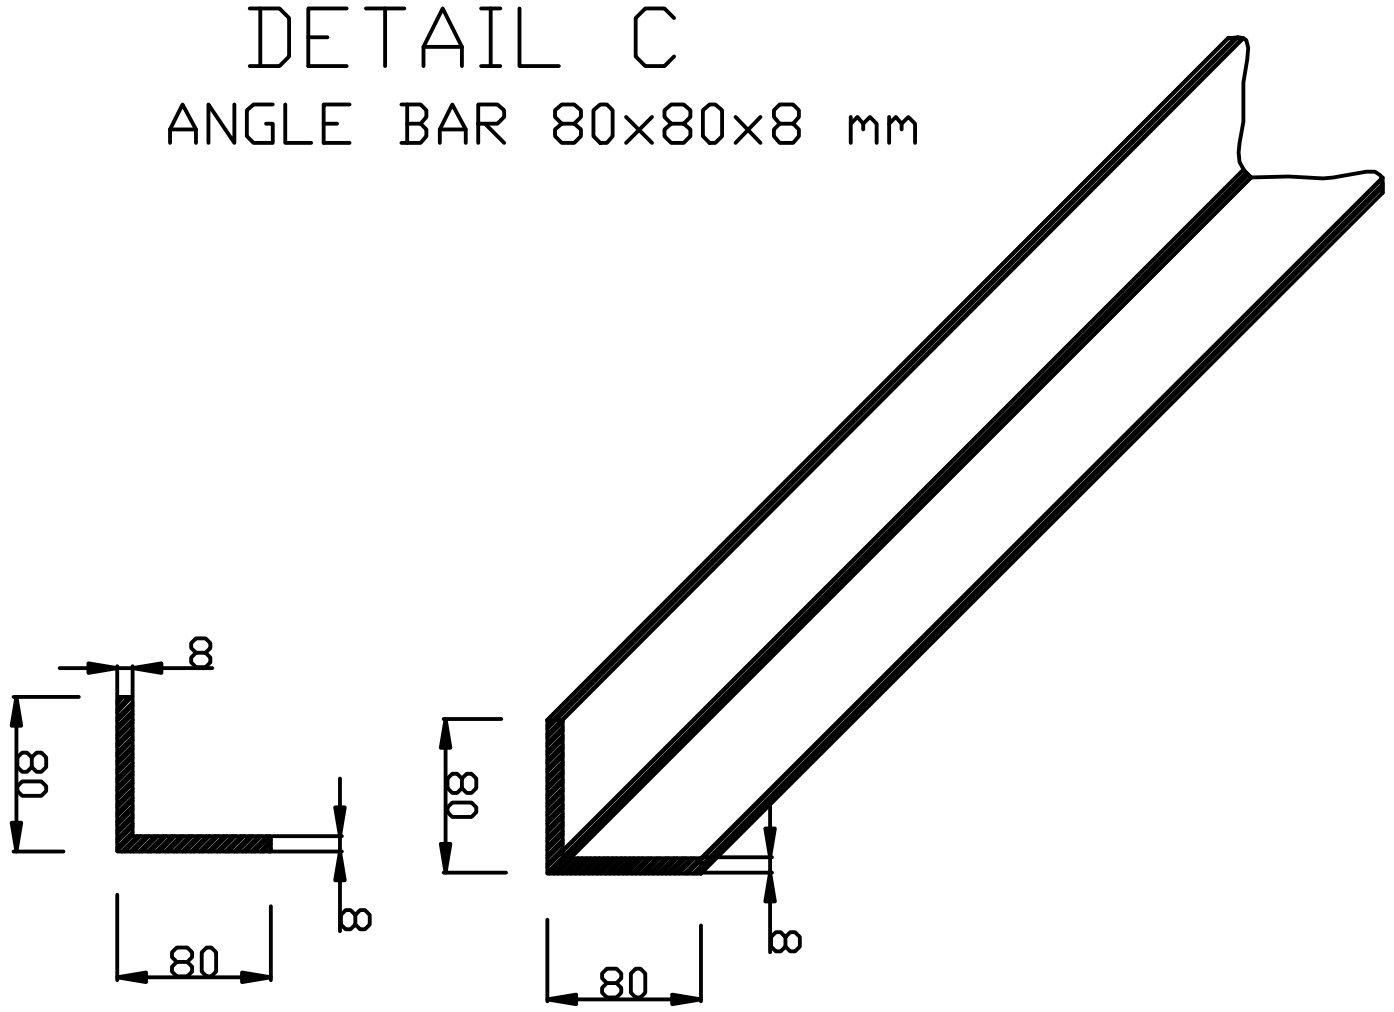

DETAIL D
'U' BOLT



A=PIPE DIAMETER=60mm
B=BOLT DIAMETER 10mm
C=THREAD LENGTH=50mm
D=INTERNAL DEPTH=110mm

PRIMASOUND LTD

ACOUSTIC CLEANERS

1-3, Afroditis & Karpathou str., Piraeus

18539, GREECE
TEL: 0030 210 4519608

FAX: 0030 210 4519721

info@primasound.com

INSTALLATION PROCEDURE FOR ACOUSTIC CLEANER '360' (GAS BOILERS).

(STEP 1): Cut an opening hole diameter d 34 mm on the gas boiler manhole (see DETAIL A).

(STEP 2): Drill three (3) holes with diameter d 9 mm around opening hole of STEP 1, at a radius of 41 mm, at 120 degrees distance between the 3 holes (see DETAIL A).

(STEP 3): Fit manhole (STEP 1), between PART A and PART B and tighten with the included three (3) M8 bolts around. (see DETAIL B).

(STEP 4) Assembly PART C on to PART B by using the three (3) included M8 bolts.

(STEP 5) Connect the solenoid valve (included) to filter regulation (also included).

(STEP 6) Connect the system with Air Supply 6-7 bar by flexible air hose.

Note: Support is to be fitted, including ANGLE BAR stiffener and appropriate U-BOLT. We suggest angle bar 80x80x8 mm (weight 9.66 kg/m) (see DETAIL C) and U-BOLT for pipe diameter 60 mm (see DETAIL D).

TYPE "360" FOR GAS BOILER

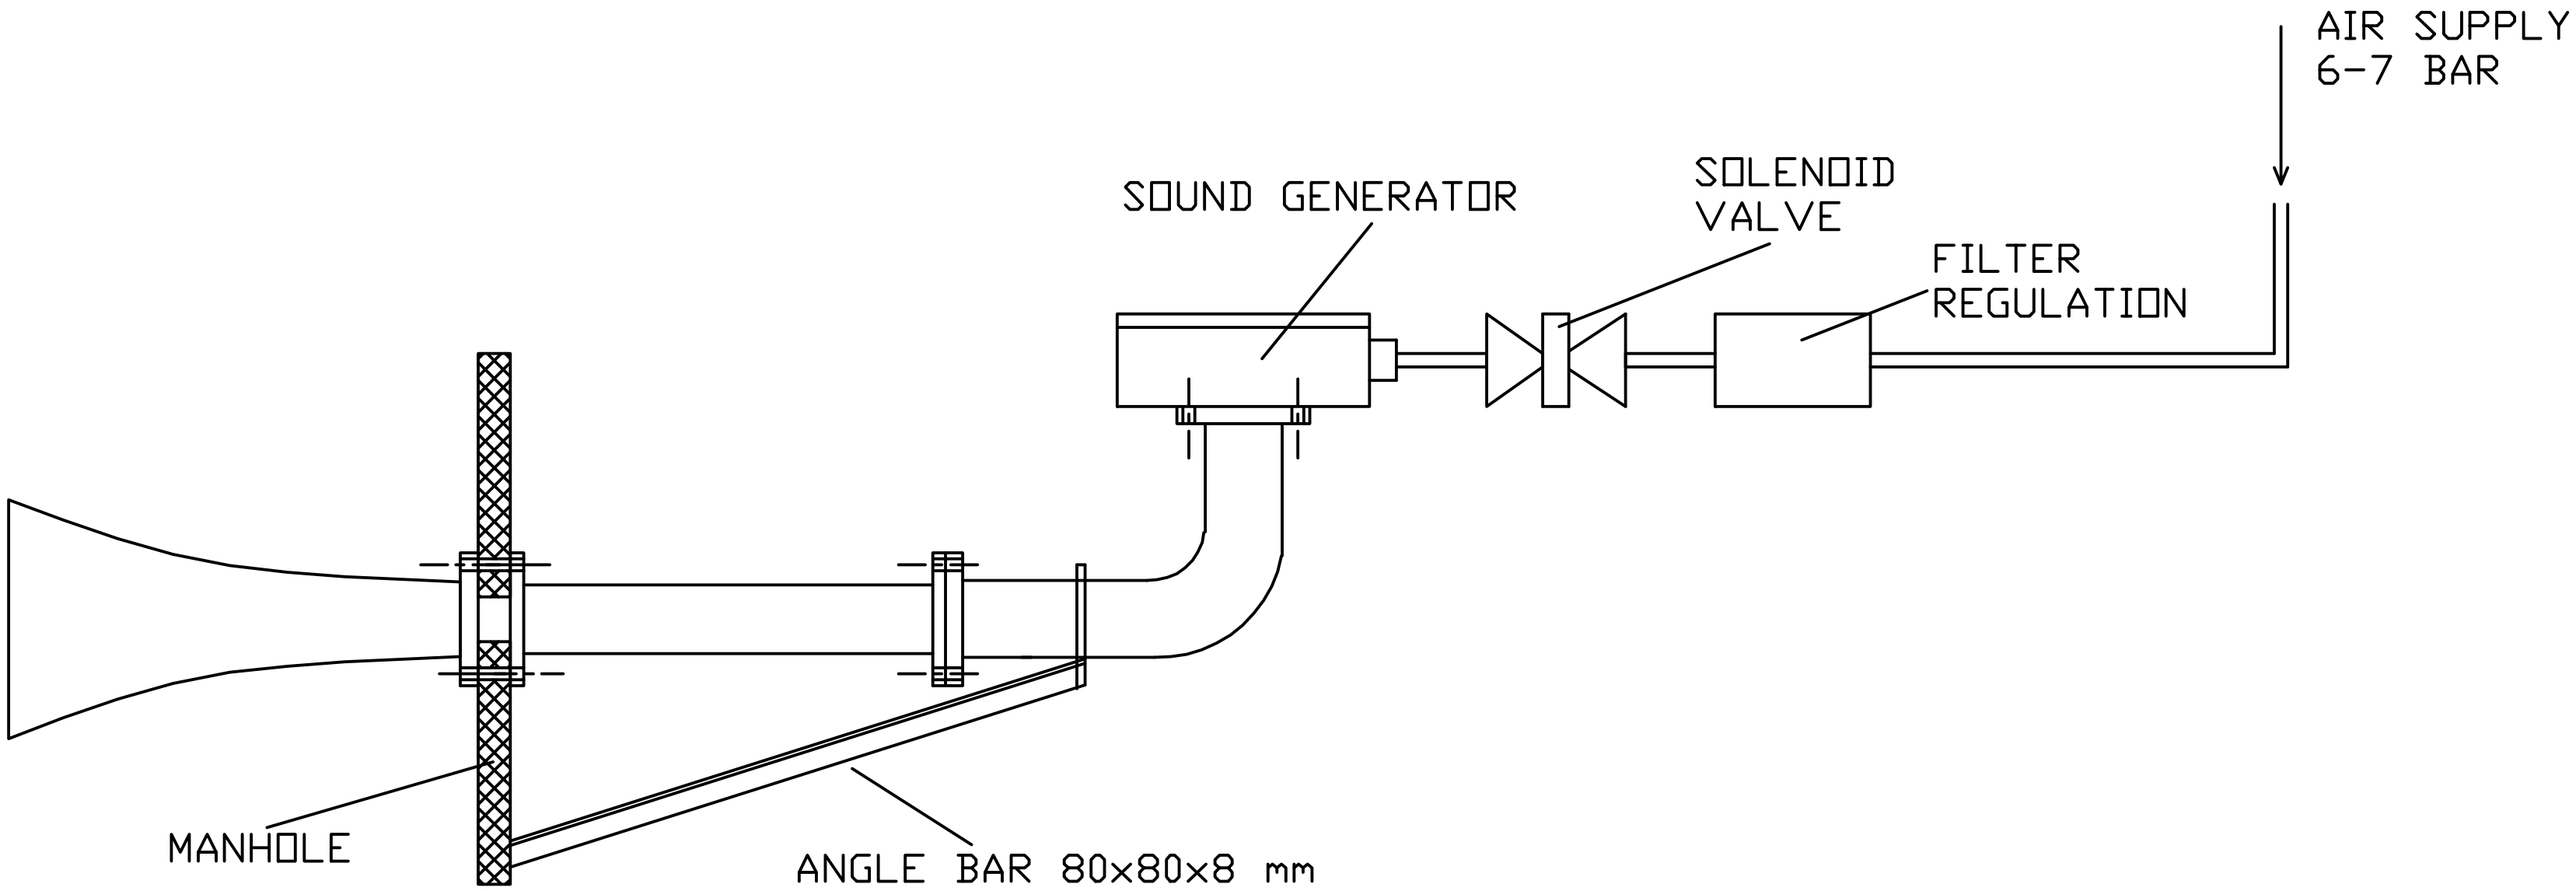

	DATE	NAME
DRAWN	20-1-2014	GIAKOUMIS M
CHECK	21-1-2014	GIAKOUMIS M
APPR.	21-1-2014	STRATIS B

No	REVISION	DATE	NAME

PRIMASOUND LTD
ACOUSTIC
CLEANERS

"ASSEMBLY DRAWING FOR ACOUSTIC CLEANER 360 FOR GAS BOILERS"

DRW NO 'PS_ASS_360_GasBoiler'

SCALE: No scale

FILE: PS DRAWINGS

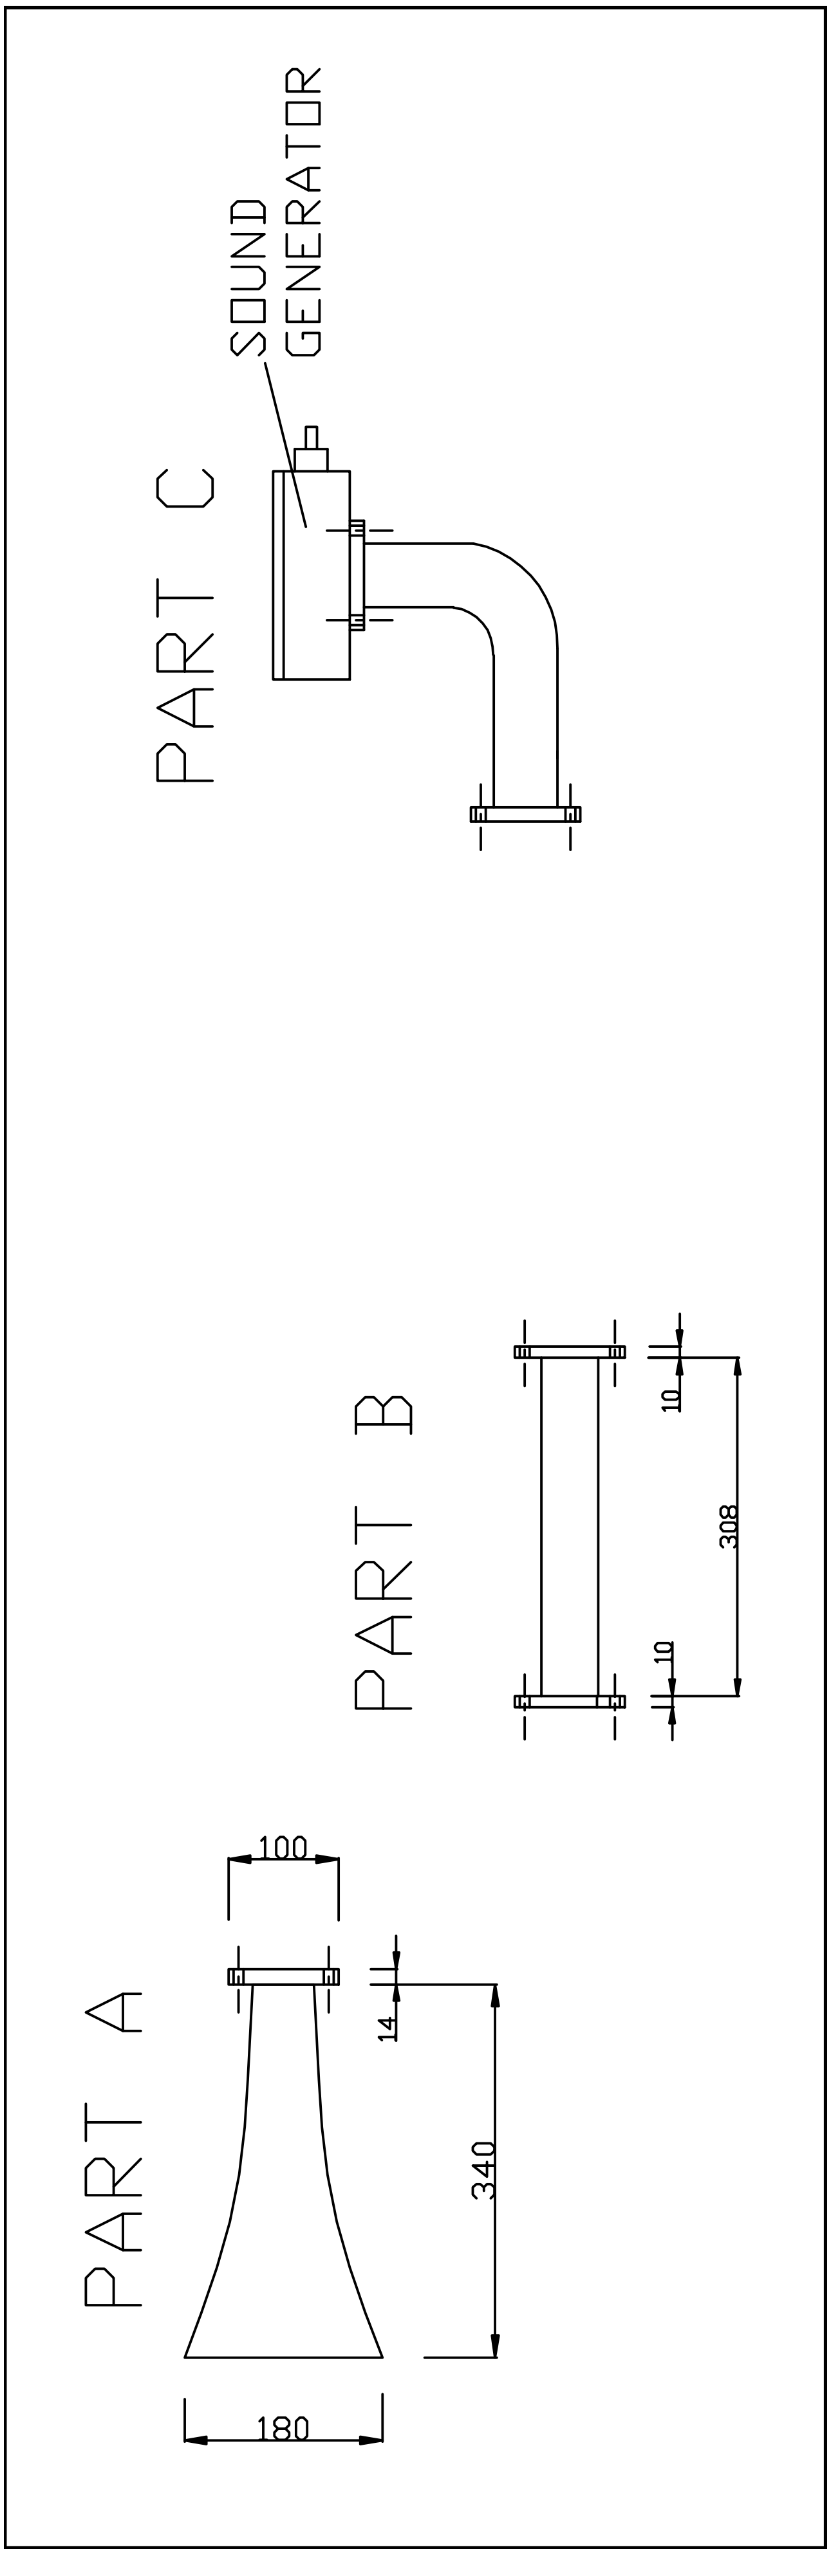
PART C
SOUND GENERATOR
PART B
10
308
10
PART A
100
14
340
180

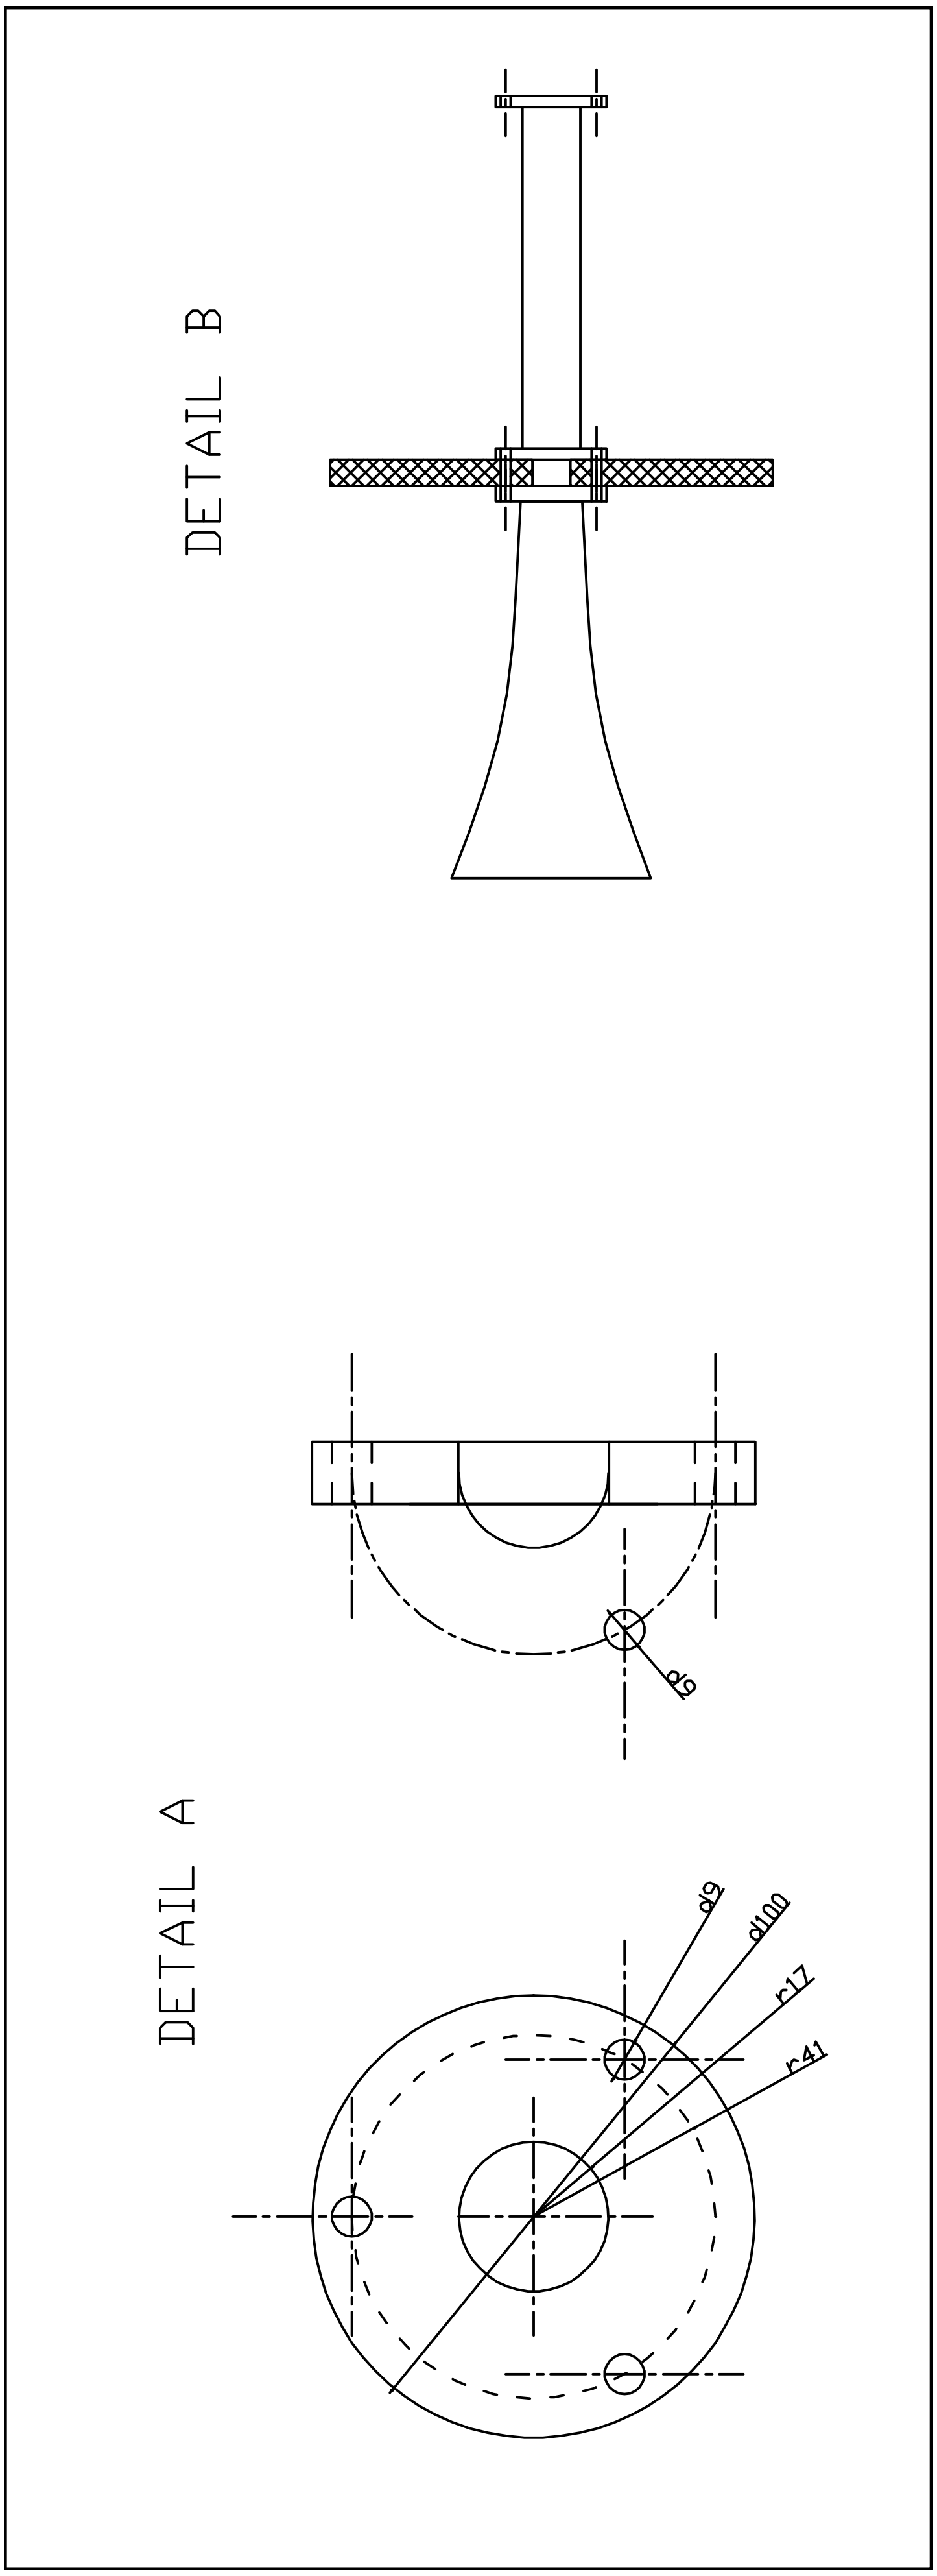
DETAIL B
DETAIL A
d9
d9
d100
r17
r41

DETAIL C

ANGLE BAR 80x80x8 mm

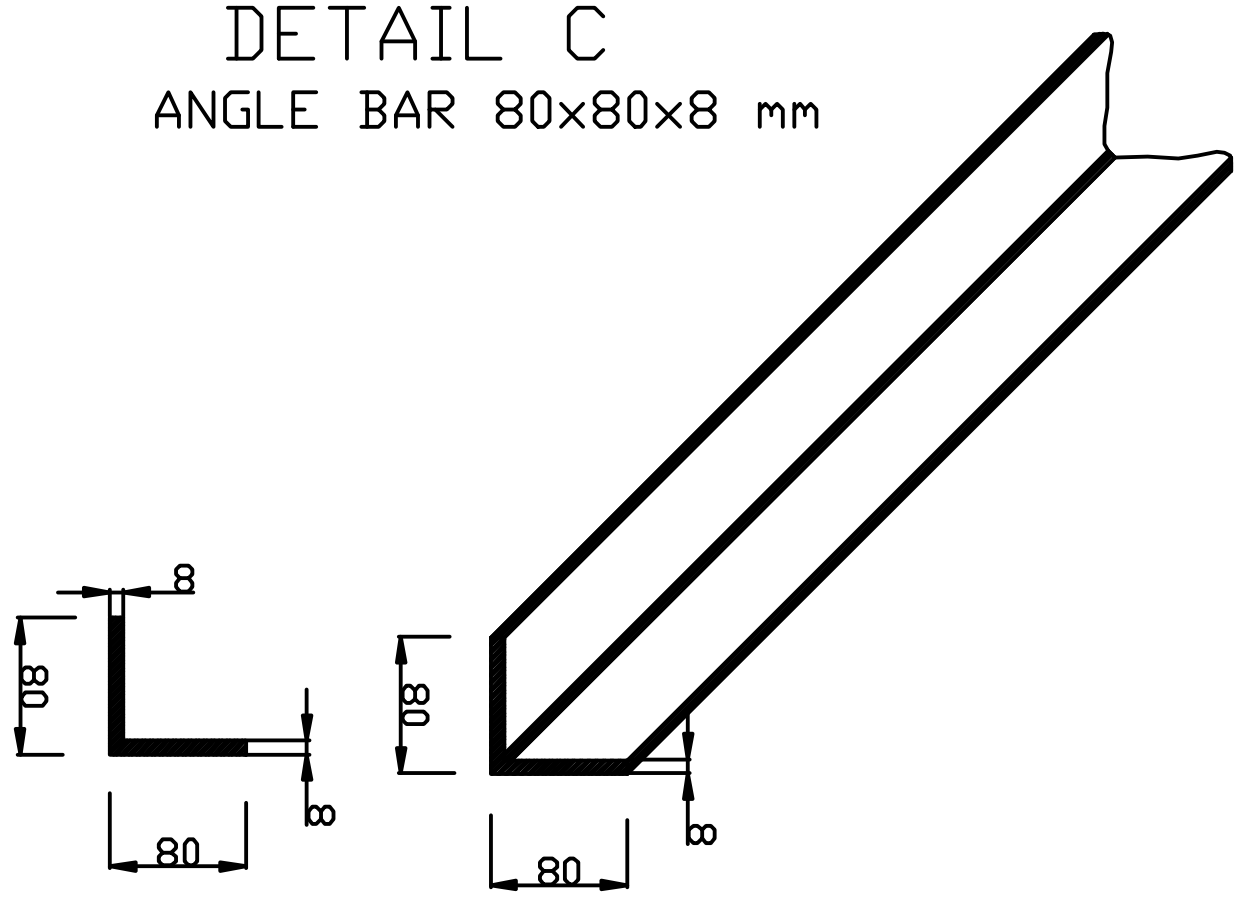

DETAIL D

'U' BOLT



A=PIPE DIAMETER=60mm
B=BOLT DIAMETER 10mm
C=THREAD LENGTH=50mm
D=INTERNAL DEPTH=110mm

PRIMASOUND LTD
INNOVATIVE PROCESS TECHNOLOGY
IMPORT – EXPORT – TRADE OF MACHINES
1-3 Afroditis & Karpathou str.

Piraeus - Athens

18539 Greece

Phone: 0030 210 4519608

Fax: 0030 210 4519721

info@primasound.com

www.primasound.com - www.primaweld.com

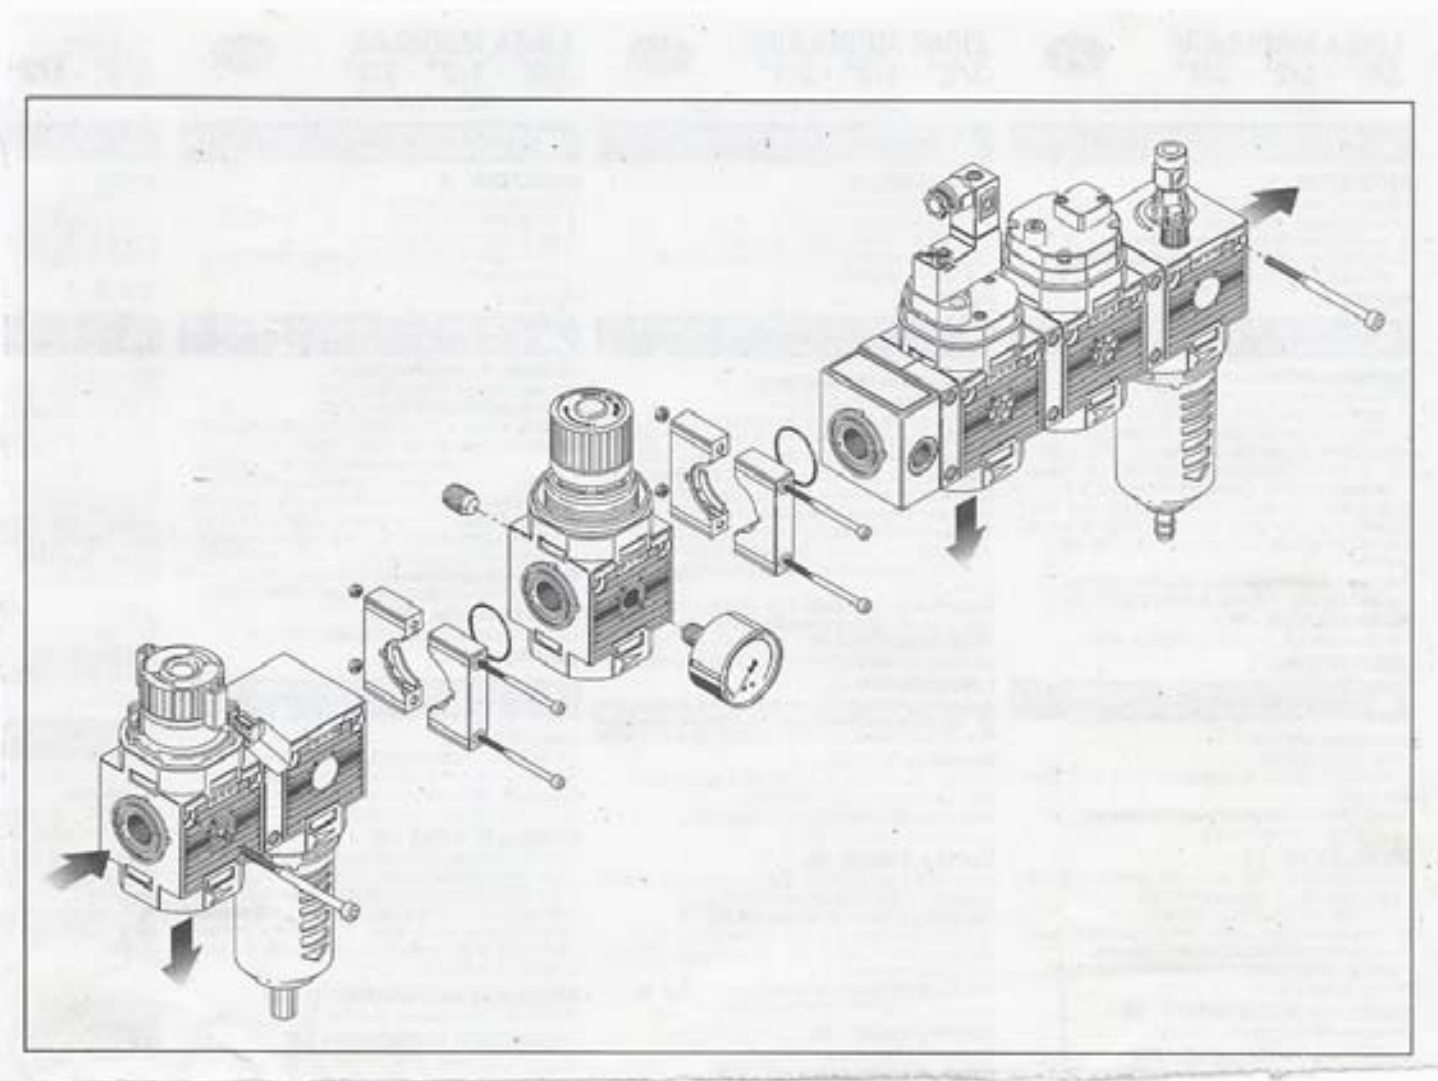

PRIMASOUND LTD

INNOVATIVE PROCESS TECHNOLOGY
IMPORT – EXPORT – TRADE OF MACHINES
1-3 Afroditis & Karpathou str.

Piraeus - Athens

18539 Greece

Phone: 0030 210 4519608

Fax: 0030 210 4519721

info@primasound.com

www.primasound.com - **www.primaweld.com**

CEME

FLUID CONTROL COMPONENTS



CARATTERISTICHE *SPECIFICATIONS*

ATTACCHI *PIPES* in → out	Ø mm	CODICE *CODE*	KV m^3/h	M.O.P.D. bar AC	M.O.P.D. bar DC	DIMENSIONI/*DIMENSIONS* mm A •	B •	C •	D •
1/4" NPT	11	8302	1.40	20	20	55	91	60	78
3/8" NPT	11	8303	1.50	20	20	55	91	60	78
1/2" NPT	11	8304	1.60	20	20	55	91	60	78
1/4"	11	8322	1.40	20	20	55	91	60	78
3/8"	11	8323	1.50	20	20	55	91	60	78
1/2"	11	8324	1.60	20	20	55	91	60	78

AZIONE DIRETTA - DIRECT ACTING - DIREKTGESTEUERTES P. MIN. = 0 ba

ATTACCHI *PIPES* in → out	Ø mm	CODICE *CODE*	KV m^3/h	M.O.P.D. bar AC	M.O.P.D. bar DC	DIMENSIONI/*DIMENSIONS* mm A •	B •	C •	D •
1/4"	11	8332	1.50	0.5	0.3	55	91	60	78
3/8"	11	8333	1.60	0.5	0.3	55	91	60	78
1/2"	11	8334	1.70	0.5	0.3	55	91	60	78

8332
8333
8334

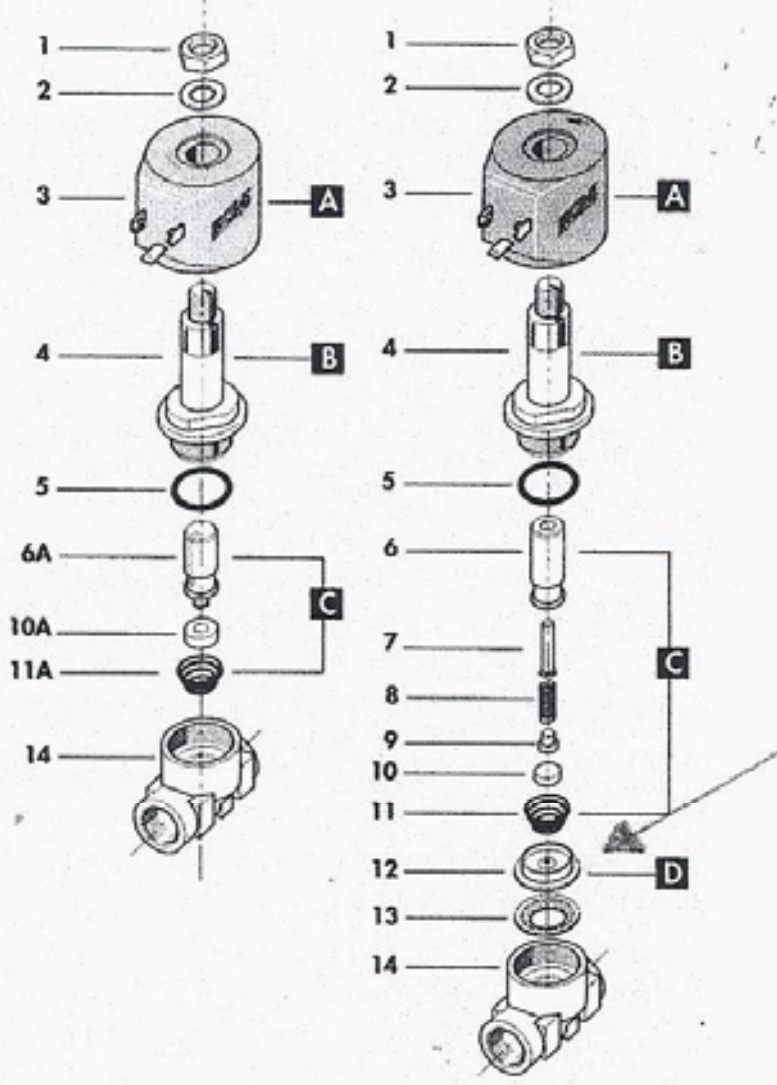

1	Dado	Lock nut	Mutter
2	Rondella	Washer	Beilagscheibe
3	Bobina	Coil	Magnetspule
4	Nucleo fisso	Tube top	Kern
5	O-ring	O-ring	O-ring
6	Nucleo mobile	Plunger	Plunger
7	Ammortizzatore	Shock-absorber	DÑmpfer
8	Molla	Spring	Feder
9	Piattello	Support	Scheibe
10	Pastiglia	Seal	Dichtung
11	Molla	Spring	Feder
12	Membrana	Diaphragm	Membrane
13	Piattello	Support	Scheibe
14	Corpo	Valve body base	Grundkörper
	RICAMBI	SPARE PARTS	ERSATZTEILE

1
2
3
4
5
6
7

CARATTERISTICHE ELETTRICHE
ELECTRICAL INFORMATION

			POTENZA, 8322-2 8332-3 NOMINALE *HOLDING*
V~	12 24 48 110 230 400	50 60 Hz	22VA
V=	12 24 48 110		21W

Per dettagli costruttivi sulle bobine vedi capitolo "INFORMAZIONI DI PR
For construction details of the coils see chapter "PROJECT INFORMATION'
Ausführliche Daten über die Ventilspulen finden Sie unter Abschnitt "TEC INFORMATIONEN""

MAX TEMPERATURA *MAX TEMPERATURE*

FLUIDI/*FLUIDS*				AMBIENTE/A
NBR	FPM	EPDM		80°(
90°C	150°C	130°C		

DIAGRAMMA PERDITA DI CARICO *PRESSURE LOSS DIAG*

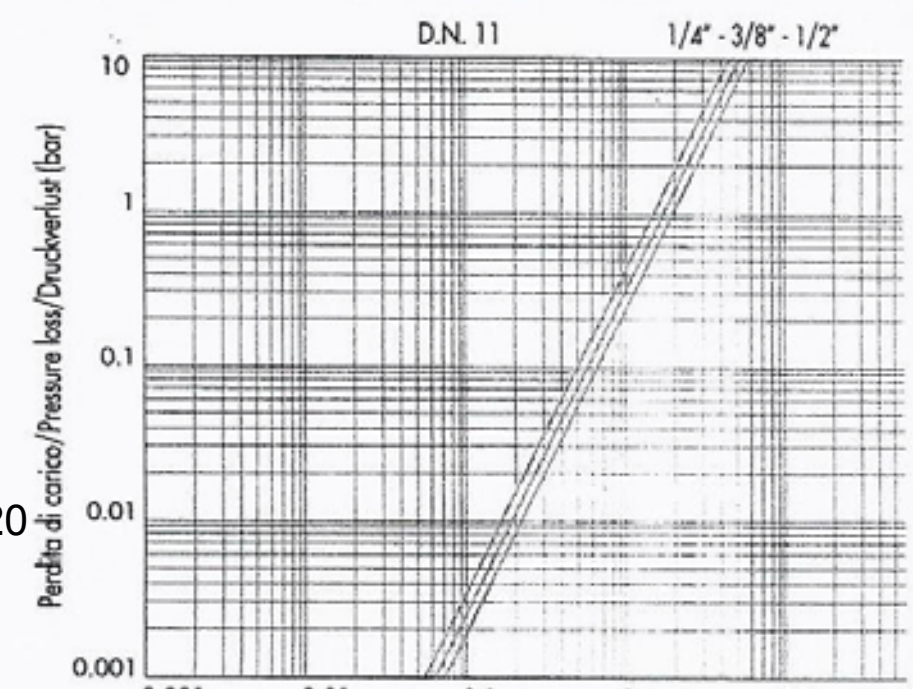

PRIMASOUND LTD

INNOVATIVE PROCESS TECHNOLOGY
IMPORT – EXPORT – TRADE OF MACHINES
1-3 Afroditis & Karpathou str.

Piraeus - Athens

18539 Greece

Phone: 0030 210 4519608

Fax: 0030 210 4519721

info@primasound.com

www.primasound.com - www.primaweld.com

FLUID CONTROL COMPONENTS CEME

ELETTROVALVOLA SERVOCOMANDATA 2/2 VIE N.C.
SOLENOID VALVE PILOT OPERATED 2/2 WAY N.C.
SERVOGESTEUERTES MAGNETVENTIL 2/2 WEGE S.G.

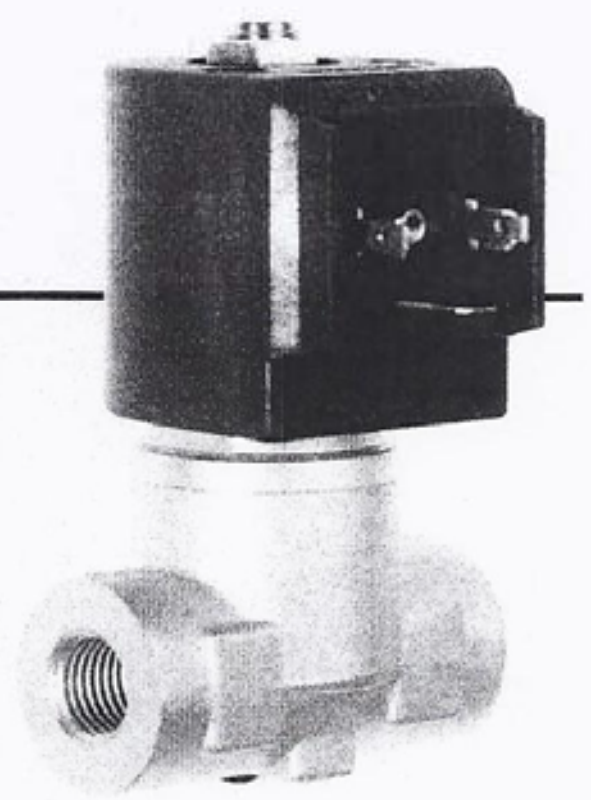

CARATTERISTICHE GENERALI

PRESSIONE MINIMA DIFFERENZIALE DI FUNZIONAMENTO 0,1 bar (modelli 8332-33-34 0 bar)

PARTI A CONTATTO CON IL FLUIDO:

TENUTA	FPM, NBR per 8332-8333-8334
CORPO	OTTONE
ORGANI INTERNI	ACCIAIO INOX
FLUIDI	ARIA - ACQUA - GAS INERTI - OLII LEGGERI
VALVOLA UNIDIREZIONALE	
VALVOLA ISPEZIONABILE	
Valvola fornita con	CONNETTORE TRIPOLARE UNI ISO 4400 (DIN 43650A)-IP65
POSIZIONE DI MONTAGGIO:	Qualsiasi; sconsigliata quella con bobina rivolta verso il basso
TEMPERATURA AMBIENTE:	80°C, in D.C. per temperature superiori ai 40°C, le performance (M.O.P.D.) potrebbero diminuire.
ESECUZIONI SPECIALI	TENUTA IN EPDM, NBR FORI FILETTATI PER IL FISSAGGIO DELLA VALVOLA VERSIONE AD AZIONE DIRETTA: 8332, 8333, 8334 PER I MODELLI 8332, 8333, 8334 E' DISPONIBILE UNA BOBINA SPECIALE PER AUMENTARE LA PRESTAZIONE IN D.C. (M.O.P.D.) A. 0,5 bar
ACCESSORI	TIMER PER REGOLAZIONE TEMPI D'INTERVENTO (vedi accessori a pagina 102)



NEW

ALTA FREQUENZA D'INTERVENTO
SCARICO CONDENSA COMPRESSORI

HIGH FREQUENCY APPLICATIONS
CONDENSATE DRAIN FOR COMPRESSORS

ANWENDUNGEN MIT HOHER SCHALTHÄUFIGKI
ABLASS KONDENSWASSER DER KOMPRESSORI

GENERAL FEATURES

MINIMUM DIFFERENTIAL WORKING PRESSURE 0,1 bar (models 8332-33-34 0 bar)

PARTS IN CONTACT WITH THE FLUID:

SEALING	FPM, NBR for 8332-8333-8334
BODY	BRASS
INTERNAL PARTS	STAINLESS STEEL
FLUIDS	AIR – WATER - INERT GAS - LIGHT OILS
ONE WAY DIRECTION VALVE	
SERVICEABLE VALVE	
VALVE SUPPLIED WITH	THREE POLE PLUG CONNECTOR UNI ISO 4400 (DIN 43650A)-IP65
MOUNTING POSITION	Any, the position with the coil downwards is not recommended.
AMBIENT TEMPERATURE	80°C, in D.C. for temperatures higher than 40°C, the performances (M.O.P.D.) could decrease.
SPECIAL EXECUTIONS	SEALING IN EPDM, NBR VALVE FIXING HOLES DIRECT ACTING VERSION (8332,8333,8334) FOR MODELS 8332,8333,8334, A SPECIAL COIL IS AVAILABLE TO INCREASE PERFORMANCES (M.O.P.D.) IN D.C. TO 0,5 BAR
ACCESSORIES	ADJUSTABLE TIMER TO PRESET DUTY CYCLE. (see accessories at page 102)

ALLGEMEINE MERKMALE

MINIMALER DIFFERENTIALARBEITSDRUCK 0,1 bar (Modelle 8332-33-34 0 bar)

MEDIUMS BERUEHRTE ELEMENTE

DICHTUNG	FPM, NBR fuer 8332-8333-8334
KOERPER	MESSING
INNERE ELEMENTE	EDELSTAHL
MEDIEN	LUFT-WASSER -EDELGAS—LEICHTE OELE
UNIDIREKTIONALES VENTIL	
VENTIL WARTUNGSFREUNDLICH	
LIEFERUMFANG	DREIPOLIGER STECKER UNI ISO 4400 (DIN 43650A)-IP65
MONTAGEPOSITION	Keine Einschraenkungen. Fuer die Montage mit dem Spulenkopf senkrecht nach unten, auf Anfrage.
UMGEBUNGSTEMPERATUR	80°C, im D.C-Betrieb koennen Temperaturen ueber 40°C, die Schaltkraefte (M.O.P.D.) des Ventils beeintraechtigen.
SONDERAUSFUEHRUNGEN	DICHTUNG AUS EPDM, NBR BEFESTIGUNGSBOHRUNGEN IM GRUNDKOERPER DIREKTGESTEUERTE VERSION: 8332,8333,8334 FUER DIE MODELLE 8332,8333,8334 BESTEHT DIE MOEGLICHKEIT, MITTELS EINER SONDERSPULE DIE SCHALTKRAEFTE (M.O.P.D.) IM D.C.-BEREICH AUF 0.5 BAR ZU ERHOEHE-



BOBINA TIPO **B12 M**