
ERM
Advanced Telematics

Email: info@ermtelematics.com
Tel: +972-3-9413313
Fax: +972-3-9413316

ERM Electronic Systems LTD
16 Hasar Shapira St. Rishon Lezion, Israel
www.ermtelematics.com





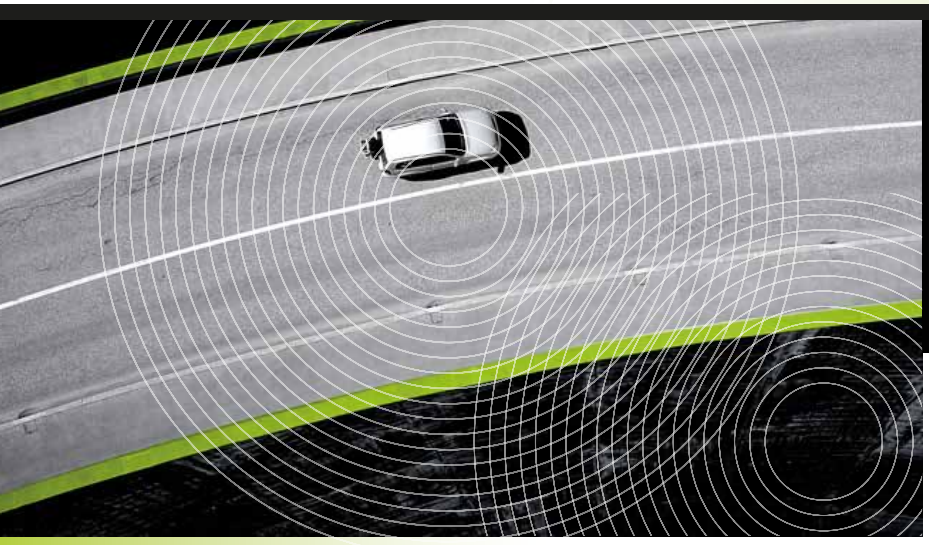

StarLink Tracker

Ultimate, Function Rich Telematics Solution

StarLink Tracker is a versatile telematics device, with highly configurable functionality and various variants to enrich and support any requirement and challenge in the Fleet Management, Vehicle Diagnostic, Driver and Passenger Safety and many additional automotive Connected Car and Telematics solutions requirements.
Many of these additional features can come embedded in the device or as external Add-Ons, added at any time during or after installation, from a growing portfolio of Add-Ons and Accessories.

StarLink Tracker is compatible with most vehicle types and complies with automotive, radio and safety standards worldwide.
With a wide variety of Add-Ons and Accessories StarLink Tracker offers the richest and most advanced solution for any fleet requirement, anywhere.

Product brochure version: 5.0

All rights reserved – ERM Electronic Systems LTD

FEATURES

1. 4G cellular module, fallback to 2G
2. Immobilization system
3. Geo-zone protection
4. FOTA
5. Embedded antennas
6. Vehicle battery diagnostics: charge, voltage and battery life (SoH)
7. Dedicated single wire com port, to use wide range of Add-Ons and Accessories
8. Output Logic Programming (OLP) for complex output signal generation
9. Full OTA support for Firmware update, configuration update I/O setup, Alert Rules, Geo-fencing and more
10. Optional Support as GateWay for Wiliot® Pixel Techonoloay (WG variant)

Available variants to choose from:



4G The device comes with 4G LTE CAT1/4 cellular module for communication technology, supporting global standard band frequencies. The module supports 2G fallback.

WF The device can function as a Wi-Fi hotspot, supporting up to 8 simultaneous connections, or be configured to operate as a Wi-Fi client to connect to a third-party Wi-Fi hotspot.

iAF The device features a Bluetooth® Low Energy communication module, enabling data transmission between the device and a mobile phone or tablet, as well as reading data from various external sensors and tags.

SF The device is equipped with a 3D high-sensitivity accelerometer and gyro, enhanced by ERM's Safety technology for driving behavior analysis and BlackBox functionality. This technology can detect 20 types of maneuvers at 3 intensity levels, providing event-based driving behavior alerts.

CAN The device features ERM's CAN Engine technology, offering a CANBUS interface compatible with various protocols such as CANBUS, OBD2, and FMS J1939. It supports up to 12 parameters, including the odometer.

232 The device comes with serial RS232 port to enable connection of external serial supported devices.

EA The device includes external GPS and cellular antenna ports, allowing for enhanced communication in vehicles where internal antennas may have limited performance, such as armored vehicles.

EC ERM's patented RF technology, eConnect, is designed to enable tracking of vehicles with jammed cellular and GPS signals by providing alternative communication between vehicles. The system operates on either 433MHz or 915MHz frequencies, depending on the request.

VD The device supports voice communication with the driver, featuring an external speaker and dedicated microphone included in this variant kit. Additionally, there is an option to use ERM's keypad or a push button for quick dialing and manual answering or disconnecting of calls.

ID The device features driver identification technology for effective driver management, supporting both Black and White Lists. The ID variant includes two proximity remote controls (eCom Tags) and accommodates various identification methods. Additional tags can be added at any time.

WG The device includes support for Wiliot® Pixel and utilizes **iRF** 2.4GHz Bluetooth Low Energy for two-way communication. It functions as a gateway, transmitting Pixel data to the cloud.

TECHNICAL SPECIFICATIONS

Cellular	LTE Bands CAT-4 (bands: 1,3,5,8) / CAT-1 (bands: 1,2,3,4,5,7,8,28) / CAT-m1,NB-1 (bands: 1,2,3,4,5,8,12,13,18,19,20,25,26,28,[39 for CAT-m1 only]) 2G/GPRS backward compatibility All cellular options come with optimized embedded antenna.
Wi-Fi (optional with WF variant only)	2.4GHz bands b/g/n
Location	GPS/GLONASS/GALILEO, Active antenna, Sensitivity -165 dBAcquisition (normal): cold 34s, warm 34s, hot 1s, accuracy: 2.5m CEP + Embedded optimized antenna
Communication	TCP/IP, text messages, Bluetooth® 2.4Ghz v4.0 (with iRF / WG variants only)
Connectors	10-pin Molex connector
Input Ports	Up to 4 inputs for general use, additional I/Os with external HUB/junction box
Output Ports	Up to 4 outputs for general use, active low, 1A
Analog Ports	2 inputs using an external adaptor 0-12V and 0-5V (optional using EDA Analog)
Dedicated Ports	Ignition port, one data wire for proprietary accessories (eNet protocol)
Power Supply	9-80VDC, 20-30mA (average), Low power mode (GPS off) < 10mA, Power save mode (standby) < 3.0mA (average)
Backup Battery	Rechargeable, 3.6V, 750mAh (Li-ion)
Vehicle Interface	Ignition On/Off, Engine On/Off (by voltage), VSS, CANBUS (optional using eData/ CANalog/eCAN Add-ons)
Configuration / Firmware Update	OTA/Via Standard PC USB Port, parameters setup, software programming
Data Logger	5,000 to 60,000 messages (depending on the variant)

ENVIRONMENT

Operating Temperature	-20 to 70° C
Storage Temperature	-40 to 85° C
Dimensions	9.2cm x 6.5cm x 2.8cm
Weight (NET)	120g
Durability	Vibration Resistance, IP65 (optional with Rubber Cover)
Max. Relative Humidity	90(±5)%

All rights reserved – ERM Electronic Systems LTD