


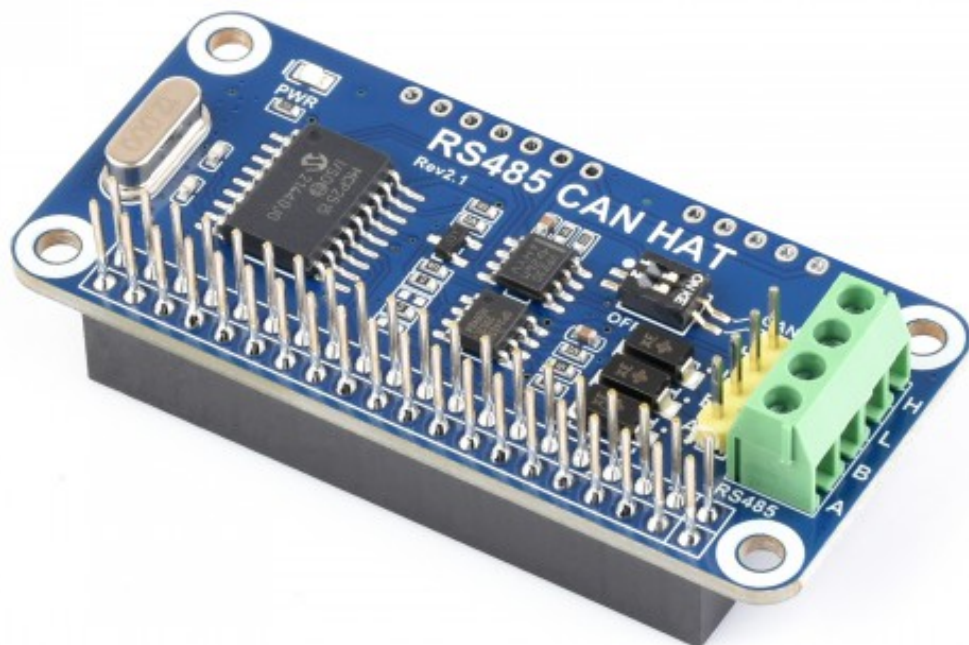

[Interface](#) / [Expansion](#) / [Power](#), [RS232](#) / [RS485](#) / [CAN](#) / [DALI2](#) , [Raspberry Pi Zero 2 W](#)

RS485 CAN HAT for Raspberry Pi

SKU 14882
Part No. RS485 CAN HAT
Brand Waveshare

CA\$19^{.90}


1

ADD TO CART

Price	Quantity
CA\$19.90	1
CA\$19.05	2
CA\$18.62	3
CA\$18.45	4+

 Chat
4+

Related Products:

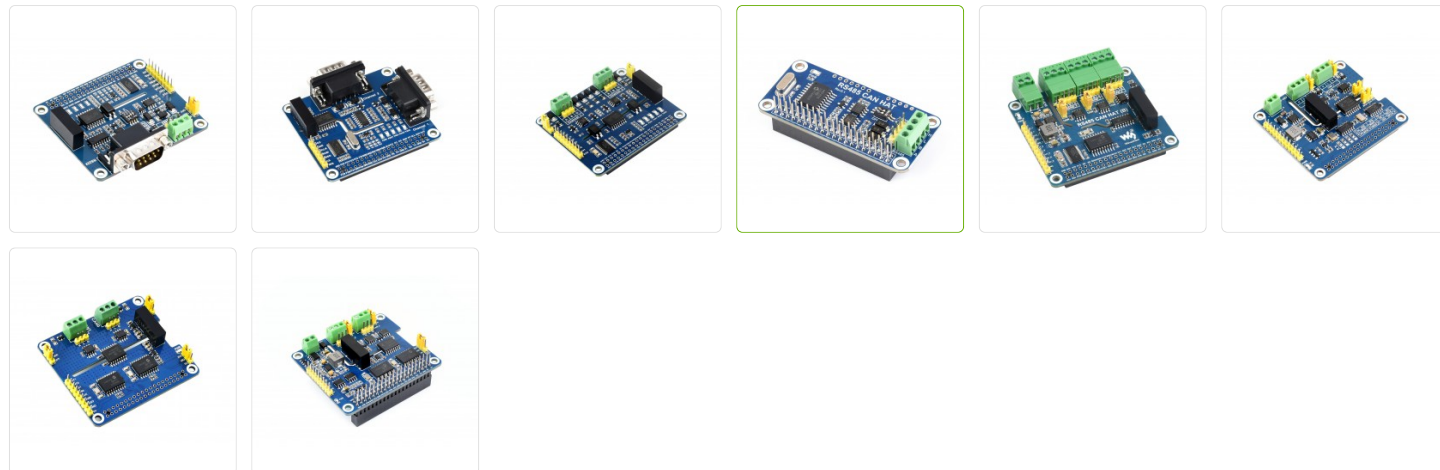[Description](#) [Package Content](#) [Wiki](#)

RS485 CAN HAT For Raspberry Pi, Allows Stable Long-Distance Communication

RS485 CAN HAT For Raspberry Pi

Allows Stable Long-Distance Communication Between Raspberry Pi And Other Devices

Comes With Online Development Resources And Manual

 Chat



Features At A Glance

- Standard Raspberry Pi 40PIN GPIO extension header, supports Raspberry Pi series boards
- CAN function, onboard CAN controller MCP2515 via SPI interface, onboard transceiver SIT65HVD230DR
- RS485 function, controlled via UART, half-duplex communication, supports automatic TX/RX control without programming, onboard transceiver SP3485
- Onboard 120Ω terminal resistor for RS485 and CAN interfaces, enabled via DIP switch
- Onboard TVS (Transient Voltage Suppressor), effectively suppress surge voltage and transient spike voltage in the circuit for RS485 transceiving, lightningproof & anti-electrostatic
- Reserved control header, allows working with other control boards
- Comes with online development resources and manual (examples in wiringPi/python)

Specifications

CAN CONTROLLER	MCP2515	OPERATING VOLTAGE	3.3V
CAN TRANSCEIVER	SIT65HVD230DR	MOUNTING HOLE SIZE	3.0mm
485 TRANSCEIVER	SP3485	DIMENSION	65×30mm


[Chat](#)

Designed For Raspberry Pi Series

Standard Raspberry Pi 40PIN GPIO Header, Customized For Raspberry Pi Series Boards

Reserved Control Header

for connecting with other control boards

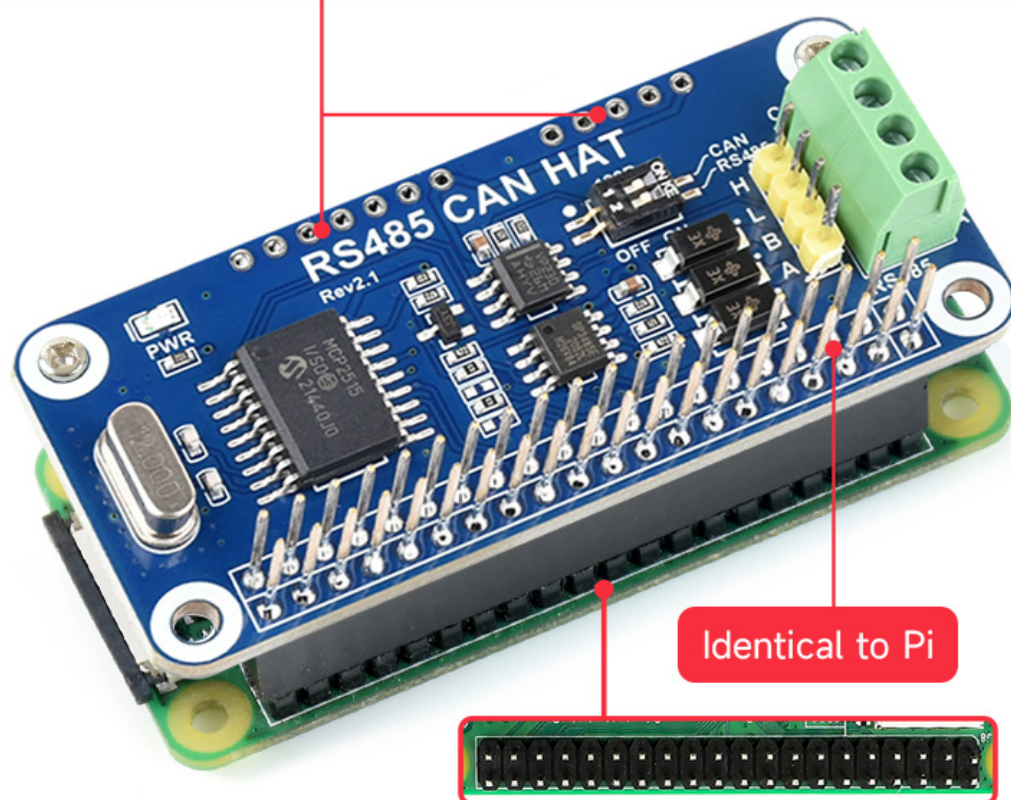


Identical to Pi

Raspberry Pi 40PIN GPIO Header

Expand CAN And RS485 Functions

CAN: Onboard CAN Controller MCP2515 Via SPI Interface, With Transceiver SIT65HVD230DR

RS485: Controlled Via UART, Half-Duplex Communication, Onboard Transceiver SP3485

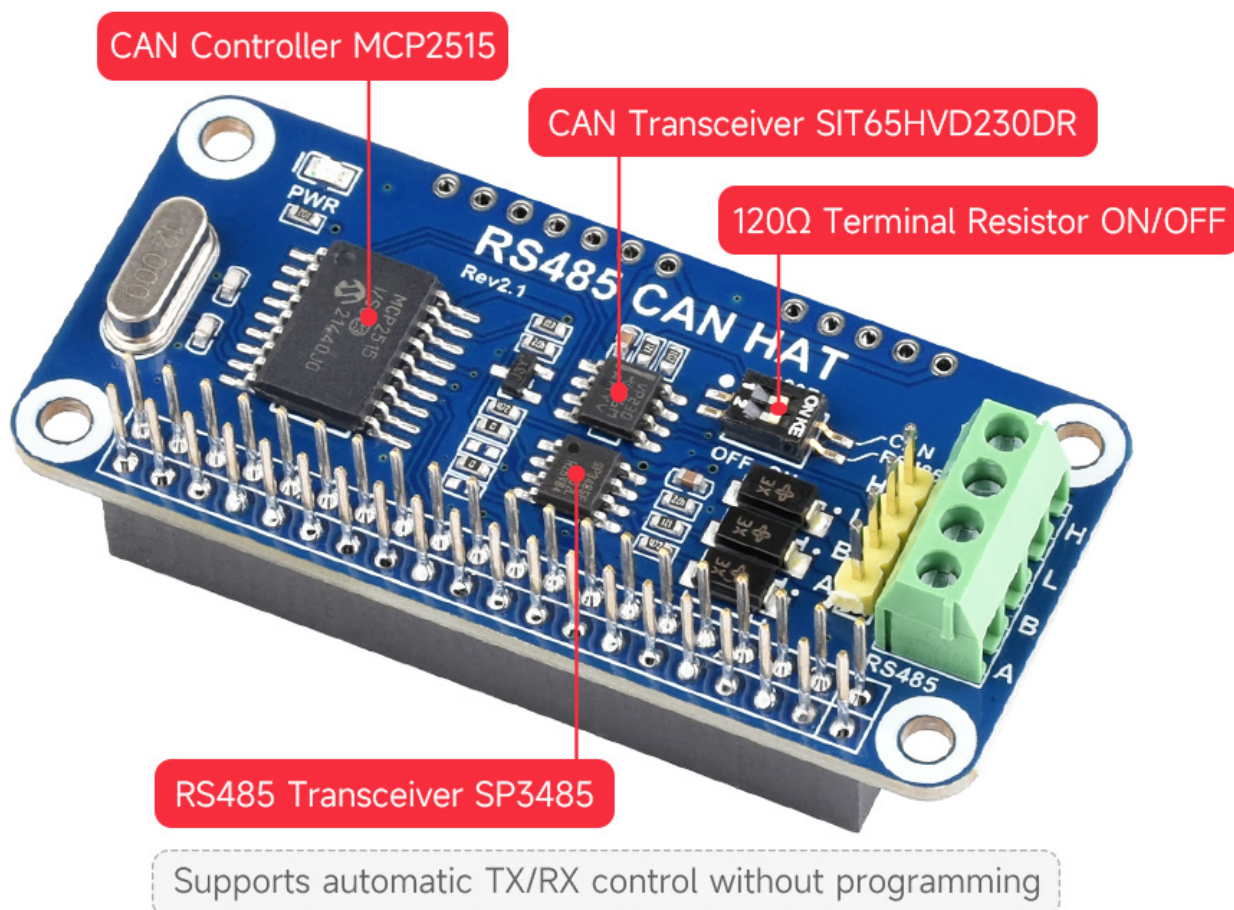


Onboard Transient Voltage Suppressor


Effectively Suppress Surge Voltage And Transient Spike Voltage In The Circuit For RS485 Transceiving

Lightningproof & Anti-electrostatic

Transient Voltage Suppressor

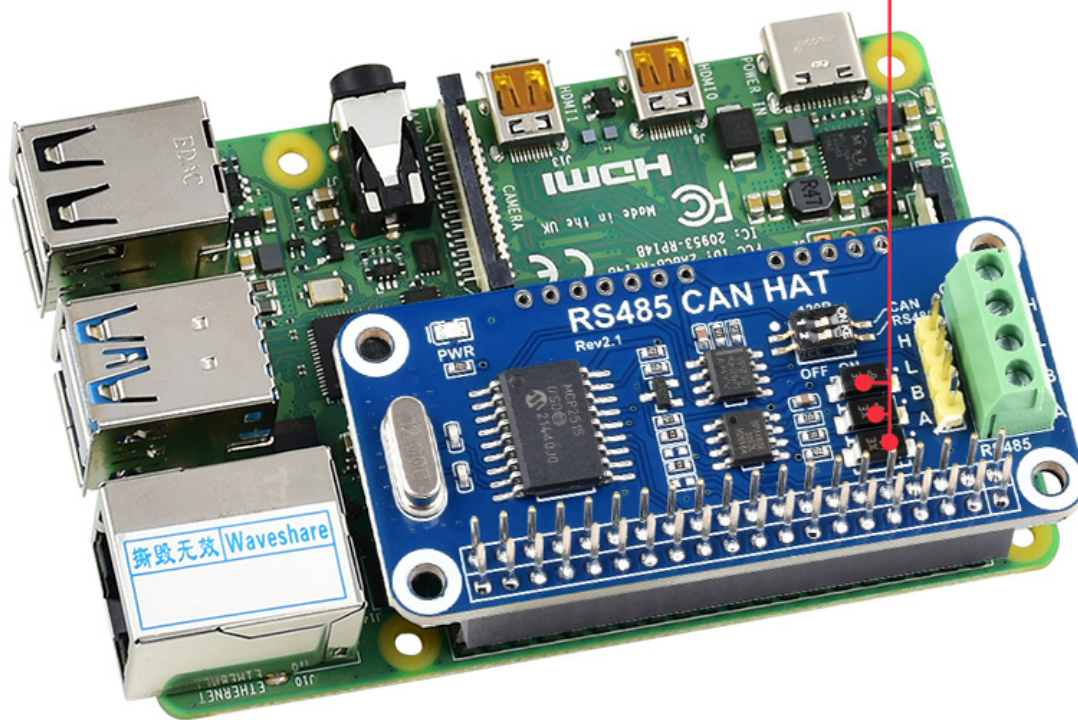


Pin Definition

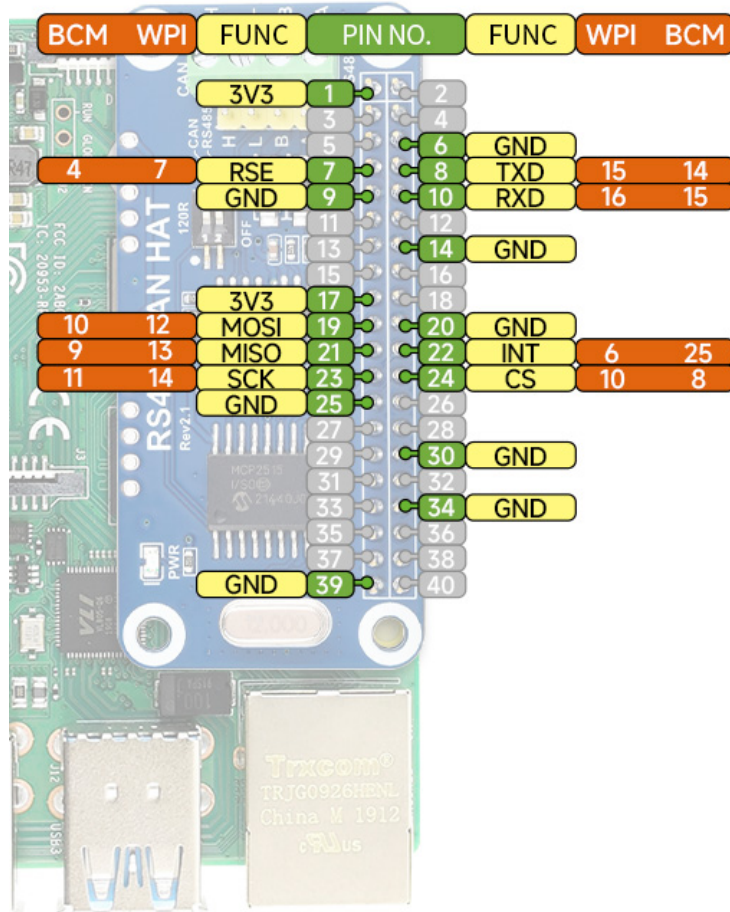


3V3	3.3V power supply
GND	Ground
SCK	SPI clock input
MOSI	SPI data input
MISO	SPI data output
CS	SPI chip select
INT	Interrupt output
RXD	RS485 UART receive
TXD	RS485 UART transmit
RSE	RS485 TX/RX control (auto control by default, some soldering is required to enable manual control), high for TX, low for RX

Product Show

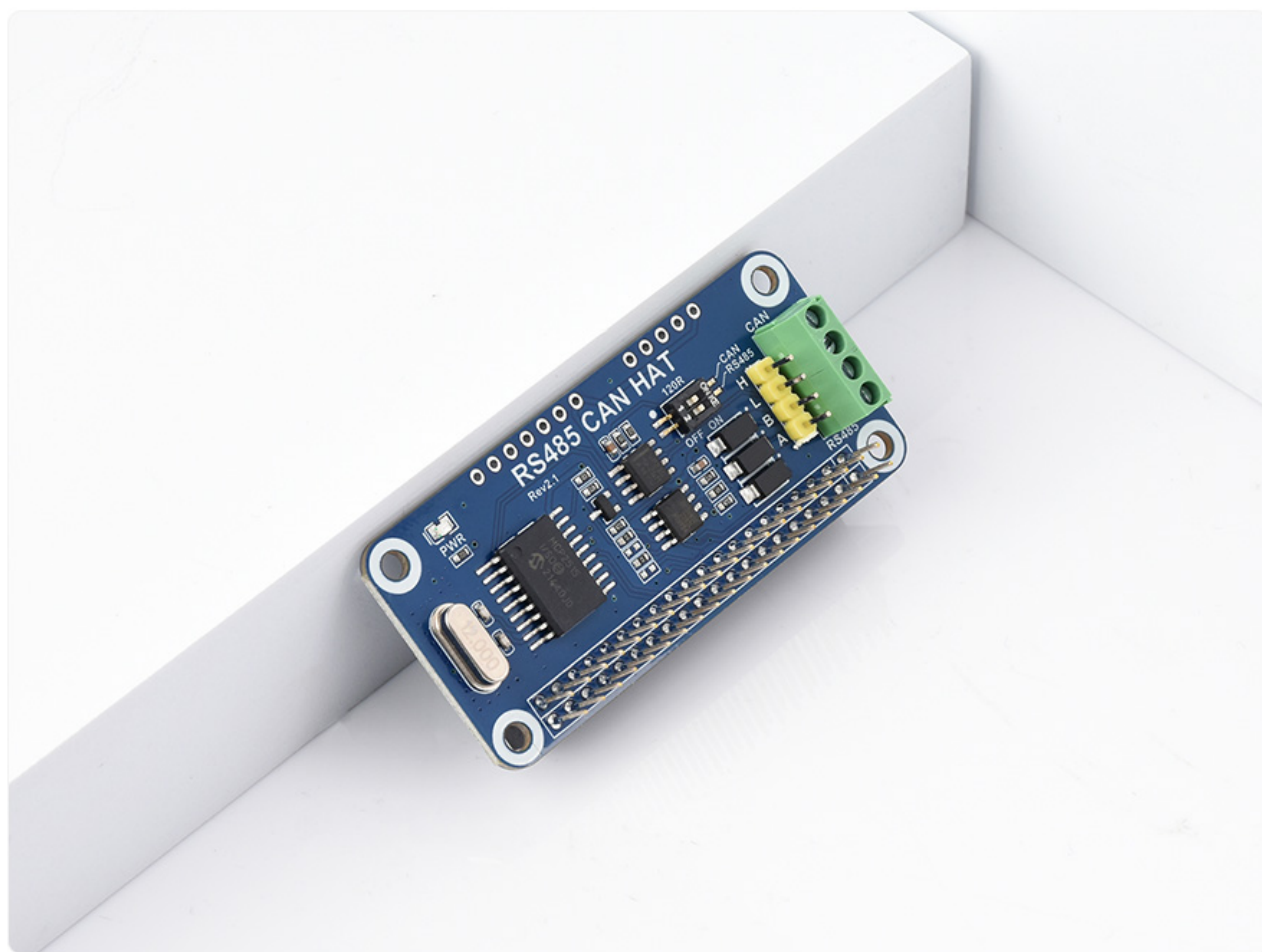

Outline Dimensions

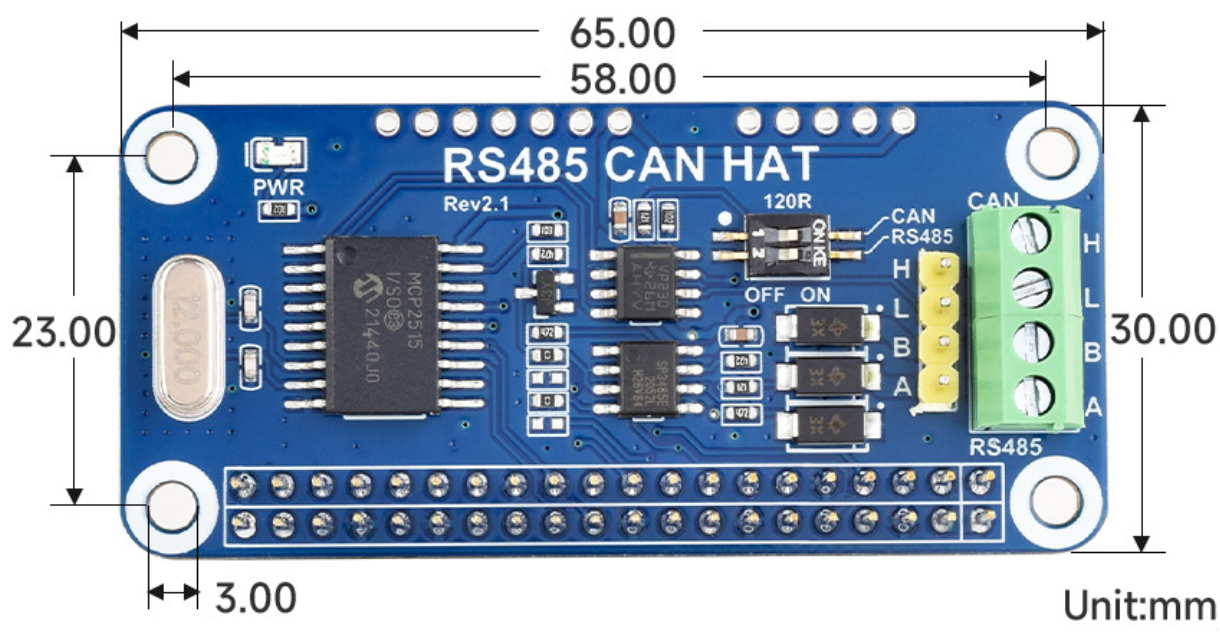

Resources & Services



WAVESHARE
ORIGINAL ✓



PROFESSIONAL
TECH SUPPORT



RICH RESOURCES
MANUAL & DEMO



User Manual



Circuit Diagram



Example Code



Dev Resources

WIKI: www.waveshare.com/wiki/RS485_CAN_HAT

* Resources for different product may vary, please check the wiki page to confirm the actually provided resources.