
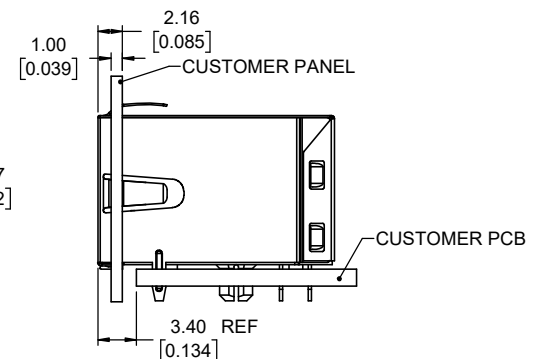
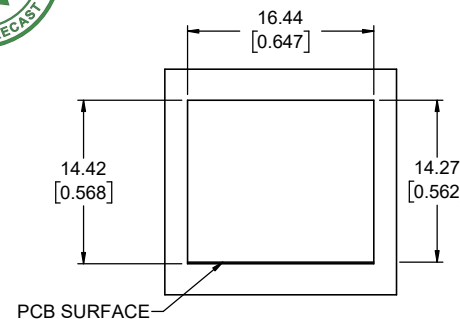
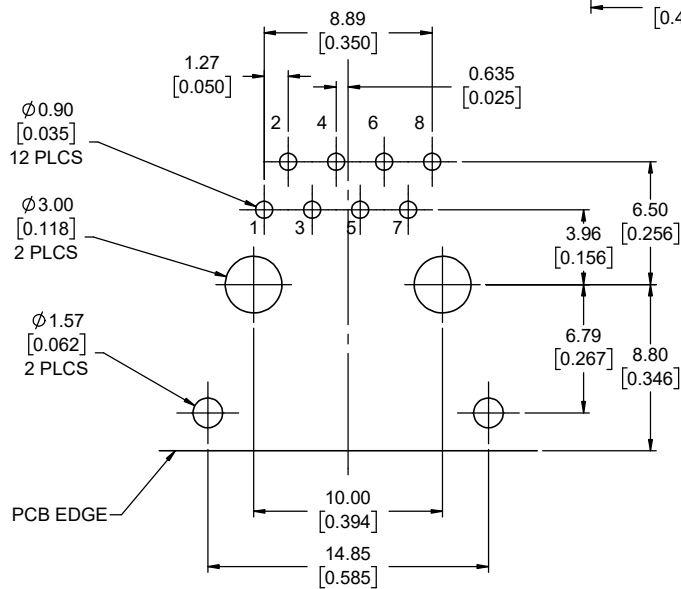
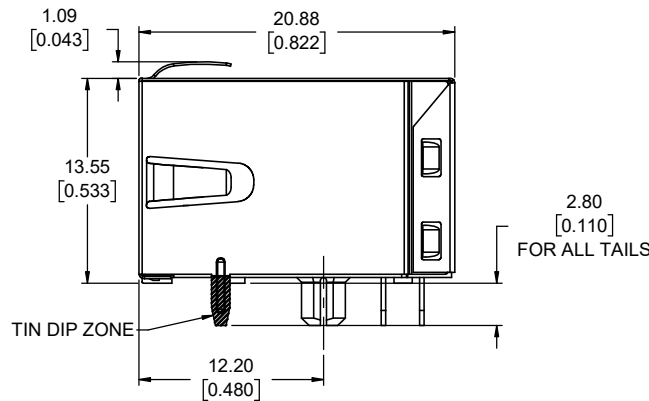
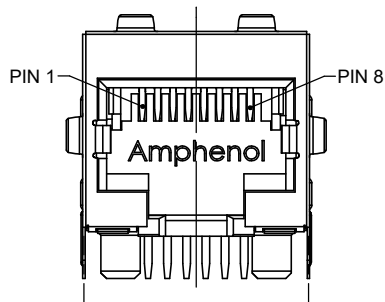



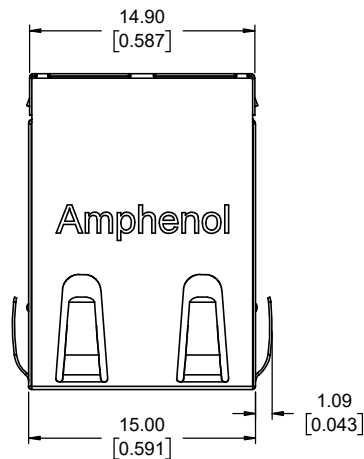

RECOMMENDED PCB LAYOUT
VIEW FROM COMPONENT SIDE
TOLERANCE: ± 0.05 [0.002]

NOTES:

- ELECTRICAL:
 - VOLTAGE RATING: 125 VAC.
 - CURRENT RATING: 1.25 AMPS PER CONTACT.
 - INSULATING RESISTANCE : 500 MEGAOHMS MINIMUM.
 - DIELECTRIC STRENGTH : 1000 VAC 60Hz, 1MIN.
- MECHANICAL:
 - SHIELD: STAINLESS STEEL WITH TIN FINISHED TAILS
 - HOUSING: HIGH TEMP THERMOPLASTIC. UL 94V-0.
 - CONTACT: PHOSPHOR BRONZE.
SELECTIVE GOLD PLATING FOR MATING SURFACE,
50u" MIN. NICKEL UNDERPLATE
100u" MATTE TIN PLATING ON CONTACT SOLDER TAIL.
- ENVIRONMENTAL:
 - OPERATING TEMPERATURE: -40 °C TO +85°C
 - MATES WITH MODULAR PLUG CONFORMING TO TIA 1096 STANDARD.
 - RECOMMENDED SOLDER PROCESS:
REFLOW SOLDER, PEAR TEMPERATURE 260°C FOR 10 SECONDS MAX.
- RJ CONNECTOR CONFORMS TIA-1096 STANDARD
- CAT6 PERFORMANCE UNDER DEVELOPMENT. CONSULT AN AMPHENOL REPRESENTATIVE FOR MORE INFORMATION

AMPHENOL PART NUMBER: RJE1D-188-X 1 X 0 1

CATEGORY OPTIONS:
2= CAT5e
3= CAT6 (SEE NOTE 5)

GOLD PLATING OPTIONS:
1=6u" GOLD PLATING
2=15u" MIN GOLD PLATING
3=30u" MIN GOLD PLATING
4=50u" MIN GOLD PLATING

TRAY INFORMATION		
CONNECTORS PER TRAY	TRAYS PER CARTON	TOTAL CONNECTORS PER CARTON
50PCS	22PCS	1100PCS

UNLESS SPECIFIED OTHERWISE		DRAWN	J.CHEN	DEC24/24
PRIMARY UNITS MILLIMETERS		CHECKED	K.TANG	DEC24/24
SECONDARY INCHES		M.E. APP'D		
REFERENCE IN PARENTHESES		Q.A. APP'D		
GENERAL TOLERANCES		DWG APPR.		
1 DECIMAL PLACE		ENG. REL. NO.	EAR 16036	
2 DECIMAL PLACES	± 0.25	REF.		
3 DECIMAL PLACES		THIRD ANGLE PROJECTION		
ANGULAR DEGREES	$\pm 2^\circ$	DO NOT SCALE DRAWING		

Amphenol Canada Corp. Commercial Products			
MODULAR JACK, 1X1, 8P8C, SHIELDED WITH TOP AND SIDE TABS, TAB DOWN, W/O LED, RoHS COMPLIANT			
DWG. NO.		REV	
P-RJE1D-188-X1X01		B	
CODE ID NO. 03554	DWG SIZE: X	SCALE: 4:1	SHEET 1 OF 1