


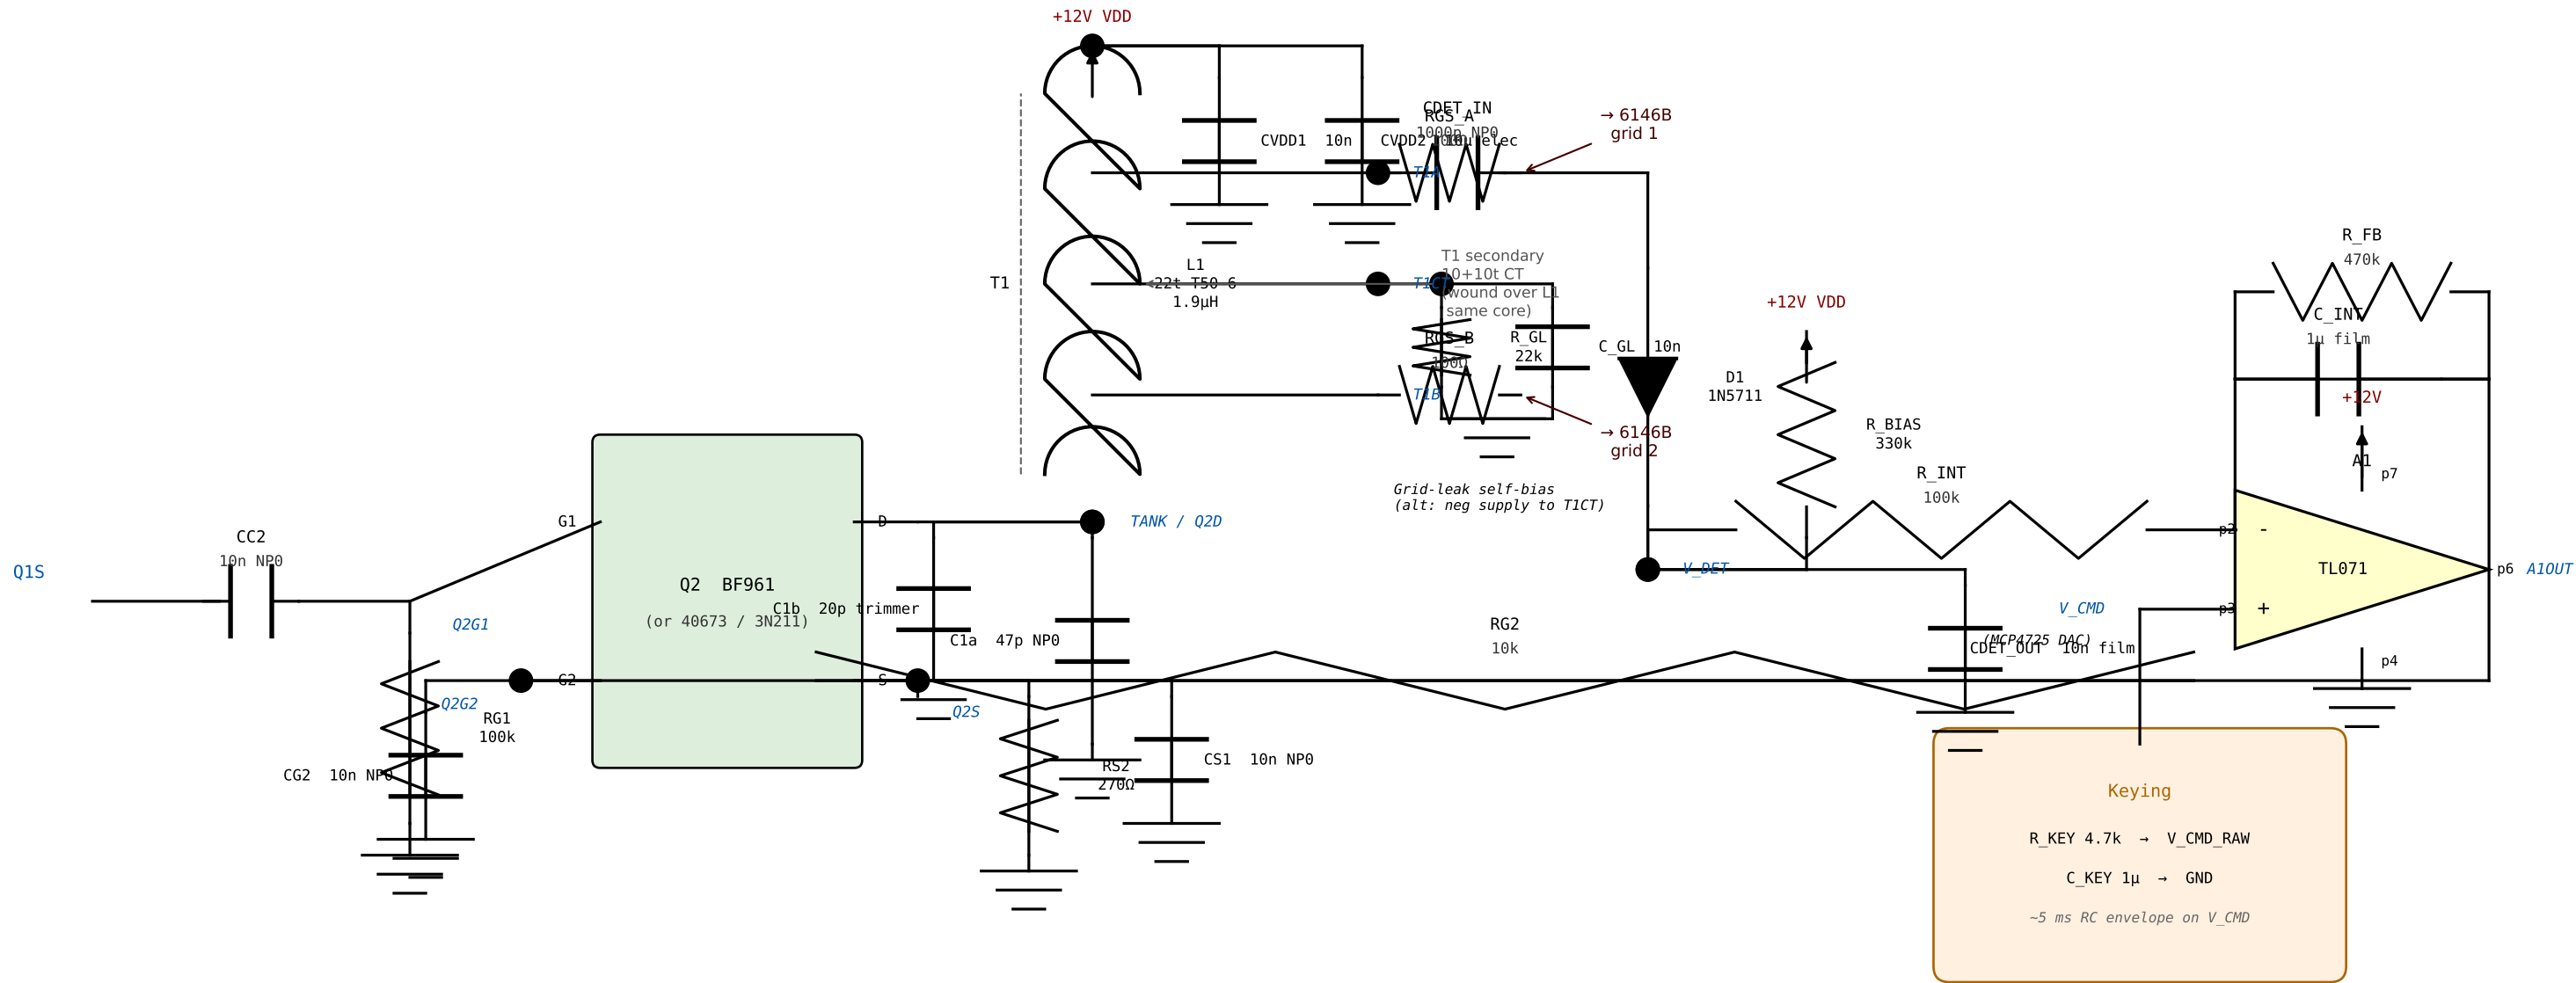

Cascode J310 substitute (if BF961/40673 unavailable):

Q2a (lower, common-source): G=Q2G1, D=Q2a_D, S=RS2a(270Ω)→GND+CS2a(10n)

Q2b (upper, common-gate): G=V_AGC, D=TANK, S=Q2a_D

V_AGC via R_VB(10k) from A1OUT; C_VB(10n) from V_AGC to Q2a_D (RF bypass)

Q2 VGA STAGE – 20 m Leveled Keyed Buffer

BF961 (or 40673/3N211) dual-gate MOSFET · T50-6 tank + T1 interstage · TL071 leveling loop

Companion to: 20m-leveled-keyed-buffer.md / Q2-stage-schematic-entry.md