


CLASSIC DELAY

User Manual

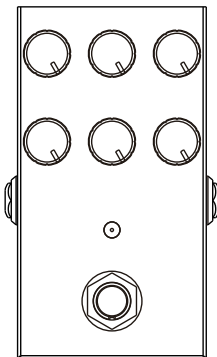

Thank you for purchasing our product. Classic DELAY is pure circuit analog product. It enhances the classic delay unit with two-band EQ and volume gain controls, allowing for precise tonal adjustments to achieve sweeter, warmer, and natural sound dynamics.

II.Attentions

The power supply:

Please use the correct power adapter with a positive 9V power supply (9V1A or 5V1A is recommended), otherwise it may cause equipment damage! Unplug the power supply without using the equipment or during a thunderstorm.

The connection:

Be sure to turn off the power of related equipment before connecting or disconnecting the device.

The electrical interference:

The electromagnetic wave of radio, television and other equipment may cause interference to the equipment, so please try to stay away from radio , television and other equipment.

The location:

To avoid deformation, discoloration, or other serious damage, do not expose this unit to the following conditions:

- a.Heat sources
- b.Magnetic fields
- c.Sunlight
- d.High temperature or moist district
- e.Excessively dusty or dirty locations
- f.Strong vibrations or shocks


III.Features

EN

1. This product is lazy style, high-grade metal appearance design.
2. This effect is a classic pure circuit analog product.
3. It can provide a maximum delay time of about 600ms, which is suitable for most music.
4. Two power supply methods can use the power adapter, use a 9V power adapter with negative inside and positive outside or USB charging cable (5V>300mA).
5. With TRUE BYPASS function.

IV.Control panel instruction

EN



①Power interface:

Use 9V DC adapter (positive outside and negative inside).

②USB-C interface:

Support 5V power supply, it is recommended to use 5V1A adapter.

③LEVEL knob:

You can use it to control CLASSIC DELAY, final output volume.

④HIGH knob:

Adjust the sound frequency.

⑤LOW knob:

Adjust the low frequency sound.

⑥TIME knob:

Adjust the feedback speed of repeated echoes.

⑦F.BACK knob:

Feedback times of the delay.

⑧MIX knob:

Adjust the mixing ratio of dry and wet signals.

⑨Output interface:

1/4 " mono audio output interface.

⑩LED:

Indicates the status of the effector. The light is on and means that the effect is on. The LED is out, indicating the BYPASS state.

⑪Input interface:

1/4" mono audio input interface.

⑫Footswitch:

Tap lightly to toggle CLASSIC DELAY on/off.

Input	Standard 1/4"jack-MONO/TS
Output	Standard 1/4"jack-MONO/TS
Power supply 1	DC9V $\geq$ 300mA $\ominus \rightarrow \oplus$
Power supply 2	USB 5V $\geq$ 300mA
Size	112(L)X68(W)X40(H)mm
Weight	221g

We will continue to improve our products and reserve the right to modify certain functions and specifications (including but not limited to appearance, packaging design, operation manual, accessories, dimensions specifications, displays, etc.) without prior notice. Please confirm the product functions and specifications with the local distributor before the purchase. Product pictures and color due to the light error and screen admiration setting. It may be different from the physical product effect. Please refer to the physical object accordingly.

★ Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement


The antennas used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located for operating in conjunction with any other antenna or transmitter.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

CLASSIC DELAY

使用说明书

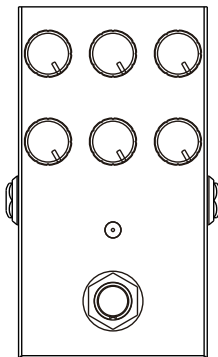

感谢您购买我司产品，CLASSIC DELAY是一款纯电路模拟的延迟效果器，在经典延迟单块中增加了2段均衡与音量增益，它可以让你细致入微的调节音色获得更甜美，温暖自然的音色动态。

二.注意事项

■ 电源供应：

请使用正确的电源适配器，适配器使用内负外正的9V电源(建议使用9V1A或者5V1A的电源)，擅自使用其他规格电源可能会导致设备损坏！在不需要使用本设备或者雷雨天气时请拔下电源。

■ 连接：

当连接或者断开设备时，请先关闭其他相关设备。

■ 电器干扰：

收音机、电视机等电磁波可能会对设备使用造成信号干扰，因此请尽量远离收音机、电视机等其他电子设备。


■ 放置场所：

为防止变形、变色和其他方面等对产品造成损坏，请避免以下情况：

- a. 热源
- b. 磁场
- c. 阳光直射
- d. 高温潮湿
- e. 多尘或不洁地方
- f. 强烈震荡或摇晃

1. 本产品为慵懒风格，高档的金属外观设计。
2. 这款效果器是一款经典的纯电路模拟商品。
3. 可提供约600ms的最大延迟时间适合大部分音乐。
4. 两种供电方式可以用电源适配器，适配器使用内负外正的9V电源或USB充电线($5V \geq 300mA$)。
5. 具有TRUE BYPASS功能。

四. 控制面板说明



- ①**电源接口**：请使用9V直流适配器（外正内负）。
- ②**USB 接口**：支持5V供电，建议使用5V 1A适配器。
- ③**LEVEL旋钮**：调整全局输出音量。
- ④**HIGH旋钮**：调节声音高频(作用于干声与湿声)。
- ⑤**LOW旋钮**：调节声音低频(作用于干声与湿声)。

- ⑥**TIME旋钮**：调整回声重复的反馈速度。
- ⑦**F.BACK旋钮**：调整回声重复次数。
- ⑧**MIX旋钮**：调节干湿信号的混合比例。
- ⑨**输出接口**：1/4"单声道音频输入接口。
- ⑩**LED 灯**：指示效果器状态。灯亮，表示效果开启。灯灭，表示BYPASS状态灯。
- ⑪**输入接口**：1/4"单声道音频输出接口。
- ⑫**踩钉**：轻触脚踏开关，启用/绕过CLASSIC DELAY(经典延迟)。

五. 技术参数

CN

输入	标准1/4"插孔MONO/TS
输出	标准1/4"插孔MONO/TS
电源供给1	DC9V $\geq$ 300mA 
电源供给2	USB 5V $\geq$ 300mA
尺寸	112(L)X68(W)X40(H)mm
重量	230g
修订	2024-07-16

我们将不断改进我们的产品并保留修改某些功能和规格(包括但不限于外观、包装设计、操作手册、配件、尺寸、规格参数、显示屏等)的权利，恕不另行通知。购买前请与当地经销商确认产品功能及规格。产品图片及颜色因拍照光线误差及屏幕设定可能与实物产品效果有所差异。请以实物为准。