


IR BOX

User Manual

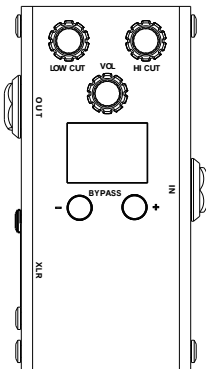

Thank you for purchasing our product. IRBOX is an impulse response (IR) technology-based cabinet simulator, IR loader, and EQ equalizer. It allows you to instantly achieve highly accurate recreations of various classic cabinet sounds.

Featuring 32 built-in presets, each position allows for the loading of IR files and adjustment of EQ Acoustic curve. Our official computer software and mobile app include a professional 9-band EQ module with adjustable frequencies ranging from 30Hz to 18kHz and a maximum ± 12 dB adjustment range, enabling precise control over sound characteristics.

You can independently use the EQ equalizer by disabling the IR module, allowing you to save custom EQ curves within any preset. This facilitates easy use of pre-configured equalization settings for different performance environments. You can conveniently fine-tune EQ curves via the mobile app at any time, or use the software/app to load third-party IR files. IRBOX supports of Bass/electric guitar/acoustic guitar CAB sounds.

■ Power supply:

Please use the correct power adapter with a positive 9V power supply (9V1A or 5V1A is recommended), otherwise it may cause equipment damage! Unplug the power supply without using the equipment or during a thunderstorm.

■ linkage:

Turn off other related devices before connecting to or disconnecting them.

■ Electrical interference:

Electromagnetic waves such as radio and TV may interfere with the use of equipment, so try to stay away from equipment such as radio and TV.

■ Place of placement:

To prevent damage from deformation, discoloration and other aspects, avoid the following:


- A. Heat source
- B. Magnetic field
- C. Direct sunlight
- D. High temperature and damp
- E. Dust or unclean places
- F. Strong strongly or shake

1. Simple, high-grade appearance design.
2. Each preset tone includes both an IR module and an EQ module. These modules can be used independently or simultaneously. When using a factory default preset tone independently, the IR module is activated by default, while the EQ module requires manual activation through the software interface.
3. The product built-in 25 kinds of classic electric guitar CAB simulation presets (No. 01-25 presets), 7 kinds of classic electric Bass CAB simulation presets (No. 26-32 presets), a total of 32 sets of presets, suitable for most music styles and music scenes.
4. High-performance digital signal processing with a signal-to-noise ratio of 103dB and a 44100Hz 24-bit sampling rate ensures high-quality sound reproduction.
5. This device can be connected to a computer or smartphone using the included USB cable for modulation.
6. Users can customize and replace IR files within the IR module using our mobile app or computer software. It supports WAV format IR files with a sampling rate of 44100Hz, 24-bit, and 2048 sample points.
7. Our computer and mobile app software features high/low cutoff points and a 7-band standard frequency section, totaling 9 frequency points adjustable in Hertz (Hz) values. It offers a maximum ± 12 dB gain adjustment range, allowing users to save settings directly to the preset values after adjustments are made.
8. EQ module can be used independently when IR module is turned off.
9. The EQ module parameters can be exported/imported from the official computer software.
10. Support XLR balanced output; Supports 3.5mm earphone monitoring.
11. Supports dual power supply options: USB-C and DC9V. Also supports USB Audio for seamless connection to computers.

Attention: Access to the software needs to adjust the volume of the IR module (0-100), and enter the computer software to restore the factory settings.

IV. Product Panel Function Diagram

EN

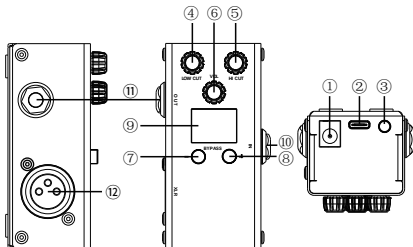

① **Power interface:** Use 9V1A DC transformer (Positive inside and negative outside).

② **USB interface:** Support 5V power supply, it is recommended to use the 5V 1A adapter.

③ **Headphone port:** Support the use of 3.5mm headset.

④ **LOW CUT knob:** Adjust the frequency point of the global low frequency shear, adjust the whole 32 preset output timbre. The shear range is 30 HZ-360 HZ (Turn the knob counterclockwise to the end of 30HZ, that is, the low frequency below 30HZ is cut. Turn the knob clockwise to the end of 360HZ, that is, the low frequency below 360HZ is cut out.)

- ⑤ **HI CUT knob:** Adjust the frequency point of the global high frequency shear, adjust the whole 32 preset output timbre. The shear range is 18 kHz-1 kHz (Turn the knob counterclockwise to the end of 18kHz, that is, high frequencies above 18kHz are cut. Turn the knob clockwise to the end of 1kHz, that is, high frequencies above 1kHz are cut.)
- ⑥ **VOL knob:** Adjust the total output volume of IR BOX, and the external audio volume through USB input is uncontrollable.
- ⑦ **Left button:** Select the preset forward. Press the left and right button to enter the BYPASS state.
- ⑧ **Right button:** Select the preset backward. Press the left and right button to enter the BYPASS state.
- ⑨ **Display screen:** Display the number of the current preset (01-32) or the BYPASS status (bp is displayed on the screen).
- ⑩ **Input interface:** 1/4 " mono audio input interface.
- ⑪ **Output interface:** 1/4 " mono audio output interface.
- ⑫ **Balance output interface:** XLRbalance Kanon output interface.

	SOUND	SIZE
1	Based on the TweedDeluxe Celestion Blue-TAB 57-CapEdge specification	2X12
2	Based on the ShowmanD130s-TAB 57-Cap specification	2X12
3	Based on the JC 120-Roland12s-U47-Cap specification	2X12
4	Based on Marshall1960B-V30s-C414-Cap specification	4X12
5	Based on Marshall Basketweave Celestion-G 12 Ls-TAB 57-Cap specification	4X12
6	Based on the Marshall1960B-T75s-U47-Cap specification	4X12
7	Based on Marshall1960B-V30s-TAB 57-Cap specification	4X12
8	Based on the Marshall Basketweave CelestionG12H30s-U47-Cap specification	4X12
9	Based on the BOGNER Uberkab-T75V30-TAB 57-Cap specification	4X12
10	Based on the ENGLProV30s-TAB 57-Cap specification	4X12
11	Based on the PEAVEY 5150-Sheffield1200s-TAB 57-Cap specification	4X12
12	Based on the TwinD120s-U87-Cap specification	2X12
13	Based on the TwinJensenC12N-KM84-Cap specification	2X12
14	Based on the VoxAC30Silvers-SM57-Cap specification	2X12
15	Based on the VoxAC30Silvers-U87-Cap specification	2X12
16	Based on the TwinD120s-TAB 57-CapOffAxis specification	2X12
17	Based on the ShowmanD130s-U47-Cap specification	2X12
18	Based on Orange4x12-V30s-C414-Cap specification	4X12
19	Based on the Diezel V30-SM57-Cap specification	4X12
20	Based on the Mesa Boogie-U87-Cap specification	4X12
21	Based on the Electrovoice-C414-Cap specification	4X12
22	Based on the R imental-TAB57-Cap specification	4X12
23	Based on the 1X15 Supro ThunderboltS6420 Jensen 15 " -TAB 57-Cap specification	1X15
24	Based on the Matchless ES212 Celestion-G12H30-TAB 57-Cap specification	2X12
25	Based on the MesaRectifierV30s-TAB 57-Cap specification	4X12
26	Based on the Jensen 10 4050 Off ax (BASS) specification	4X10
27	Based on the Studio 22 441 Edge 48s (BASS) specification	4X10
28	Based on the Ampeg SVT-410HE (BAS) specification	4X10
29	Based on the Aguilar DIS25 (BASS) specification	4X10
30	Based on the TP5 PV 421 610 (BASS) specification	4X10
31	Based on the EDEN E300 (BASS) specification	4X10
32	Based on the Work 15 4050 (BASS) specification	4X10

Attention: In the factory state, all the presets only open the IR module, and the EQ module is not open by default. If the user needs to open and save the EQ parameter to the machine, please enter the APP or connect the computer for operation.

This product supports independent use of the EQ module when the IR module is turned off.

VI. Software Support

EN

■ Software support:

CubeSuite for Android/iOS: Scan the QR code



■ **Computer connection method:** Use USB cable to connect the computer, you can connect the computer software CUBESUITE for operation.

■ **Mobile APP connection method:** Search and use CUBESUITE for download and install. After entering the software interface, click "Scan nearby device", select "IR-BOX", and click "Pair", which can be used after successful loading.

Attention: Only support BT wireless control APP, do not support BT audio transmission.

Input impedance	1 MΩ		
Non-balanced output	1/4 "TS interface	Impedance	1kΩ
Balanced output	XLR interface	Impedance	1kΩ
Headset output	1/8 "stereo output (TRS)	Impedance	22Ω
Power supply 1	DC9V≥300mA		
Power supply 2	USB5V≥300mA		
Operating current	9V 80mA 5V 120mA		
Attachment	USB-C data line		
Dimension	90(L)X50(W)X45(H)mm		
Weight	155g		
Revised	April 19, 2024		

We will continually improve our products and reserve the right to modify certain features and specifications (including but not limited to appearance, packaging design, user manuals, accessories, dimensions, specifications, and displays) without prior notice.

Please confirm the product features and specifications with your local dealer before purchasing. Product images and colors may vary from the actual product due to lighting and screen settings. Please refer to the actual product.

★ Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement


The antennas used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located for operating in conjunction with any other antenna or transmitter.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

IR BOX

用户说明书

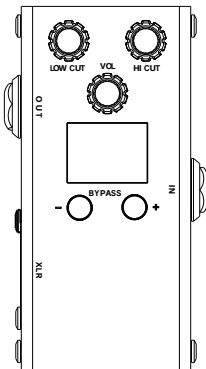

感谢您购买我司产品，IRBOX是一款基于脉冲响应 (ImpulseResponse)技术的箱体模拟效果器、IR加载器、EQ均衡器，使用它能让您立刻得到还原度极高的各类经典音箱箱体声音。

内置32个预设，每个预设位置可自由加载IR文件和调节EQ均衡曲线。

官方电脑软件 and 手机APP配有专业9段EQ模块，灵活可变的频点 30HZ-18KHZ和最大 ± 12 dB的调节范围，细致入微的调节声音质感。

可关闭IR模块单独使用EQ均衡器，即可把自定义 EQ 均衡曲线保存于任一预设中，方便在不同的演出场景下使用事先做好的均衡曲线，可随时随地连接手机APP对均衡曲线进行微调或连接软件/APP来加载第三方IR文件，支持电贝斯音箱箱体模拟、电吉他音箱箱体、木吉他音箱箱体模拟等。

■ 电源供应:

请使用正确的电源适配器，适配器使用内负外正的9V电源(建议使用9V1A或者5V1A的电源)，否则可能会导致设备损坏！在不需要使用本设备或雷雨天时请拔下电源。

■ 连接:

当连接或断开设备前，请先关闭其他相关设备。

■ 电器干扰:

收音机、电视机等电磁波可能会对设备使用造成干扰，因此请尽量远离收音机和电视机等设备。


■ 放置场所:

为防止变形、变色和其他方面等对产品造成损坏，请避免以下情况：

- A. 热源
- B. 磁场
- C. 阳光直射
- D. 高温潮湿
- E. 灰尘或不洁的地方
- F. 强烈震动或摇晃

- 1、简洁、高档的外观设计。
- 2、每一个预设音色包含IR模块和EQ模块，两个模块可单独使用或者同时使用，单独使用出厂的预设音色时默认只打开IR模块，EQ模块需要进入软件界面手动打开。
- 3、产品内置25种经典电吉他箱体模拟预设(01-25号预设)，7种经典电贝司箱体模拟预设(26-32号预设)，一共32组预设，适用于大部分音乐风格和音乐场景。
- 4、高性能数字信号处理，信噪比为103dB，44100hz 24bit采样率，让您得到高品质的声音。
- 5、本机可使用附带USB线连接电脑或手机进行调制。
- 6、用户可使用我司APP或电脑软件在IR模块中自定义更换IR文件，可支持44100hz，24bit采样率，2048采样点WAV格式的IR文件。
- 7、在电脑端与手机APP软件中配有高/低切频点和7段常规频段，共有9段频点可以调节频率值(HZ)，最大 ± 12 dB的增益调节的范围，调节完毕后可一键保存于主机预设中。
- 8、在关闭IR模块的情况下可独立使用EQ模块。
- 9、EQ模块参数可在官方电脑软件导出/导入预设。
- 10、支持XLR平衡输出；支持3.5mm耳机监听。
- 11、支持USB-C和DC9V两种供电方式；支持USB Audio，可连接电脑使用。

注意：需要进入软件才能调节IR模块的音量(0-100)，进入电脑软件可以恢复出厂设置。

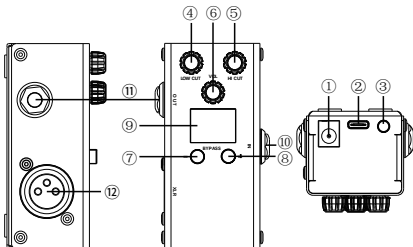

①电源接口：使用9V1A直流变压器（内负外正）。

②USB接口：支持5V供电，建议使用5V 1A适配器。

③耳机接口：支持连接3.5mm耳机使用。

④LOW CUT旋钮：调节全局低频剪切的频点，整体调节32个预设的输出音色。剪切范围30HZ-360HZ（逆时针旋转旋钮到尽头为30HZ，即30HZ以下低频被切除。顺时针旋转旋钮到尽头为360HZ，即360HZ以下低频被切除。）

⑤HI CUT旋钮：调节全局高频剪切的频点，整体调节32个预设的输出音色。剪切范围18kHz-1kHz（逆时针旋转旋钮到尽头为18kHz，即18kHz以上高频被切除。顺时针旋转旋钮到尽头为1kHz，即1kHz以上高频被切除。）

⑥VOL旋钮：调节IR BOX的总输出音量，通过USB输入的外部音频音量不可控。

⑦左按键：向前选择预设。同时按住左&右键可进入BYPASS状态。

⑧右按键：向后选择预设。同时按住左&右键可进入BYPASS状态。

⑨显示屏幕：显示当前预设（01-32）的编号或者BYPASS状态（屏幕上显示bp）。

⑩输入接口：1/4"单声道音频输入接口。

⑪输出接口：1/4"单声道音频输出接口。

⑫平衡输出接口：XLRbalance卡农输出接口。

	声音	规格
1	基于TweedDeluxe Celestion Blue-TAB57-CapEdge	2X12
2	基于ShowmanD130s-TAB57-Cap	2X12
3	基于JC120-Roland12s-U47-Cap	2X12
4	基于Marshall1960B-V30s-C414-Cap	4X12
5	基于Marshall Basketweave Celestion-G12Ls-TAB57-Cap	4X12
6	基于Marshall1960B-T75s-U47-Cap	4X12
7	基于Marshall1960B-V30s-TAB57-Cap	4X12
8	基于Marshall Basketweave CelestionG12H30s-U47-Cap	4X12
9	基于BOGNER Uberkab-T75V30-TAB57-Cap	4X12
10	基于ENGLProV30s-TAB57-Cap	4X12
11	基于PEAVEY 5150-Sheffield1200s-TAB57-Cap	4X12
12	基于TwinD120s-U87-Cap	2X12
13	基于TwinJensenC12N-KM84-Cap	2X12
14	基于VoxAC30Silvers-SM57-Cap	2X12
15	基于VoxAC30Silvers-U87-Cap	2X12
16	基于TwinD120s-TAB57-CapOffAxis	2X12
17	基于ShowmanD130s-U47-Cap	2X12
18	基于Orange4x12-V30s-C414-Cap	4X12
19	基于Diezel V30-SM57-Cap	4X12
20	基于Mesa Boogie-U87-Cap	4X12
21	基于Electrovoice-C414-Cap	4X12
22	基于Rimental-TAB57-Cap	4X12
23	基于1X15 Supro ThunderboltS6420 Jensen 15"-TAB57-Cap	1X15
24	基于Matchless ES212 Celestion-G12H30-TAB57-Cap	2X12
25	基于MesaRectifierV30s-TAB57-Cap	4X12
26	基于Jensen 10 4050 Off ax (BASS)	4X10
27	基于Studio 22 441 Edge 48s (BASS)	4X10
28	基于Ampeg SVT-410HE (BASS)	4X10
29	基于Aguilar DIS25 (BASS)	4X10
30	基于TP5 PV 421 610 (BASS)	4X10
31	基于EDEN E300 (BASS)	4X10
32	基于Work 15 4050 (BASS)	4X10

注意：在出厂状态下，所有的预设都只打开IR模块，默认状态下EQ模块属于未开启状态，如用户需要开启和保存均衡参数到本机，请进入APP或连接电脑进行操作。

以上所提及的厂商及产品名称仅用于描述IR BOX的音色特点，无其他意图，商标名称归其公司所有。我们将不断更新音色，恕不另行通知，可能与实物有所差异，请以实物为准。

六. 软件支持

CN

■ 软件支持：

手机端Android/iOS下载APP：扫描二维码下载



■ **电脑连接方法：**使用USB连接线直插电脑，即可连接电脑软件CUBESUITE进行操作。

■ **手机APP连接方法：**手机搜索应用CUBESUITE进行下载安装，打开手机BT，进入软件界面后点击“扫描附近设备”，选择“IR-BOX”，点击“配对”，加载成功后即可使用。

注意：仅支持BT无线操控APP，不支持BT音频传输。

输入阻抗	1M Ω		
非平衡输出	1/4 "TS 接口	阻抗	1k Ω
平衡输出	XLR 接口	阻抗	1k Ω
耳机输出	1/8 "立体声输出(TRS)	阻抗	22 Ω
电源供给1	DC9V $\geq$ 300mA		
电源供给2	USB5V $\geq$ 300mA		
工作电流	9V 80mA 、 5V 120mA		
附件	USB-C数据线		
尺寸	90(L)X50(W)X45(H)mm		
重量	155g		
修订	2024年7月5日		

我们将不断改进我们的产品并保留修改某些功能和规格(包括, 但不限于外观、包装设计、操作手册、配件、尺寸、规格参数、显示屏等)的权利, 恕不另行通知。

购买前请与当地经销商确认产品功能及规格。产品图片及颜色因拍照光线误差及屏幕设定可能与实物产品效果有所差异。请以实物为准。