



USER MANUAL



PEDAL POWER

EN I.Features

- Eight independent 9V power outputs.
- Each LED light indicates the status of a channel, the corresponding LED light will go off when the channel overcurrent.
- Each channel has independent overcurrent protection function, and the failure of one channel does not affect other channels.
- Power Input: Type-C 5V 2A.
- Power Output: 6 channels DC 9V 100mA , 2 channels DC 9V 300mA . It can provide a steady and low-noise power for your equipment.

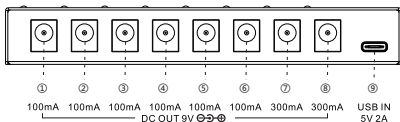

EN II.Technical parameters

Size Chart	139.6x26x20mm
Weight	110.8g
Package Includes	1 x Host, 1 x Type-C Cord ,8 x DC Cords
Revise date	20240124


EN III.FCC Warning

★FCC Warning Statement Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

多路电源产品说明书



PEDAL POWER

CN 一.功能简介


■8路独立的9V电源输出。

■每个LED灯指示每个通道的状态，当通道过流时对应的LED灯会熄灭。

■每个通道都有独立的过流保护功能，一个通道有故障不会影响到其他通道。

■电源输入：Type-C 5V 2A。

■电源输出：6路DC 9V 100mA ，2路 DC 9V 300mA ，它能给你的设备提供稳定的、低噪声的电源。

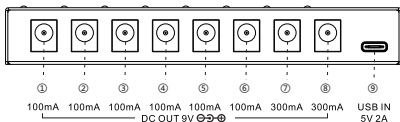

CN 二.技术参数

产品尺寸	139.6x26x20mm
产品重量	110.8g
产品配件	1 X 主机, 1 X Type-C电源线, 8 X DC连接线
修订日期	20240124