SAO NUNCHUCK

I2C ADDRESS 0x52 (82)

All 7-bit addresses should be greater
than 0x07 and less than 0x78 (120).

X2
Nunchuck

TOP NOTCH

GND	6
N.C.	5
SCL	4
3V3	3
PRES.	2
SDA	1

BOTTOM

3V3

SCL

SDA

GND

3V3

SDA

SCL

X1

3V3
GND
SDA
SCL
GPIO1

SAO_conn_SFH11-NBPC-D03-ST-BK

GND
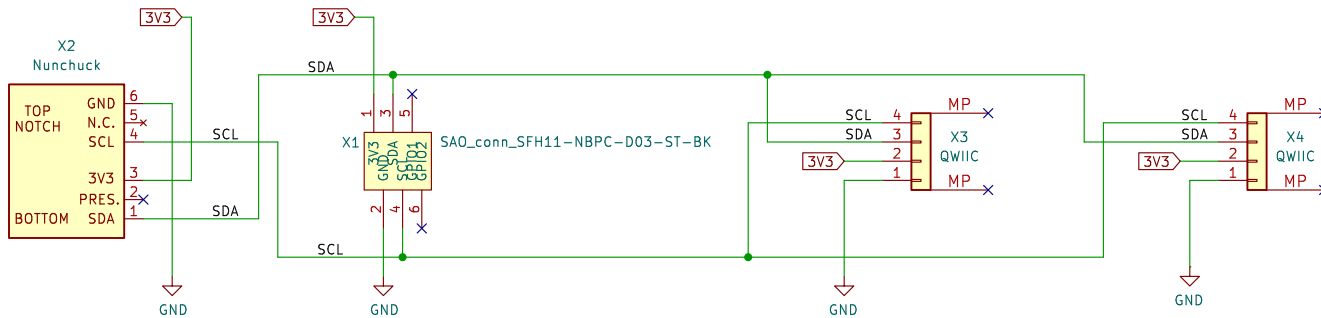
https://hackaday.io/project/175182-simple-add-ons-sao
using Sullins SFH11-NBPC-D03-ST-BK female header
https://www.digikey.com/product-detail/en/sullins-connector-solutions/
SFH11-NBPC-D03-ST-BK/S9717-ND/4558818

SCL	4	MP
SDA	3	X3
3V3	2	QWIIC
	1	MP

GND

SCL	4	MP
SDA	3	X4
3V3	2	QWIIC
	1	MP

GND