

GPIO TO I2C CONVERTER


OLED COLOR SPI W/MICRO SD

I2C-SAO CONFIG

Diagram illustrating the connection for Pin 11 (VIN) on the X3 module. The module pins are labeled 1 through 11. Pin 11 is connected to VIN. The diagram also shows connections for other pins: 1 (COP1), 2 (CS OLED), 3 (CS SD), 4 (CIPO), and 11 (HEADER_11-PIN_0.1). A note indicates 'OLED ON THIS SIDE OF HEADER TOP VIEW OF PCB'.

MICRO SD CARD

BADGE

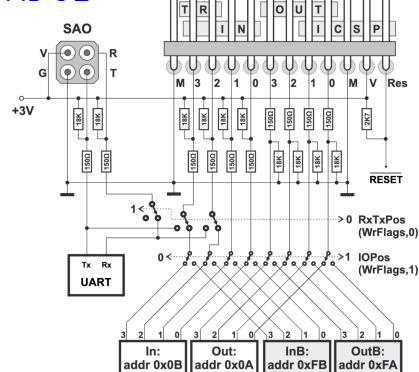

ALTERNATE BATTERY

3V3 REGULATOR

SOT-23-5
 .3V DROP @300mA
 U1
 SSP9193-33MSR
 IN BP
 GND OUT
 EN
 4 5
 3V3R
 C2 C3
 0.01uF 1uF
 L1
 Mac
 All
 De
 Sh

All non-polarized capacitors are X7R or X5R ceramic unless otherwise noted.
Designed by: Andy G., Koppany H.

I2C-SAO CONFIGURATION

Title: SAO Voja4 Adapter

Rev: 1.0
Id: 1/1