

Electric towing tractor 4.0 ton

Simai

Three wheel-series

TTE40



Electric towing tractor 4.0 ton

Truck specifications					TTE40
Identification	1.1	Manufacturer			Simai S.p.A
	1.2	Model			TTE40
	1.3	Drive			Electric
	1.4	Operator type			Sit-on
	1.5	Load capacity/rated load	Q	kg	4000
	1.7	Rated drawbar pull	F	N	1000
	1.9	Wheelbase	y	mm	1000
Weight	2.1	Service weight		kg	710
	2.2	Axle load, with load, front/rear		kg	320 / 470
	2.3	Axle load, without load, front/rear		kg	290 / 420
Tyres	3.1	Tyre - Cushion(Cu), Extra-elastic(SE), Pneumatic(Pn),Polyurethane			SE/Pn
	3.2	Tyre - size, front			15x4,5-8
	3.3	Tyre - size, rear			15x4,5-8
	3.5	Wheels, number front/rear (x = driven wheels)			1/2X
	3.6	Track width, front	b ₁₀	mm	-
	3.7	Track width, rear	b ₁₁	mm	818
Dimensions	4.7	Height of cab	h ₆	mm	1770
	4.8	Seat height	h ₇	mm	743
	4.12	Coupling height	h ₁₀	mm	290 - 345 - 400
	4.13	Loading height, unloaded	h ₁₁	mm	-
	4.16	Length of loading surface	l ₃	mm	-
	4.17	Overhang	l ₅	mm	210
	4.18	Width of loading surface	b ₉	mm	-
	4.19	Overall length	l ₁	mm	1520
	4.21	Overall width	b ₁	mm	950
	4.32	Ground clearance, centre of wheelbase	m ₂	mm	137
	4.35	Turning radius	W _a	mm	1528
	4.36	Internal turning radius	b ₁₃	mm	470
Performance data	5.1	Travel speed, with/without load		km/h	7 / 15
	5.6	Max. drawbar pull		N	3200
	5.7	Gradeability		%	see chart
	5.8	Max. gradeability loaded/unloaded		%	see chart
	5.10	Service / parking brake (I=Hydraulic E=Electromagnetic M=Mechanical)			I/E
Electric motor	6.1	Drive motor rating S2 60 min		kW	2
	6.4	Battery voltage, nominal capacity ¹⁾	K ₅	V/Ah	24/240 - 300 - 360
	6.5	Battery weight		kg	300 - 320 - 340
	6.6	Energy consumption according to VDI cycle ²⁾		kWh/h	
Others	8.1	Electronics control			Inverter AC
	8.4	Sound level at driver's ear according to EN 12053		dB(A)	69

¹⁾ Performances and weight are intended with 300 Ah battery.

²⁾ Contact the supplier for information.

As per VDI guidelines 2198, this datasheet applies to standard electric tractor / platform truck only.




Dimensions are not binding and can be changed in any moment. The performances must be intended for brand new machines, after having completed the running-in tested in San Donato Milanese factory in normal climatic conditions.

Performances and weight are to be intended with standard motors and battery and with pneumatic tires.

Some data can vary according to different equipments.

Towed weight

READING EXAMPLE:
CHARGE = 1 TONS
GRADIENT = 8 %
DRAWBAR PULL = 1850 N
SPEED = 4,8 Km/h
MAX PRACTICABLE RAMP LENGHT = 250 m

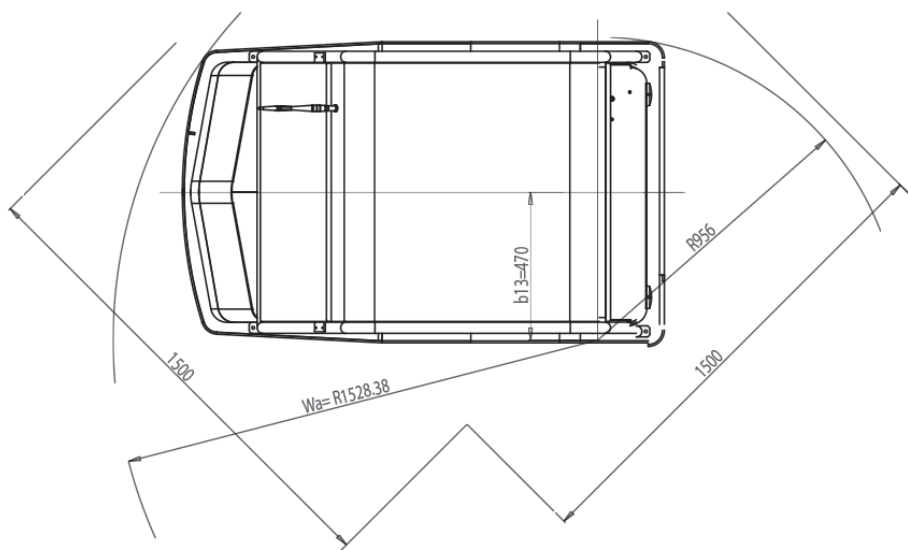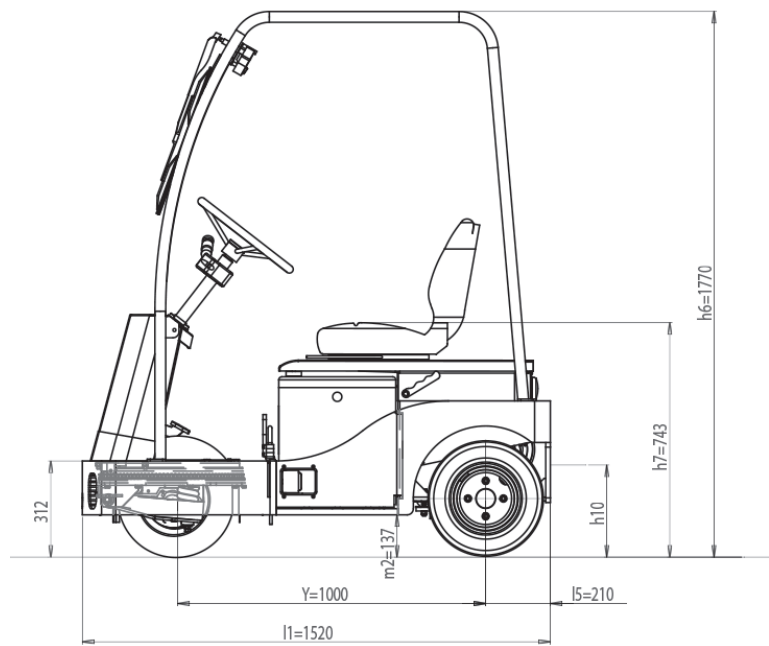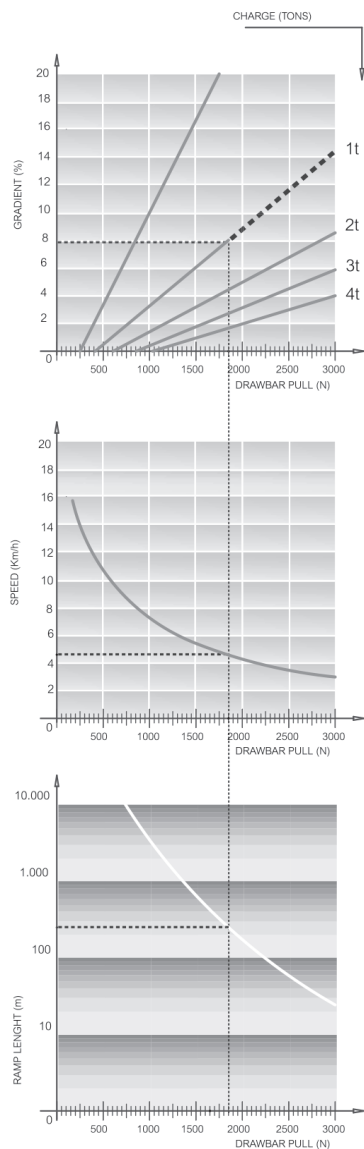

Standard equipments:

- Inching buttons
- Operator presence system
- AC power system
- Pneumatic tyres
- Rear drawbar
- Automatic parking brake
- Regenerative braking
- Head and tail lights, turn signal lights
- Digital display



TMHE-Toyota Material Handling Europe — version 1, 2018-08-22

TOYOTA

MATERIAL HANDLING