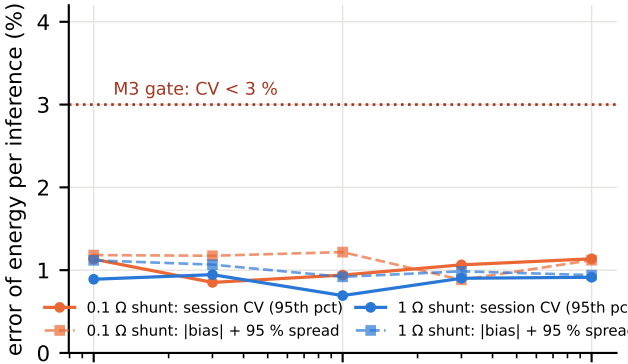
error of energy per inference (%)
4
3
2
1
0
M3 gate: CV < 3 %
0.1 Ω shunt: session CV (95th pct)
1 Ω shunt: session CV (95th pct)
0.1 Ω shunt: |bias| + 95 % spread
1 Ω shunt: |bias| + 95 % spread
0.01
0.1
1
board current noise per sample (mA, std)

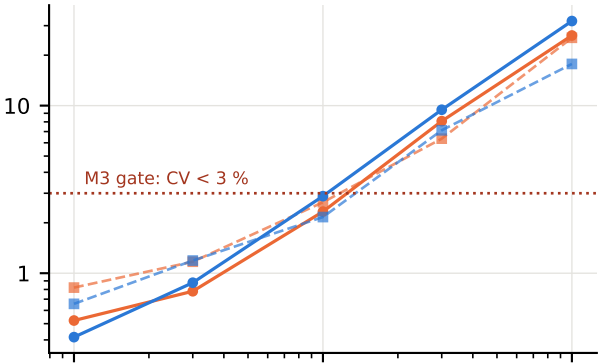
10
1
M3 gate: CV < 3 %
0.1
1
10
baseline shift between IDLE and RUN window (%)