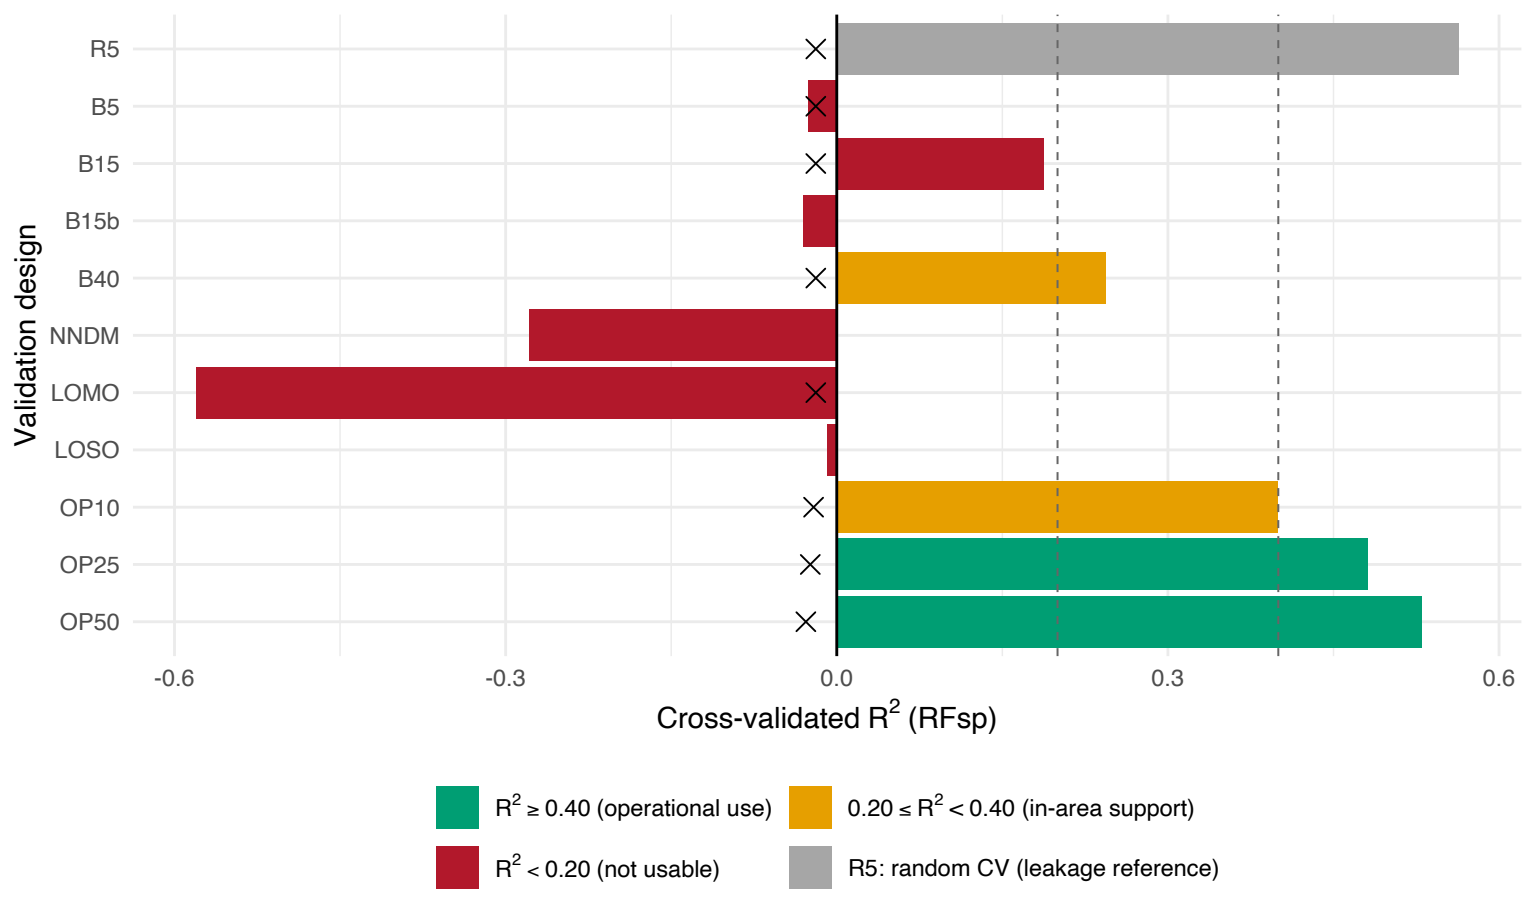
R5
B5
B15
B15b
B40
NNDM
LOMO
LOSO
OP10
OP25
OP50
Validation design
-0.6
-0.3
0.0
0.3
0.6
Cross-validated R^2 (RFsp)
$R^2 \geq 0.40$ (operational use)
$0.20 \leq R^2 < 0.40$ (in-area support)
$R^2 < 0.20$ (not usable)
R5: random CV (leakage reference)