

Every Day Carry Fanny Pack

Cut and Sew Instructions

Description

www.LearnMYOG.com

27 January 2020

Created by u/g8trtim

Every day carry fanny pack is 8" by 5" by 2" featuring a large main compartment, inner pocket, and exterior front zip pocket for keys and other smalls. This simple construction is beginner-friendly. The pattern is easily scaled for larger packs and the inside pockets can be easily tailored. These ubiquitous fanny packs make great gifts. As designed, the pack is roughly 8" by 5" by 2".

Preparations

Print the pattern on US Letter (8.5 x 11) paper. It is very important to print at 1:1 scale. Where applicable, the pattern will print on multiple pages. Cut out the pattern shapes along outer most lines. Tape adjoining patterning pieces along Joining Lines.


Trace the pattern pieces from the pattern sheet onto the wrong side of the fabric. Note, for pattern pieces with fold lines, fold over fabric wrong sides facing out, align, and cut.

Standard seam allowance is 3/8 inches throughout unless otherwise stated.

Assembly Instructions

1. Prepare fabric panel per Preparations. Notch or mark fabric panels at seam marks.
2. Wrong sides out, attach zipper along long edge of Zipper Gusset part A. Repeat along Zipper Gusset part B. Top stitch zipper to finish. Remove excess zipper tape. Trim assembled Zipper Gusset to match width of Bottom Gusset.
3. Wrong sides out, sew assembled Zipper Gusset to Bottom Gusset along short sides. Top stitch to finish. Repeat other short side. Assembled gusset forms a "hoop".
Optional: Insert short webbing loops into gusset seams.
4. Assemble front panel by inserting zipper along long edge of part A and part B. Top stitch to finish. Right sides out, baste stitch front panel to Inner Panel with 1/4" seam allowance.
5. Pocket. Fold edge 1/4", then fold again, and top stitch hem to guideline as shown. Right sides out, baste stitch Pocket to Back Panel with 1/4" seam allowance along outside edges. Do NOT sew hem line to back panel.

Instructions continue...

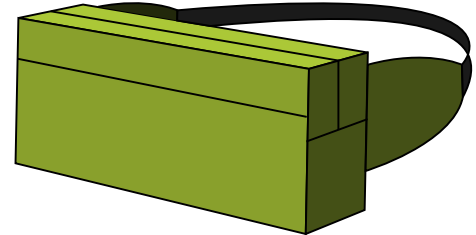

Materials

Two zippers, YKK #3 or #5
Fabric panels per pattern
Webbing 1", length to fit waist
Quick release buckle 1"

Fabric recommendations:

Cordura 500D
Cotton Canvas
X-PAC VX07 or LS07

Symbols


Fold Line

A broken line indicates the fold edge of a double layer of fabric. A broken line pattern edge must be placed on a fold and not cut.




Seam Marks

Shown on curved or long seams, these small lines perpendicular to the cutting line indicate edges to be matched. Align the seam marks to one another.




Lengthening




For long pattern pieces, this symbol indicates you must lengthen the piece before cutting. Lengthen the pattern from the point of arrow by the amount indicated.




Joining Line

Large pattern pieces must be taped together after they have been traced on paper. Red colored lines indicate matched edges. Small triangles indicated alignment points.



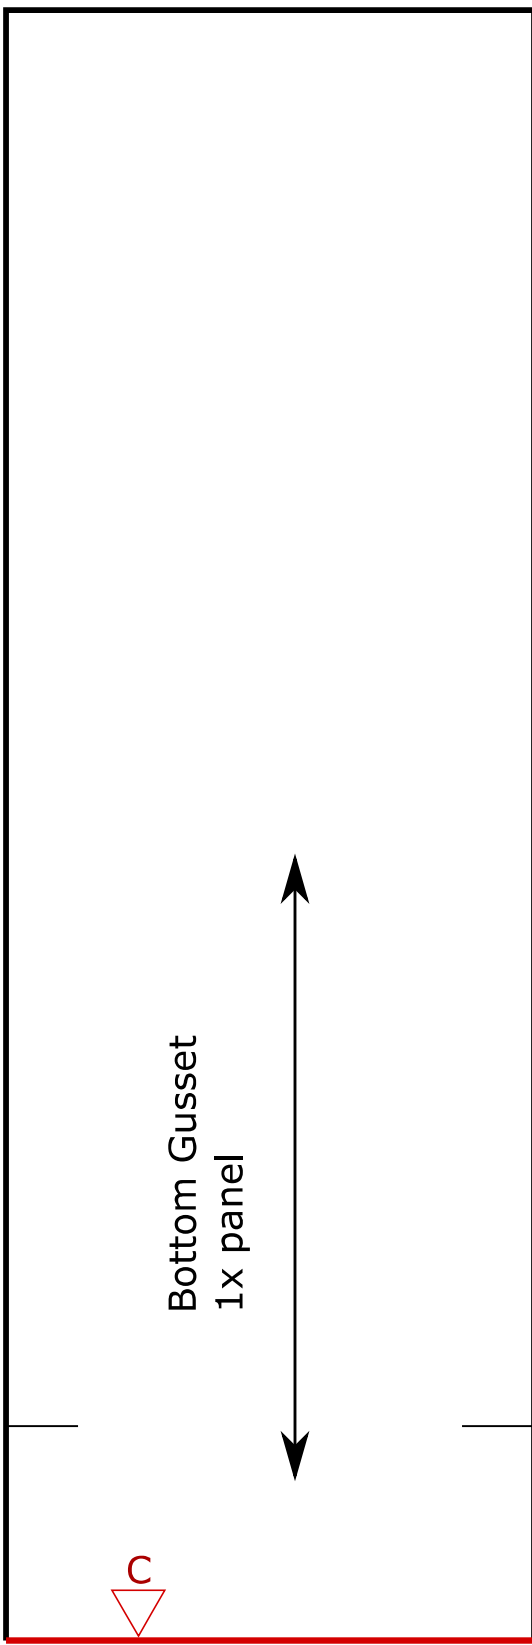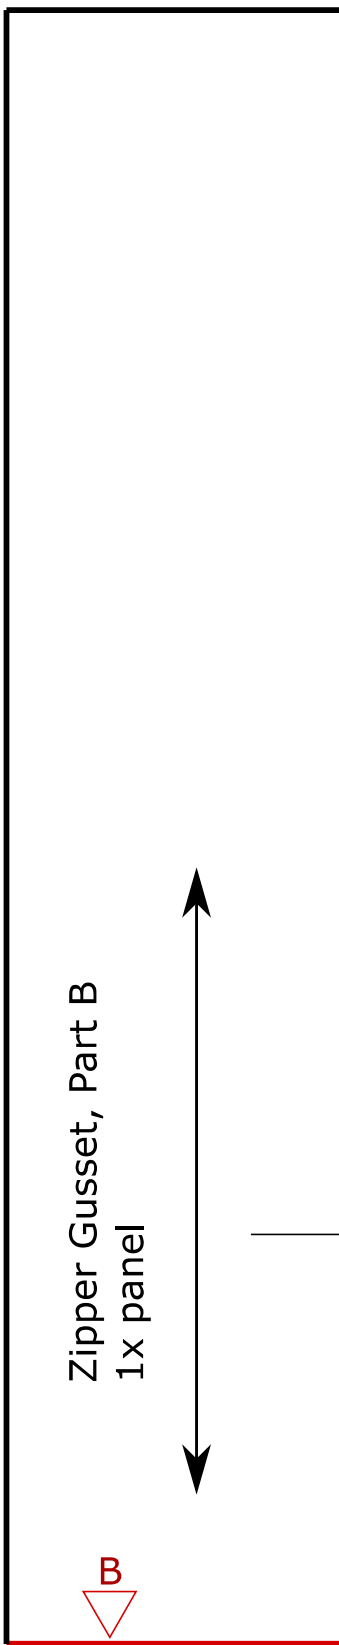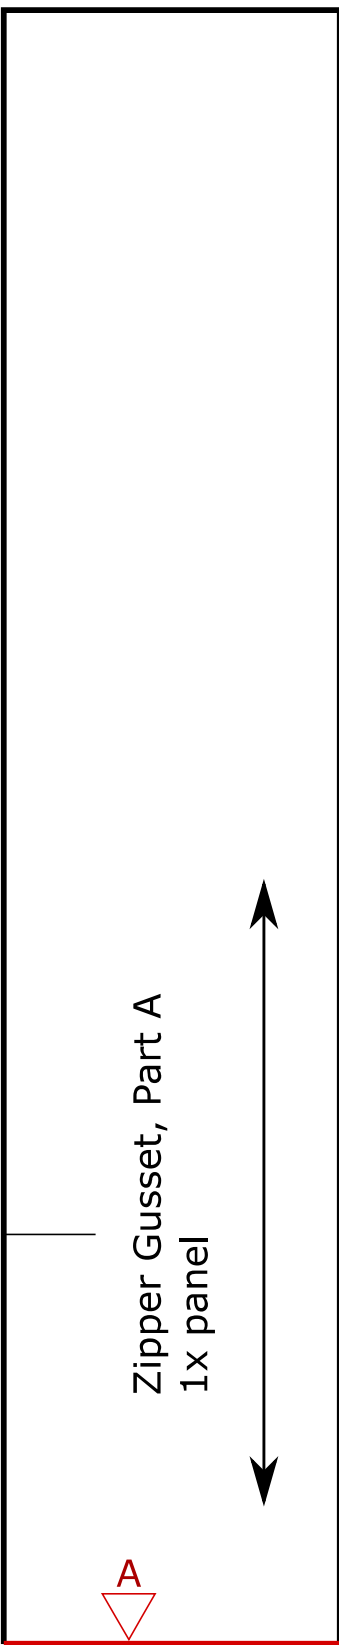

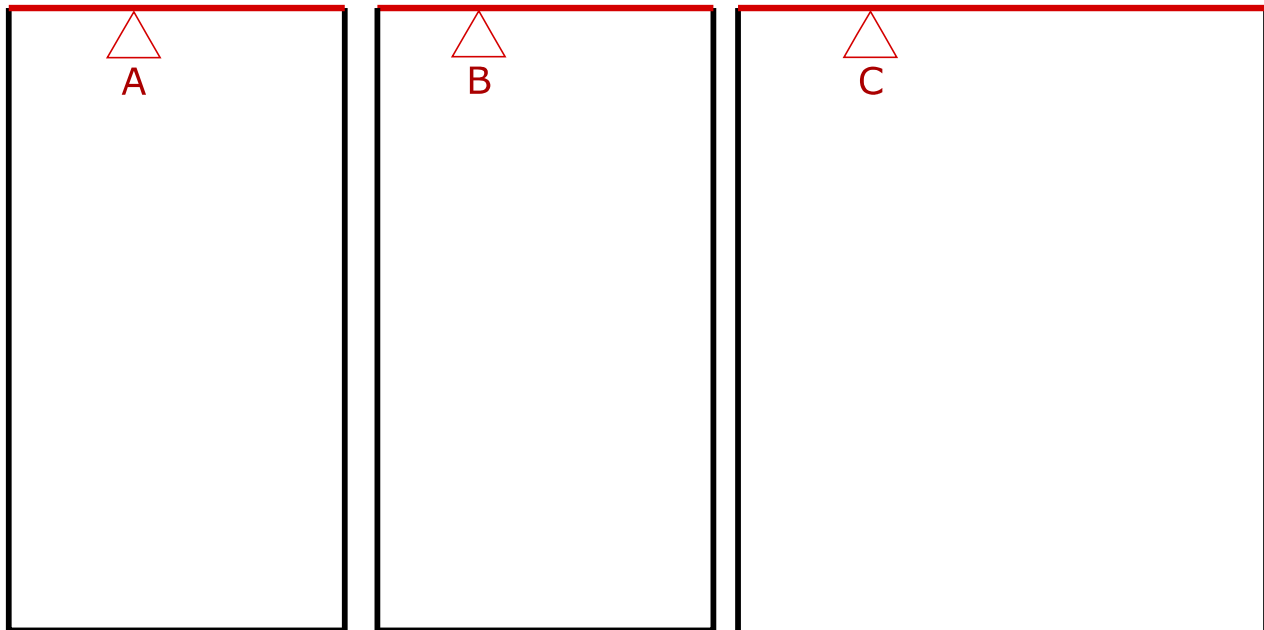

Assembly Instructions Continued

6. Right sides out, insert webbing into Belt Wing along fold line. Roll raw edges under and top stitch along perimeter. Secure webbing with box stitch or bar tack. Repeat opposite side.



7. Align and baste Belt Wing to Back Panel. Belt Wing should be inside the Back Panel perimeter! Repeat other side.

8. Wrong sides out, pin or clip Gusset to Back Panel along zipper. Align seam marks or adjust zipper position to preference. Attach assembled Gusset to Back Panel with 3/8" seam allowance. Strengthen Belt Wing attachment with bar tacks or multiple rows of straight stitches.

9. Wrong sides out, pin or clip Gusset to Front panel. Attach with 3/8" seam allowance.

10. Unzip top zipper and flip fanny pack right side out. Thread webbing thru Quick Release buckle, repeat other side.

Enjoy your fanny pack!

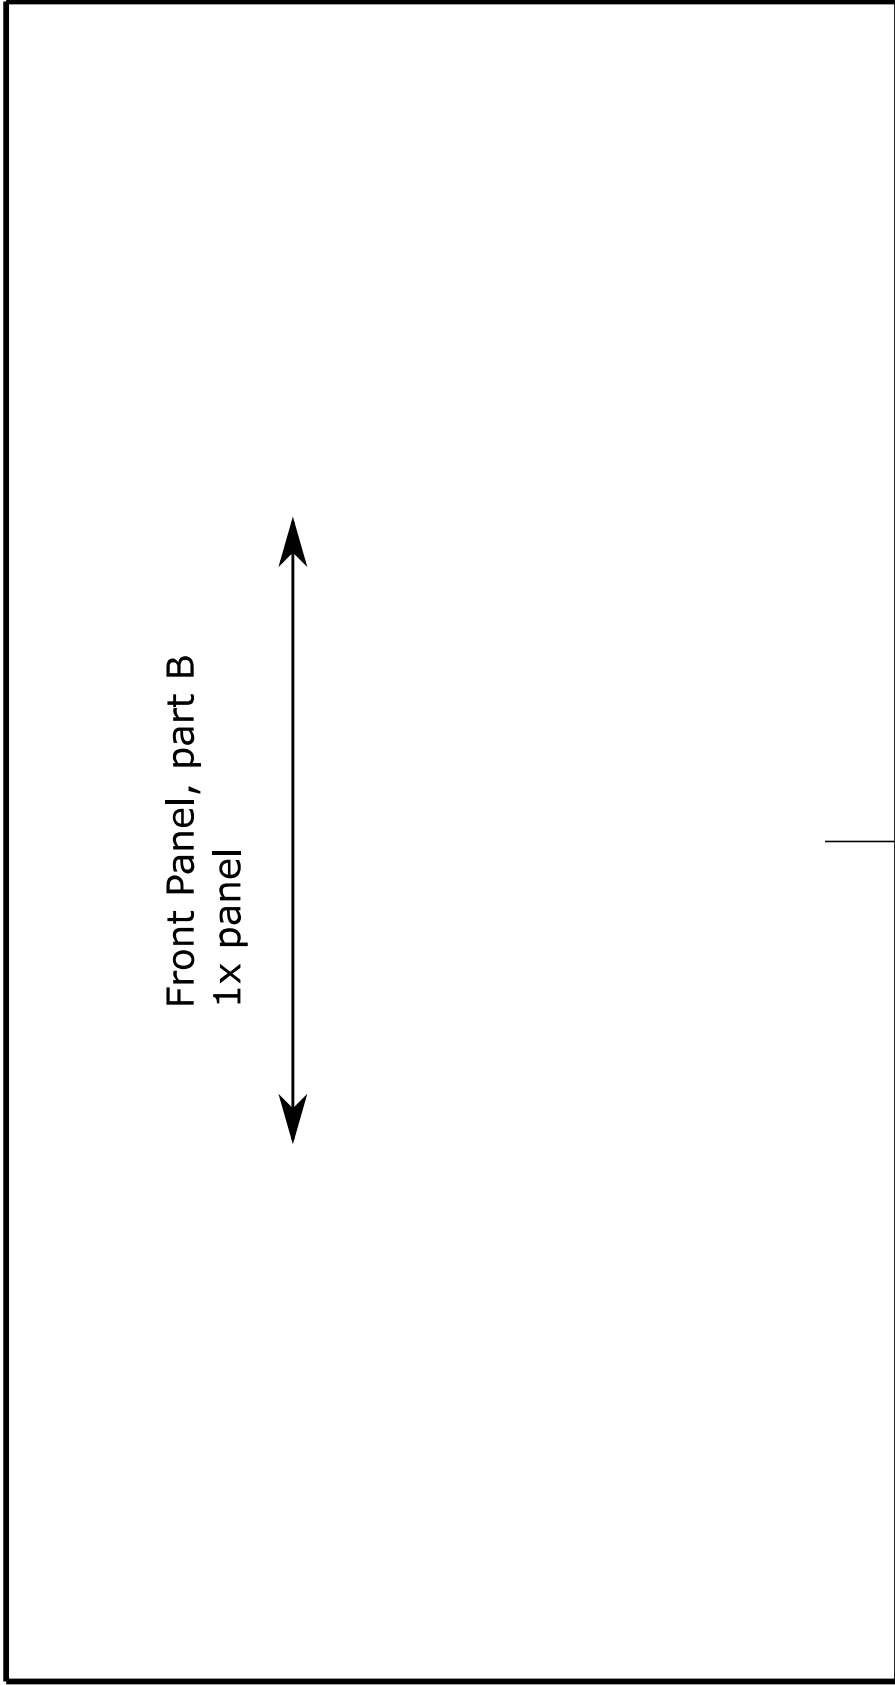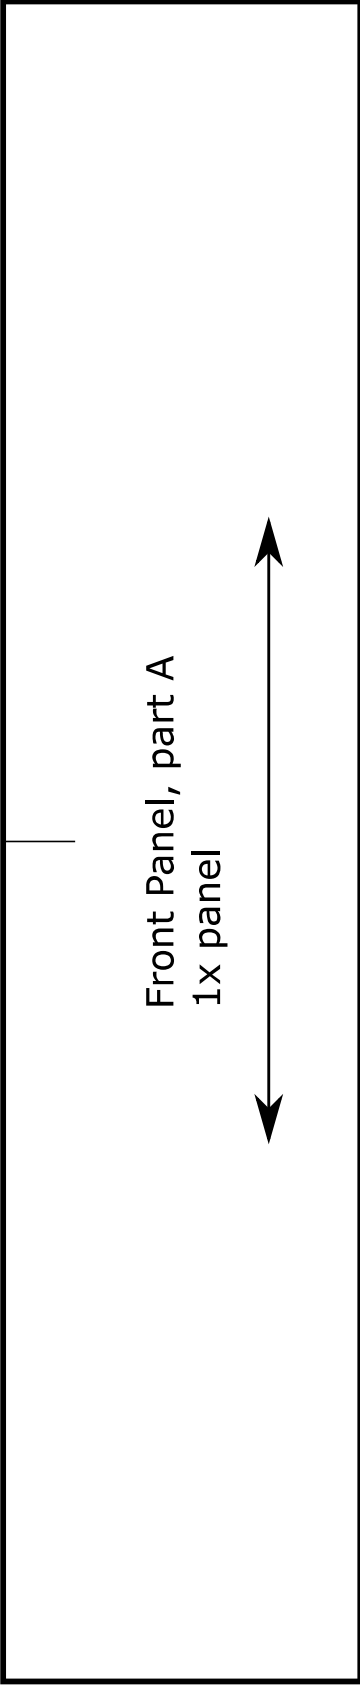

Back Panel and Inner Panel
2x panel



1/4" Hem

Pocket
1x panel



