

# 2500 GALLON CONCRETE SEPTIC TANK MONOLITHIC


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

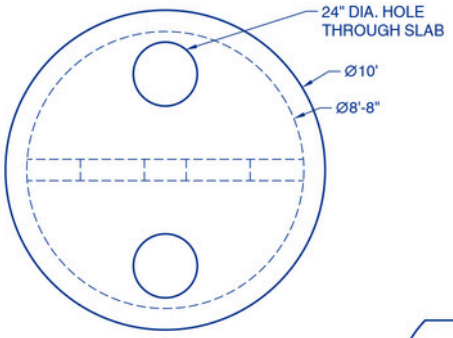



TOP VIEW 1:35





DETAIL A
SCALE 3/8" = 1'-0"

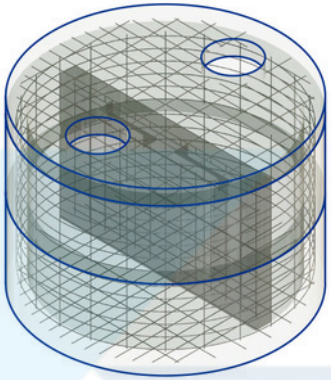


ISOMETRIC VIEW 1:35

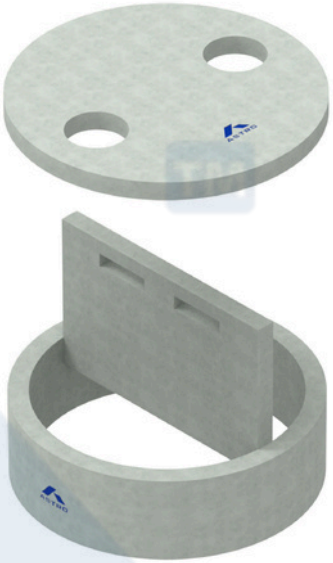


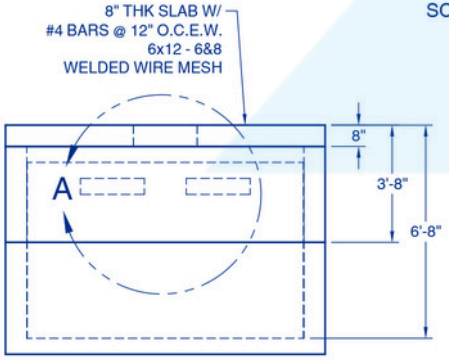


PLAN VIEW 1:35

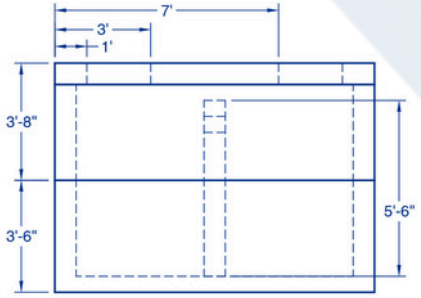


SIDE VIEW 1:35



3D RENDER

| | |
|---|---|
| **PRODUCT NO.** | AR 2500G STM |
| **DESCRIPTION** | 2500G SEPTIC TANK M. |
| **STANDARD** | SUFFOLK & NASSAU COUNTY |
| **DIAMETERS** | OUTER - 10' |
| | INNER - 8'8" |
| **THICKNESS** | WALL - 8" |
| | TOP SLAB - 8" |
| **JOINT SEAL** | 1" SQ. OR 1" DIA. SELF SEALING BUTYL RUBBER GASKET EQUAL TO FED. SPEC. SS-S-00210 |
| **BASE TYPE** | MONOLITHIC |
| **WEIGHT** | 24200 LBS. |
| **LOAD RATING** | A.A.S.H.T.O. HS20-44 |
| **TESTING BY** | ALL ISLAND TESTING |
| **ENGINEERING BY** | FIONA S. |

## ENGINEERS APPROVAL SPACE

## SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:35
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

## PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED

## COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO


## ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064) GRADE 60 ASTM A-185-02
MESH CENTERED WITH 1.5"MIN COVER

ASTRO™

# PRECAST CONCRETE GREASE TRAPS

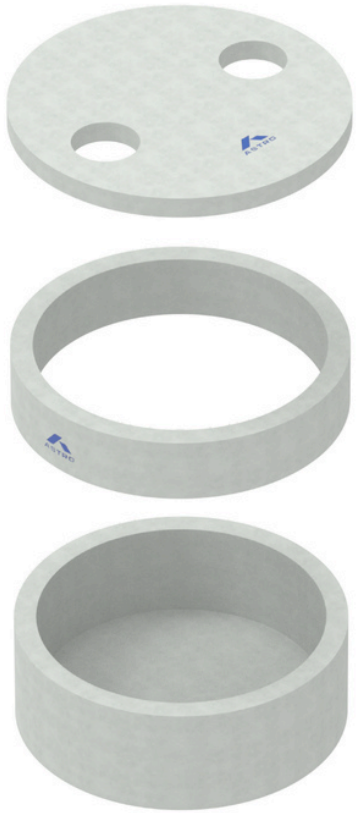

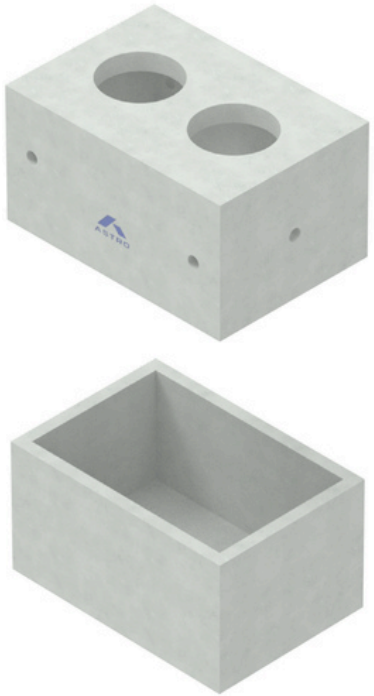


# GREASE TRAPS


- 1000 GALLON GREASE TRAP
- 1250 GALLON GREASE TRAP
- 1500 GALLON GREASE TRAP
- 2000 GALLON GREASE TRAP
- 2500 GALLON GREASE TRAP
- 1250 GALLON GREASE TRAP MONOLITHIC
- 1500 GALLON GREASE TRAP MONOLITHIC
- 2000 GALLON GREASE TRAP MONOLITHIC
- 2500 GALLON GREASE TRAP MONOLITHIC

# 1000 GALLON CONCRETE GREASE TRAP


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

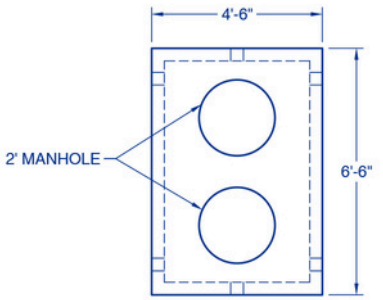



TOP VIEW 1:30

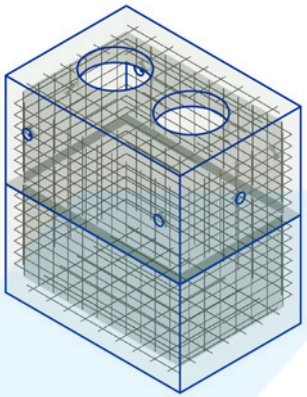


ISOMETRIC VIEW 1:30

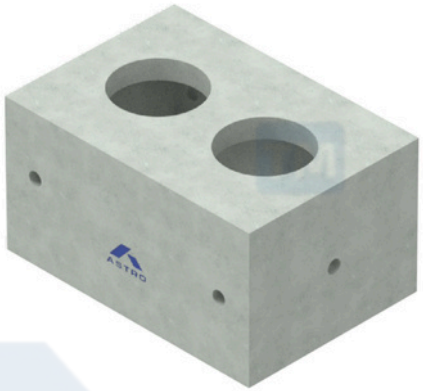


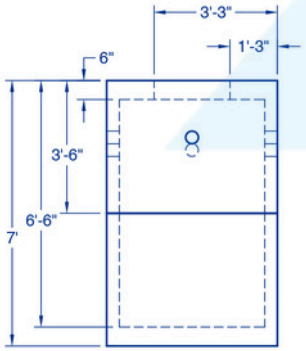


PLAN VIEW 1:30

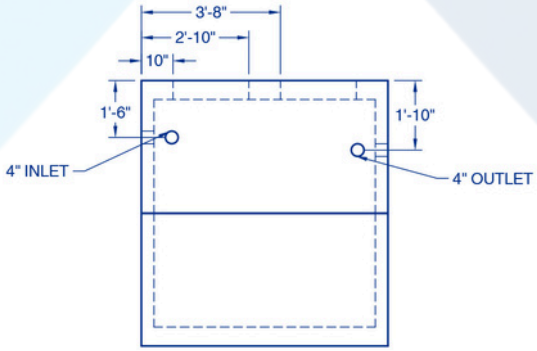


SIDE VIEW 1:30

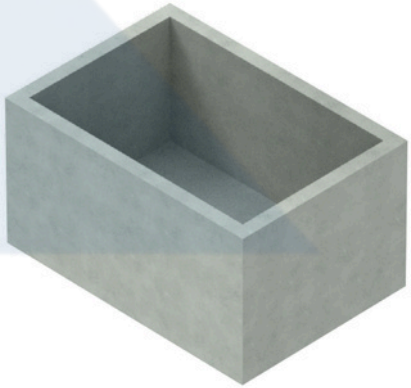

3D RENDER

| | |
|---|---|
| **PRODUCT NO.** | AR 1000G GT |
| **DESCRIPTION** | 1000G GREASE TRAP |
| **STANDARD** | SUFFOLK & NASSAU COUNTY |
| **SIZES** | LENGTH - 6'6" |
| | WIDTH - 4'6" |
| | HEIGHT - 7' |
| **THICKNESS** | WALL - 4" |
| | TOP SLAB - 6" |
| **JOINT SEAL** | 1" SQ. OR 1" DIA. SELF SEALING BUTYL RUBBER GASKET EQUAL TO FED. SPEC. SS-S-00210 |
| **WEIGHT** | 8000 LBS |
| **LOAD RATING** | A.A.S.H.T.O. HS20-44 |
| **TESTING BY** | ALL ISLAND TESTING |
| **ENGINEERING BY** | FIONA S. |

## ENGINEERS APPROVAL SPACE

## SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:30
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

## PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED

## COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

## ADDITIONAL NOTES:


REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064) GRADE 60 ASTM A-185-02
MESH CENTERED WITH 1.5"MIN COVER

# 1250 GALLON CONCRETE GREASE TRAP


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

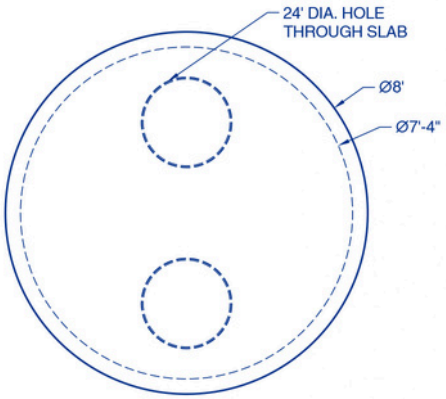




TOP VIEW 1:25

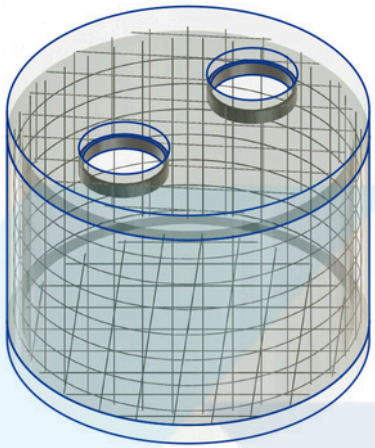


ISOMTRIC VIEW 1:25

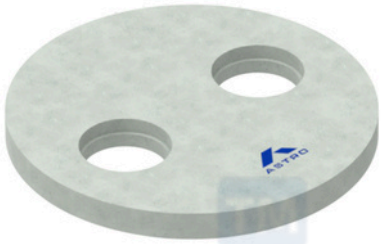

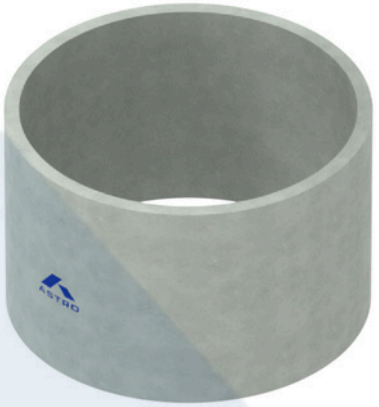


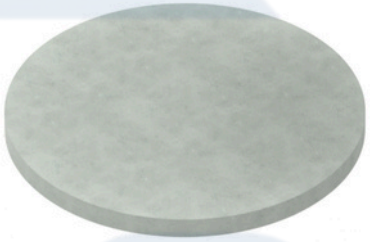

3D RENDER

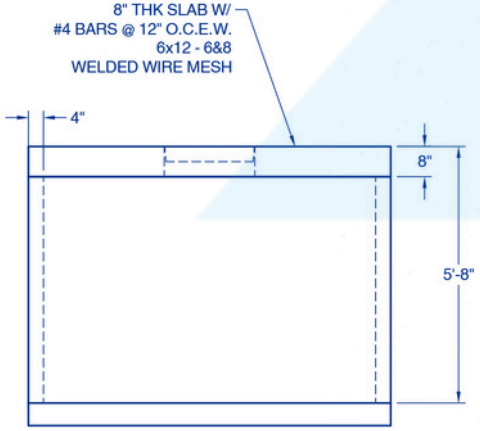


PLAN VIEW 1:25

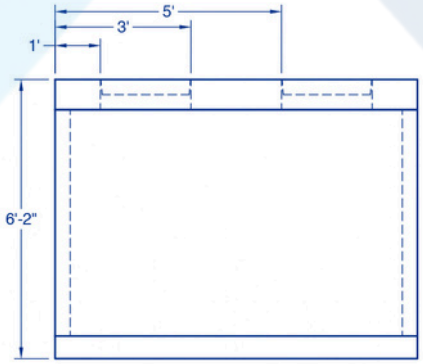


RIGHT SIDE VIEW 1:25

## ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064) GRADE 60 ASTM A-185-02
MESH CENTERED WITH 1.5"MIN COVER

| | |
|---|---|
| **PRODUCT NO.** | AR 1250G GT |
| **DESCRIPTION** | 1250G GREASE TRAP |
| **STANDARD** | SUFFOLK & NASSAU COUNTY |
| **DIAMETERS** | OUTER - 8' |
| | INNER - 7'4" |
| **THICKNESS** | WALL - 4" |
| | TOP SLAB - 6" |
| **JOINT SEAL** | 1" SQ. OR 1" DIA. SELF SEALING BUTYL RUBBER GASKET EQUAL TO FED. SPEC. SS-S-00210 |
| **BASE TYPE** | NON MONOLITHIC |
| **WEIGHT** | 9500 LBS |
| **LOAD RATING** | A.A.S.H.T.O. HS20-44 |
| **TESTING BY** | ALL ISLAND TESTING |
| **ENGINEERING BY** | FIONA S. |

## ENGINEERS APPROVAL SPACE

## SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

## PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED


## COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

# 1250 GALLON CONCRETE GREASE TRAP MONOLITHIC


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

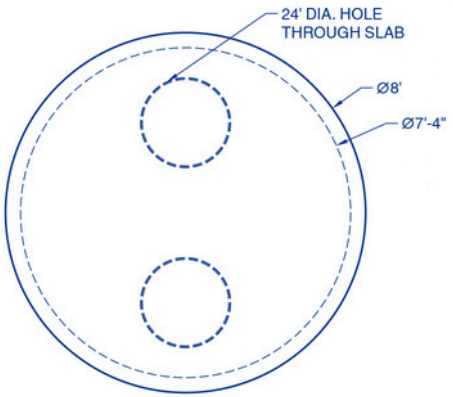



TOP VIEW 1:25

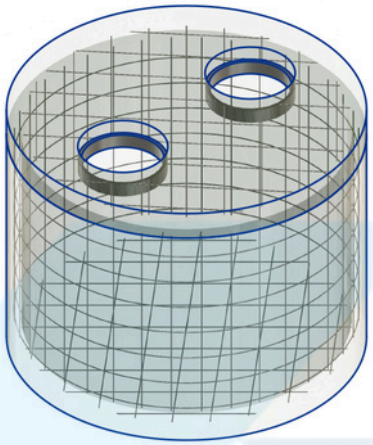


ISOMTRIC VIEW 1:25

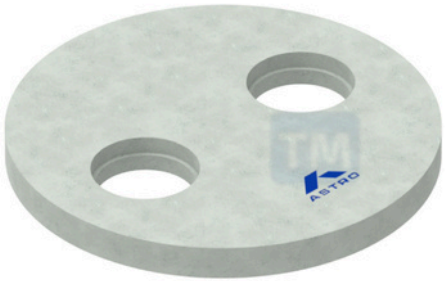


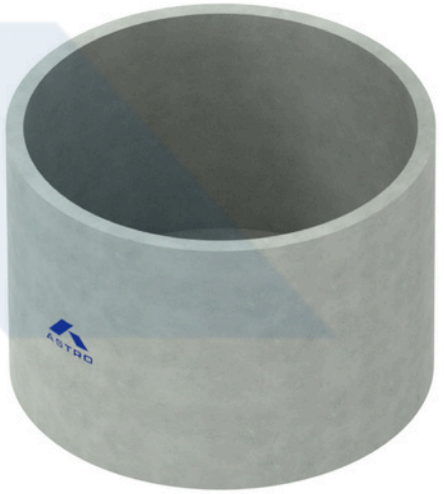

3D RENDER

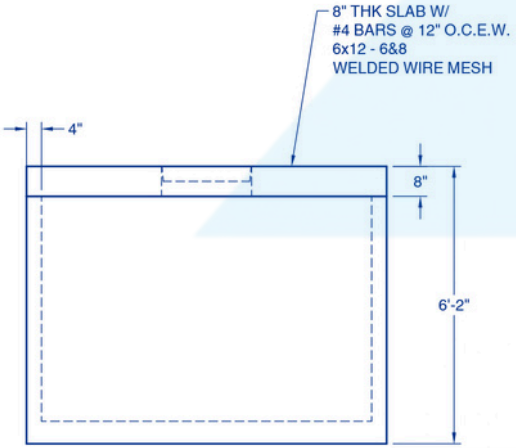


PLAN VIEW 1:25

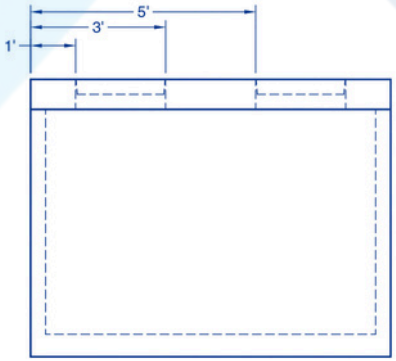


RIGHT SIDE VIEW 1:25

| | |
|---|---|
| **PRODUCT NO.** | AR 1250G GTM |
| **DESCRIPTION** | 1250G GREASE TRAP M. |
| **STANDARD** | SUFFOLK & NASSAU COUNTY |
| **DIAMETERS** | OUTER - 8' |
| | INNER - 7'4" |
| **THICKNESS** | WALL - 4" |
| | TOP SLAB - 6" |
| **JOINT SEAL** | 1" SQ. OR 1" DIA. SELF SEALING BUTYL RUBBER GASKET EQUAL TO FED. SPEC. SS-S-00210 |
| **BASE TYPE** | MONOLITHIC |
| **WEIGHT** | 9500 LBS |
| **LOAD RATING** | A.A.S.H.T.O. HS20-44 |
| **TESTING BY** | ALL ISLAND TESTING |
| **ENGINEERING BY** | FIONA S. |

## ENGINEERS APPROVAL SPACE

## SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

## PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED

## COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

## ADDITIONAL NOTES:


REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064) GRADE 60 ASTM A-185-02
MESH CENTERED WITH 1.5"MIN COVER

# 1500 GALLON CONCRETE GREASE TRAP


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

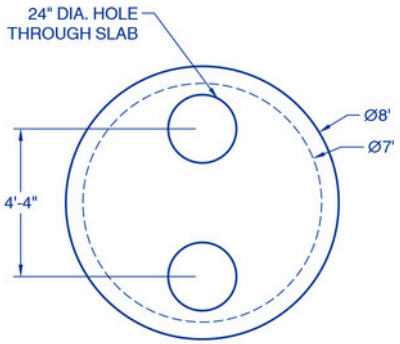



TOP VIEW 1:35

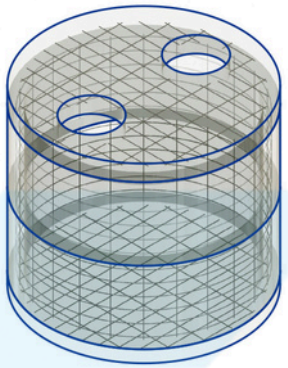


ISOMETRIC VIEW 1:35

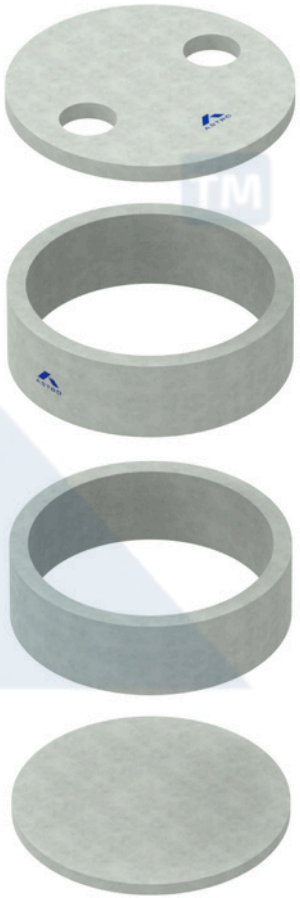

3D RENDER

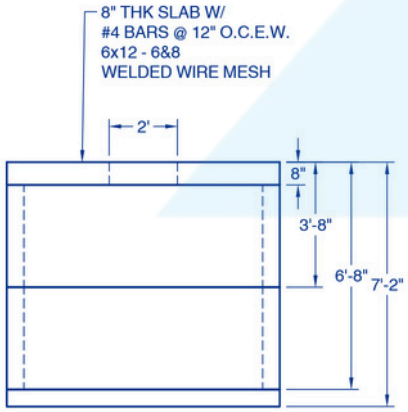


PLAN VIEW 1:35

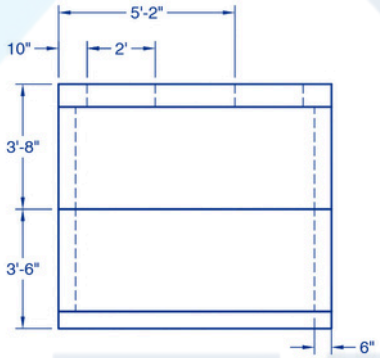


SIDE VIEW 1:35

## ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064) GRADE 60 ASTM A-185-02
MESH CENTERED WITH 1.5"MIN COVER

| | |
|---|---|
| **PRODUCT NO.** | AR 1500G GT |
| **DESCRIPTION** | 1500G GREASE TRAP |
| **STANDARD** | SUFFOLK & NASSAU COUNTY |
| **DIAMETERS** | OUTER - 8' |
| | INNER - 7'4" |
| **THICKNESS** | WALL - 6" |
| | TOP SLAB - 8" |
| **JOINT SEAL** | 1" SQ. OR 1" DIA. SELF SEALING BUTYL RUBBER GASKET EQUAL TO FED. SPEC. SS-S-00210 |
| **BASE TYPE** | NON MONOLITHIC |
| **WEIGHT** | 12000 LBS |
| **LOAD RATING** | A.A.S.H.T.O. HS20-44 |
| **TESTING BY** | ALL ISLAND TESTING |
| **ENGINEERING BY** | FIONA S. |

## ENGINEERS APPROVAL SPACE

## SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:35
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

## PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED


## COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

# 1500 GALLON CONCRETE GREASE TRAP MONOLITHIC


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

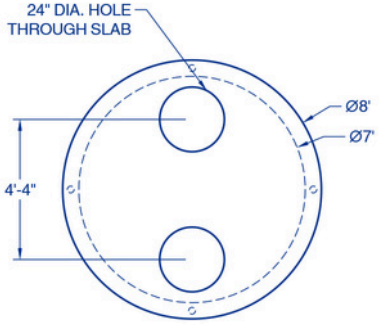



TOP VIEW 1:35

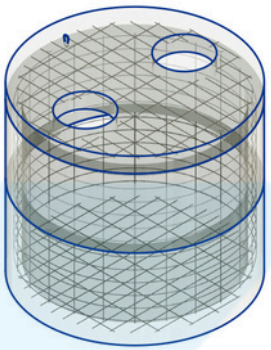


ISOMETRIC VIEW 1:35

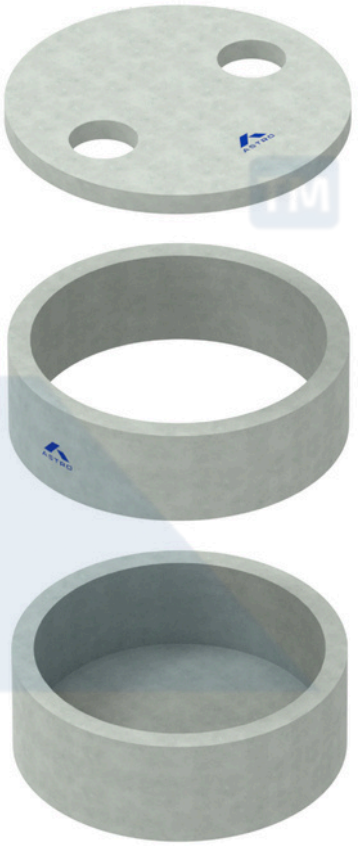

3D RENDER

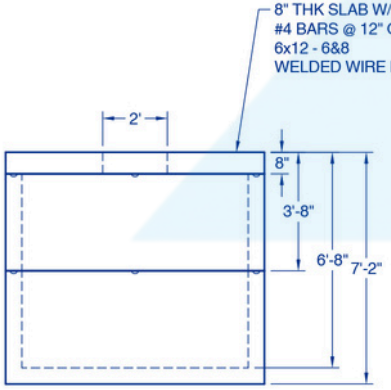


PLAN VIEW 1:35

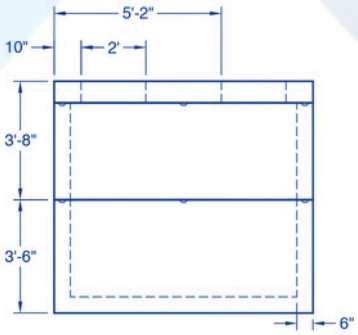


SIDE VIEW 1:35

## ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064) GRADE 60 ASTM A-185-02
MESH CENTERED WITH 1.5"MIN COVER

| | |
|---|---|
| **PRODUCT NO.** | AR 1500G GTM |
| **DESCRIPTION** | 1500G GREASE TRAP M. |
| **STANDARD** | SUFFOLK & NASSAU COUNTY |
| **DIAMETERS** | OUTER - 8' |
| | INNER - 7'4" |
| **THICKNESS** | WALL - 6" |
| | TOP SLAB - 8" |
| **JOINT SEAL** | 1" SQ. OR 1" DIA. SELF SEALING BUTYL RUBBER GASKET EQUAL TO FED. SPEC. SS-S-00210 |
| **BASE TYPE** | MONOLITHIC |
| **WEIGHT** | 12000 LBS |
| **LOAD RATING** | A.A.S.H.T.O. HS20-44 |
| **TESTING BY** | ALL ISLAND TESTING |
| **ENGINEERING BY** | FIONA S. |

## ENGINEERS APPROVAL SPACE

## SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:35
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

## PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED


## COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

# 2000 GALLON CONCRETE GREASE TRAP


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

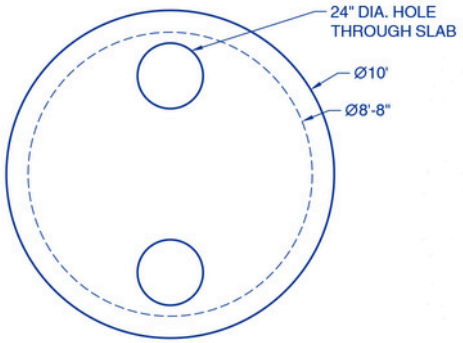



TOP VIEW 1:35

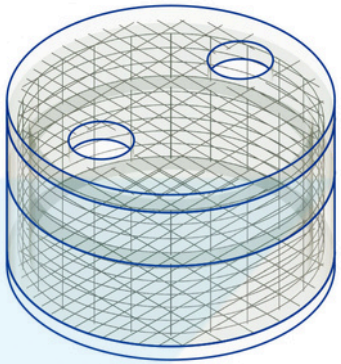


ISOMETRIC VIEW 1:35

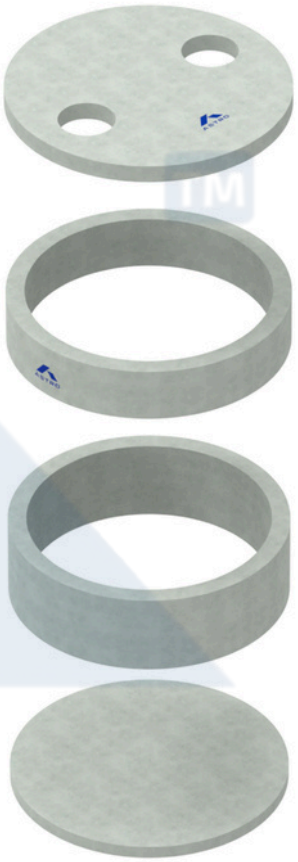

3D RENDER

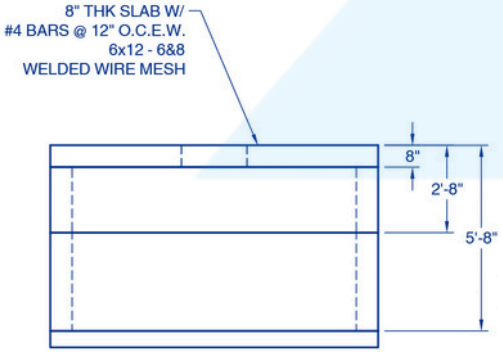


PLAN VIEW 1:35

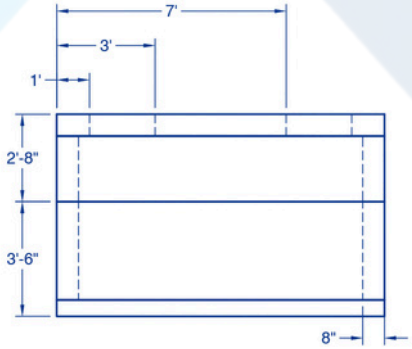


SIDE VIEW 1:35

## ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064) GRADE 60 ASTM A-185-02
MESH CENTERED WITH 1.5"MIN COVER

| | |
|---|---|
| **PRODUCT NO.** | AR 2000G GT |
| **DESCRIPTION** | 2000G GREASE TRAP |
| **STANDARD** | SUFFOLK & NASSAU COUNTY |
| **DIAMETERS** | OUTER - 10' |
| | INNER - 8'8" |
| **THICKNESS** | WALL - 8" |
| | TOP SLAB - 8" |
| **JOINT SEAL** | 1" SQ. OR 1" DIA. SELF SEALING BUTYL RUBBER GASKET EQUAL TO FED. SPEC. SS-S-00210 |
| **BASE TYPE** | NON MONOLITHIC |
| **WEIGHT** | 14000 LBS |
| **LOAD RATING** | A.A.S.H.T.O. HS20-44 |
| **TESTING BY** | ALL ISLAND TESTING |
| **ENGINEERING BY** | FIONA S. |

## ENGINEERS APPROVAL SPACE

## SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:35
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

## PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED


## COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

# 2000 GALLON CONCRETE GREASE TRAP MONOLITHIC


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

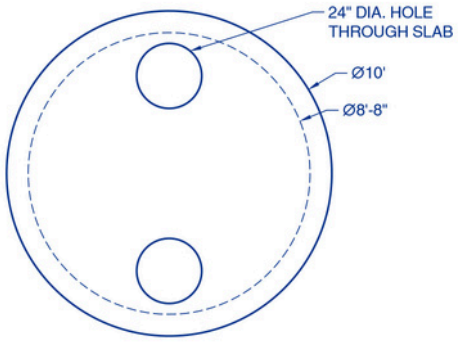



TOP VIEW 1:35

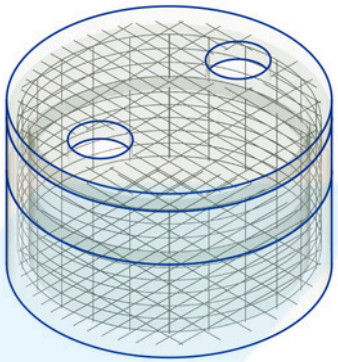


ISOMETRIC VIEW 1:35

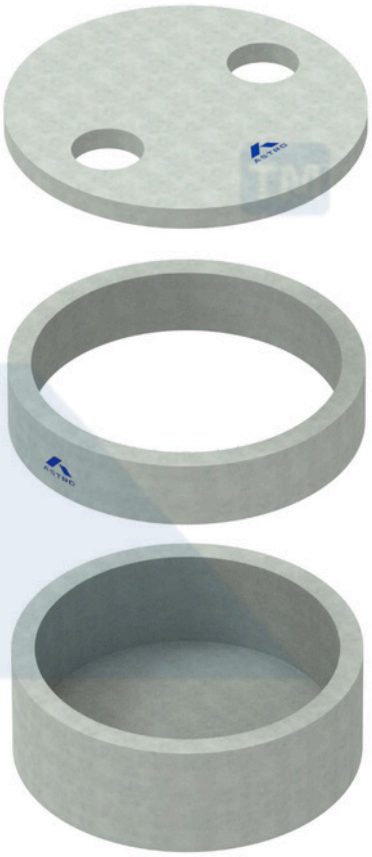

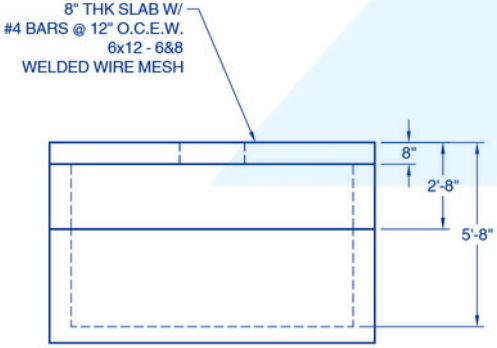


PLAN VIEW 1:35

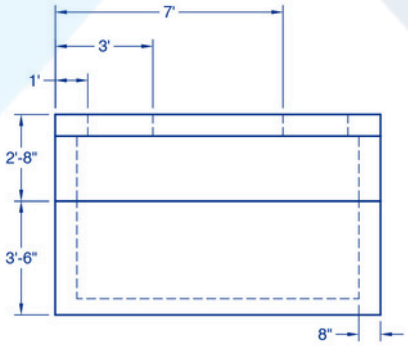


SIDE VIEW 1:35

3D RENDER

| | |
|---|---|
| **PRODUCT NO.** | AR 2000G GTM |
| **DESCRIPTION** | 2000G GREASE TRAP M. |
| **STANDARD** | SUFFOLK & NASSAU COUNTY |
| **DIAMETERS** | OUTER - 10' |
| | INNER - 8'8" |
| **THICKNESS** | WALL - 8" |
| | TOP SLAB - 8" |
| **JOINT SEAL** | 1" SQ. OR 1" DIA. SELF SEALING BUTYL RUBBER GASKET EQUAL TO FED. SPEC. SS-S-00210 |
| **BASE TYPE** | MONOLITHIC |
| **WEIGHT** | 14000 LBS |
| **LOAD RATING** | A.A.S.H.T.O. HS20-44 |
| **TESTING BY** | ALL ISLAND TESTING |
| **ENGINEERING BY** | FIONA S. |

## ENGINEERS APPROVAL SPACE

## SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

## PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED

## COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

## ADDITIONAL NOTES:


REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064) GRADE 60 ASTM A-185-02
MESH CENTERED WITH 1.5"MIN COVER

# 2500 GALLON CONCRETE GREASE TRAP


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

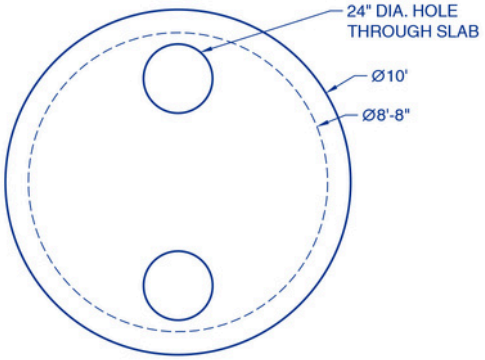



TOP VIEW 1:35

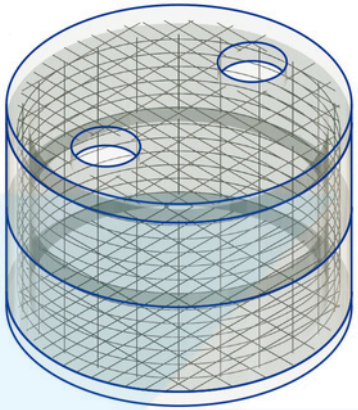


ISOMETRIC VIEW 1:35

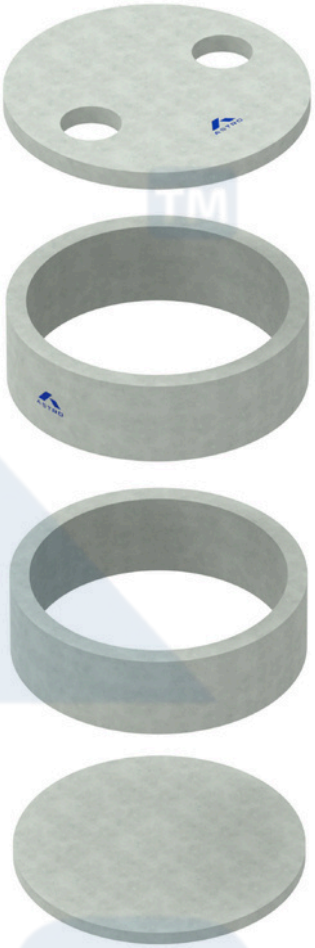

3D RENDER

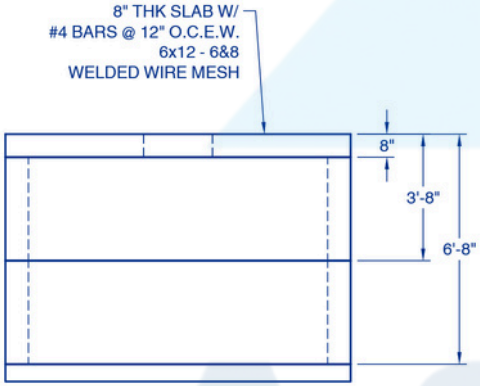


PLAN VIEW 1:35

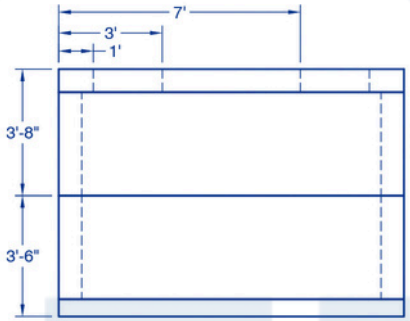


SIDE VIEW 1:35

## ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064) GRADE 60 ASTM A-185-02
MESH CENTERED WITH 1.5"MIN COVER

| | |
|---|---|
| **PRODUCT NO.** | AR 2500G GT |
| **DESCRIPTION** | 2500G GREASE TRAP |
| **STANDARD** | SUFFOLK & NASSAU COUNTY |
| **DIAMETERS** | OUTER - 10' |
| | INNER - 8'8" |
| **THICKNESS** | WALL - 8" |
| | TOP SLAB - 8" |
| **JOINT SEAL** | 1" SQ. OR 1" DIA. SELF SEALING BUTYL RUBBER GASKET EQUAL TO FED. SPEC. SS-S-00210 |
| **BASE TYPE** | NON MONOLITHIC |
| **WEIGHT** | 15000 LBS |
| **LOAD RATING** | A.A.S.H.T.O. HS20-44 |
| **TESTING BY** | ALL ISLAND TESTING |
| **ENGINEERING BY** | FIONA S. |

## ENGINEERS APPROVAL SPACE

## SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

## PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED

## COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com

ASTRO