

2500 GALLON CONCRETE GREASE TRAP MONOLITHIC


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

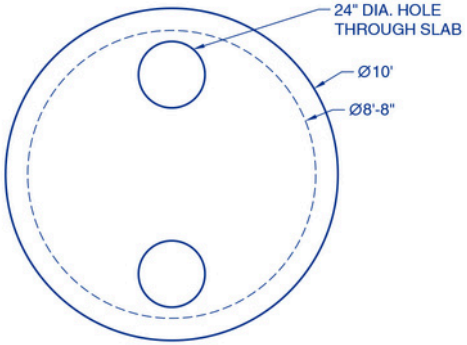



TOP VIEW 1:35

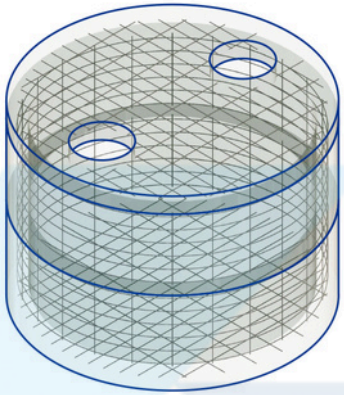


ISOMETRIC VIEW 1:35

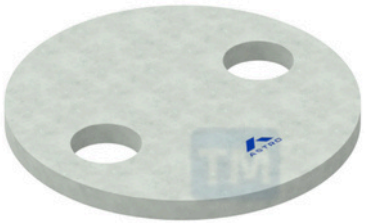

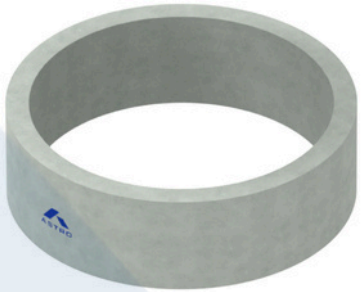


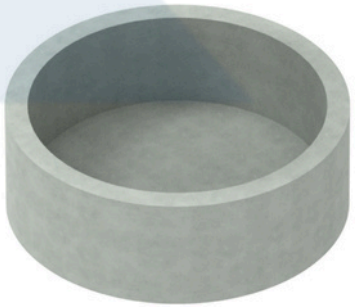

3D RENDER

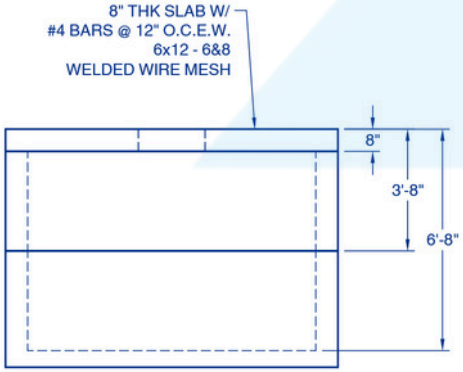

PLAN VIEW 1:35

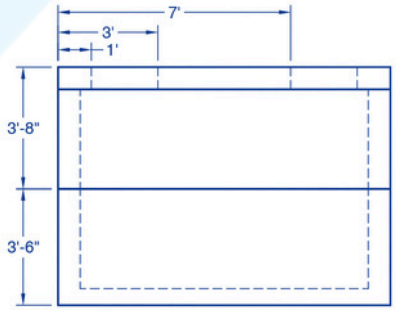

SIDE VIEW 1:35

ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064) GRADE 60 ASTM A-185-02
MESH CENTERED WITH 1.5"MIN COVER

PRODUCT NO.	AR 2500G GTM
DESCRIPTION	2500G GREASE TRAP M.
STANDARD	SUFFOLK & NASSAU COUNTY
DIAMETERS	OUTER - 10'
	INNER - 8'8"
THICKNESS	WALL - 8"
	TOP SLAB - 8"
JOINT SEAL	1" SQ. OR 1" DIA. SELF SEALING BUTYL RUBBER GASKET EQUAL TO FED. SPEC. SS-S-00210
BASE TYPE	MONOLITHIC
WEIGHT	15000 LBS
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED

COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com

ASTRO

ASTRO™

PRECAST CONCRETE DISTRIBUTION BOXES

