

6' CIRCULAR FOOTING RING


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

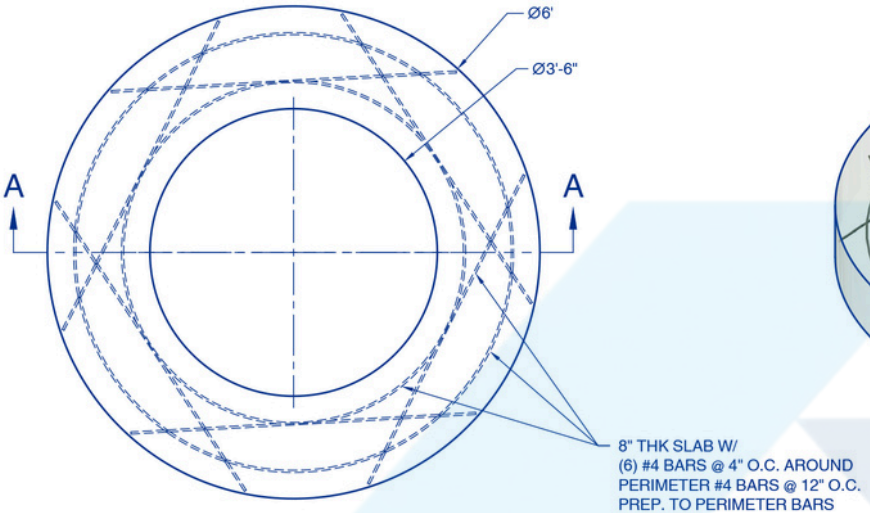


TOP VIEW 1:14

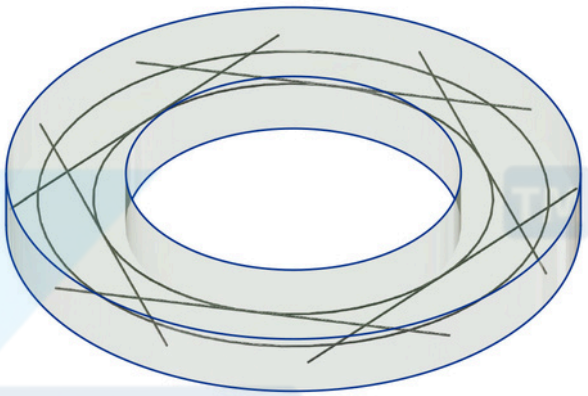

ISOMETRIC VIEW 1:14

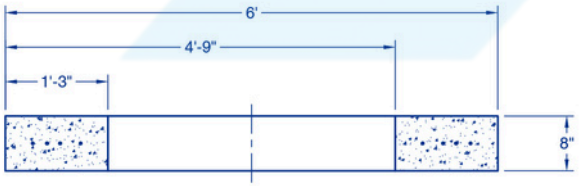

SECTION A-A
SCALE 1:14

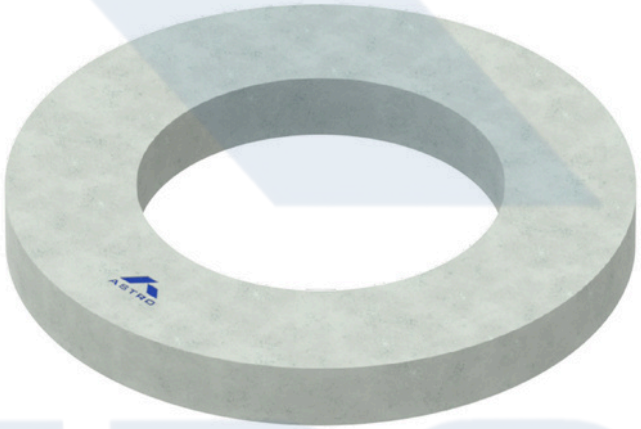

3D RENDER

PRODUCT NO.	AR 6 FR
DESCRIPTION	6' FOOTING RING
STANDARD	SUFFOLK & NASSAU COUNTY
WIDTH	6'
SLAB THICKNESS	8" INCH
DIAMETERS	OUTER - 6'
	INNER - 3'6"
WEIGHT	980 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:14
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF ASTRO IS PROHIBITED

COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

ADDITIONAL NOTES:


REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 8" WALL WITH 1.5"
MIN COVER

8' CIRCULAR FOOTING RING


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

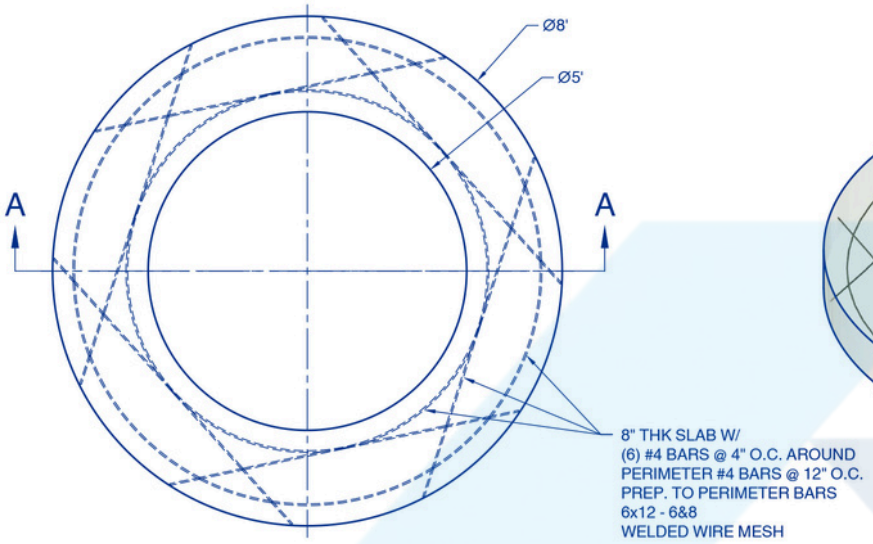


TOP VIEW 1:18

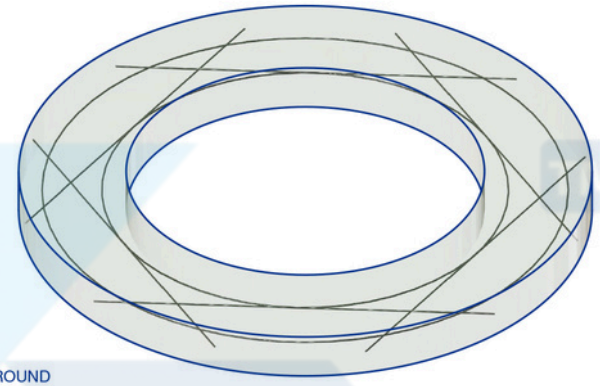

ISOMETRIC VIEW 1:18

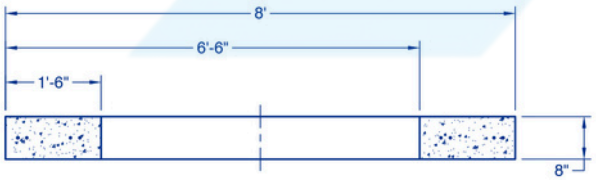

SECTION A-A
SCALE 1:18

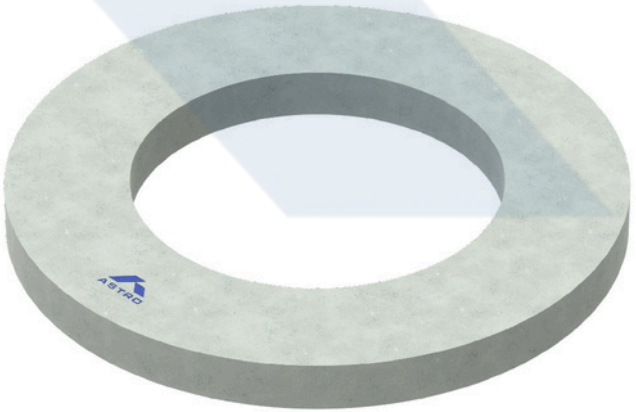

3D RENDER

PRODUCT NO.	AR 8 FR
DESCRIPTION	8' FOOTING RING
STANDARD	SUFFOLK & NASSAU COUNTY
WIDTH	8'
SLAB THICKNESS	8" INCH
DIAMETERS	OUTER - 8'
	INNER - 5'
WEIGHT	1875 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:18
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF ASTRO IS PROHIBITED

COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

ADDITIONAL NOTES:


REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 8" WALL WITH 1.5"
MIN COVER

10' CIRCULAR FOOTING RING


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

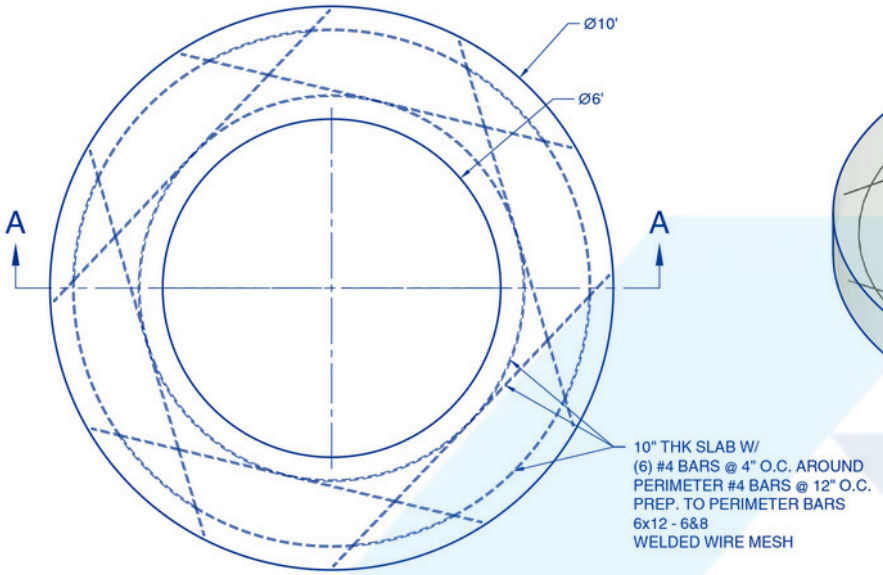


TOP VIEW 1:20

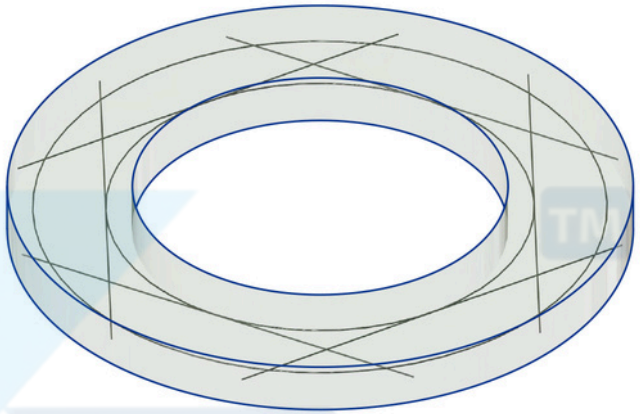

ISOMETRIC VIEW 1:20

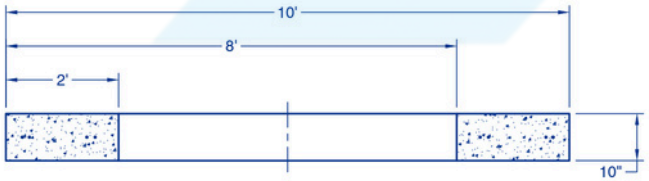

SECTION A-A
SCALE 1:20

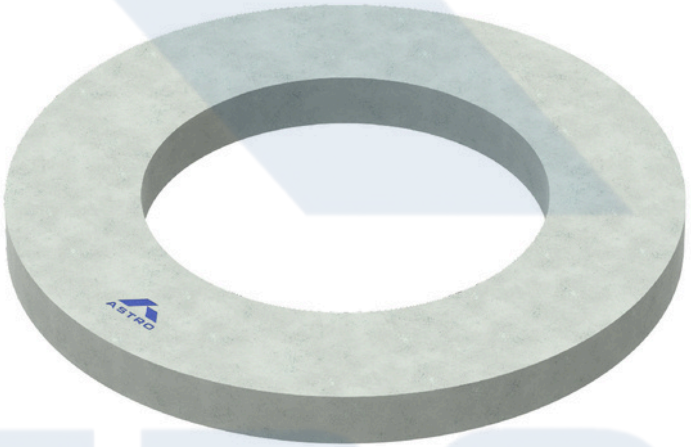

3D RENDER

PRODUCT NO.	AR 10 FR
DESCRIPTION	10' FOOTING RING
STANDARD	SUFFOLK & NASSAU COUNTY
WIDTH	10'
SLAB THICKNESS	10" INCH
DIAMETERS	OUTER - 10'
	INNER - 7'4"
WEIGHT	3629 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:20
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF ASTRO IS PROHIBITED

COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

ADDITIONAL NOTES:


REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 10" WALL WITH 1.5"
MIN COVER

12' CIRCULAR FOOTING RING


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

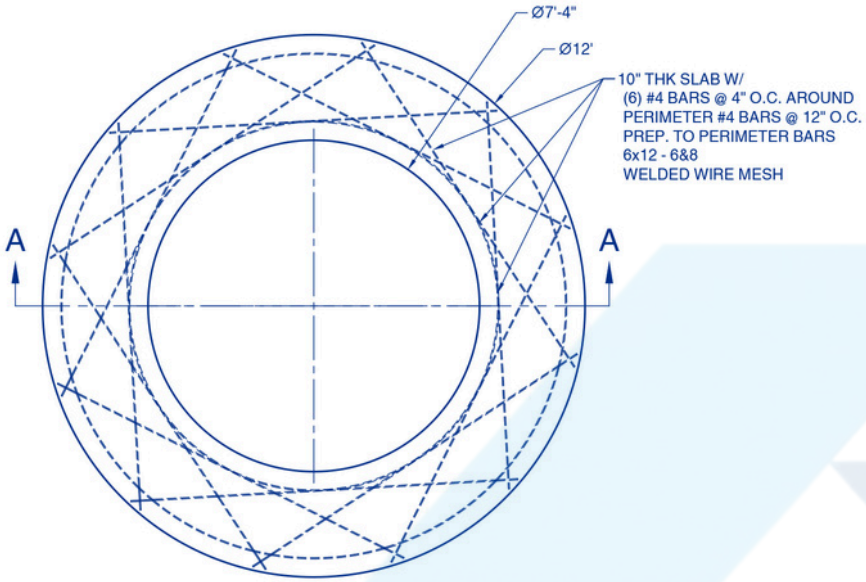


TOP VIEW 1:25

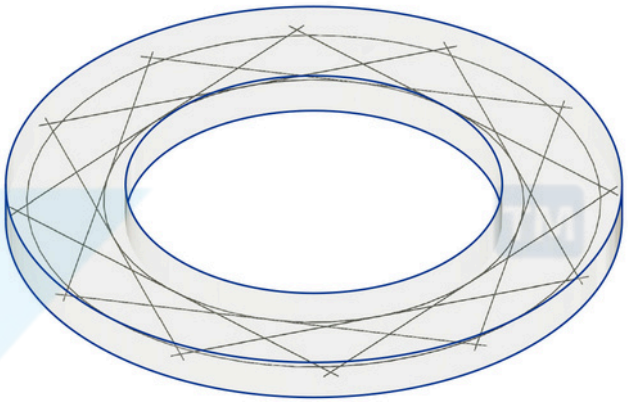

ISOMETRIC VIEW 1:25

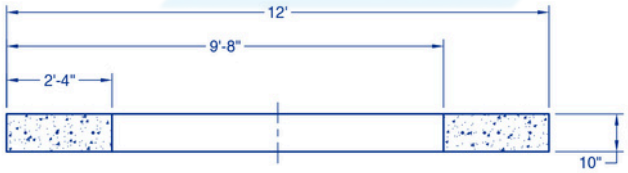

SECTION A-A
SCALE 1:25

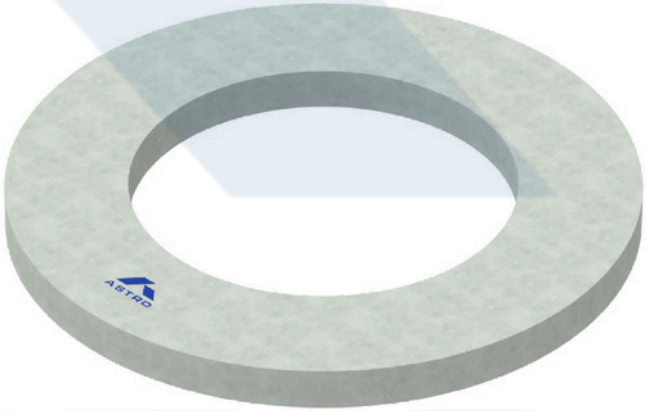

3D RENDER

PRODUCT NO.	AR 12 FR
DESCRIPTION	12' FOOTING RING
STANDARD	SUFFOLK & NASSAU COUNTY
WIDTH	12'
SLAB THICKNESS	10" INCH
DIAMETERS	OUTER - 12'
	INNER - 7'4"
WEIGHT	4471 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF ASTRO IS PROHIBITED

COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO


ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 10" WALL WITH 1.5"
MIN COVER

ASTRO™

PRECAST CONCRETE HIGH COLLARS

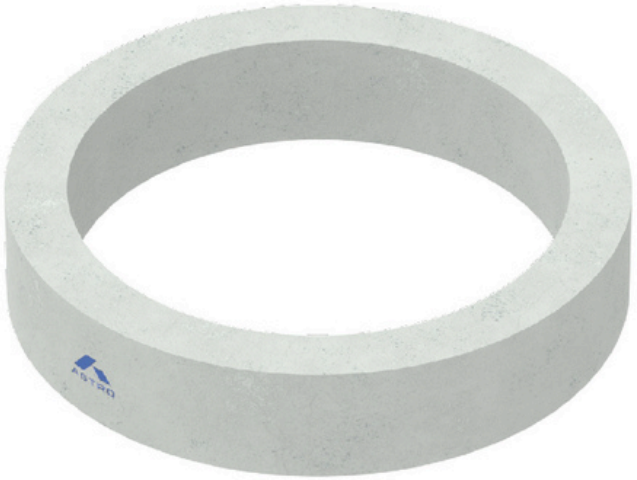

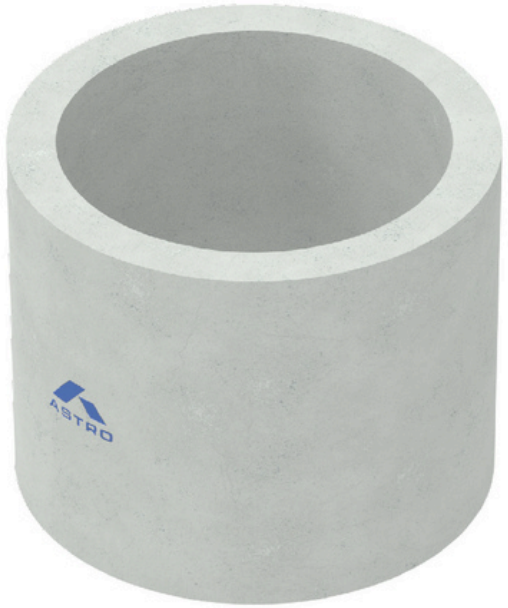

HIGH COLLARS

6" HIGH COLLARS

12" HIGH COLLARS

18" HIGH COLLARS

24" HIGH COLLARS