

12' CONCRETE LOW DOME


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

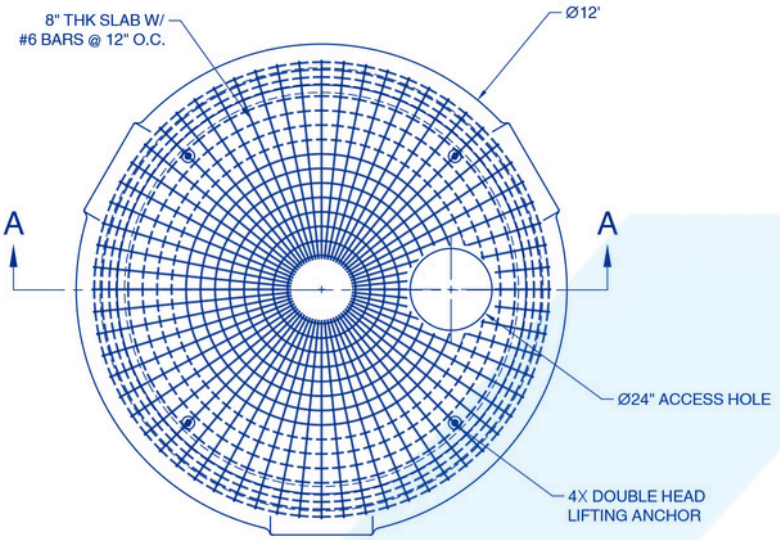


TOP VIEW 1:28

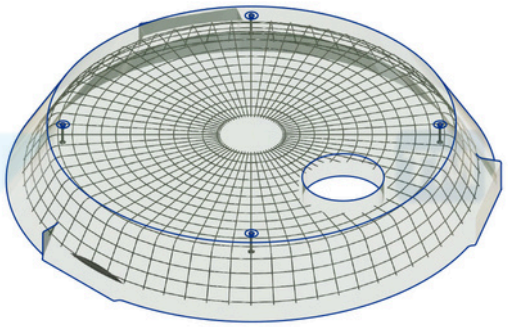

ISOMETRIC VIEW 1:28

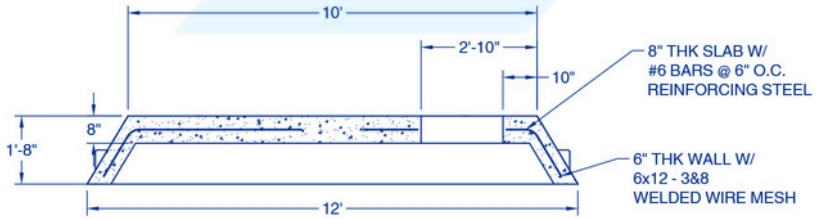

SECTION A-A
SCALE 1:28

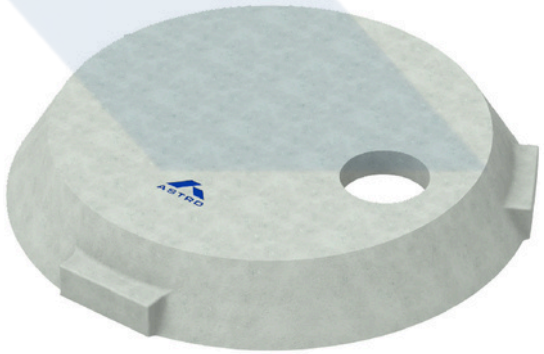

3D RENDER
REFERANCE ONLY

PRODUCT NO.	AR 12 LD
DESCRIPTION	12' LOW DOME
STANDARD	SUFFOLK & NASSAU COUNTY
HEIGHT	20"
SLAB DIAMETER	12'
ACCESS OPENING	24" DIA STANDARD
THICKNESS	TOP SLAB - 8"
	SIDE WALL - 6"
WEIGHT	8800 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:28
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED.

COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com

ASTRO


ADDITIONAL NOTES:

4 SHPERICAL LIFTING ANCHORS WITH SWL OF 3500 LBS

REINFORCEMENT: WWF 6" × 12" - 6&8, W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 8" TOP SLAB AND 6" SIDE WALL WITH 1.5" MIN COVER.

ASTRO™

PRECAST CONCRETE HIGH DOMES

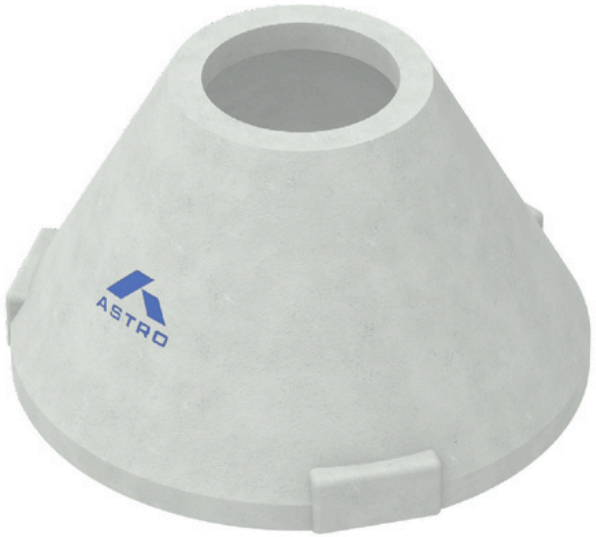



HIGH DOMES


6' HIGH DOME

8' HIGH DOME


10' HIGH DOME

6' CONCRETE HIGH DOME


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

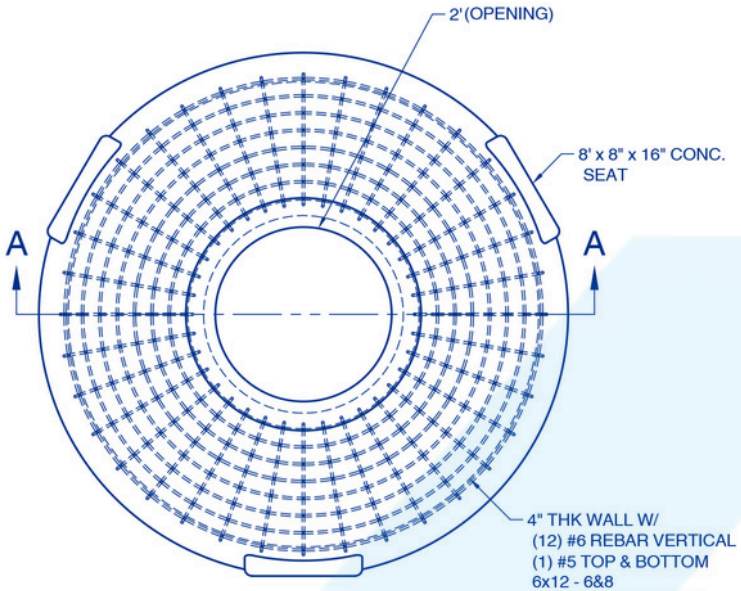


TOP VIEW 1:14

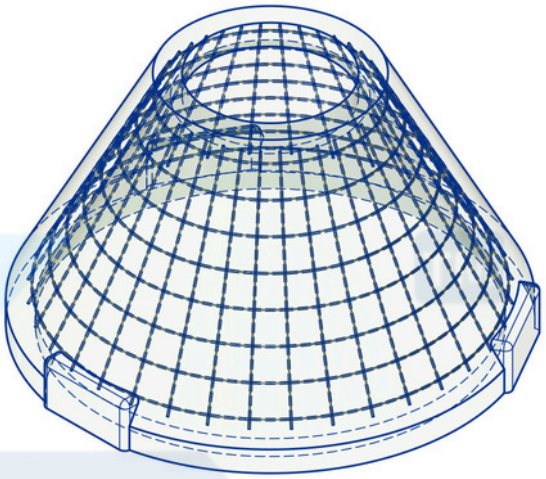

ISOMETRIC VIEW 1:14

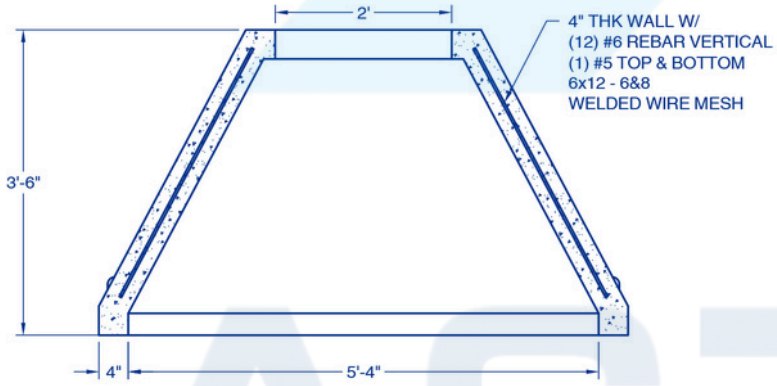

SECTION A-A
SCALE 1:14

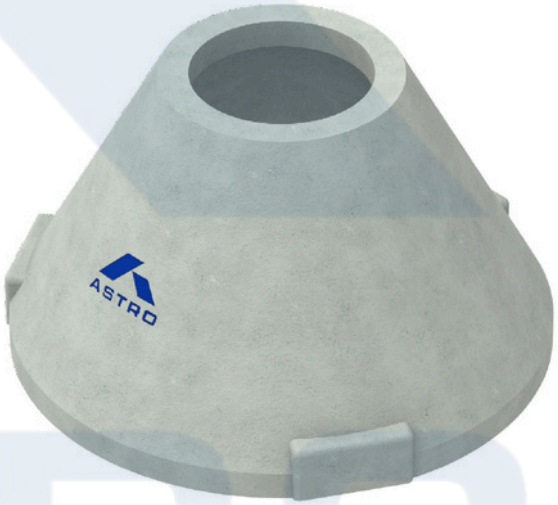

3D RENDER

ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5"
MIN COVER

PRODUCT NO.	AR 6 HD
DESCRIPTION	6' HIGH DOME
STANDARD	SUFFOLK & NASSAU COUNTY
HEIGHT	3'6"
SLAB DIAMETER	6'
ACCESS OPENING	24" DIA STANDARD
THICKNESS	TOP SLAB - 4"
	SIDE WALL- 4"
WEIGHT	3800 LBS
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:14
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED.


COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

8' CONCRETE HIGH DOME


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

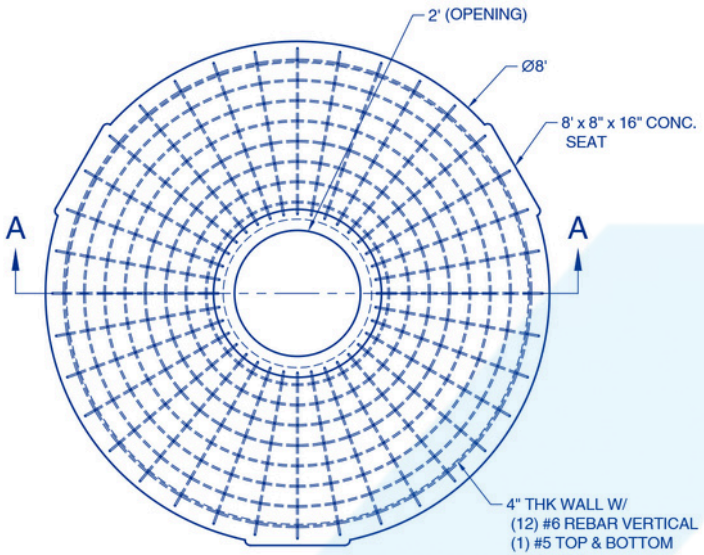


TOP VIEW 1:18

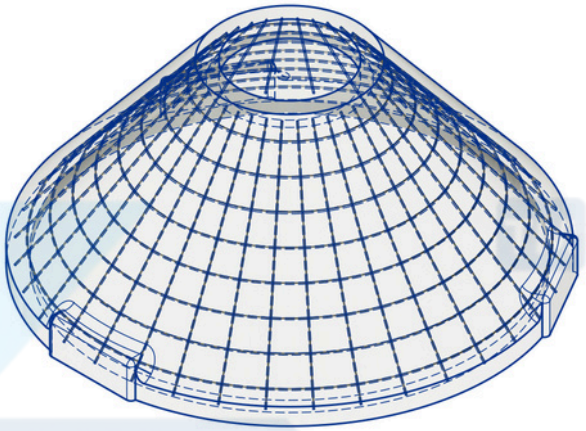

ISOMETRIC VIEW 1:18

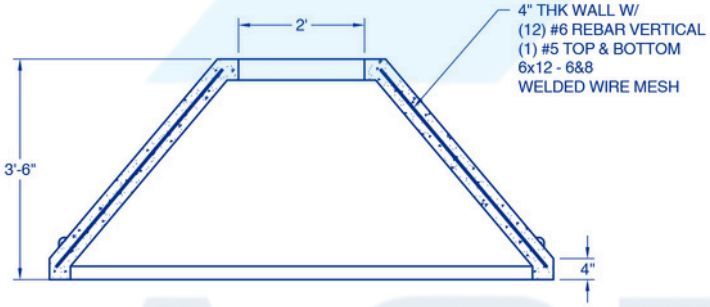

SECTION A-A
SCALE 1:18

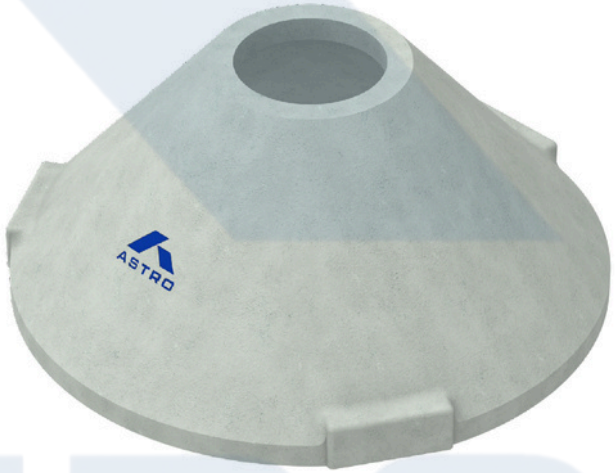

3D RENDER

ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5"
MIN COVER

PRODUCT NO.	AR 8 HD
DESCRIPTION	8' HIGH DOME
STANDARD	SUFFOLK & NASSAU COUNTY
HEIGHT	3'6"
SLAB DIAMETER	8'
ACCESS OPENING	24" DIA STANDARD
THICKNESS	TOP SLAB - 4"
	SIDE WALL- 4"
WEIGHT	4000 LBS
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:18
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED.

COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com

ASTRO