

# 12' X 2' SOLID RING


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

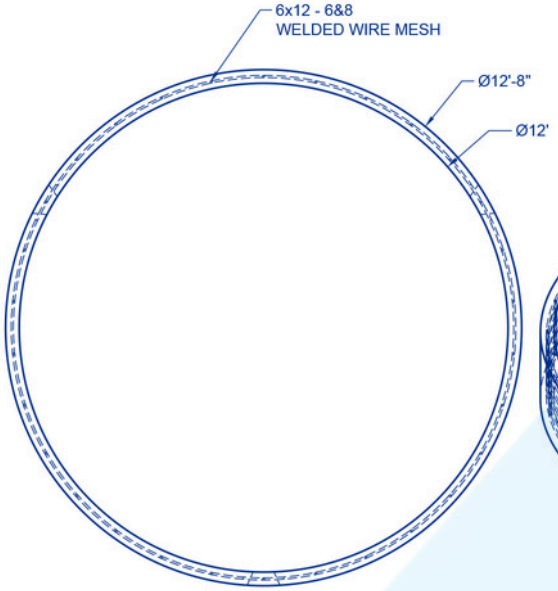



TOP VIEW 1:28

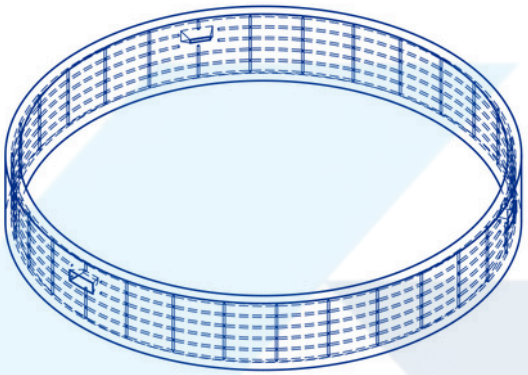


ISOMETRIC VIEW 1:28

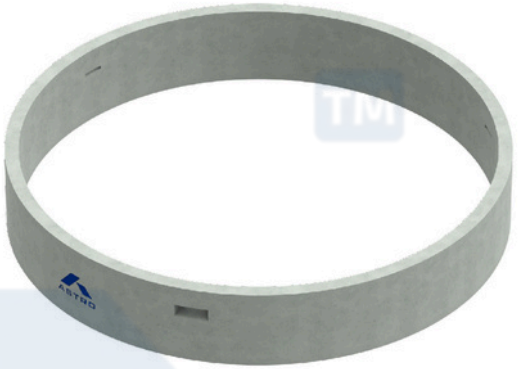


3D RENDER

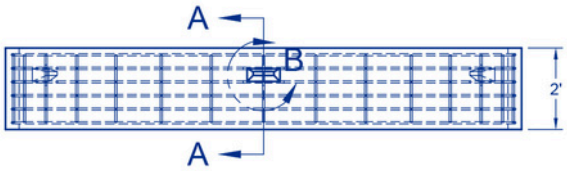


PLAN VIEW 1:28




DETAIL B
SCALE 1:16

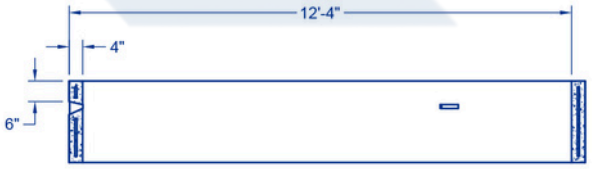


SECTION A-A
SCALE 1:28

## ADDITIONAL NOTES:

4 SHPERICAL LIFTING ANCHORS WITH
SWL OF 1500 LBS

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5"
MIN COVER.

| | |
|---|---|
| **PRODUCT NO.** | AR 122 SR |
| **DESCRIPTION** | 12' X 2' SOLID RING |
| **STANDARD** | SUFFOLK & NASSAU COUNTY |
| **WALL THICKNESS** | 4" INCHES |
| **DRAIN WALL AREA** | 130 SQ.FT. |
| **DIAMETERS** | OUTER - 12'8" |
| | INNER - 12' |
| **OPENINGS** | NO. OF OPENING - 3 |
| | SIZE - 10 X 6 INCH |
| **WEIGHT** | 3650 LBS. |
| **LOAD RATING** | A.A.S.H.T.O. HS20-44 |
| **TESTING BY** | ALL ISLAND TESTING |
| **ENGINEERING BY** | FIONA S. |

## ENGINEERS APPROVAL SPACE

## SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:28
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

## PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED.


## COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

# 12' X 3' SOLID RING


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

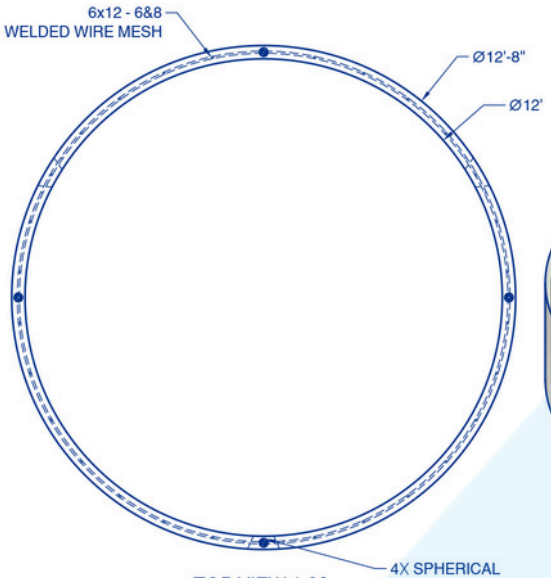



TOP VIEW 1:28

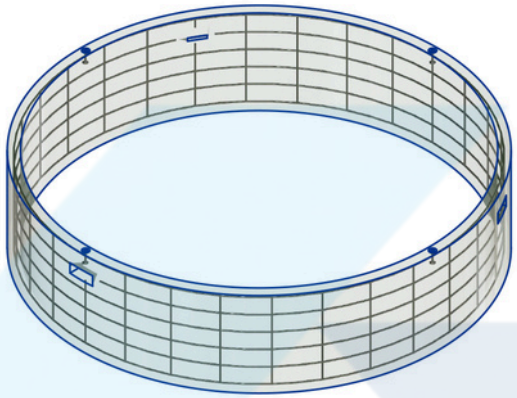


ISOMETRIC VIEW 1:28

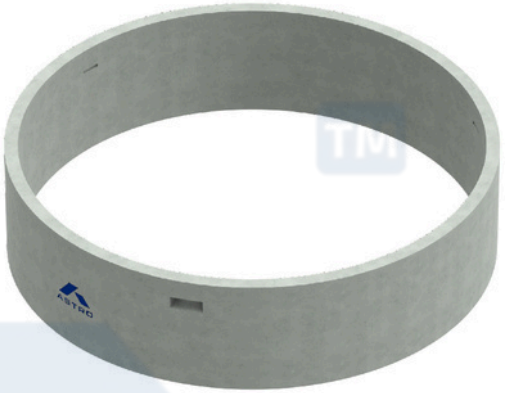


3D RENDER

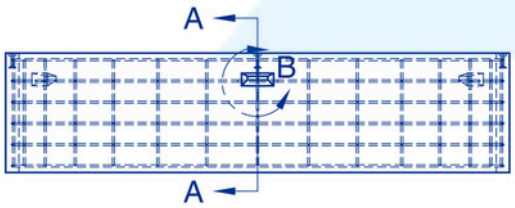


PLAN VIEW 1:28




DETAIL B
SCALE 1:16

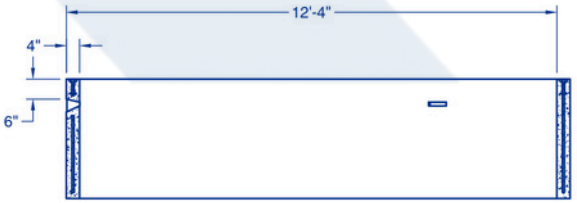


SECTION A-A
SCALE 1:28

| | |
|---|---|
| **PRODUCT NO.** | AR 123 SR |
| **DESCRIPTION** | 12' X 3' SOLID RING |
| **STANDARD** | SUFFOLK & NASSAU COUNTY |
| **WALL THICKNESS** | 4" INCHES |
| **DRAIN WALL AREA** | 113.1 SQ.FT. |
| **DIAMETERS** | OUTER - 12'8" |
| | INNER - 12' |
| **OPENINGS** | NO. OF OPENING - 3 |
| | SIZE - 10 X 6 INCH |
| **WEIGHT** | 5481 LBS. |
| **LOAD RATING** | A.A.S.H.T.O. HS20-44 |
| **TESTING BY** | ALL ISLAND TESTING |
| **ENGINEERING BY** | FIONA S. |

## ENGINEERS APPROVAL SPACE

## SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:28
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

## PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED.

## COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com

ASTRO


## ADDITIONAL NOTES:

4 SHPERICAL LIFTING ANCHORS WITH SWL OF 2000 LBS


REINFORCEMENT: WWF 6" × 12" - 6&8, W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5" MIN COVER.

# 12' X 4' SOLID RING


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

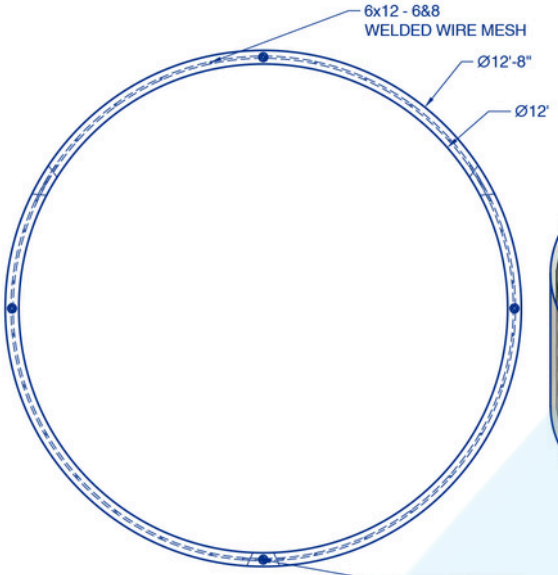



TOP VIEW 1:28

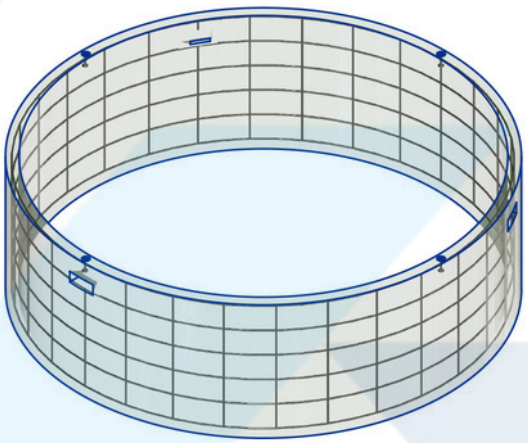


ISOMETRIC VIEW 1:28

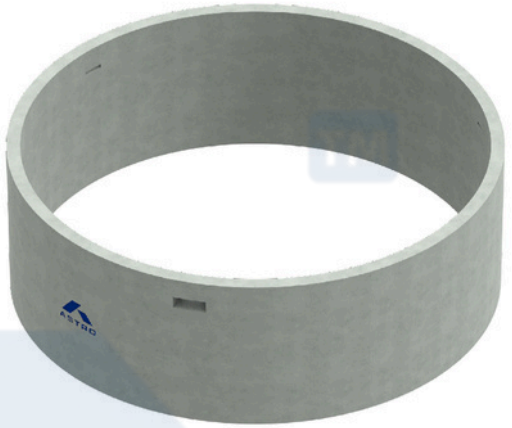


3D RENDER

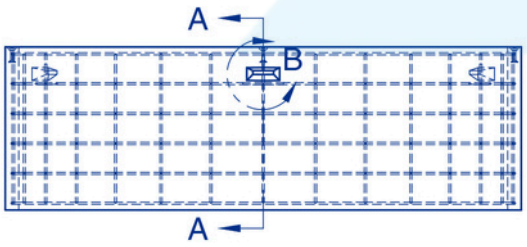


PLAN VIEW 1:28




DETAIL B
SCALE 1:16

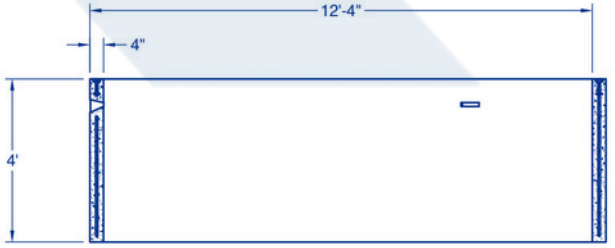


SECTION A-A
SCALE 1:28

| | |
|---|---|
| **PRODUCT NO.** | AR 124 SR |
| **DESCRIPTION** | 12' X 4' SOLID RING |
| **STANDARD** | SUFFOLK & NASSAU COUNTY |
| **WALL THICKNESS** | 4" INCHES |
| **DRAIN WALL AREA** | 150.8 SQ.FT. |
| **DIAMETERS** | OUTER - 12'8" |
| | INNER - 12' |
| **OPENINGS** | NO. OF OPENING - 3 |
| | SIZE - 10 X 6 INCH |
| **WEIGHT** | 7322 LBS. |
| **LOAD RATING** | A.A.S.H.T.O. HS20-44 |
| **TESTING BY** | ALL ISLAND TESTING |
| **ENGINEERING BY** | FIONA S. |

## ENGINEERS APPROVAL SPACE

## SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:28
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

## PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED.

## COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

## ADDITIONAL NOTES:


4 SHPERICAL LIFTING ANCHORS WITH SWL OF 3500 LBS

REINFORCEMENT: WWF 6" × 12" - 6&8, W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5" MIN COVER.


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

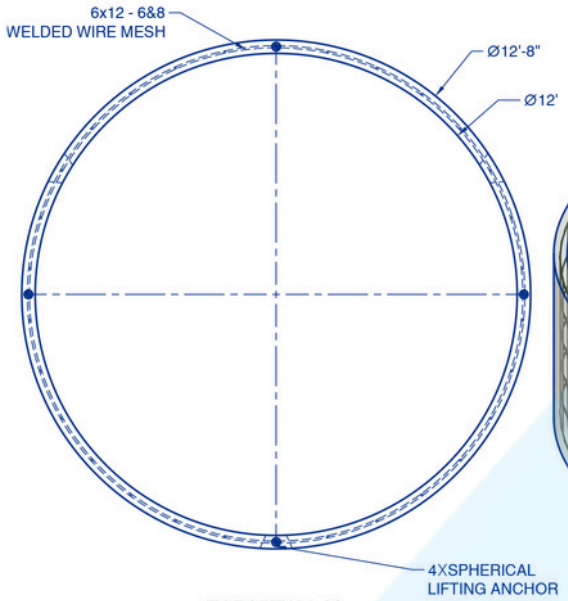



TOP VIEW 1:28

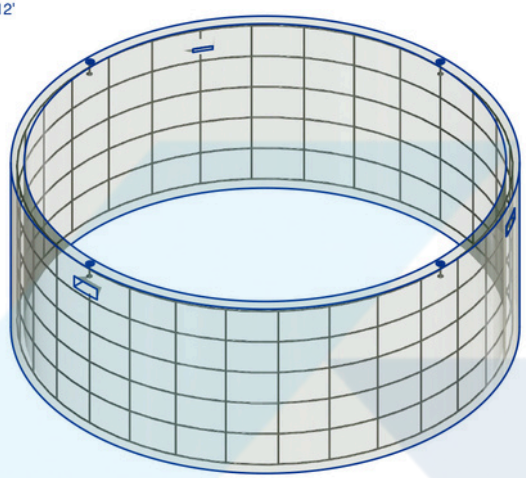


ISOMETRIC VIEW 1:28

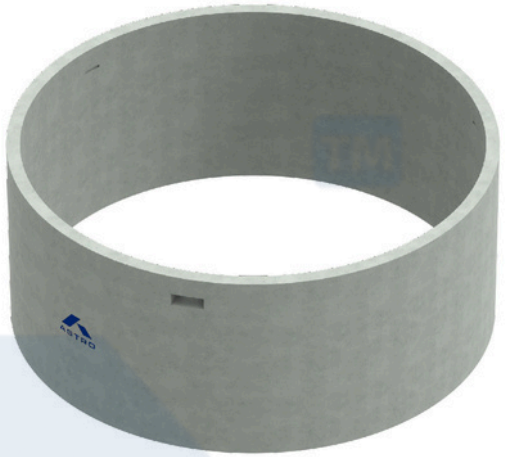


3D RENDER

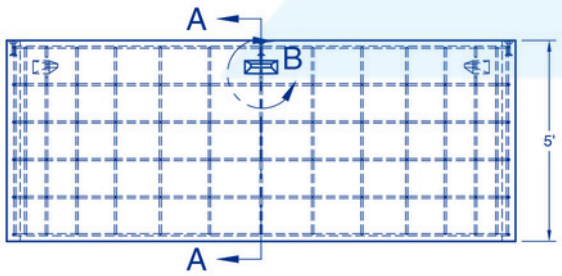


PLAN VIEW 1:28




DETAIL B
SCALE 1:16

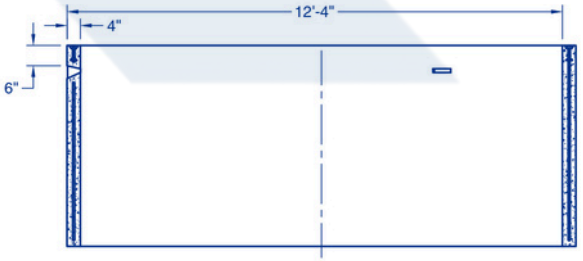


SECTION A-A
SCALE 1:28

| | |
|---|---|
| **PRODUCT NO.** | AR 125 SR |
| **DESCRIPTION** | 12' X 5' SOLID RING |
| **STANDARD** | SUFFOLK & NASSAU COUNTY |
| **WALL THICKNESS** | 4" INCHES |
| **DRAIN WALL AREA** | 188.5 SQ.FT. |
| **DIAMETERS** | OUTER - 12'8" |
| | INNER - 12' |
| **OPENINGS** | NO. OF OPENING - 3 |
| | SIZE - 10 X 6 INCH |
| **WEIGHT** | 9164 LBS. |
| **LOAD RATING** | A.A.S.H.T.O. HS20-44 |
| **TESTING BY** | ALL ISLAND TESTING |
| **ENGINEERING BY** | FIONA S. |

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:28
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED.

COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com

ASTRO

ADDITIONAL NOTES:


4 SHPERICAL LIFTING ANCHORS WITH SWL OF 4000 LBS

REINFORCEMENT: WWF 6" × 12" - 6&8, W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5" MIN COVER.

ASTRO™

# PRECAST CONCRETE SANITARY RINGS




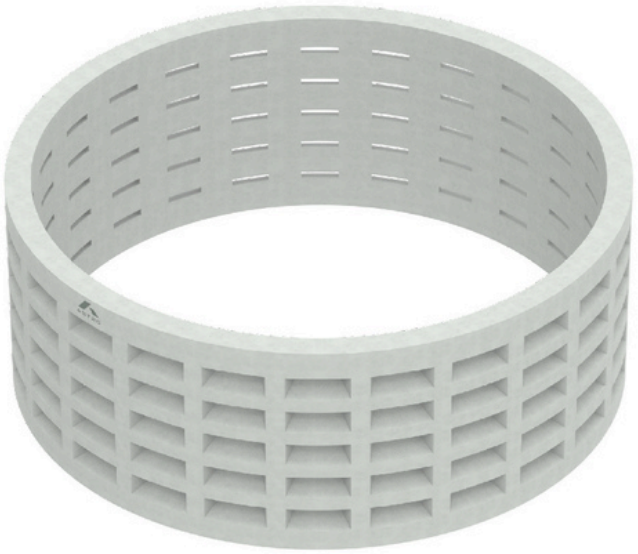


# SANITARY RINGS

- 4'X3' SANITARY RING
- 4'X4' SANITARY RING
- 6'X3' SANITARY RING
- 6'X4' SANITARY RING
- 8'X2' SANITARY RING
- 8'X3' SANITARY RING
- 8'X3.5' SANITARY RING
- 8'X4' SANITARY RING
- 10'X3' SANITARY RING
- 10'X4' SANITARY RING
- 10'X5' SANITARY RING


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

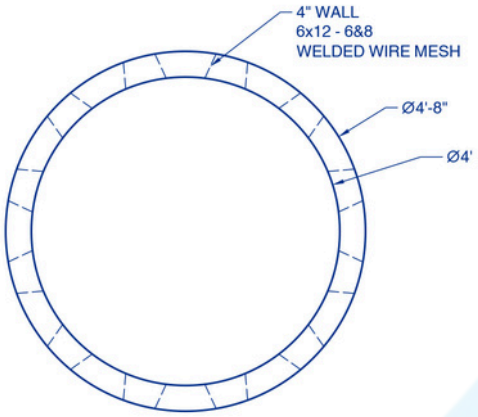



TOP VIEW 1:15

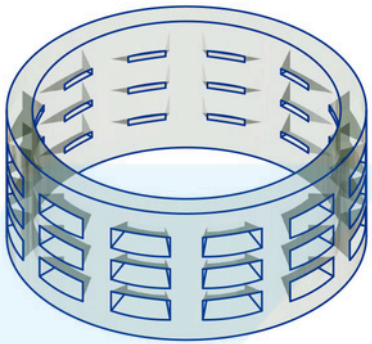


ISOMETRIC VIEW 1:15

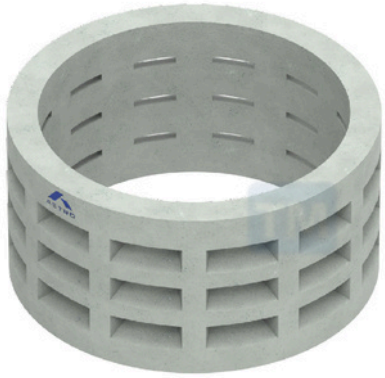


3D RENDER

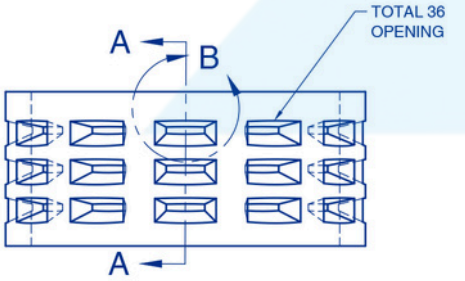


PLAN VIEW 1:15




DETAIL B
SCALE 1:10

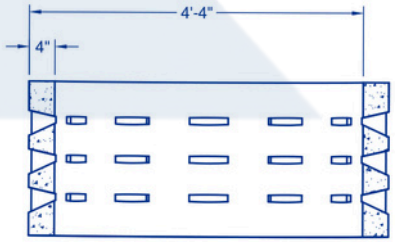


SECTION A-A
SCALE 1:15

## ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5"
MIN COVER.

| | |
|---|---|
| **PRODUCT NO.** | AR 42 SR |
| **DESCRIPTION** | 4' X 2' SANITARY RING |
| **STANDARD** | SUFFOLK & NASSAU COUNTY |
| **WALL THICKNESS** | 4" INCHES |
| **DRAIN WALL AREA** | 48 SQ.FT. |
| **DIAMETERS** | OUTER - 4'8" |
| | INNER - 4' |
| **OPENINGS** | NO. OF OPENING - 36 |
| | SIZE - 10 X 4 INCH |
| **WEIGHT** | 2000 LBS |
| **LOAD RATING** | A.A.S.H.T.O. HS20-44 |
| **TESTING BY** | ALL ISLAND TESTING |
| **ENGINEERING BY** | FIONA S. |

## ENGINEERS APPROVAL SPACE

## SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:1REINFORCEMENT:
5. WWF 6" × 12" - 6&8,
6. W2.0 × W2.0 (ASTM A1064)
7. MESH CENTERED IN 4" WALL WITH 1.5" MIN COVER.5
8. ALL DIMENSIONS ARE IN INCHES TOLERANCE X ± 0.5"

## PROPRIETARY & CONFIDENTIAL


THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED.

## COMPANY ADDRESS


928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com

ASTRO

ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

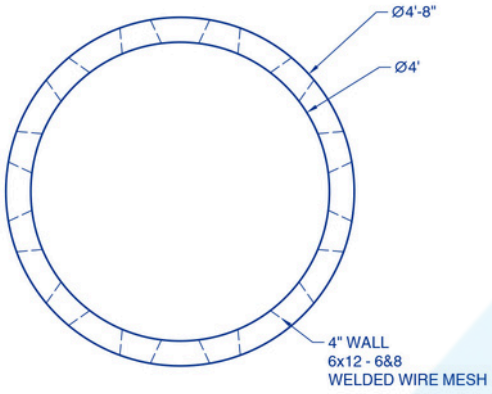



TOP VIEW 1:15

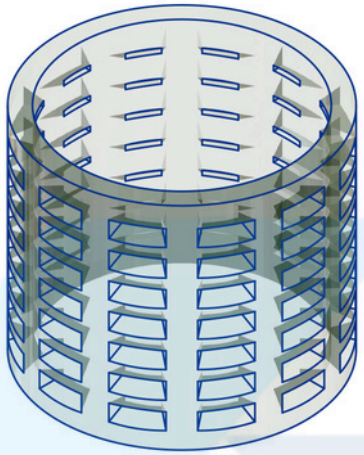


ISOMETRIC VIEW 1:15




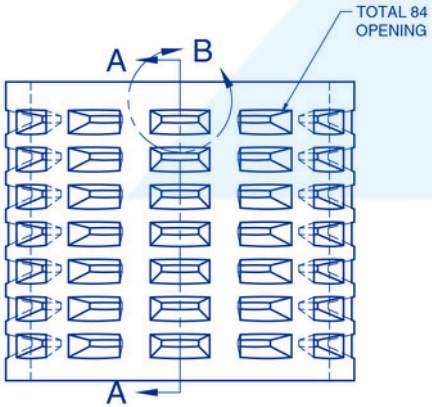


PLAN VIEW 1:15




DETAIL B
SCALE 1:10

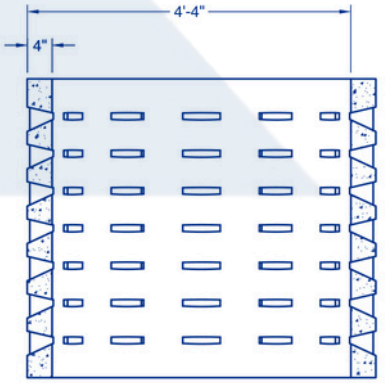


SECTION A-A SCALE
1:15

| | |
|---|---|
| PRODUCT NO. | AR 44 SR |
| DESCRIPTION | 4' X 4' SANITARY RING |
| STANDARD | SUFFOLK & NASSAU COUNTY |
| WALL THICKNESS | 4" INCHES |
| DRAIN WALL AREA | 50 SQ.FT. |
| DIAMETERS | OUTER - 4'8" |
| | INNER - 4' |
| OPENINGS | NO. OF OPENING - 84 |
| | SIZE - 10 X 4 INCH |
| WEIGHT | 2200 LBS |
| LOAD RATING | A.A.S.H.T.O. HS20-44 |
| TESTING BY | ALL ISLAND TESTING |
| ENGINEERING BY | FIONA S. |

## ENGINEERS APPROVAL SPACE

## SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:15
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

## PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED.

## COMPANY ADDRESS


928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com

ASTRO


## ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5"
MIN COVER.


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

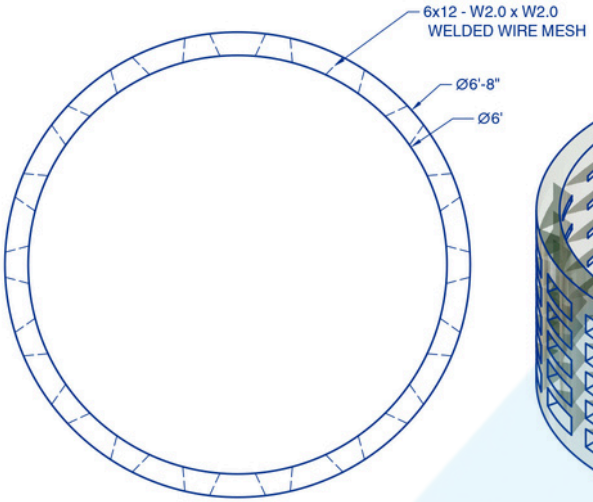



TOP VIEW 1:14

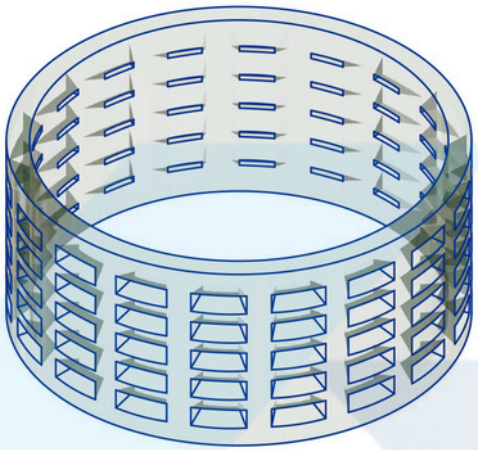


ISOMETRIC VIEW 1:14

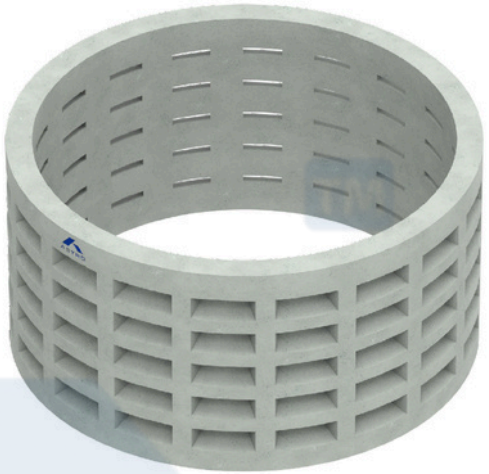


3D RENDER

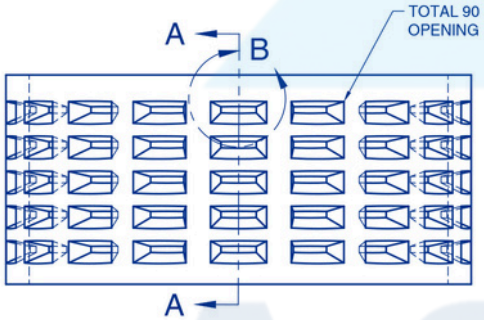


PLAN VIEW 1:14




DETAIL B
SCALE 1:10

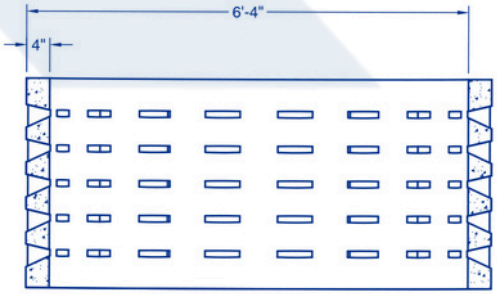


SECTION A-A
SCALE 1:16

## ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5"
MIN COVER.

| | |
|---|---|
| **PRODUCT NO.** | AR 63 SR |
| **DESCRIPTION** | 6' X 3' SANITARY RING |
| **STANDARD** | SUFFOLK & NASSAU COUNTY |
| **WALL THICKNESS** | 4" INCHES |
| **DRAIN WALL AREA** | 65 SQ.FT. |
| **DIAMETERS** | OUTER - 6'8" |
| | INNER - 6' |
| **OPENINGS** | NO. OF OPENING - 90 |
| | SIZE - 10 X 4 INCH |
| **WEIGHT** | 2800 LBS |
| **LOAD RATING** | A.A.S.H.T.O. HS20-44 |
| **TESTING BY** | ALL ISLAND TESTING |
| **ENGINEERING BY** | FIONA S. |

## ENGINEERS APPROVAL SPACE

## SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:16
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

## PROPRIETARY & CONFIDENTIAL


THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED.

## COMPANY ADDRESS


928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com

ASTRO


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

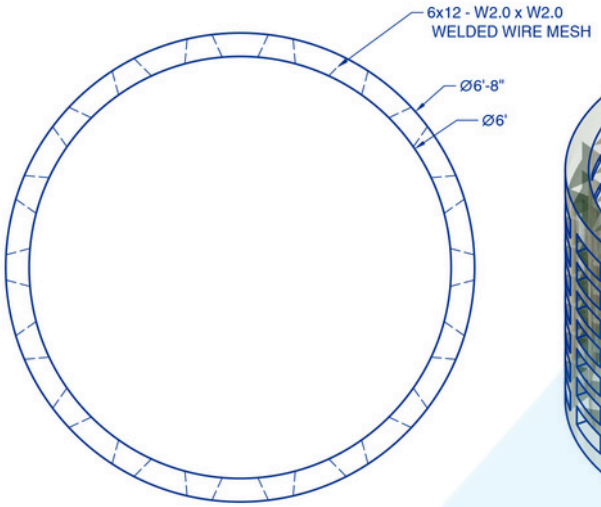



TOP VIEW 1:16

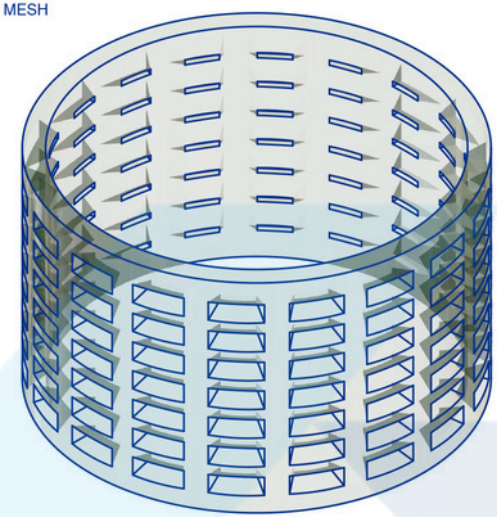


ISOMETRIC VIEW 1:16

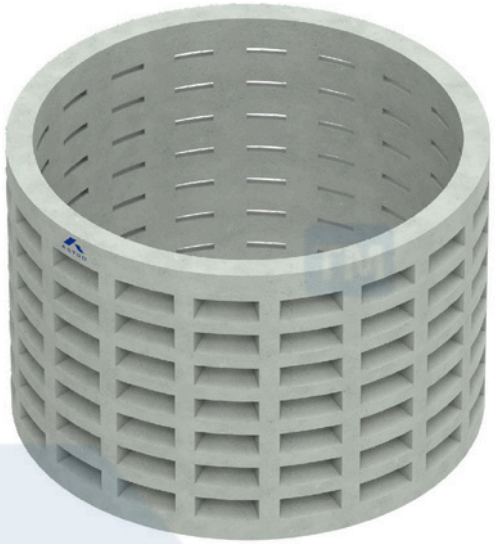


3D RENDER

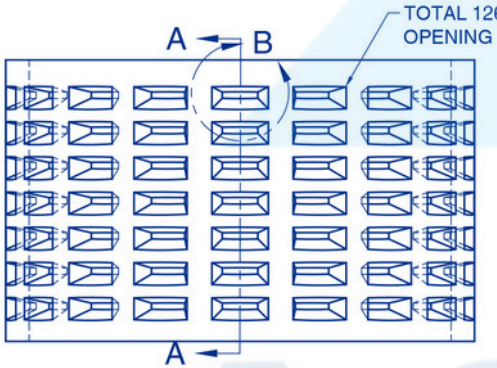


PLAN VIEW 1:16




DETAIL B
SCALE 1:10

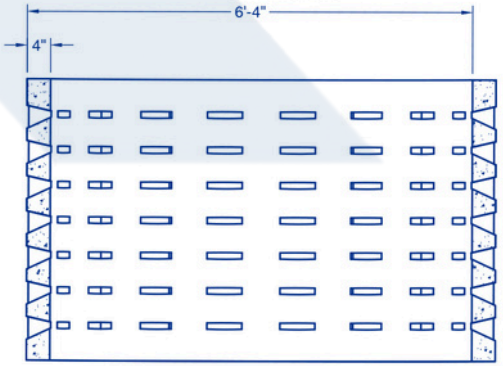


SECTION A-A
SCALE 1:16

| | |
|---|---|
| **PRODUCT NO.** | AR 64 SR |
| **DESCRIPTION** | 6' X 4' SANITARY RING |
| **STANDARD** | SUFFOLK & NASSAU COUNTY |
| **WALL THICKNESS** | 4" INCHES |
| **DRAIN WALL AREA** | 60 SQ.FT. |
| **DIAMETERS** | OUTER - 6'8" |
| | INNER - 6' |
| **OPENINGS** | NO. OF OPENING - 126 |
| | SIZE - 10 X 4 INCH |
| **WEIGHT** | 2800 LBS |
| **LOAD RATING** | A.A.S.H.T.O. HS20-44 |
| **TESTING BY** | ALL ISLAND TESTING |
| **ENGINEERING BY** | FIONA S. |

## ENGINEERS APPROVAL SPACE

## SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:16
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

## PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED.

## COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

## ADDITIONAL NOTES:


REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5"
MIN COVER.

# 8' X 2' SANITARY RING


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

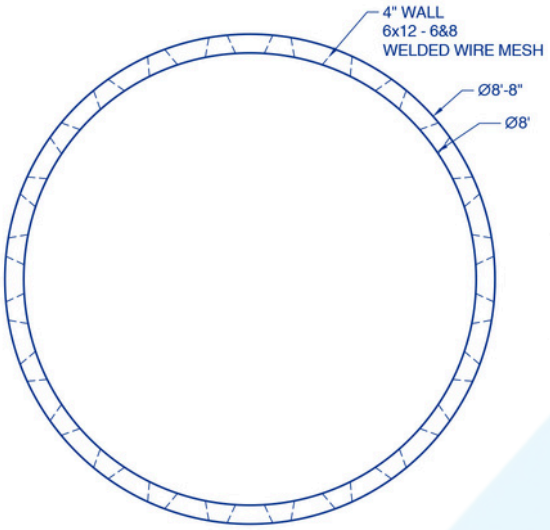



TOP VIEW 1:20

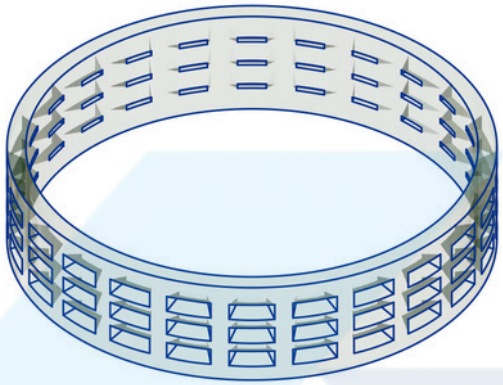


ISOMETRIC VIEW 1:20

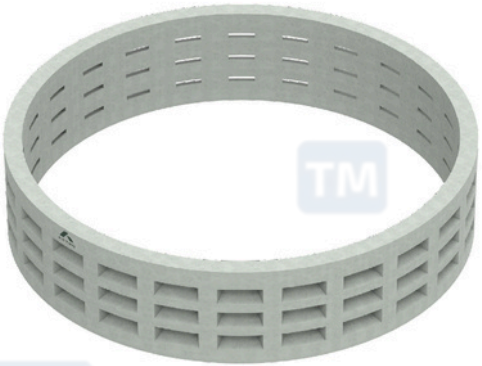


3D RENDER

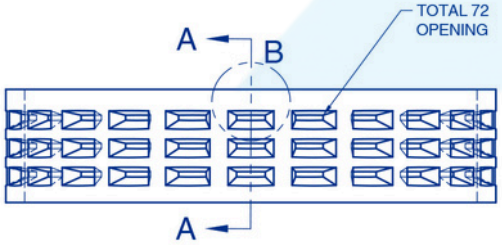


PLAN VIEW 1:20




DETAIL B
SCALE 1:10

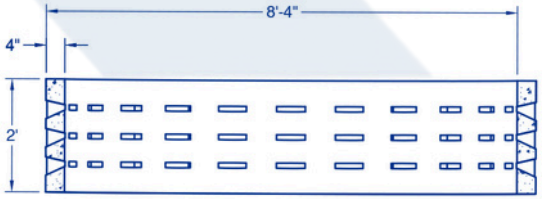


SECTION A-A
SCALE 1:20

## ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5"
MIN COVER.

| | |
|---|---|
| **PRODUCT NO.** | AR 82 SR |
| **DESCRIPTION** | 8' X 2' SANITARY RING |
| **STANDARD** | SUFFOLK & NASSAU COUNTY |
| **WALL THICKNESS** | 4" INCHES |
| **DRAIN WALL AREA** | 50.3 SQ.FT. |
| **DIAMETERS** | OUTER - 8'8" |
| | INNER - 8' |
| **OPENINGS** | NO. OF OPENING - 72 |
| | SIZE - 10 X 4 INCH |
| **WEIGHT** | 1897 LBS. |
| **LOAD RATING** | A.A.S.H.T.O. HS20-44 |
| **TESTING BY** | ALL ISLAND TESTING |
| **ENGINEERING BY** | FIONA S. |

## ENGINEERS APPROVAL SPACE

## SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:20
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

## PROPRIETARY & CONFIDENTIAL


THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED

## COMPANY ADDRESS


928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com

ASTRO


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

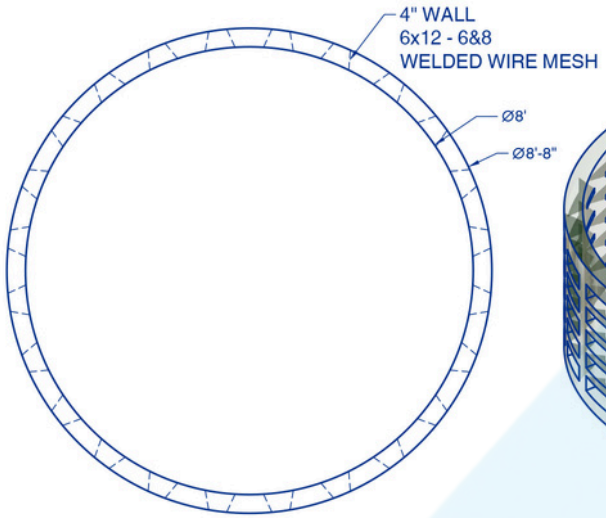



TOP VIEW 1:20

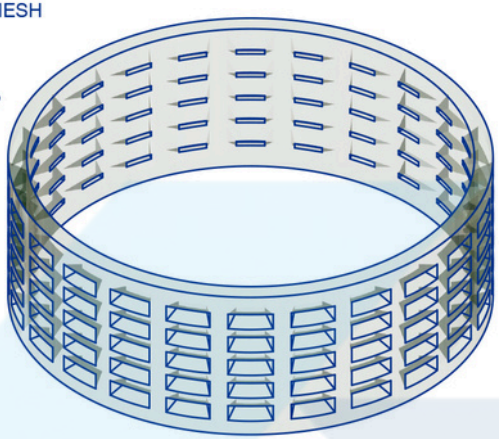


ISOMETRIC VIEW 1:20

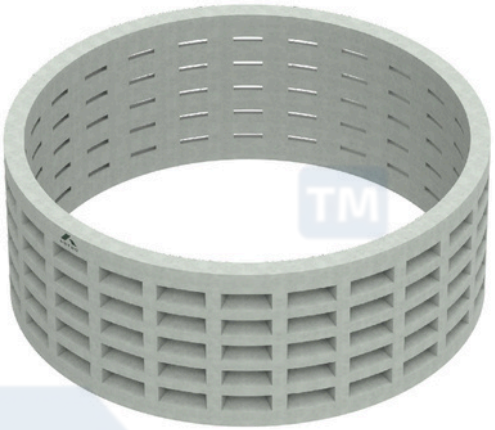


3D RENDER

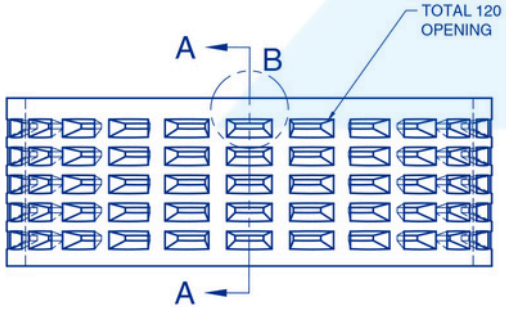


PLAN VIEW 1:20




DETAIL B
SCALE 1:10

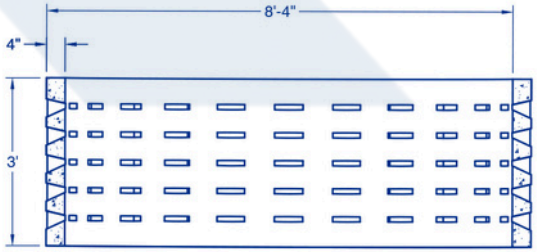


SECTION A-A
SCALE 1:20

| | |
|---|---|
| PRODUCT NO. | AR 83 SR |
| DESCRIPTION | 8' X 3' SANITARY RING |
| STANDARD | SUFFOLK & NASSAU COUNTY |
| WALL THICKNESS | 4" INCHES |
| DRAIN WALL AREA | 90 SQ.FT. |
| DIAMETERS | OUTER - 8'8" |
| | INNER - 8' |
| OPENINGS | NO. OF OPENING - |
| | SIZE - 10 X 4 INCH |
| WEIGHT | 2895 LBS. |
| LOAD RATING | A.A.S.H.T.O. HS20-44 |
| TESTING BY | ALL ISLAND TESTING |
| ENGINEERING BY | FIONA S. |

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:20
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED

COMPANY ADDRESS


928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com

ASTRO


ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5"
MIN COVER.


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

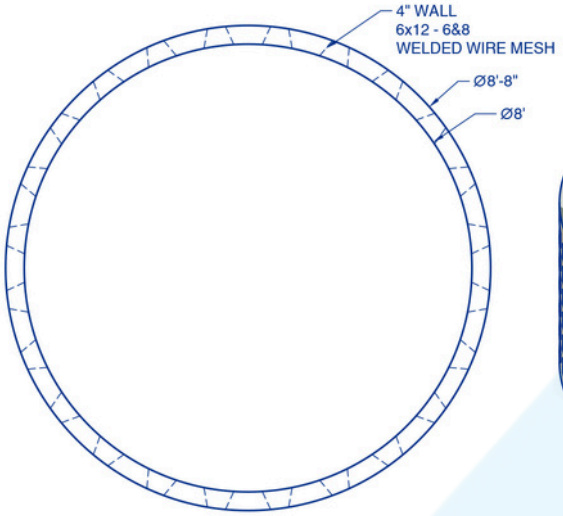



TOP VIEW 1:20

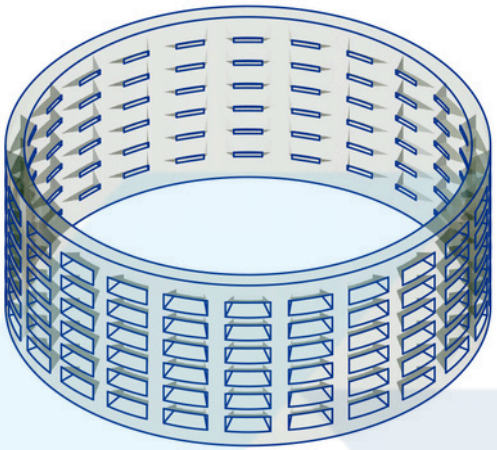


ISOMETRIC VIEW 1:20

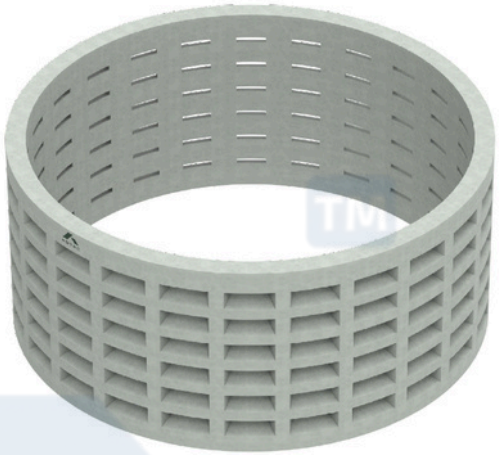


3D RENDER

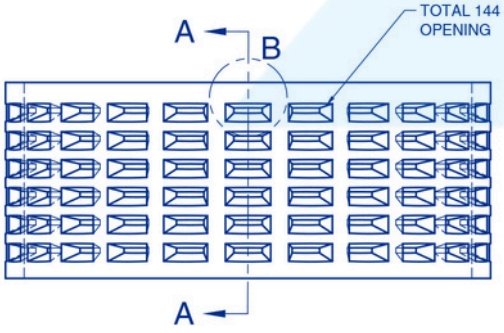


PLAN VIEW 1:20




DETAIL B
SCALE 1:10

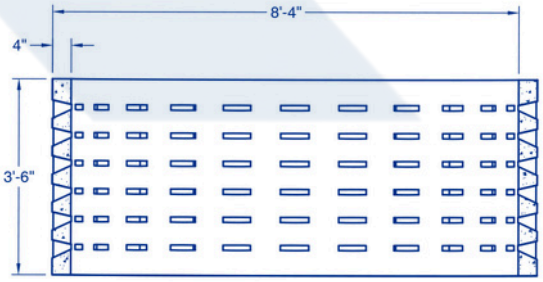


SECTION A-A
SCALE 1:20

| | |
|---|---|
| **PRODUCT NO.** | AR 835 SR |
| **DESCRIPTION** | 8' X 3.5' SANITARY RING |
| **STANDARD** | SUFFOLK & NASSAU COUNTY |
| **WALL THICKNESS** | 4" INCHES |
| **DRAIN WALL AREA** | 88.8 SQ.FT. |
| **DIAMETERS** | OUTER - 8'8" |
| | INNER - 8' |
| **OPENINGS** | NO. OF OPENING - 144 |
| | SIZE - 10 X 4 INCH |
| **WEIGHT** | 3188 LBS. |
| **LOAD RATING** | A.A.S.H.T.O. HS20-44 |
| **TESTING BY** | ALL ISLAND TESTING |
| **ENGINEERING BY** | FIONA S. |

## ENGINEERS APPROVAL SPACE

## SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:20
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

## PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED

## ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5"
MIN COVER.

## COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com

ASTRO