


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

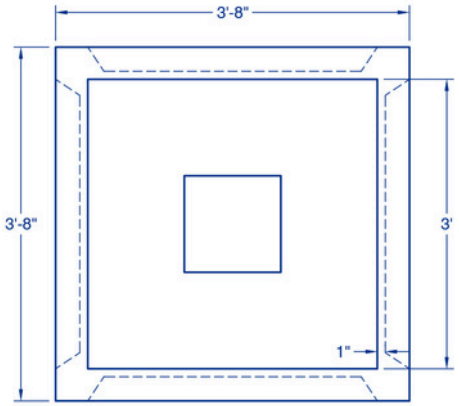


TOP VIEW 1:12

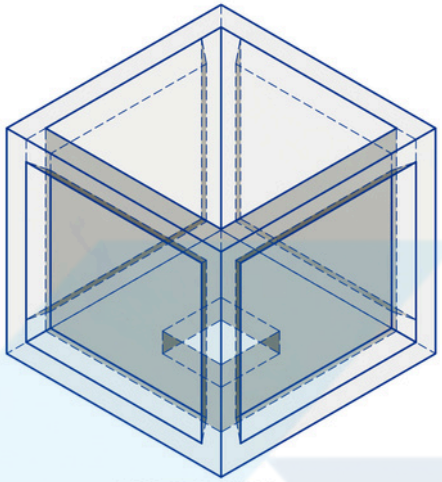


ISOMETRIC VIEW 1:14

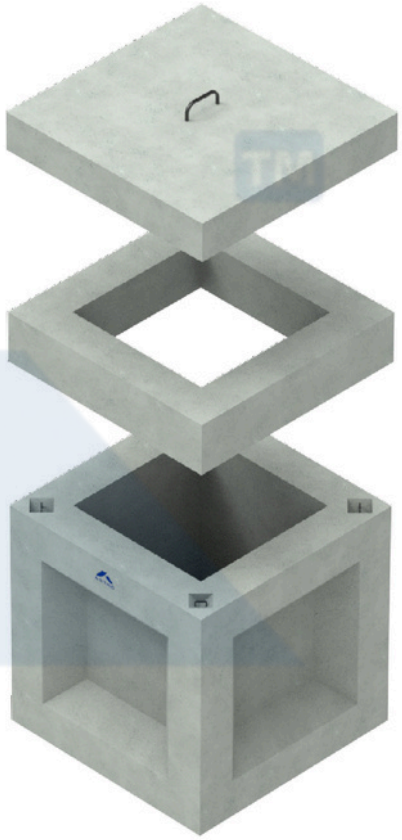

3D RENDER

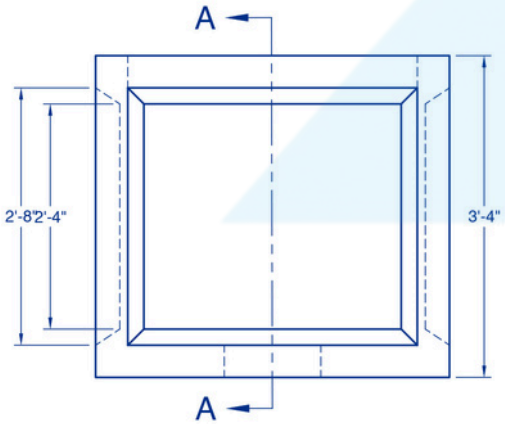

PLAN VIEW 1:12

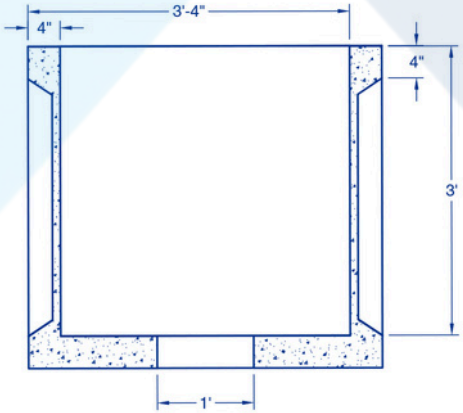

SECTION A-A
SCALE 1:12

PRODUCT NO.	AR 36 CB
DESCRIPTION	36 X 36 CATCH BASIN
STANDARD	SUFFOLK & NASSAU COUNTY
WALL THICKNESS	4"
CUT OUT SIZE	36" X 32"
COVER TYPE	SOLID COVER
WEIGHT	1250 LBS
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:12
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED.

COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO


ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5"
MIN COVER

ASTRO™

PRECAST CONCRETE SEPTIC TANKS

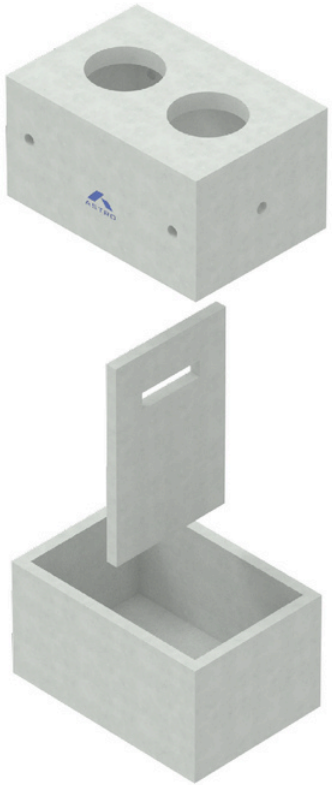

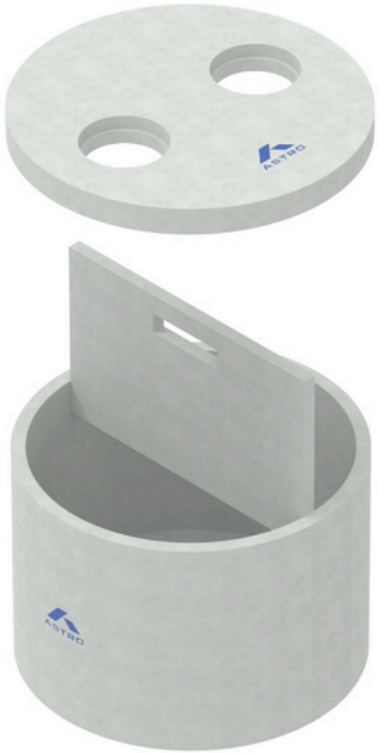


SEPTIC TANKS


- 1000 GALLON SEPTIC TANK
- 1250 GALLON SEPTIC TANK
- 1500 GALLON SEPTIC TANK
- 2000 GALLON SEPTIC TANK
- 2500 GALLON SEPTIC TANK
- 1250 GALLON SEPTIC TANK MONOLITHIC
- 1500 GALLON SEPTIC TANK MONOLITHIC
- 2000 GALLON SEPTIC TANK MONOLITHIC
- 2500 GALLON SEPTIC TANK MONOLITHIC

1000 GALLON CONCRETE SEPTIC TANK


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

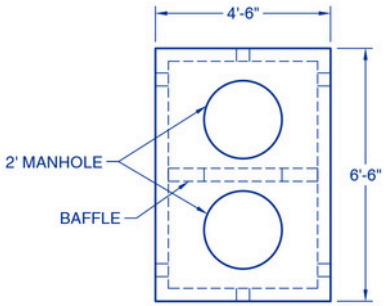


TOP VIEW 1:30

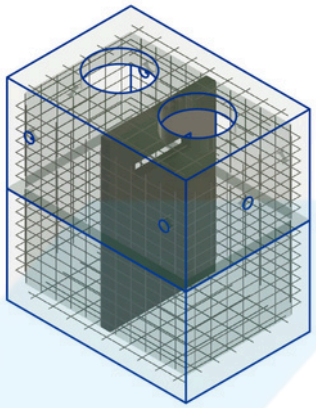


ISOMETRIC VIEW 1:30

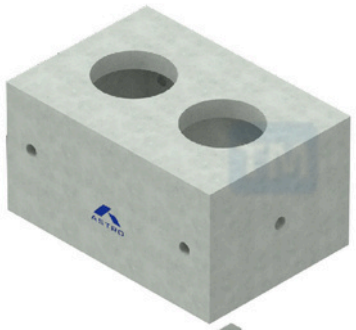





DETAIL A
SCALE 1/2" = 1'-0"



PLAN VIEW 1:30

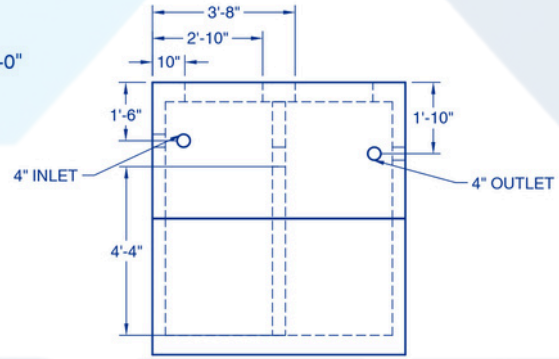

SIDE VIEW 1:30

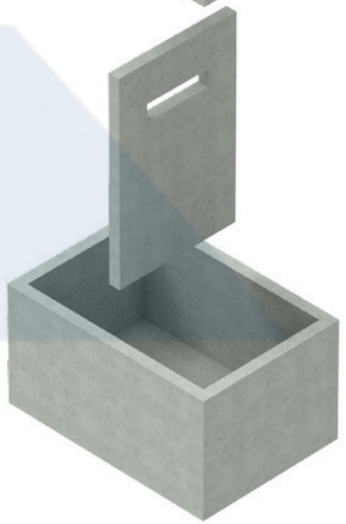

3D RENDER

PRODUCT NO.	AR 1000G ST
DESCRIPTION	1000G SEPTIC TANK
STANDARD	SUFFOLK & NASSAU COUNTY
SIZES	LENGTH - 6'6"
	WIDTH - 4'6"
	HEIGHT - 7'
THICKNESS	WALL - 4"
	TOP SLAB - 6"
JOINT SEAL	1" SQ. OR 1" DIA. SELF SEALING BUTYL RUBBER GASKET EQUAL TO FED. SPEC. SS-S-00210
WEIGHT	8200 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:30
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED

COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

ADDITIONAL NOTES:


REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064) GRADE 60 ASTM A-185-02
MESH CENTERED WITH 1.5"MIN COVER

1250 GALLON CONCRETE SEPTIC TANK


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

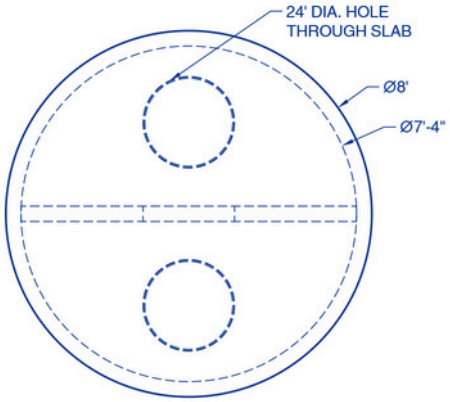


TOP VIEW 1:25




DETAIL A
SCALE 1/2" = 1'-0"

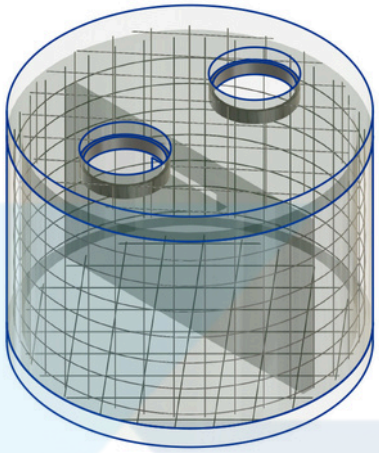


ISOMTRIC VIEW 1:25

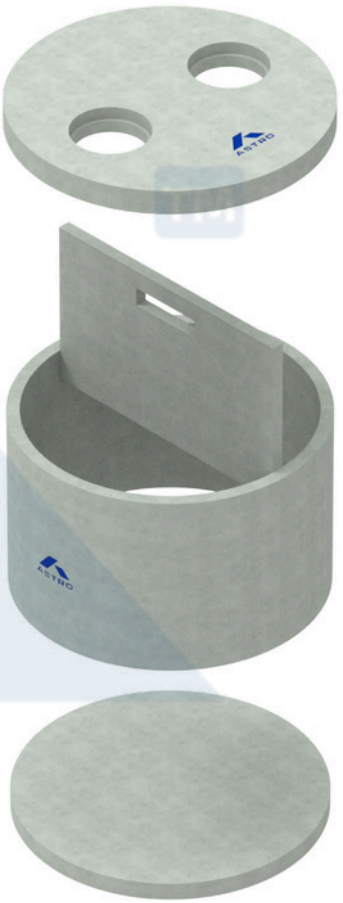

3D RENDER

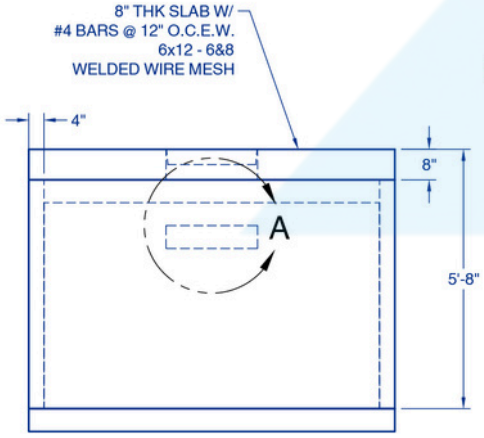

PLAN VIEW 1:25

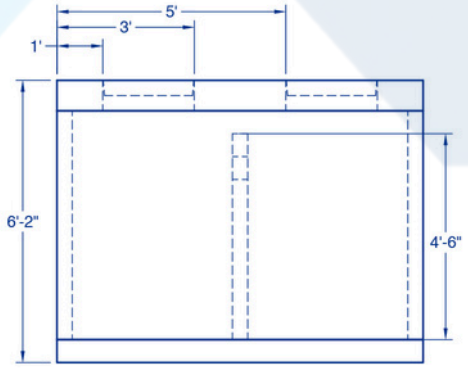

RIGHT SIDE VIEW 1:25

ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064) GRADE 60 ASTM A-185-02
MESH CENTERED WITH 1.5"MIN COVER

PRODUCT NO.	AR 1250G ST
DESCRIPTION	1250G SEPTIC TANK
STANDARD	SUFFOLK & NASSAU COUNTY
DIAMETERS	OUTER - 8'
	INNER - 7'4"
THICKNESS	WALL - 4"
	TOP SLAB - 8"
JOINT SEAL	1" SQ. OR 1" DIA. SELF SEALING BUTYL RUBBER GASKET EQUAL TO FED. SPEC. SS-S-00210
BASE TYPE	NON MONOLITHIC
WEIGHT	15000 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED


COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

1250 GALLON CONCRETE SEPTIC TANK MONOLITHIC


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

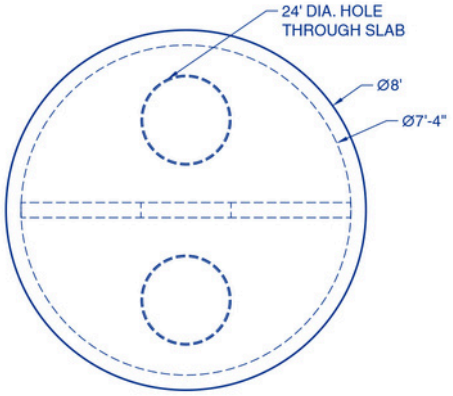


TOP VIEW 1:25

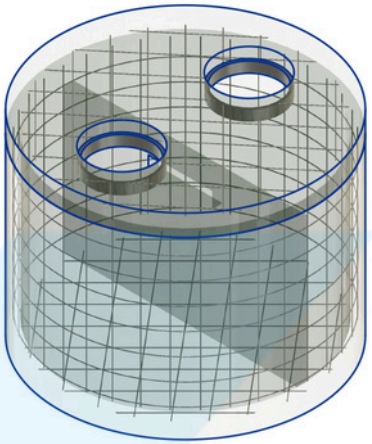


ISOMTRIC VIEW 1:25

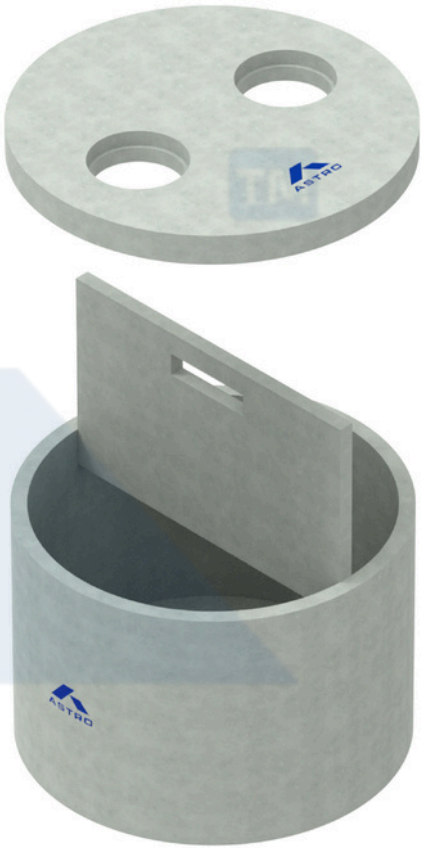


3D RENDER



DETAIL A
SCALE 1/2" = 1'-0"

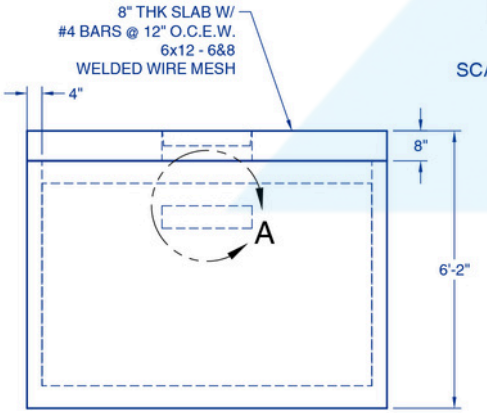

PLAN VIEW 1:25

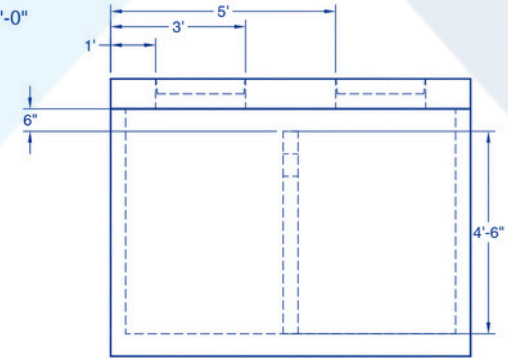

RIGHT SIDE VIEW 1:25

ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064) GRADE 60 ASTM A-185-02
MESH CENTERED WITH 1.5"MIN COVER

PRODUCT NO.	AR 1250G STM
DESCRIPTION	1250G SEPTIC TANK M.
STANDARD	SUFFOLK & NASSAU COUNTY
DIAMETERS	OUTER - 8'
	INNER - 7'4"
THICKNESS	WALL - 4"
	TOP SLAB - 6"
JOINT SEAL	1" SQ. OR 1" DIA. SELF SEALING BUTYL RUBBER GASKET EQUAL TO FED. SPEC. SS-S-00210
BASE TYPE	MONOLITHIC
WEIGHT	15000 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED


COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

1500 GALLON CONCRETE SEPTIC TANK


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

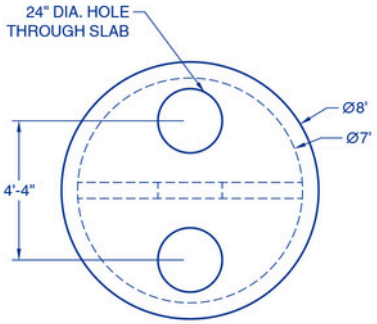


TOP VIEW 1:35




ISOMETRIC VIEW 1:35




DETAIL A
SCALE 3/8" = 1'-0"

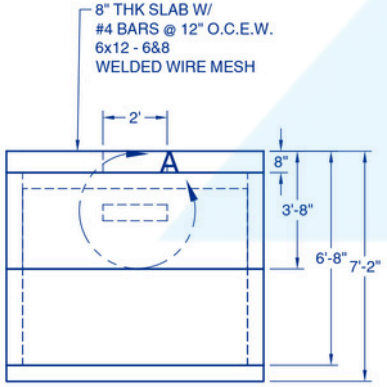

PLAN VIEW 1:35

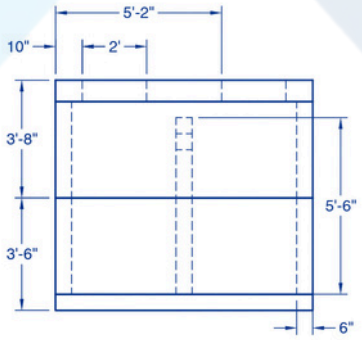

SIDE VIEW 1:35

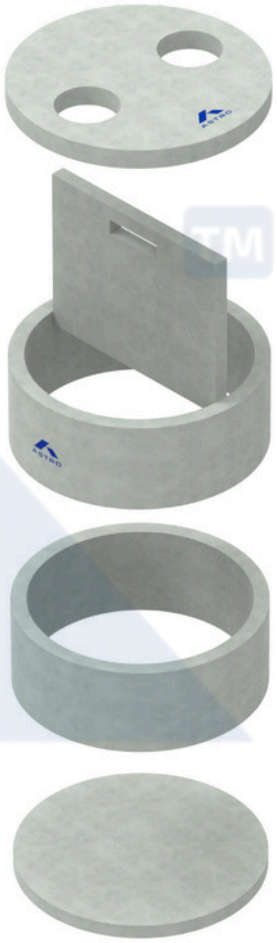

3D RENDER

PRODUCT NO.	AR 1500G ST
DESCRIPTION	1500G SEPTIC TANK
STANDARD	SUFFOLK & NASSAU COUNTY
DIAMETERS	OUTER - 8'
	INNER - 7'4"
THICKNESS	WALL - 6"
	TOP SLAB - 8"
JOINT SEAL	1" SQ. OR 1" DIA. SELF SEALING BUTYL RUBBER GASKET EQUAL TO FED. SPEC. SS-S-00210
BASE TYPE	NON MONOLITHIC
WEIGHT	17200 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:35
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED

COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

ADDITIONAL NOTES:


REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064) GRADE 60 ASTM A-185-02
MESH CENTERED WITH 1.5"MIN COVER

1500 GALLON CONCRETE SEPTIC TANK MONOLITHIC


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

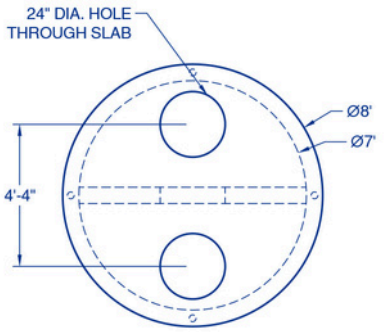


TOP VIEW 1:35




DETAIL A
SCALE 3/8" = 1'-0"

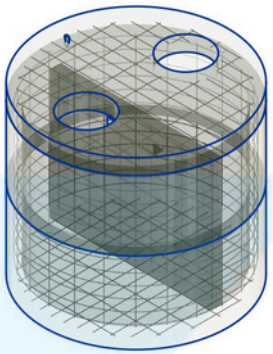


ISOMETRIC VIEW 1:35

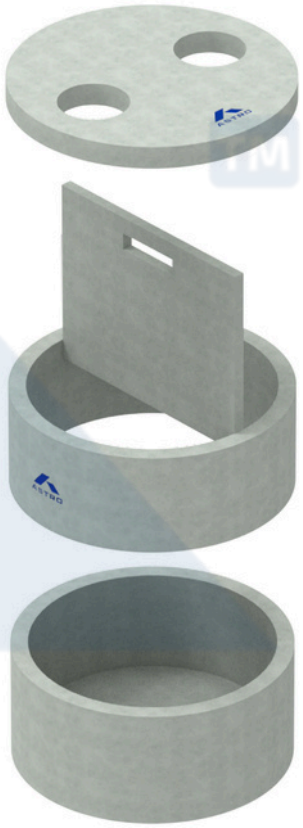

3D RENDER

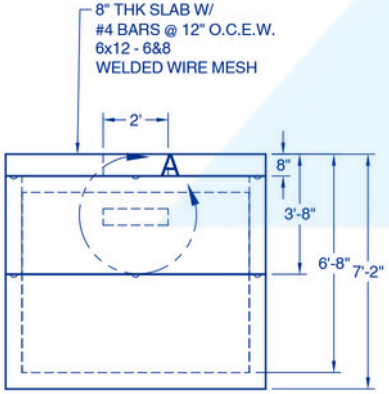

PLAN VIEW 1:35

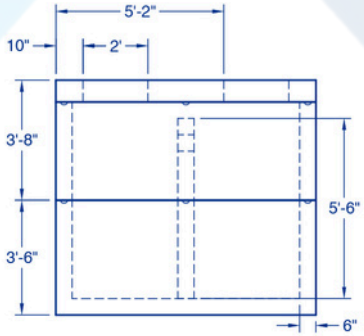

SIDE VIEW 1:35

ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064) GRADE 60 ASTM A-185-02
MESH CENTERED WITH 1.5"MIN COVER

PRODUCT NO.	AR 1500G STM
DESCRIPTION	1500G SEPTIC TANK M.
STANDARD	SUFFOLK & NASSAU COUNTY
DIAMETERS	OUTER - 8'
	INNER - 7'4"
THICKNESS	WALL - 6"
	TOP SLAB - 8"
JOINT SEAL	1" SQ. OR 1" DIA. SELF SEALING BUTYL RUBBER GASKET EQUAL TO FED. SPEC. SS-S-00210
BASE TYPE	MONOLITHIC
WEIGHT	17200 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:35
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED


COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

2000 GALLON CONCRETE SEPTIC TANK


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

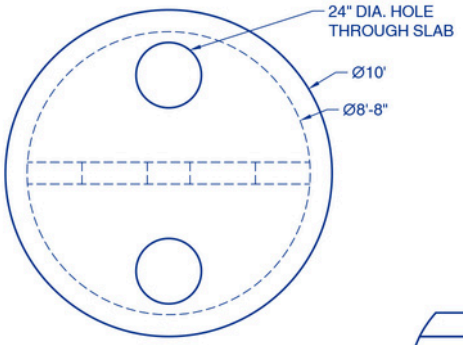


TOP VIEW 1:35




DETAIL A
SCALE 3/8" = 1'-0"

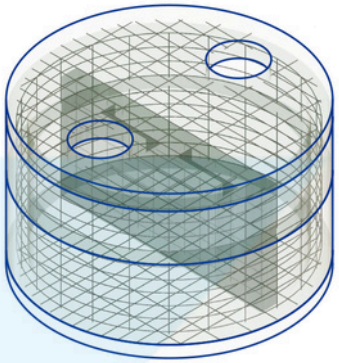


ISOMETRIC VIEW 1:35

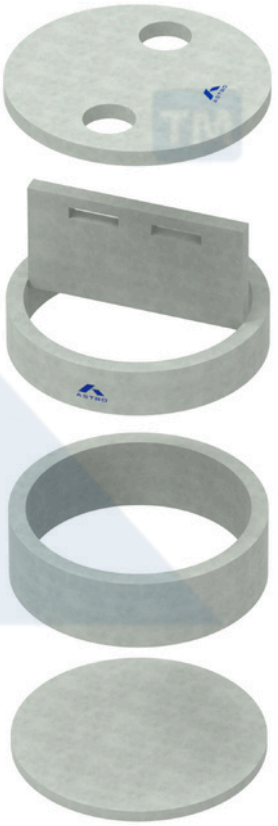

3D RENDER

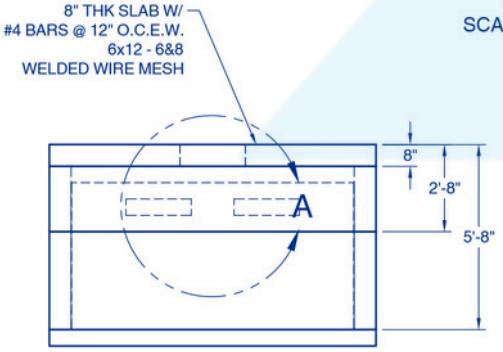

PLAN VIEW 1:35

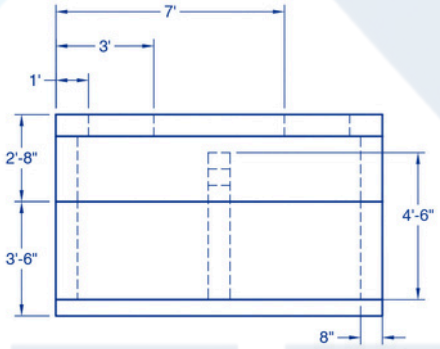

SIDE VIEW 1:35

ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064) GRADE 60 ASTM A-185-02
MESH CENTERED WITH 1.5"MIN COVER

PRODUCT NO.	AR 2000G ST
DESCRIPTION	2000G SEPTIC TANK
STANDARD	SUFFOLK & NASSAU COUNTY
DIAMETERS	OUTER - 10'
	INNER - 8'8"
THICKNESS	WALL - 8"
	TOP SLAB - 8"
JOINT SEAL	1" SQ. OR 1" DIA. SELF SEALING BUTYL RUBBER GASKET EQUAL TO FED. SPEC. SS-S-00210
BASE TYPE	NON MONOLITHIC
WEIGHT	17200 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:35
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED


COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

2000 GALLON CONCRETE SEPTIC TANK MONOLITHIC


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

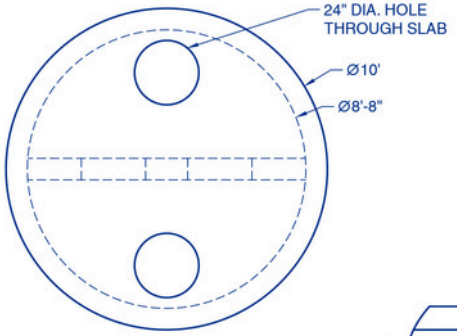


TOP VIEW 1:35




DETAIL A
SCALE 3/8" = 1'-0"

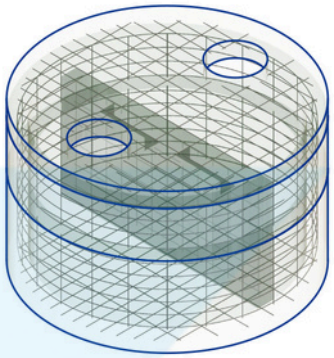


ISOMETRIC VIEW 1:35

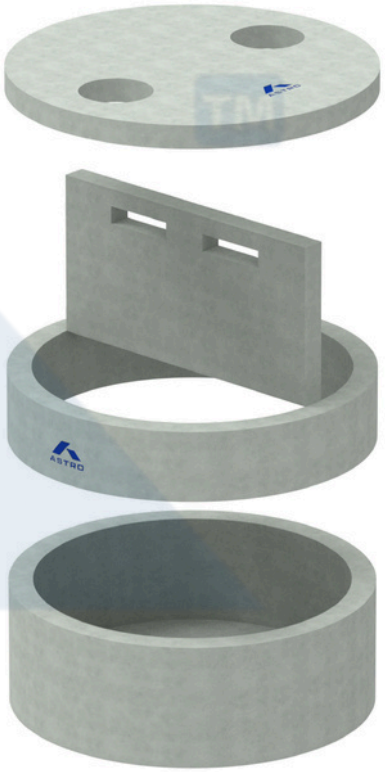

3D RENDER

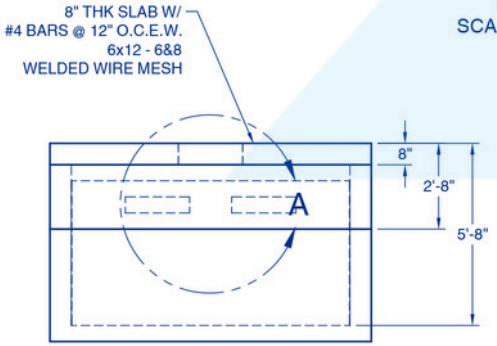

PLAN VIEW 1:35

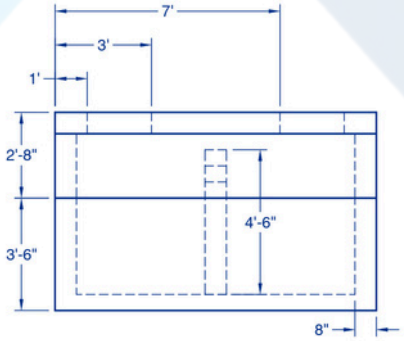

SIDE VIEW 1:35

ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064) GRADE 60 ASTM A-185-02
MESH CENTERED WITH 1.5"MIN COVER

PRODUCT NO.	AR 2000G STM
DESCRIPTION	2000G SEPTIC TANK M.
STANDARD	SUFFOLK & NASSAU COUNTY
DIAMETERS	OUTER - 10'
	INNER - 8'8"
THICKNESS	WALL - 8"
	TOP SLAB - 8"
JOINT SEAL	1" SQ. OR 1" DIA. SELF SEALING BUTYL RUBBER GASKET EQUAL TO FED. SPEC. SS-S-00210
BASE TYPE	MONOLITHIC
WEIGHT	17200 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:35
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED


COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

2500 GALLON CONCRETE SEPTIC TANK


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

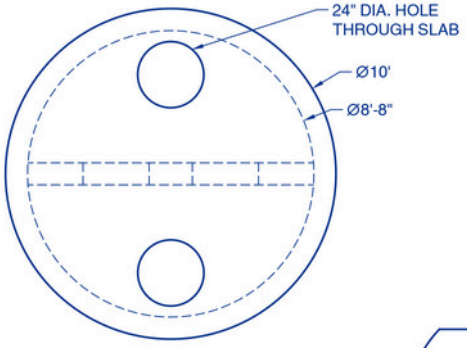


TOP VIEW 1:35




DETAIL A
SCALE 3/8" = 1'-0"

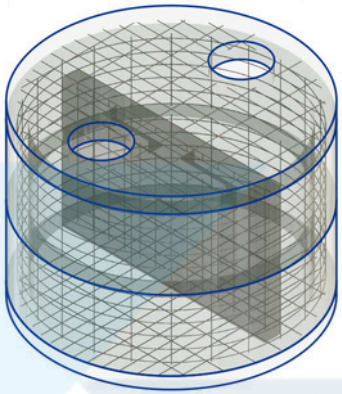


ISOMETRIC VIEW 1:35

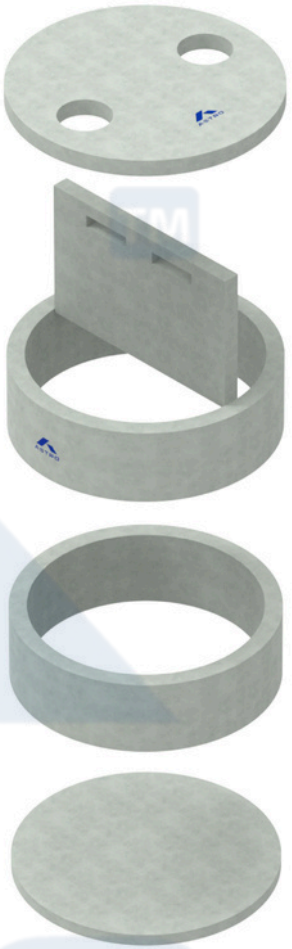

3D RENDER

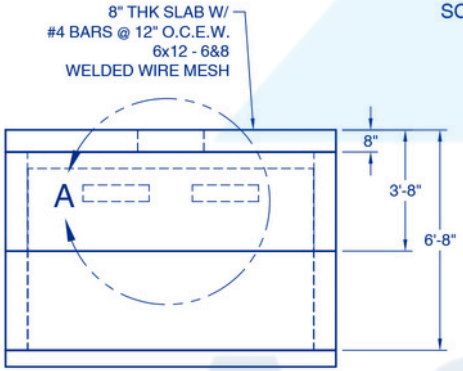

PLAN VIEW 1:35

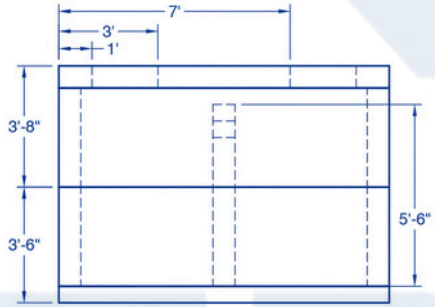

SIDE VIEW 1:35

ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064) GRADE 60 ASTM A-185-02
MESH CENTERED WITH 1.5"MIN COVER

PRODUCT NO.	AR 2500G ST
DESCRIPTION	2500G SEPTIC TANK
STANDARD	SUFFOLK & NASSAU COUNTY
DIAMETERS	OUTER - 10'
	INNER - 8'8"
THICKNESS	WALL - 8"
	TOP SLAB - 8"
JOINT SEAL	1" SQ. OR 1" DIA. SELF SEALING BUTYL RUBBER GASKET EQUAL TO FED. SPEC. SS-S-00210
BASE TYPE	NON MONOLITHIC
WEIGHT	24200 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:35
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED

COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com

ASTRO