


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

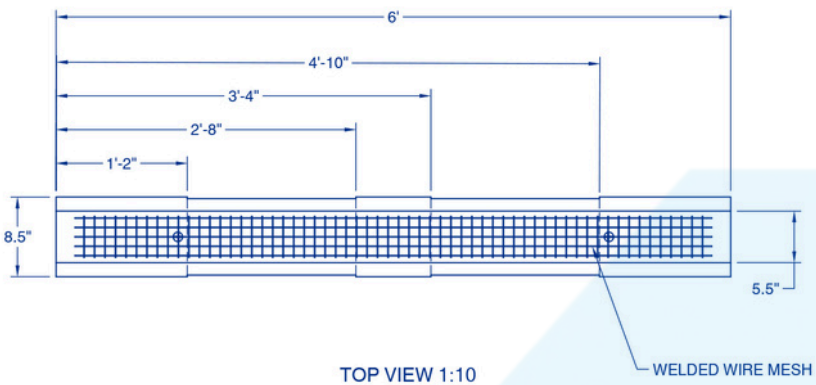


TOP VIEW 1:10

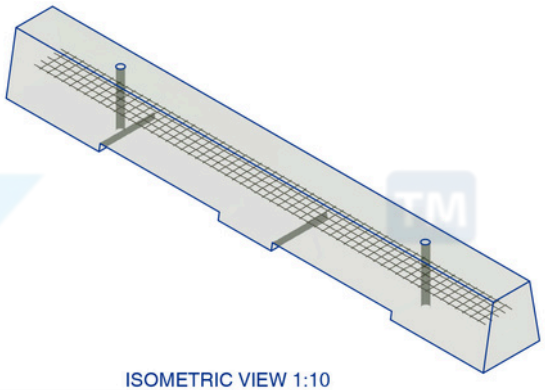


ISOMETRIC VIEW 1:10

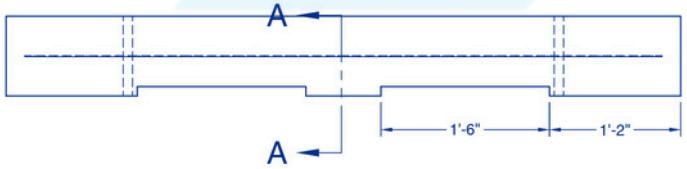

PLAN VIEW 1:10



SECTION A-A
SCALE 1:10

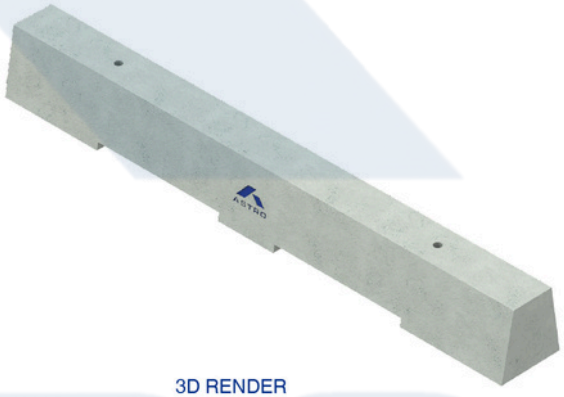

3D RENDER
REFERENCE ONLY

PRODUCT NO.	AR 655 CS
DESCRIPTION	6' X 5.5" CURB STOP
STANDARD	SUFFOLK & NASSAU COUNTY
SIZE	TOP - 5.5" HEIGHT - 8.5" BOTTOM - 8.5"
WEIGHT	900 LBS
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED

COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO


ADDITIONAL NOTES:

REINFORCEMENT: (ASTM A1064)
MESH CENTERED IN SLAB WITH 1.5"
MIN COVER

ASTRO™

PRECAST CONCRETE SLABS

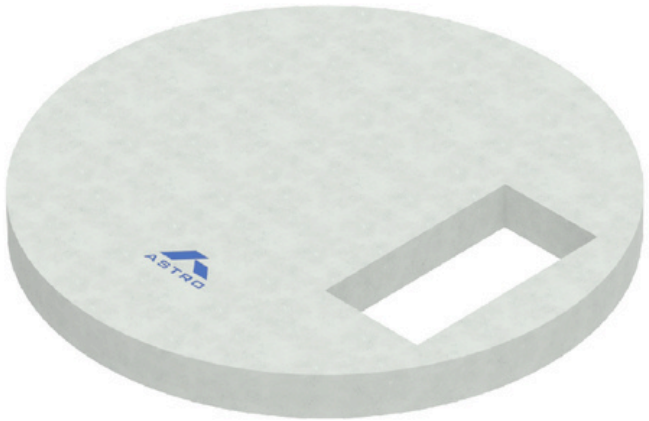

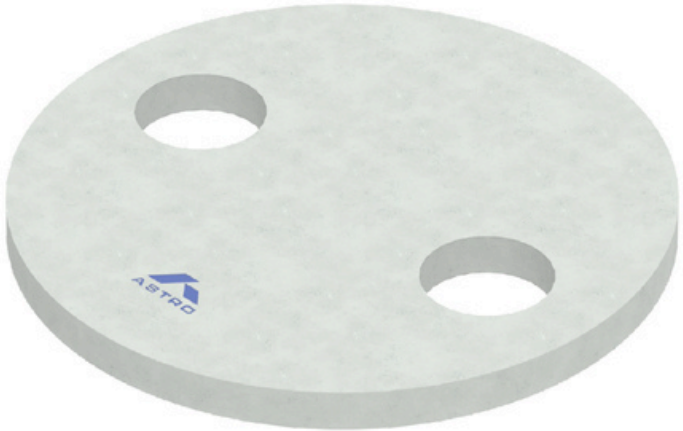


CONCRETE SLABS


- 6' CIRCULAR SOLID SLAB
- 8' X 8" CIRCULAR SOLID SLAB
- 10' X 10" CIRCULAR SOLID SLAB
- 8' TRAFFIC SLAB WITH 24" OFFSET OPENING
- 8' X 8" TRAFFIC SLAB WITH 24" OFFSET OPENING
- 8' X 8" TRAFFIC SLAB WITH 24"X48" OPENING
- 6' TRAFFIC SLAB WITH 24" OFFSET OPENING
- 10' X 10" TRAFFIC SLAB WITH 24" OPENING
- 12' X 10" TRAFFIC SLAB WITH 24" OPENING
- 12' X 10" TRAFFIC SLAB WITH 24"X48" OPENING
- 8' CIRCULAR SOLID SLAB
- 10' X 8" CIRCULAR SOLID SLAB
- 12' X 10" CIRCULAR SOLID SLAB
- 8' TRAFFIC SLAB WITH TWO 24" OPENING
- 8' X 8" TRAFFIC SLAB WITH TWO 24" OPENING
- 10' X 8" TRAFFIC SLAB WITH 24" OFFSET OPENING
- 10' X 8" TRAFFIC SLAB WITH 24"X48" OPENING
- 10' X 10" TRAFFIC SLAB WITH 24"X48" OPENING
- 12' X 10" TRAFFIC SLAB WITH 24" OFFSET OPENING
- 10' X 10" TRAFFIC SLAB WITH 24" OFFSET OPENING

4' CIRCULAR SOLID SLAB


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

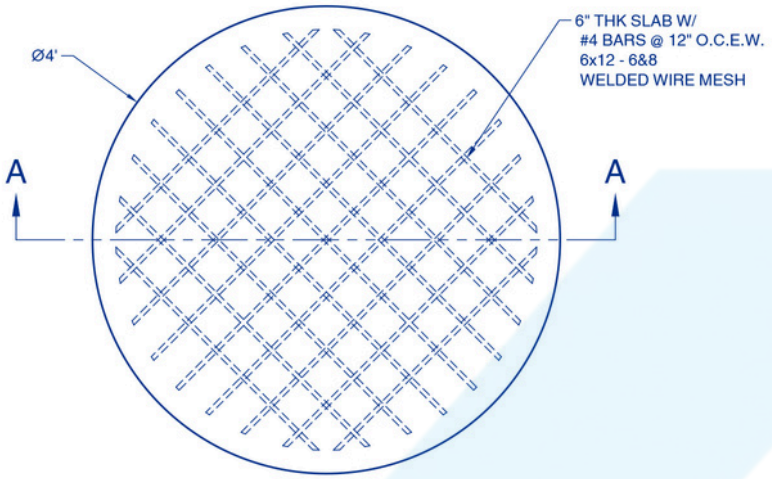


TOP VIEW 1:10

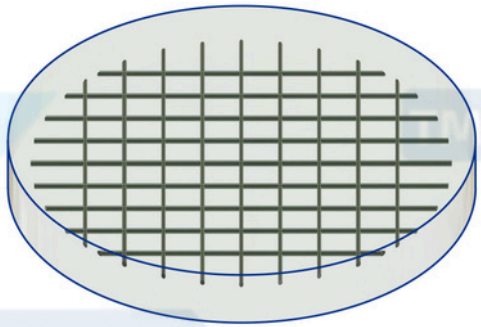

ISOMETRIC VIEW 1:10



SECTION A-A
SCALE 1:10

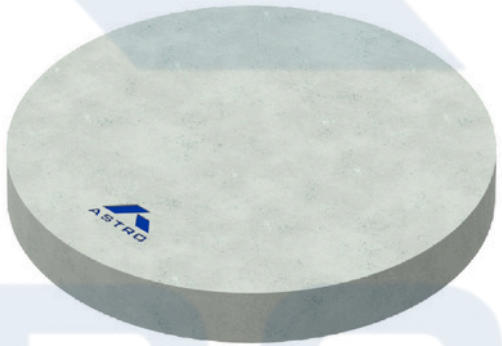

3D RENDER

ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 6" WALL WITH 1.5"
MIN COVER

PRODUCT NO.	AR 46 CSS
DESCRIPTION	4' CIRCULAR SOLID SLAB
STANDARD	SUFFOLK & NASSAU COUNTY
THICKNESS	6" INCHES
ACCESS OPENING	NOT APPLICABLE
WEIGHT	942 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:10
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL


THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED

COMPANY ADDRESS


928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com

ASTRO


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

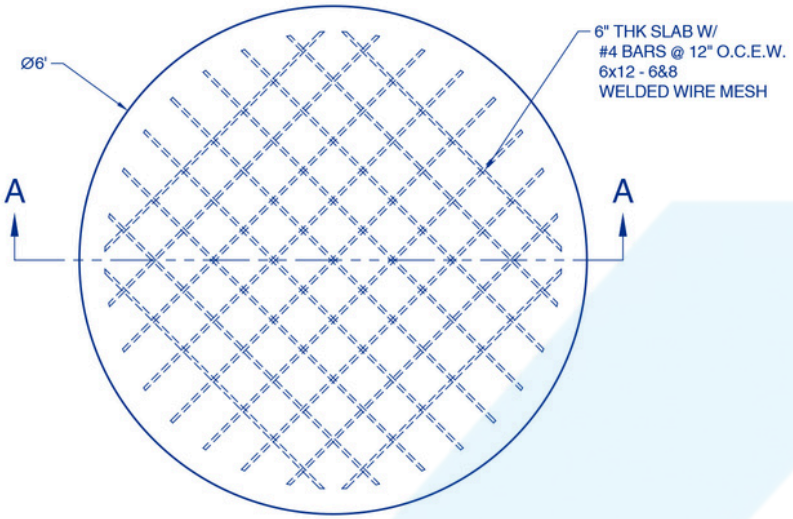


TOP VIEW 1:14

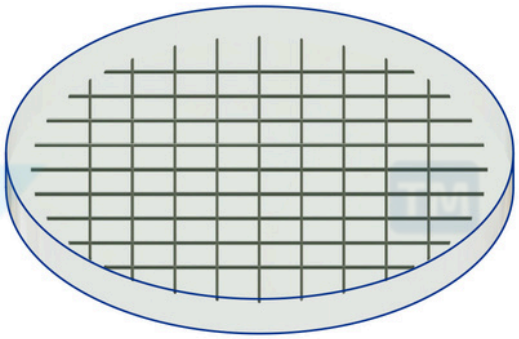

ISOMETRIC VIEW 1:14



SECTION A-A
SCALE 1:14

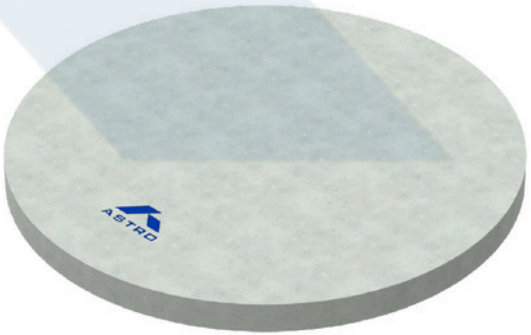

3D RENDER

PRODUCT NO.	AR 66 CSS
DESCRIPTION	6' CIRCULAR SOLID SLAB
STANDARD	SUFFOLK & NASSAU COUNTY
THICKNESS	6" INCHES
ACCESS OPENING	NOT APPLICABLE
WEIGHT	1500 LBS
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:14
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 6" WALL WITH 1.5"
MIN COVER

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED


COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

6' TRAFFIC SLAB WITH 24" OFFSET OPENING


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

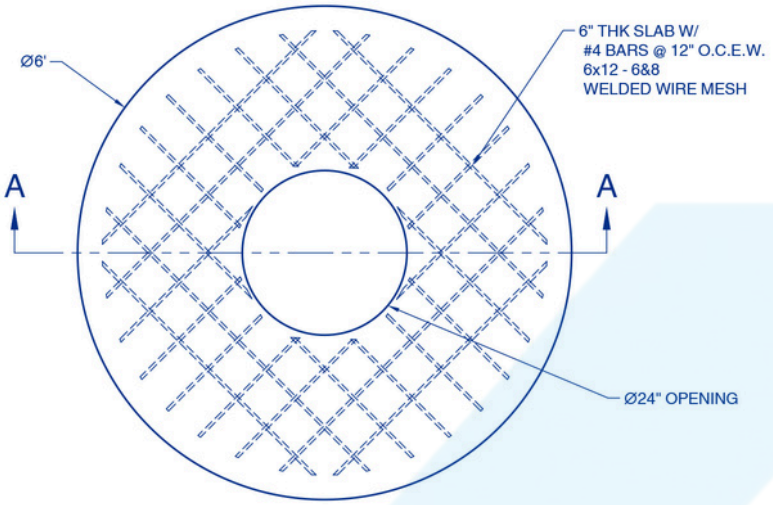


TOP VIEW 1:14

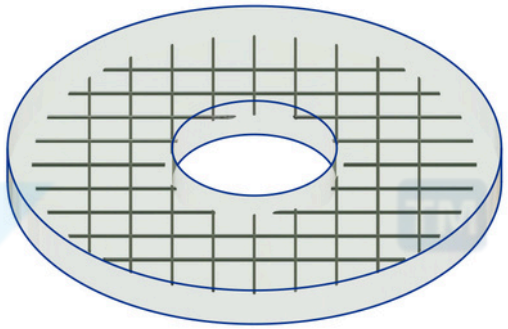

ISOMETRIC VIEW 1:14

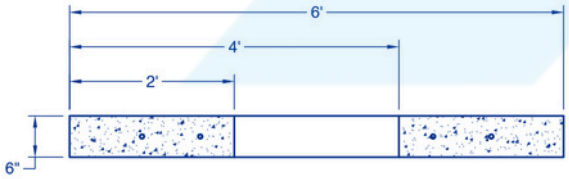

SECTION A-A
SCALE 1:14

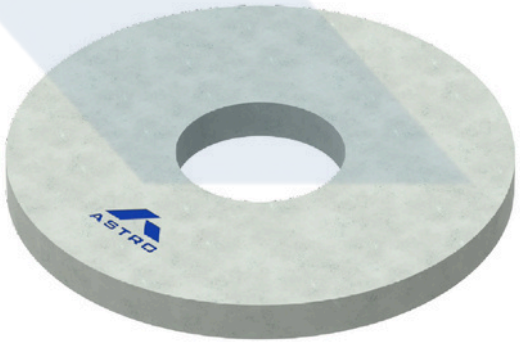

3D RENDER

PRODUCT NO.	AR 66241 TS
DESCRIPTION	6' TRAFFIC SLAB
STANDARD	SUFFOLK & NASSAU COUNTY
THICKNESS	6" INCHES
ACCESS OPENING	24" OFFSET
WEIGHT	1800 LBS
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:14
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED

COMPANY ADDRESS


928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com

ASTRO


ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 6" WALL WITH 1.5"
MIN COVER


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

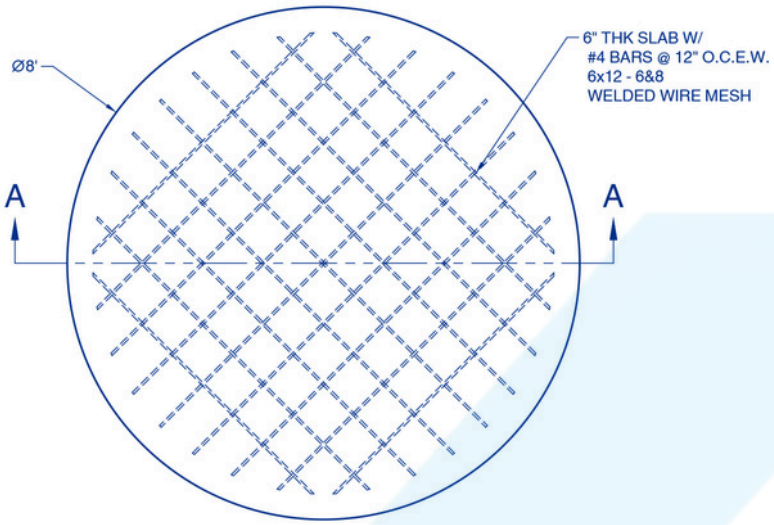


TOP VIEW 1:18

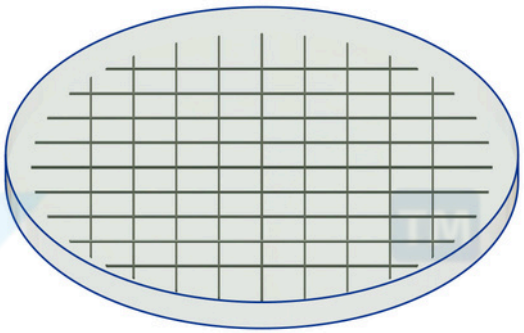

ISOMETRIC VIEW 1:18



SECTION A-A
SCALE 1:18

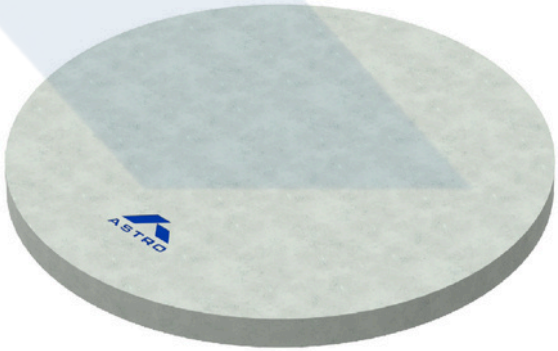

3D RENDER

PRODUCT NO.	AR 86 CSS
DESCRIPTION	8' CIRCULAR SOLID SLAB
STANDARD	SUFFOLK & NASSAU COUNTY
THICKNESS	6" INCHES
ACCESS OPENING	NOT APPLICABLE
WEIGHT	3770 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:18
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED

COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

ADDITIONAL NOTES:


REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 6" WALL WITH 1.5"
MIN COVER

8' TRAFFIC SLAB WITH 24" OFFSET OPENING


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

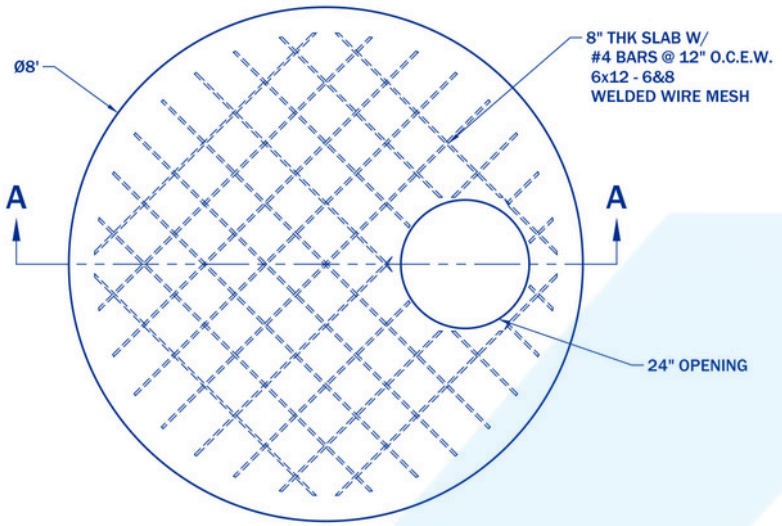


TOP VIEW 1:18

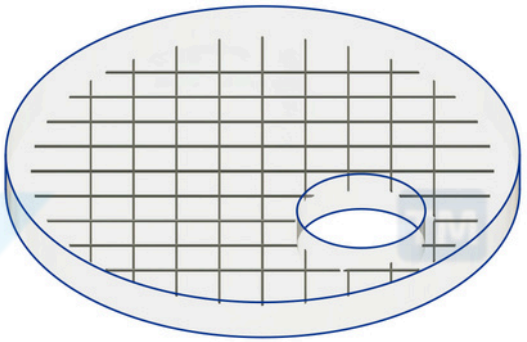

ISOMETRIC VIEW 1:18

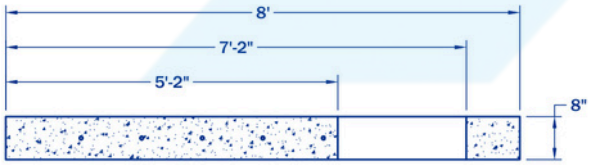

SECTION A-A
SCALE 1:18

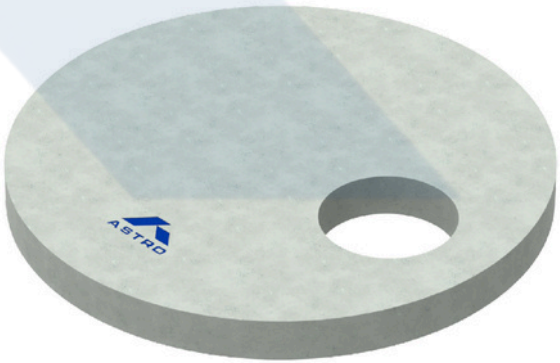

3D RENDER

ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 8" WALL WITH 1.5"
MIN COVER

PRODUCT NO.	AR 86241 TS
DESCRIPTION	8' TRAFFIC SLAB
STANDARD	SUFFOLK & NASSAU COUNTY
THICKNESS	6" INCHES
ACCESS OPENING	24" OFFSET
WEIGHT	3770 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:18
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED


COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

8' TRAFFIC SLAB WITH TWO 24" OPENING


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

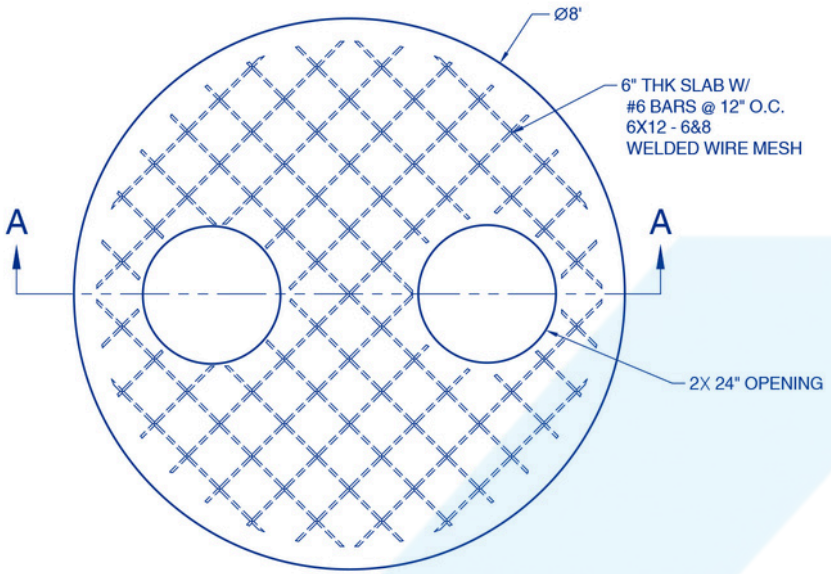


TOP VIEW 1:18

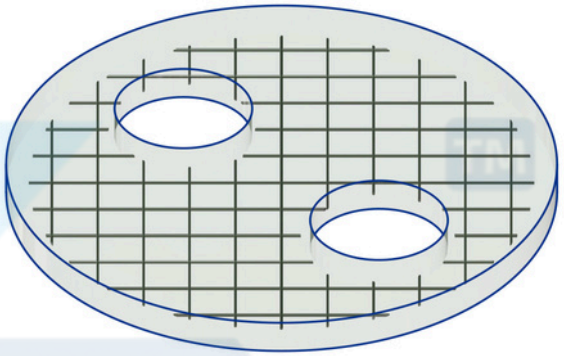

ISOMETRIC VIEW 1:18

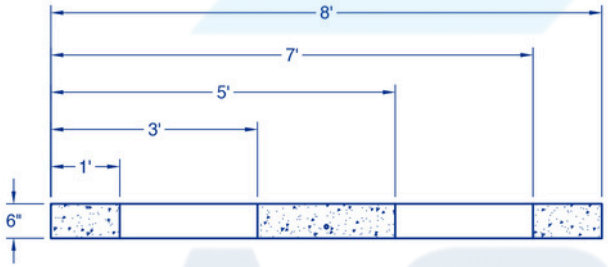

SECTION A-A
SCALE 1:18

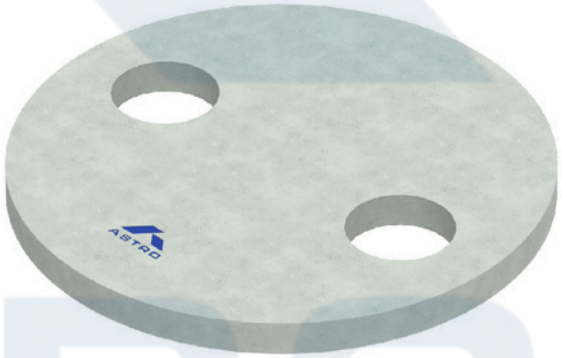

3D RENDER

ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 6" WALL WITH 1.5"
MIN COVER

PRODUCT NO.	AR 86242 TS
DESCRIPTION	8' TRAFFIC SLAB
STANDARD	SUFFOLK & NASSAU COUNTY
THICKNESS	6" INCHES
ACCESS OPENING	24" TWO OPENING
WEIGHT	3770 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:18
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED


COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

8' TRAFFIC SLAB WITH 24"-48" RECTANGLE OPENING


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

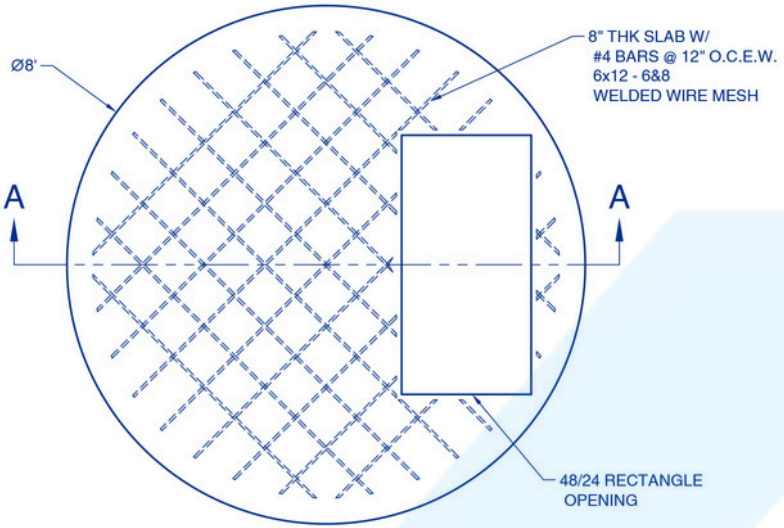


TOP VIEW 1:18

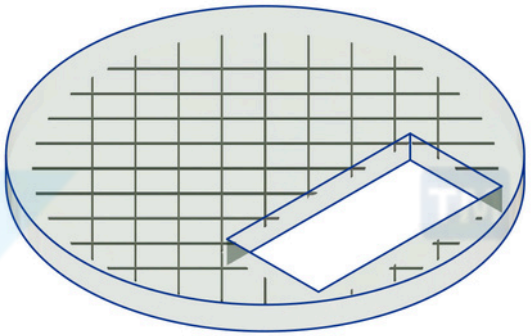

ISOMETRIC VIEW 1:18

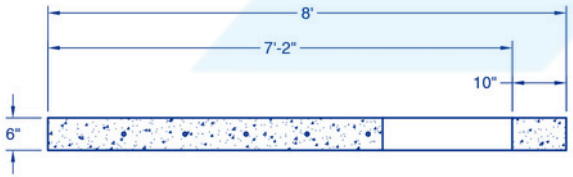

SECTION A-A
SCALE 1:18

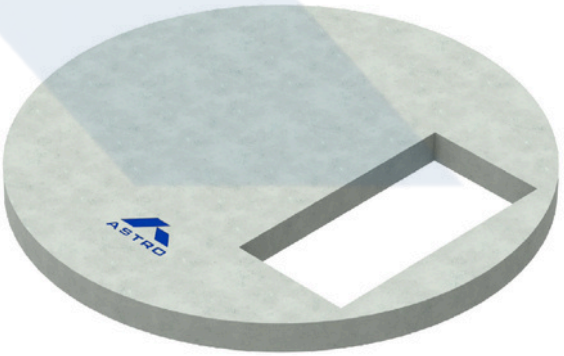

3D RENDER

PRODUCT NO.	AR 86242 TS
DESCRIPTION	8' TRAFFIC SLAB
STANDARD	SUFFOLK & NASSAU COUNTY
THICKNESS	6" INCHES
ACCESS OPENING	24" -48" OPENING
WEIGHT	3770 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:18
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED

COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

ADDITIONAL NOTES:


REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 6" WALL WITH 1.5"
MIN COVER

8' X 8" CIRCULAR SOLID SLAB

ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

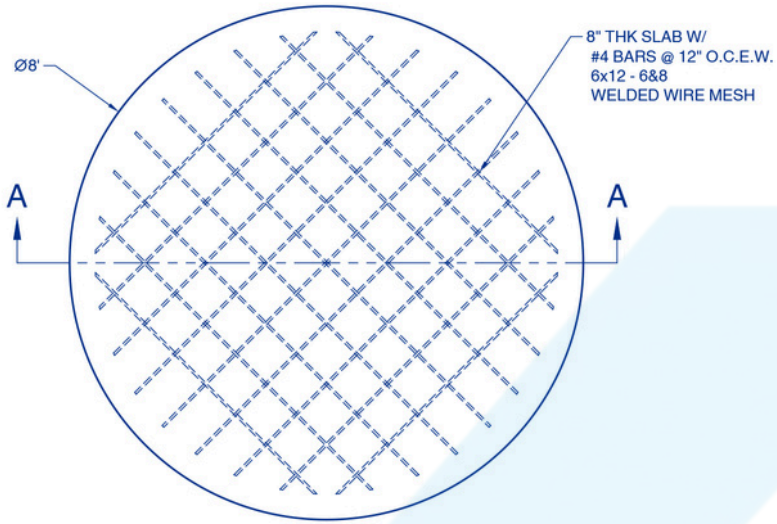


TOP VIEW 1:18

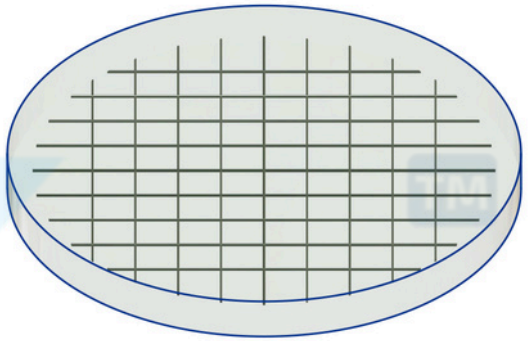

ISOMETRIC VIEW 1:18



SECTION A-A
SCALE 1:18

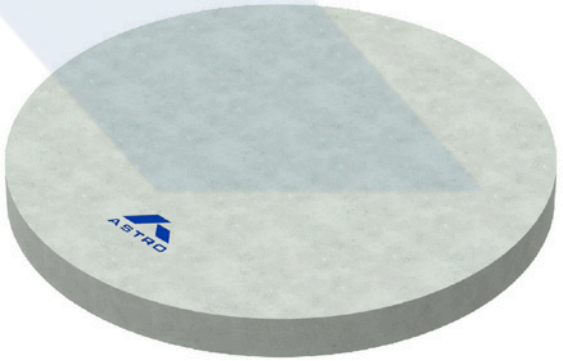

3D RENDER

PRODUCT NO.	AR 88 CSS
DESCRIPTION	8' CIRCULAR SOLID SLAB
STANDARD	SUFFOLK & NASSAU COUNTY
THICKNESS	8" INCHES
ACCESS OPENING	NOT APPLICABLE
WEIGHT	5027 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:18
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED

COMPANY ADDRESS


928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com

ADDITIONAL NOTES:


REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 8" WALL WITH 1.5"
MIN COVER

8' X 8" TRAFFIC SLAB WITH 24" OFFSET OPENING


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

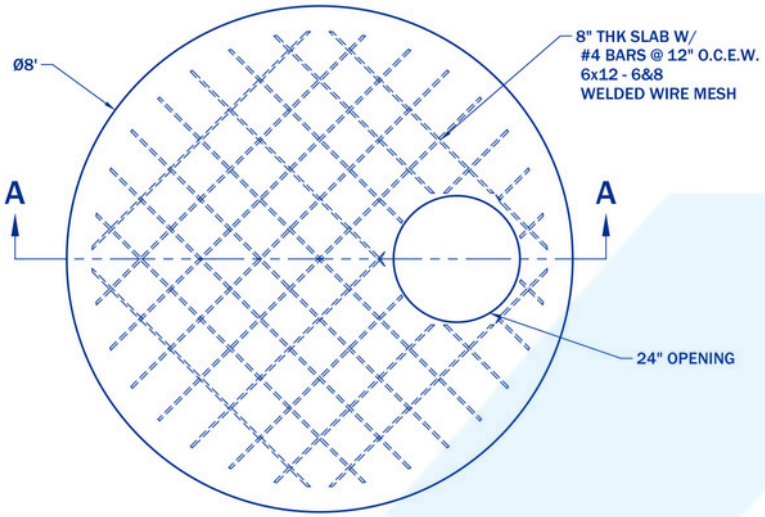


TOP VIEW 1:18

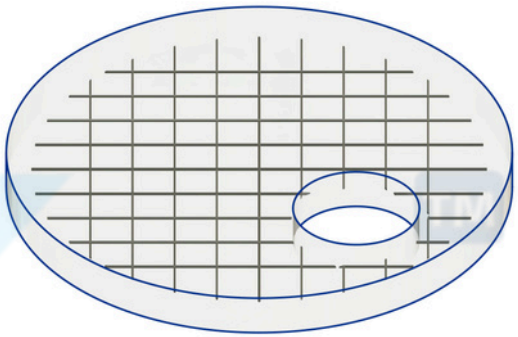

ISOMETRIC VIEW 1:18

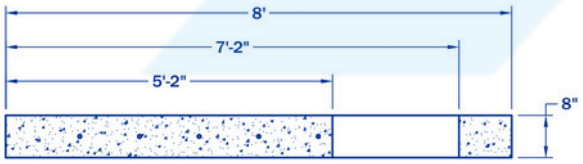

SECTION A-A
SCALE 1:18

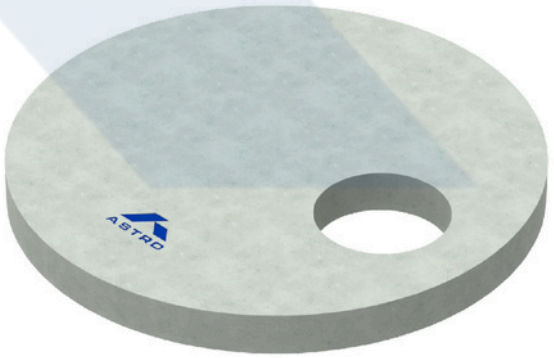

3D RENDER

PRODUCT NO.	AR 88241 TS
DESCRIPTION	8' TRAFFIC SLAB
STANDARD	SUFFOLK & NASSAU COUNTY
THICKNESS	8" INCHES
ACCESS OPENING	24" OFFSET OPENING
WEIGHT	5027 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:18
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED

COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

ADDITIONAL NOTES:


REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 8" WALL WITH 1.5"
MIN COVER

8' X 8" TRAFFIC SLAB WITH TWO 24" OPENING


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

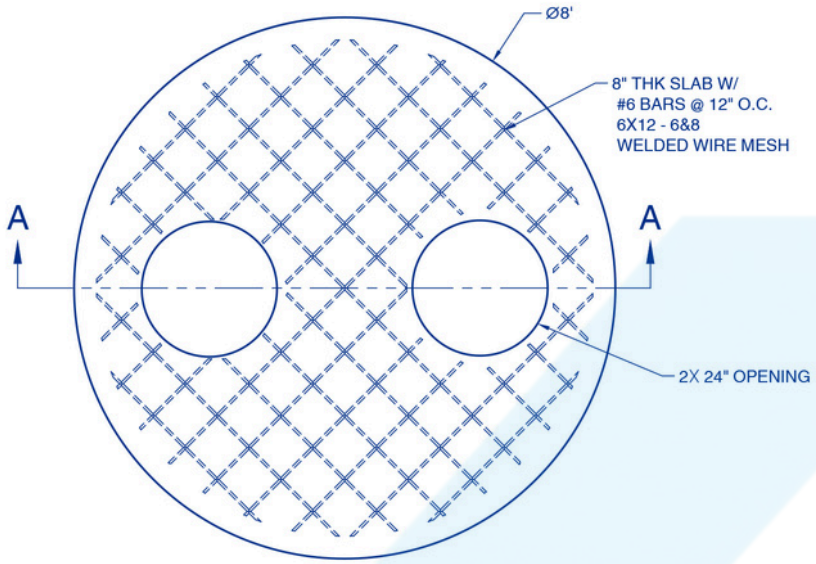


TOP VIEW 1:18

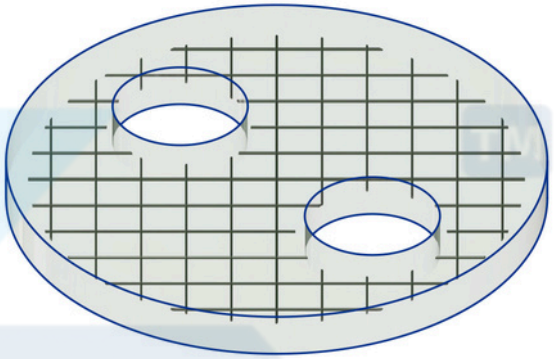

ISOMETRIC VIEW 1:18

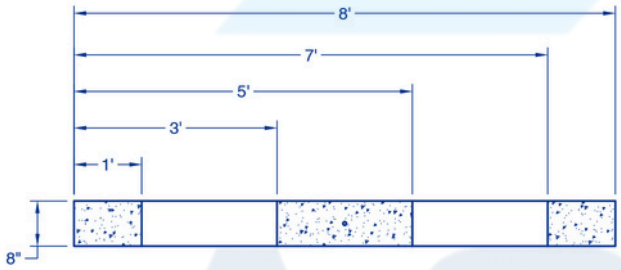

SECTION A-A
SCALE 1:18

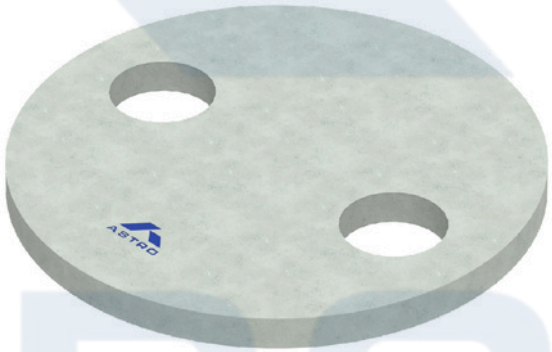

3D RENDER

PRODUCT NO.	AR 88242 TS
DESCRIPTION	8' TRAFFIC SLAB
STANDARD	SUFFOLK & NASSAU COUNTY
THICKNESS	8" INCHES
ACCESS OPENING	24" TWO OPENING
WEIGHT	5027 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:18
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED

COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

ADDITIONAL NOTES:


REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 8" WALL WITH 1.5"
MIN COVER

8' TRAFFIC SLAB WITH 24"-48" RECTANGLE OPENING


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

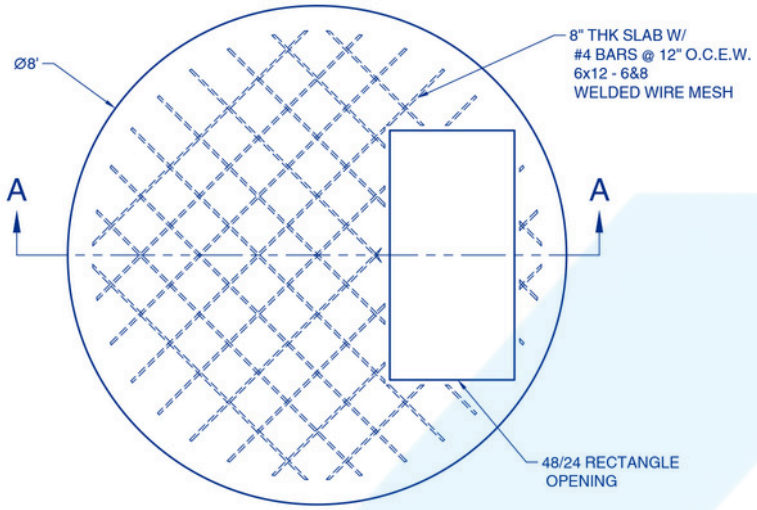


TOP VIEW 1:18

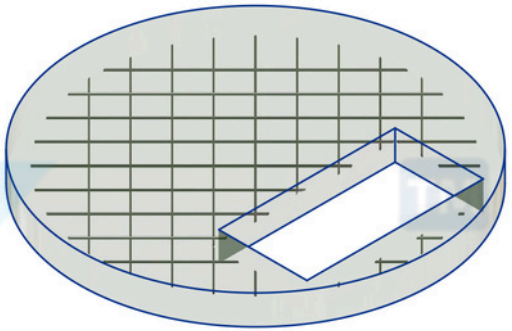

ISOMETRIC VIEW 1:18

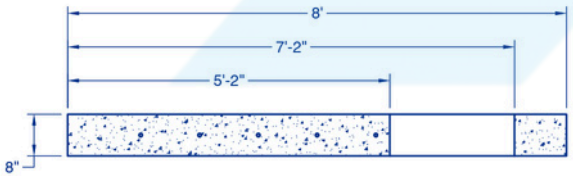

SECTION A-A
SCALE 1:18

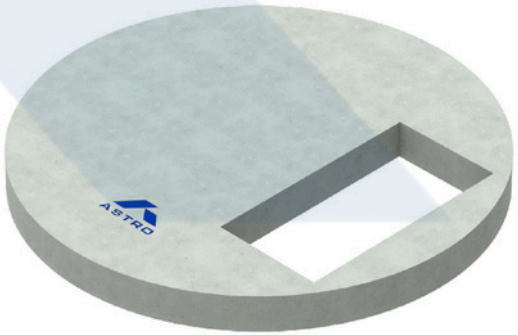

3D RENDER

PRODUCT NO.	AR 86242 TS
DESCRIPTION	8' TRAFFIC SLAB
STANDARD	SUFFOLK & NASSAU COUNTY
THICKNESS	8" INCHES
ACCESS OPENING	24" -48" OPENING
WEIGHT	4770 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:18
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED

COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

ADDITIONAL NOTES:


REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 6" WALL WITH 1.5"
MIN COVER

10' X 8" CIRCULAR SOLID SLAB


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

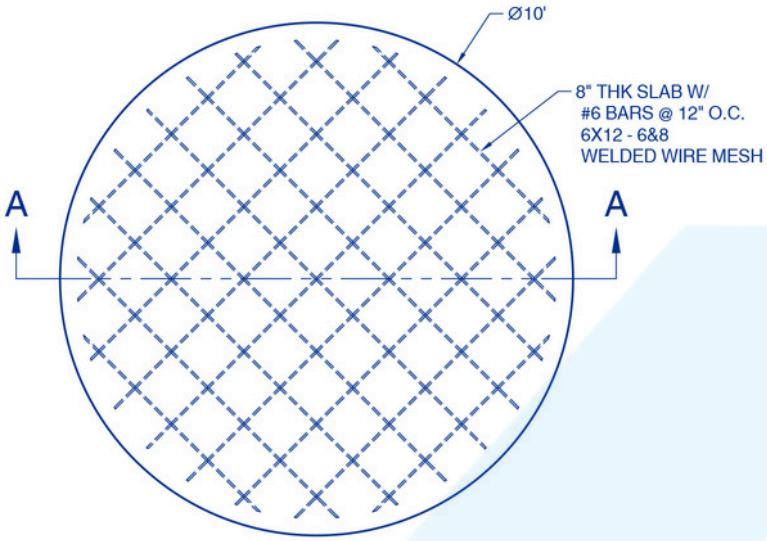


TOP VIEW 1:25

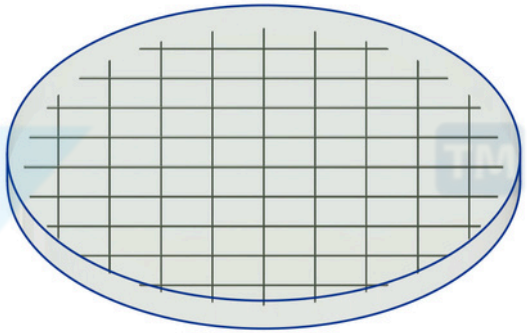

ISOMETRIC VIEW 1:25



SECTION A-A
SCALE 1:25

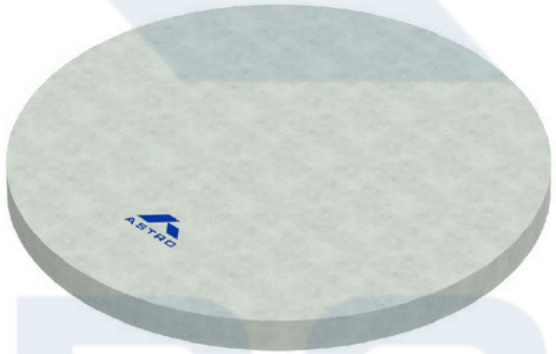

3D RENDER

ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 8" WALL WITH 1.5"
MIN COVER

PRODUCT NO.	AR 108 CSS
DESCRIPTION	10' CIRCULAR SOLID SLAB
STANDARD	SUFFOLK & NASSAU COUNTY
THICKNESS	8" INCHES
ACCESS OPENING	NOT APPLICABLE
WEIGHT	8050 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED


COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

10' X 8" TRAFFIC SLAB WITH 24" OFFSET OPENING


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

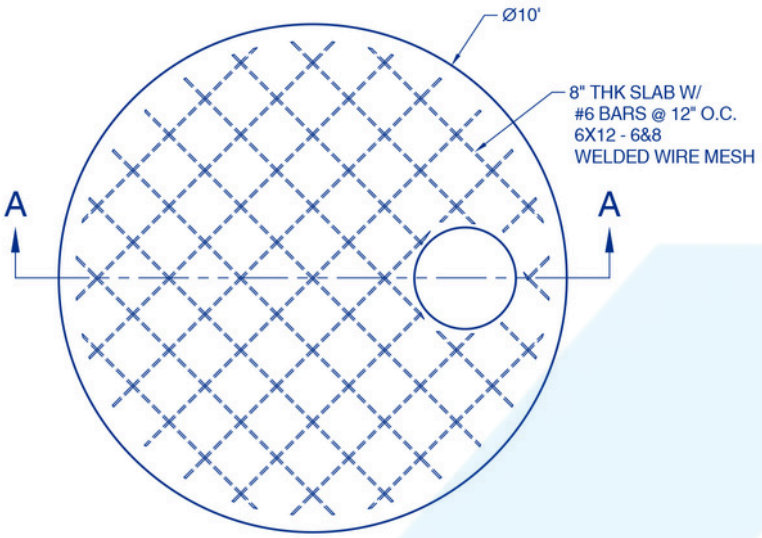


TOP VIEW 1:25

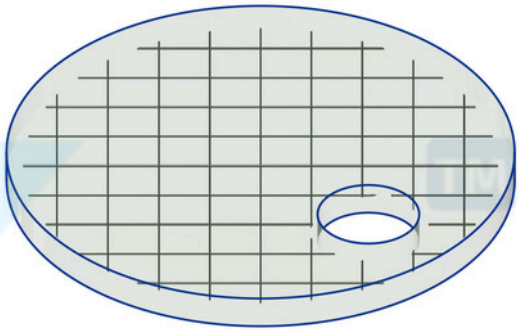

ISOMETRIC VIEW 1:25

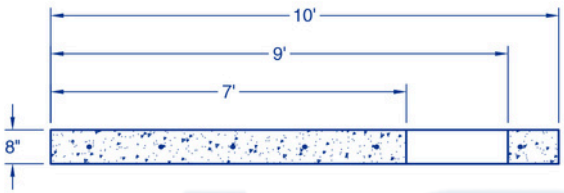

SECTION A-A
SCALE 1:25

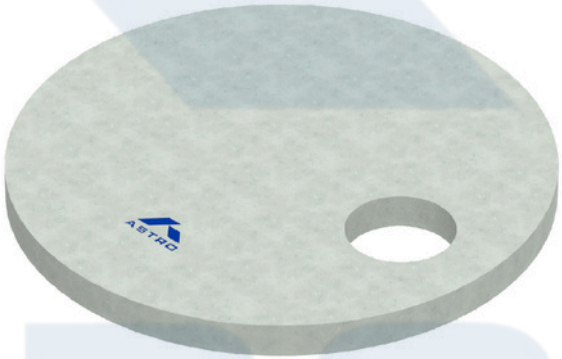

3D RENDER

PRODUCT NO.	AR 108241 TS
DESCRIPTION	10' TRAFFIC SLAB
STANDARD	SUFFOLK & NASSAU COUNTY
THICKNESS	8" INCHES
ACCESS OPENING	24" OFFSET OPENING
WEIGHT	7800 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED

COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

ADDITIONAL NOTES:


REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 8" WALL WITH 1.5"
MIN COVER

10' X 8" TRAFFIC SLAB WITH TWO 24" OPENING


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

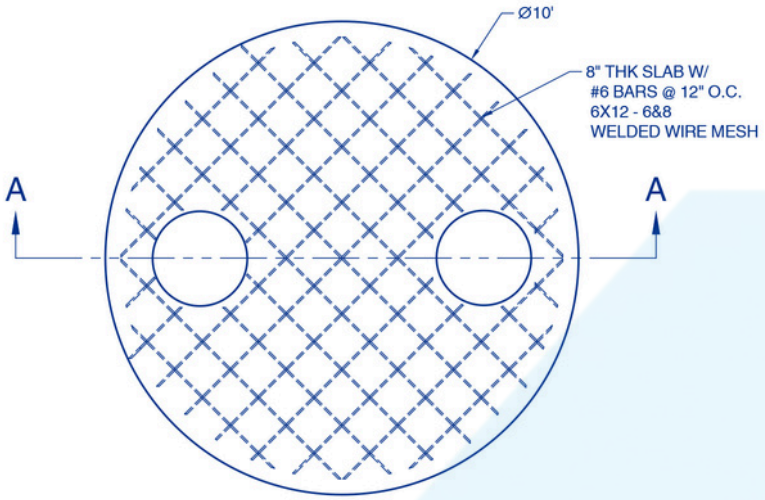


TOP VIEW 1:25

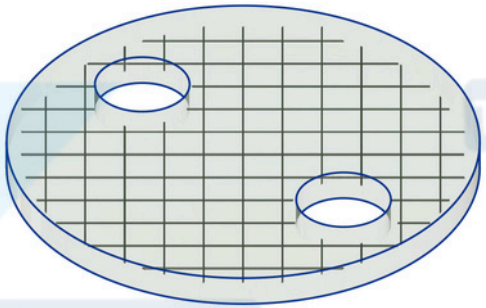

ISOMETRIC VIEW 1:25

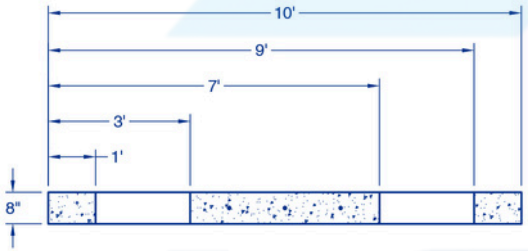

SECTION A-A
SCALE 1:25

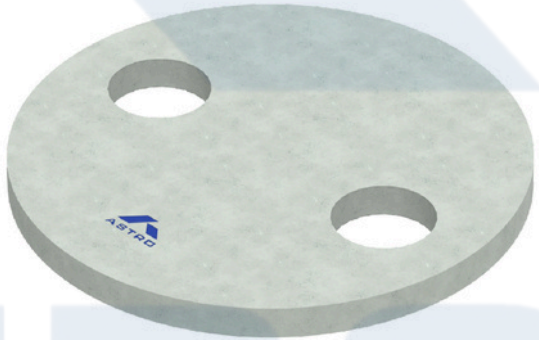

3D RENDER

PRODUCT NO.	AR 108242 TS
DESCRIPTION	10' TRAFFIC SLAB
STANDARD	SUFFOLK & NASSAU COUNTY
THICKNESS	8" INCHES
ACCESS OPENING	24" TWO OPENING
WEIGHT	7854 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED

COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

ADDITIONAL NOTES:


REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 10" WALL WITH 1.5"
MIN COVER

10' X 8" TRAFFIC SLAB WITH 24" X 48" OPENING


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

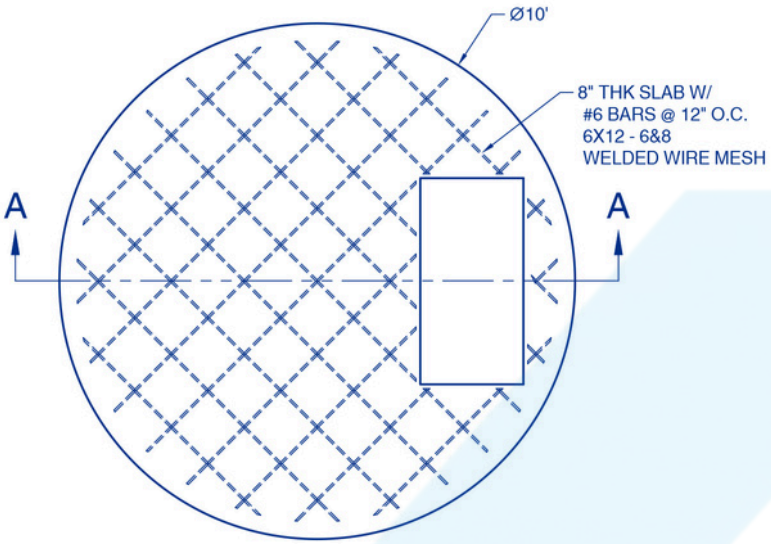


TOP VIEW 1:25

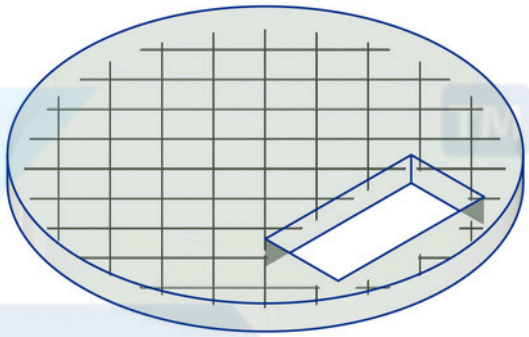

ISOMETRIC VIEW 1:25

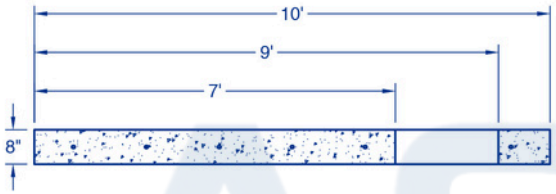

SECTION A-A
SCALE 1:25

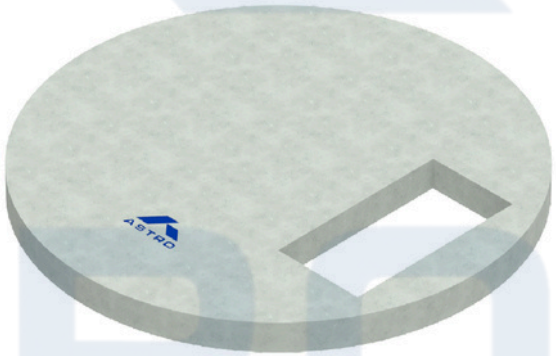

3D RENDER

ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 10" WALL WITH 1.5"
MIN COVER

PRODUCT NO.	AR 1082448 TS
DESCRIPTION	10' TRAFFIC SLAB
STANDARD	SUFFOLK & NASSAU COUNTY
THICKNESS	8" INCHES
ACCESS OPENING	24" X 48" OPENING
WEIGHT	7854 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED


COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

10' X 10" CIRCULAR SOLID SLAB


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

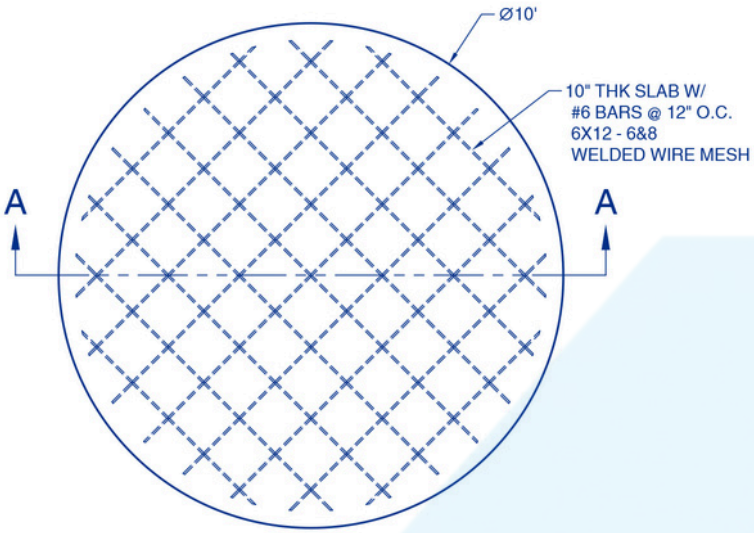


TOP VIEW 1:25

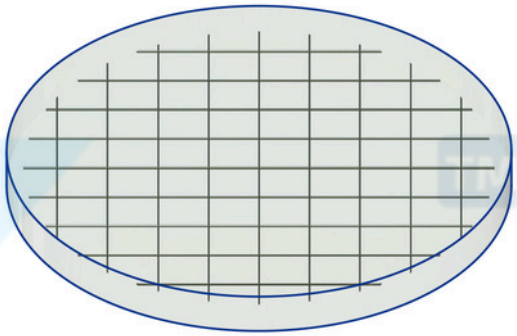

ISOMETRIC VIEW 1:25



SECTION A-A
SCALE 1:25

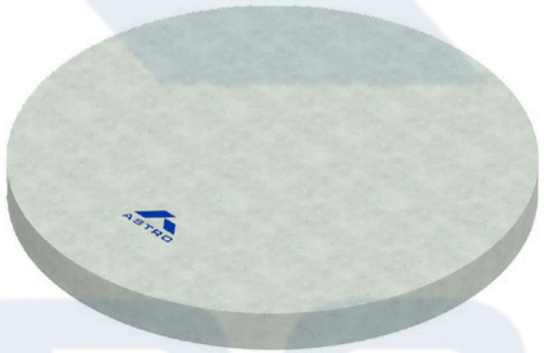

3D RENDER

PRODUCT NO.	AR 1010 CSS
DESCRIPTION	10' CIRCULAR SOLID SLAB
STANDARD	SUFFOLK & NASSAU COUNTY
THICKNESS	10" INCHES
ACCESS OPENING	NOT APPLICABLE
WEIGHT	8050 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED

COMPANY ADDRESS


928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com

ADDITIONAL NOTES:


REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 10" WALL WITH 1.5"
MIN COVER

10' X 10" TRAFFIC SLAB WITH 24" OFFSET OPENING


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

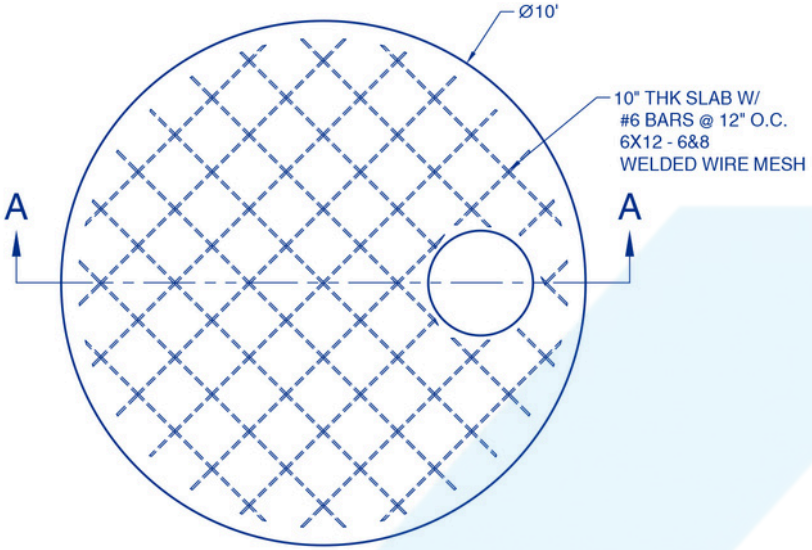


TOP VIEW 1:25

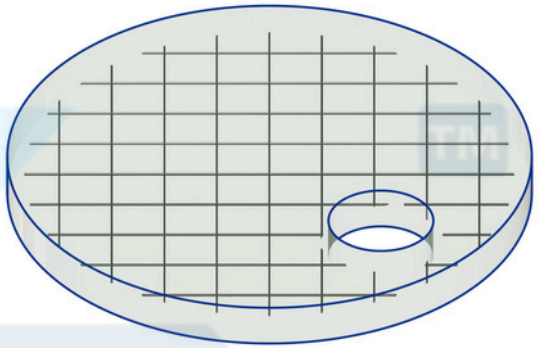

ISOMETRIC VIEW 1:25

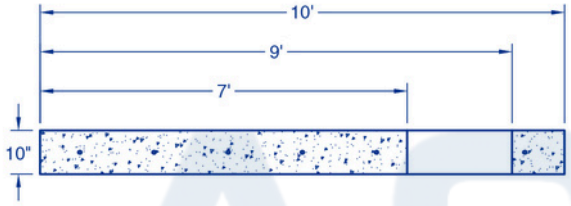

SECTION A-A
SCALE 1:25

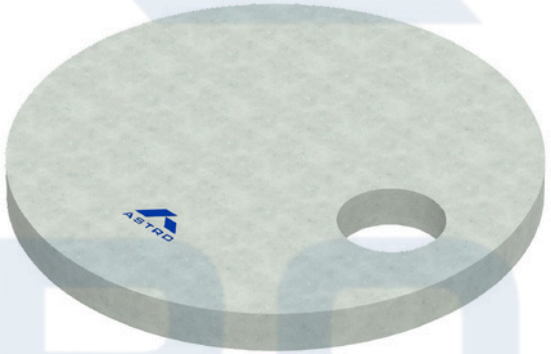

3D RENDER

ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 10" WALL WITH 1.5"
MIN COVER

PRODUCT NO.	AR 101024 TS
DESCRIPTION	10' TRAFFIC SLAB
STANDARD	SUFFOLK & NASSAU COUNTY
THICKNESS	10" INCHES
ACCESS OPENING	24" OFFSET
WEIGHT	7800 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED


COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

10' X 10" TRAFFIC SLAB WITH TWO 24" OPENING


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

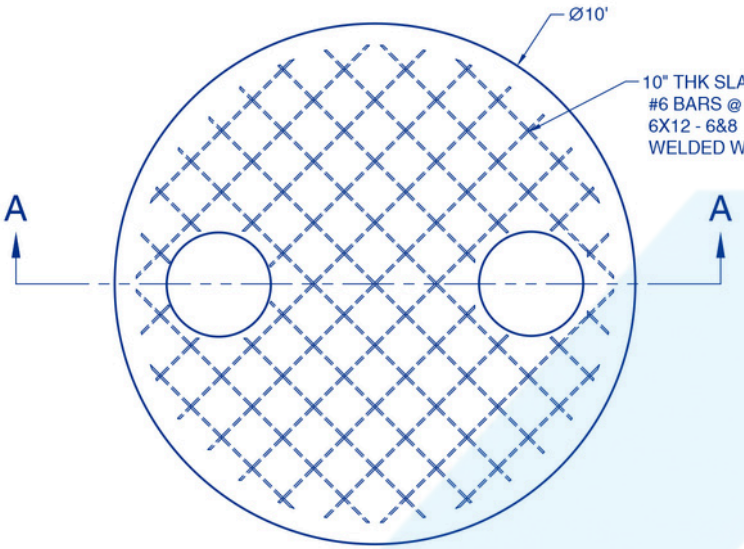


TOP VIEW 1:25

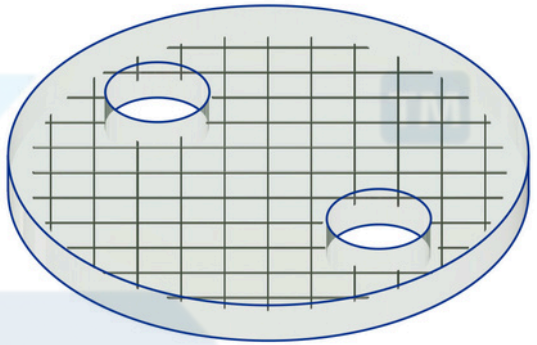

ISOMETRIC VIEW 1:25

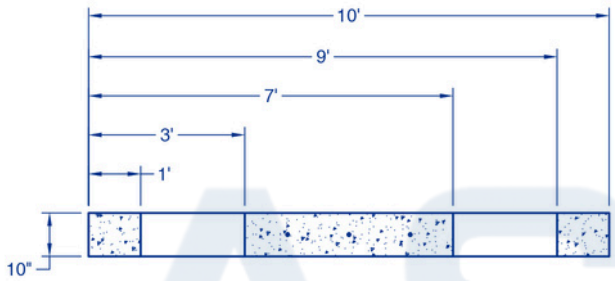

SECTION A-A
SCALE 1:25

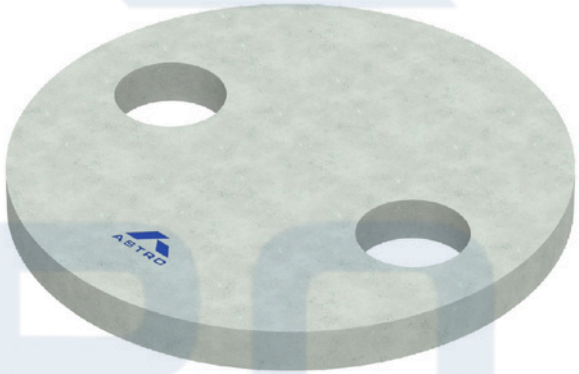

3D RENDER

ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 10" WALL WITH 1.5"
MIN COVER

PRODUCT NO.	AR 1010242 TS
DESCRIPTION	10' TRAFFIC SLAB
STANDARD	SUFFOLK & NASSAU COUNTY
THICKNESS	10" INCHES
ACCESS OPENING	24" TWO OPENING
WEIGHT	7800 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED


COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

10' X 10" TRAFFIC SLAB WITH 24" X 48" OPENING


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

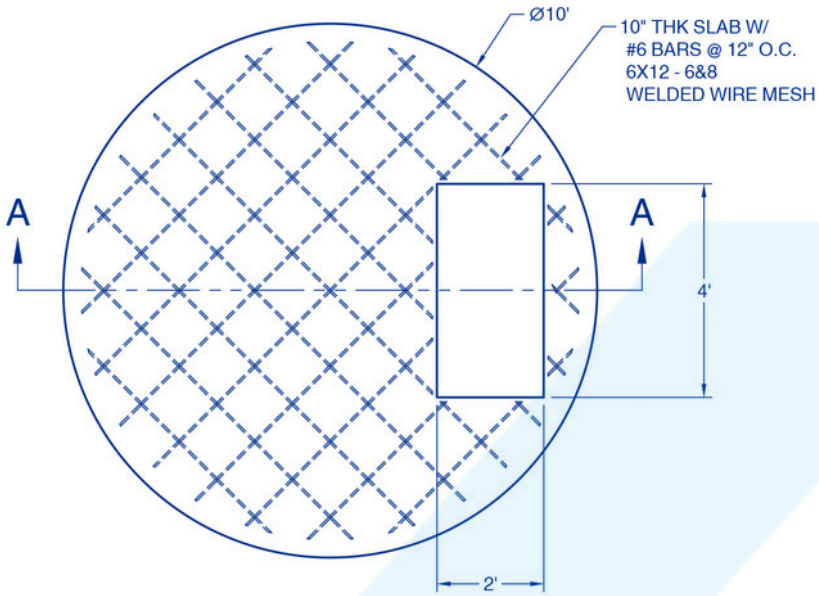


TOP VIEW 1:25

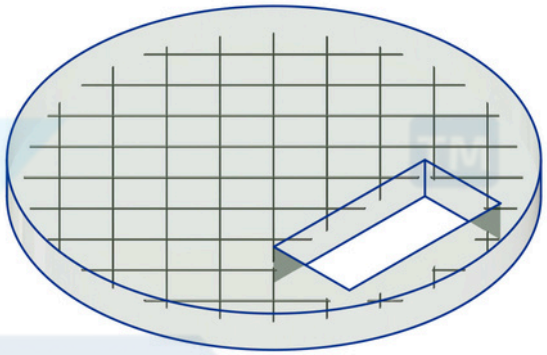

ISOMETRIC VIEW 1:25

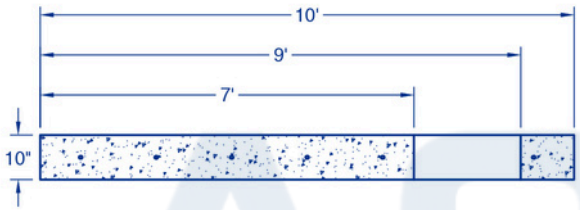

SECTION A-A
SCALE 1:25

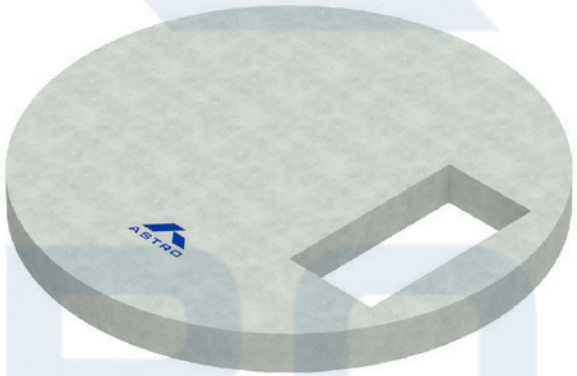

3D RENDER

ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 10" WALL WITH 1.5"
MIN COVER

PRODUCT NO.	AR 10102448 TS
DESCRIPTION	10' TRAFFIC SLAB
STANDARD	SUFFOLK & NASSAU COUNTY
THICKNESS	10" INCHES
ACCESS OPENING	24" X 48" OPENING
WEIGHT	7800 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED

COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com

ASTRO