

12’ X 10” CIRCULAR SOLID SLAB


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

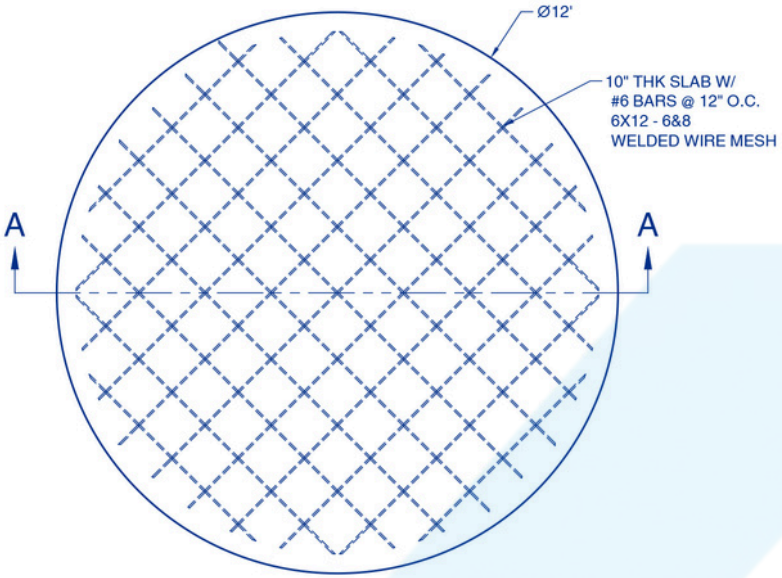


TOP VIEW 1:25

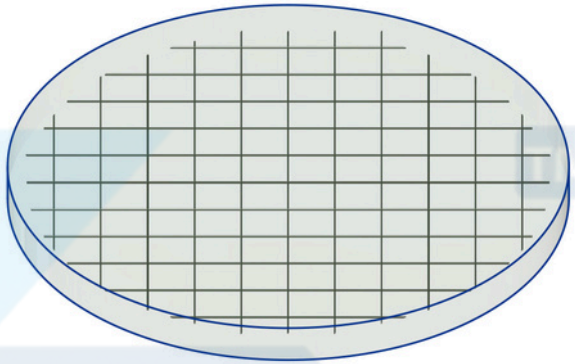

ISOMETRIC VIEW 1:25



SECTION A-A
SCALE 1:25

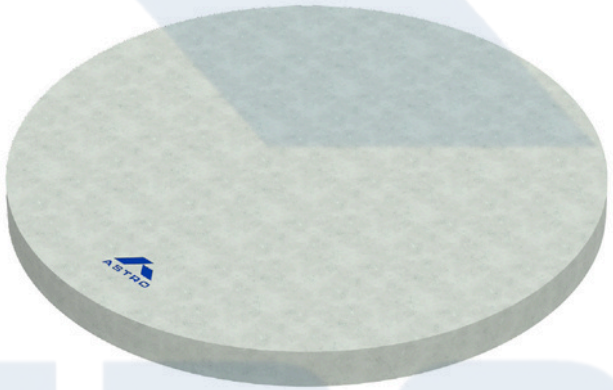

3D RENDER

PRODUCT NO.	AR 1210 CSS
DESCRIPTION	12’ CIRCULAR SOLID SLAB
STANDARD	SUFFOLK & NASSAU COUNTY
THICKNESS	10” INCHES
ACCESS OPENING	NOT APPLICABLE
WEIGHT	14137 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5”
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED

ADDITIONAL NOTES:

REINFORCEMENT: WWF 6” × 12” - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 10” WALL WITH 1.5”
MIN COVER


COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

12' X 10" TRAFFIC SLAB WITH 24" OFFSET OPENING


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

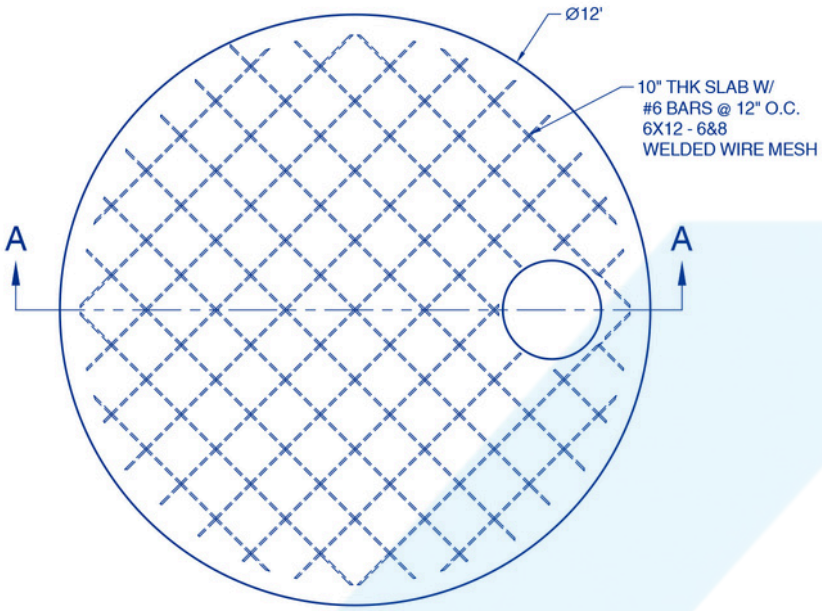


TOP VIEW 1:25

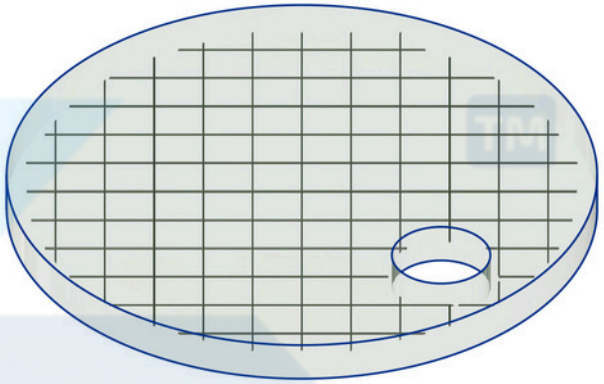

ISOMETRIC VIEW 1:25

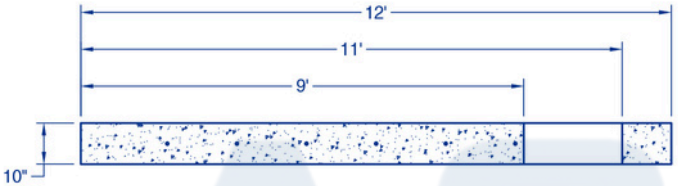

SECTION A-A
SCALE 1:25

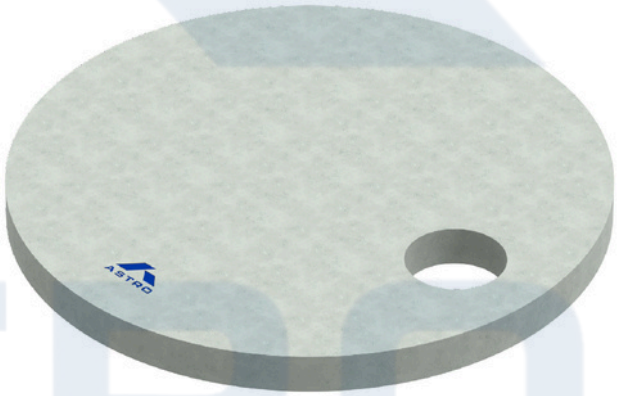

3D RENDER

ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 10" WALL WITH 1.5"
MIN COVER

PRODUCT NO.	AR 121024 TS
DESCRIPTION	12' TRAFFIC SLAB
STANDARD	SUFFOLK & NASSAU COUNTY
THICKNESS	10" INCHES
ACCESS OPENING	24" OFFSET
WEIGHT	8482 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED


COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

12' X 10" TRAFFIC SLAB WITH TWO 24" OPENING


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

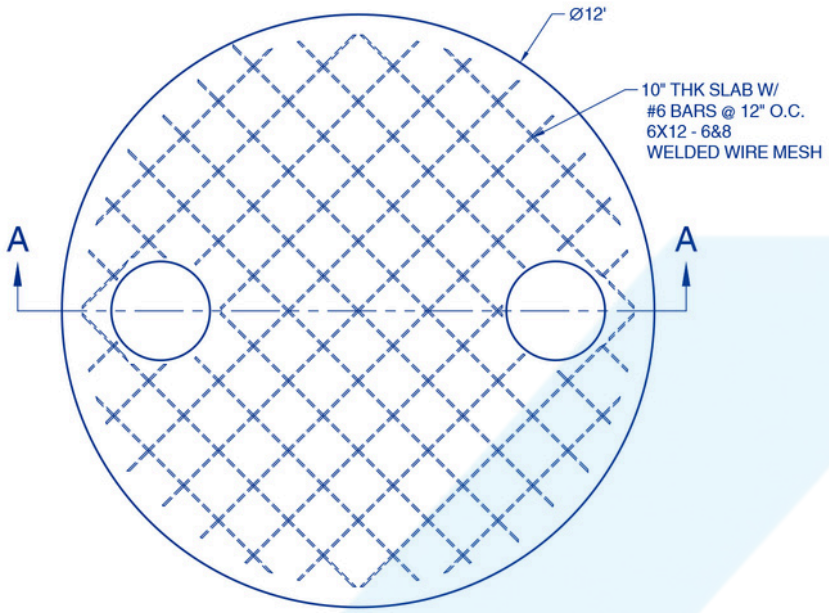


TOP VIEW 1:25

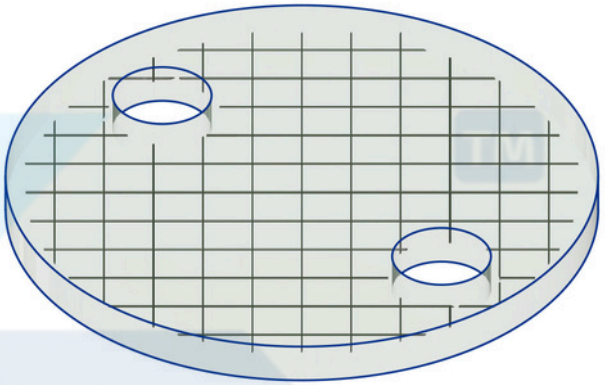

ISOMETRIC VIEW 1:25

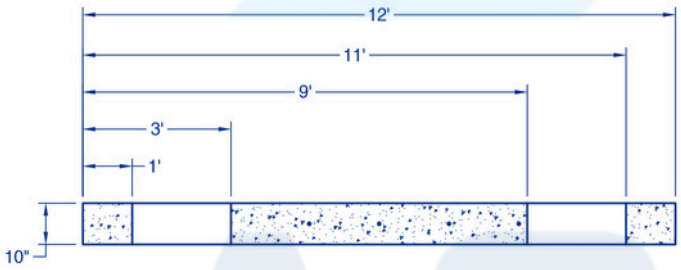

SECTION A-A
SCALE 1:25

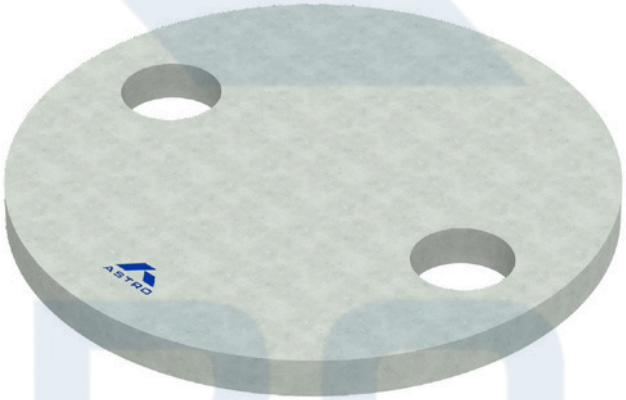

3D RENDER

PRODUCT NO.	AR 1210242 TS
DESCRIPTION	12' TRAFFIC SLAB
STANDARD	SUFFOLK & NASSAU COUNTY
THICKNESS	10" INCHES
ACCESS OPENING	24" TWO OPENINGS
WEIGHT	8482 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED

COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

ADDITIONAL NOTES:


REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 10" WALL WITH 1.5"
MIN COVER

12' X 10" TRAFFIC SLAB WITH 24" X 48" OPENING


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

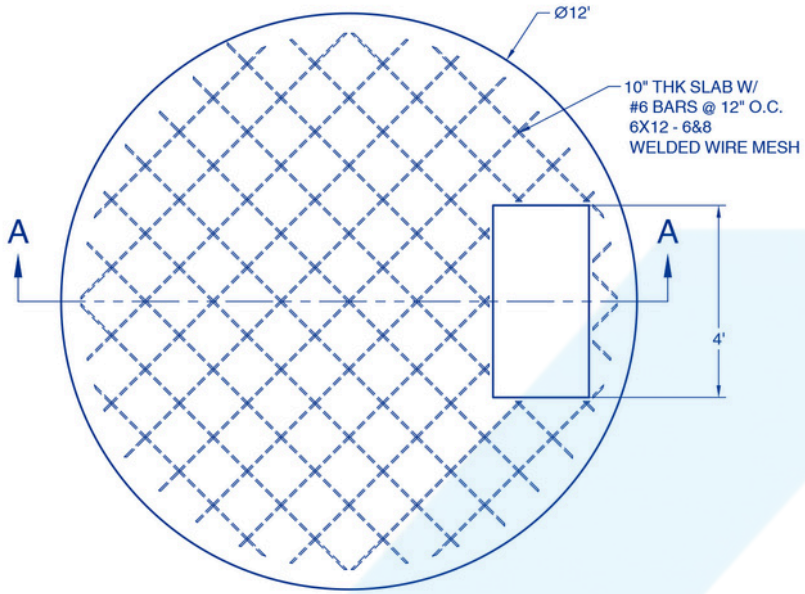


TOP VIEW 1:25

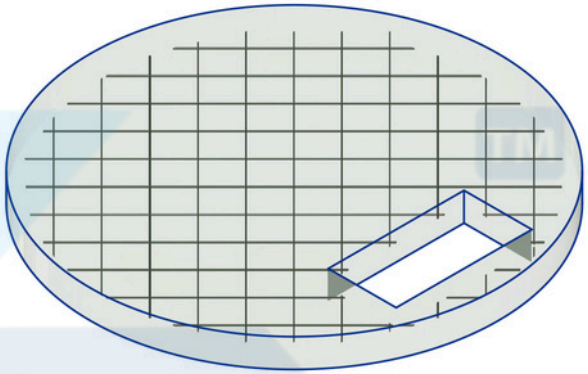

ISOMETRIC VIEW 1:25

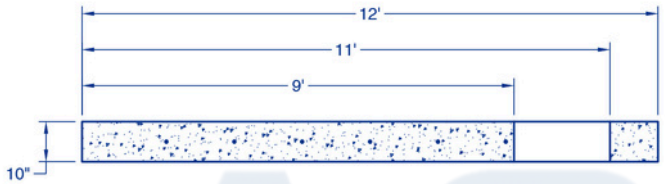

SECTION A-A
SCALE 1:25

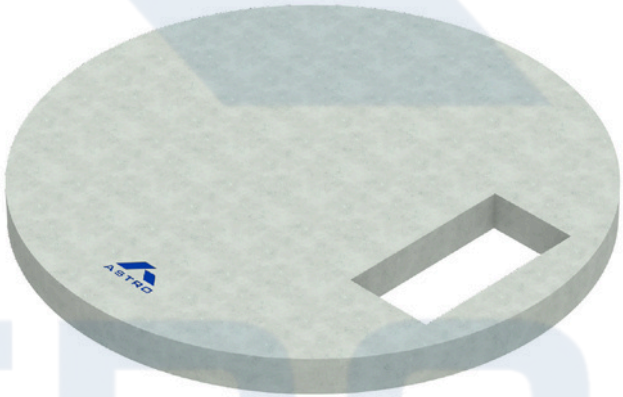

3D RENDER

PRODUCT NO.	AR 12102448 TS
DESCRIPTION	12' TRAFFIC SLAB
STANDARD	SUFFOLK & NASSAU COUNTY
THICKNESS	10" INCHES
ACCESS OPENING	24" X 48" OPENING
WEIGHT	8482 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED

COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com

ASTRO


ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 10" WALL WITH 1.5"
MIN COVER

ASTRO™

PRECAST CONCRETE SOLID RINGS



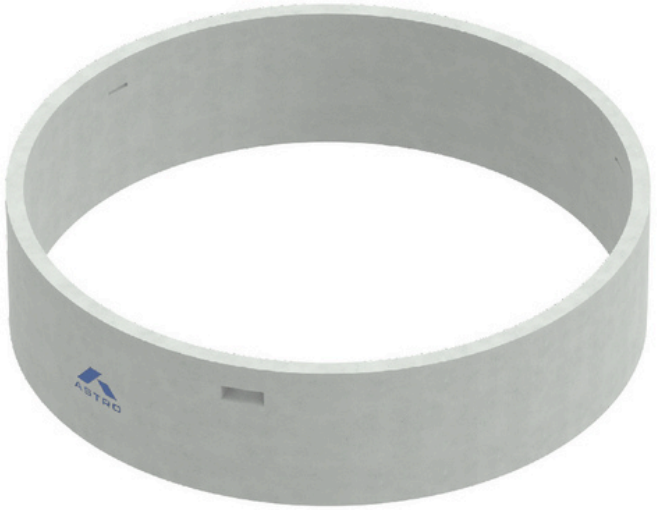


SOLID RINGS


- 4' X 2' SOLID RING
- 4' X 4' SOLID RING
- 6' X 3' SOLID RING
- 6' X 4' SOLID RING
- 8' X 2' SOLID RING
- 8' X 3' SOLID RING
- 8' X 3.5' SOLID RING
- 8' X 4' SOLID RING
- 8' X 5' SOLID RING
- 10' X 3' SOLID RING
- 10' X 4' SOLID RING
- 10' X 5' SOLID RING
- 12' X 2' SOLID RING
- 12' X 3' SOLID RING
- 12' X 4' SOLID RING
- 12' X 5' SOLID RING

4' X 2' SOLID RING


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

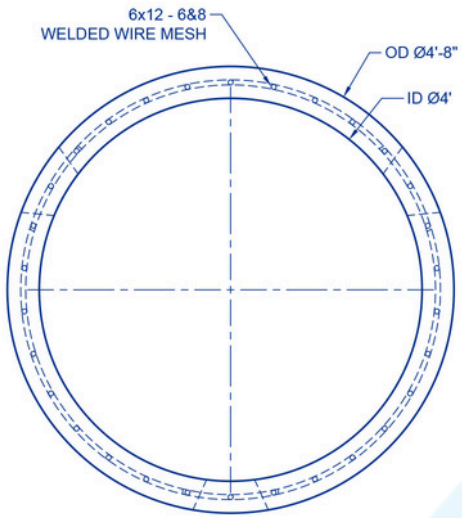


TOP VIEW 1:12

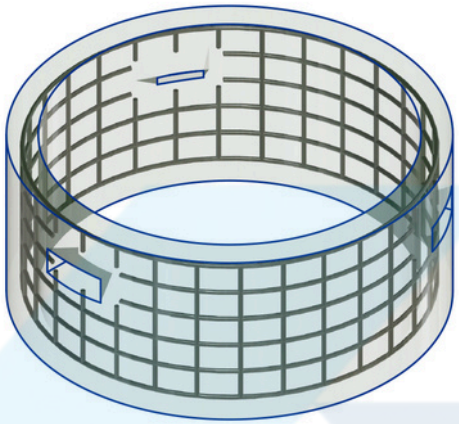


ISOMETRIC VIEW 1:12

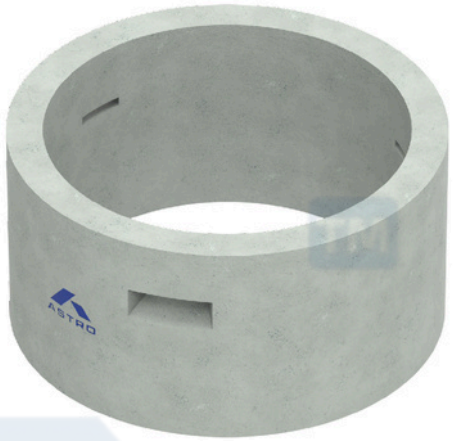


3D RENDER

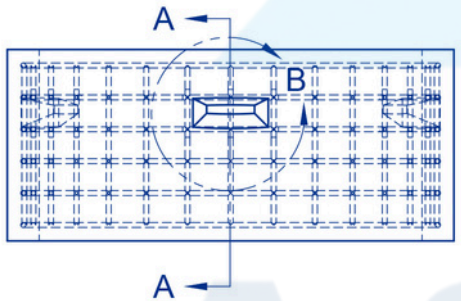

PLAN VIEW 1:12



DETAIL B
SCALE 1:16

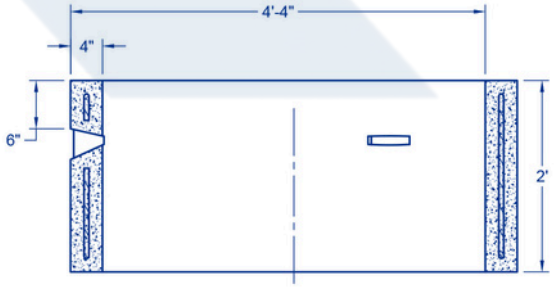

SECTION A-A
SCALE 1:12

ADDITIONAL NOTES:

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5"
MIN COVER.

PRODUCT NO.	AR 42 SR
DESCRIPTION	4' X 2' SOLID RING
STANDARD	SUFFOLK & NASSAU COUNTY
WALL THICKNESS	4" INCHES
DRAIN WALL AREA	40 SQ.FT.
DIAMETERS	OUTER - 4'
	INNER - 3'4"
OPENINGS	NO. OF OPENING - 3
	SIZE - 10 X 6 INCH
WEIGHT	2100 LBS
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL


THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED.

COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com

ASTRO


ASTRO MASONRY©2025-26 I ALL RIGHTS RESERVED

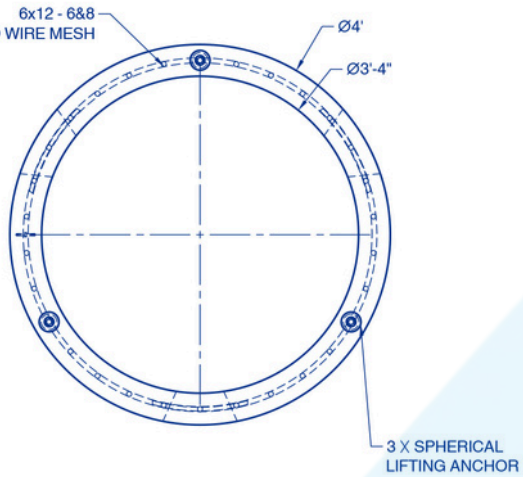


TOP VIEW 1:14




ISOMETRIC VIEW 1:14

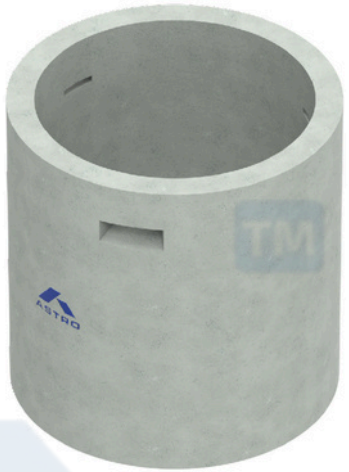


3D RENDER

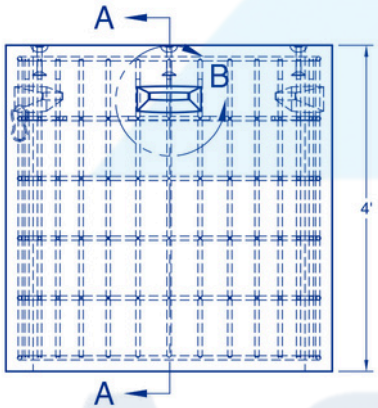

PLAN VIEW 1:14



DETAIL B
SCALE 1:16

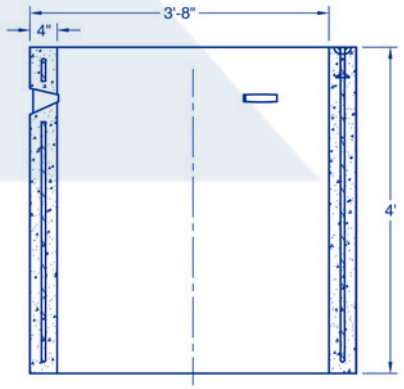

SECTION A-A
SCALE 1:14

PRODUCT NO.	AR 44 SR
DESCRIPTION	4' X 4' SOLID RING
STANDARD	SUFFOLK & NASSAU COUNTY
WALL THICKNESS	4" INCHES
DRAIN WALL AREA	50.3 SQ.FT.
DIAMETERS	OUTER - 4'
	INNER - 3'4"
OPENINGS	NO. OF OPENING - 3
	SIZE - 10 X 6 INCH
WEIGHT	2292 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED.

COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com

ASTRO


ADDITIONAL NOTES:

3 SHPERICAL LIFTING ANCHORS WITH SWL OF 1000 LBS


REINFORCEMENT: WWF 6" × 12" - 6&8, W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5" MIN COVER.

6' X 3' SOLID RING


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

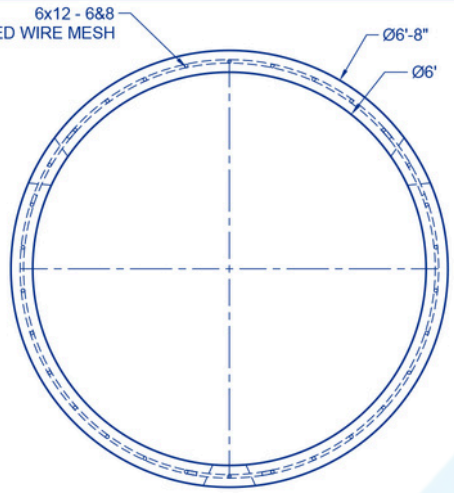


TOP VIEW 1:18

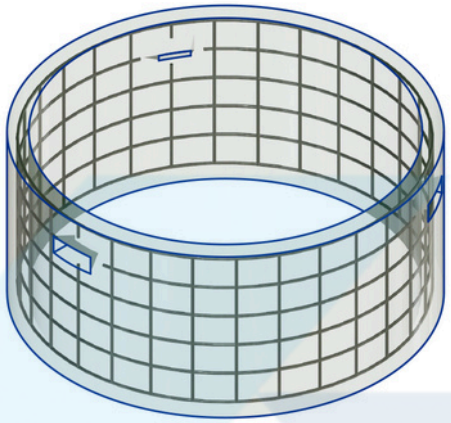


ISOMETRIC VIEW 1:18

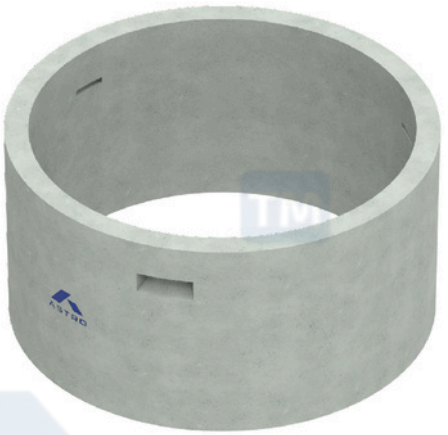


3D RENDER

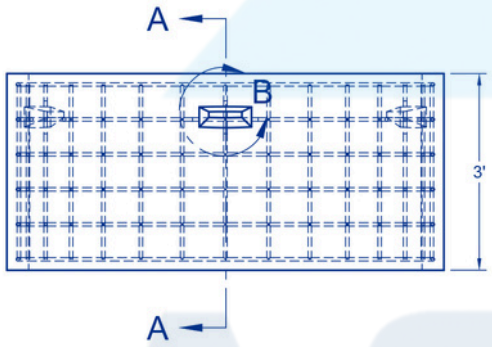

PLAN VIEW 1:18



DETAIL B
SCALE 1:16

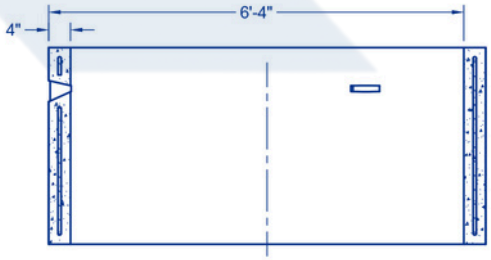

SECTION A-A
SCALE 1:18

ADDITIONAL NOTES:

3 SHPERICAL LIFTING ANCHORS WITH
SWL OF 1000 LBS

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5"
MIN COVER.

PRODUCT NO.	AR 63 SR
DESCRIPTION	6' X 3' SOLID RING
STANDARD	SUFFOLK & NASSAU COUNTY
WALL THICKNESS	4" INCHES
DRAIN WALL AREA	85 SQ.FT.
DIAMETERS	OUTER - 6'
	INNER - 5'4"
OPENINGS	NO. OF OPENING - 3
	SIZE - 10 X 6 INCH
WEIGHT	2000 LBS
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED.


COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

6' X 4' SOLID RING


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

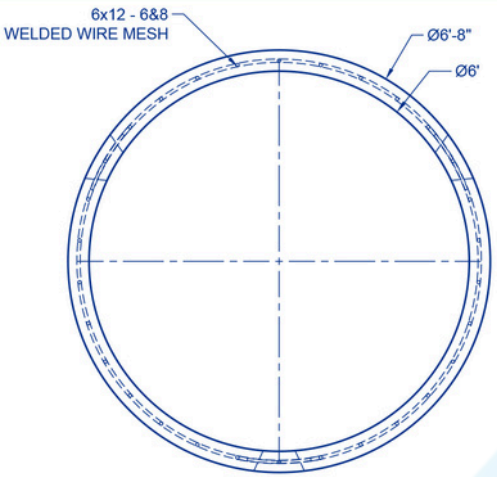


TOP VIEW 1:18

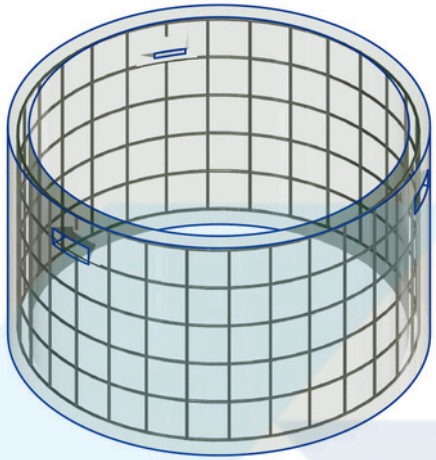


ISOMETRIC VIEW 1:18

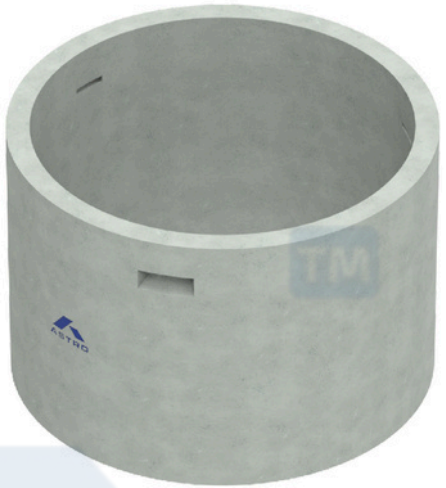


3D RENDER

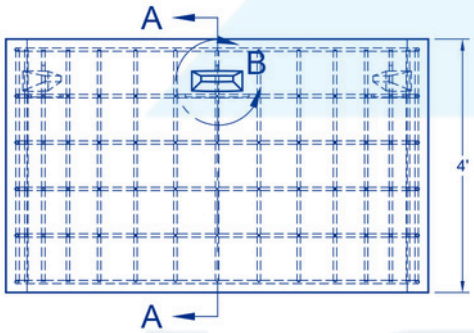

PLAN VIEW 1:18



DETAIL B
SCALE 1:16

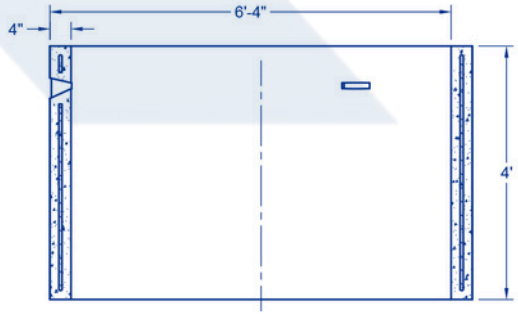

SECTION A-A
SCALE 1:18

PRODUCT NO.	AR 64 SR
DESCRIPTION	6' X 4' SOLID RING
STANDARD	SUFFOLK & NASSAU COUNTY
WALL THICKNESS	4" INCHES
DRAIN WALL AREA	95 SQ.FT.
DIAMETERS	OUTER - 6'
	INNER - 5'4"
OPENINGS	NO. OF OPENING - 3
	SIZE - 10 X 6 INCH
WEIGHT	2100 LBS
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED.

COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

ADDITIONAL NOTES:


3 SHPERICAL LIFTING ANCHORS WITH SWL OF 1500 LBS

REINFORCEMENT: WWF 6" × 12" - 6&8, W2.0 × W2.0 (ASTM A1064) MESH CENTERED IN 4" WALL WITH 1.5" MIN COVER.


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

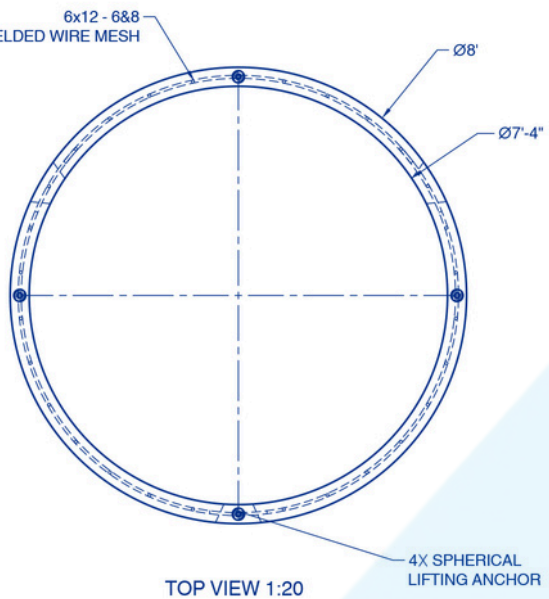


TOP VIEW 1:20

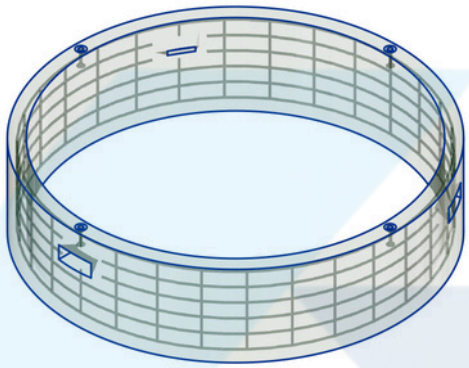


ISOMETRIC VIEW 1:20

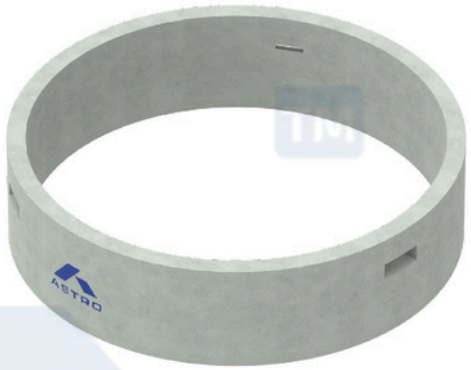


3D RENDER

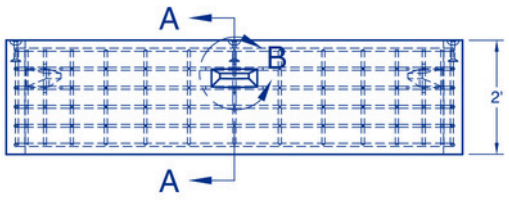

PLAN VIEW 1:20



DETAIL B
SCALE 1:16

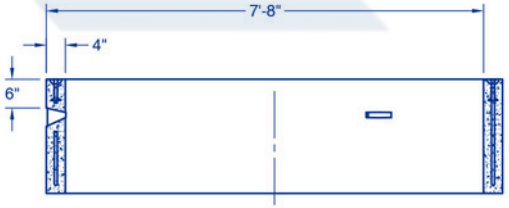

SECTION A-A
SCALE 1:20

PRODUCT NO.	AR 82 SR
DESCRIPTION	8' X 2' SOLID RING
STANDARD	SUFFOLK & NASSAU COUNTY
WALL THICKNESS	4" INCHES
DRAIN WALL AREA	50.3 SQ. FT.
DIAMETERS	OUTER - 8'
	INNER - 7'4"
OPENINGS	NO. OF OPENING - 3
	SIZE - 10 X 6 INCH
WEIGHT	2246 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED.

COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com

ASTRO


ADDITIONAL NOTES:

4 SHPERICAL LIFTING ANCHORS WITH SWL OF 1000 LBS


REINFORCEMENT: WWF 6" × 12" - 6&8, W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5" MIN COVER.

8' X 3' SOLID RING


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

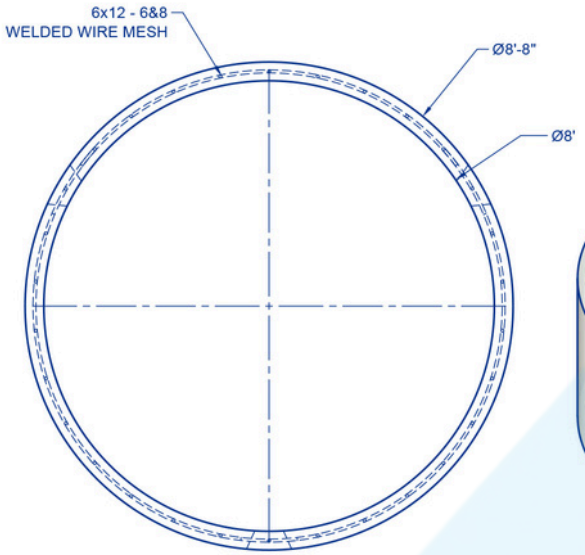


TOP VIEW 1:20

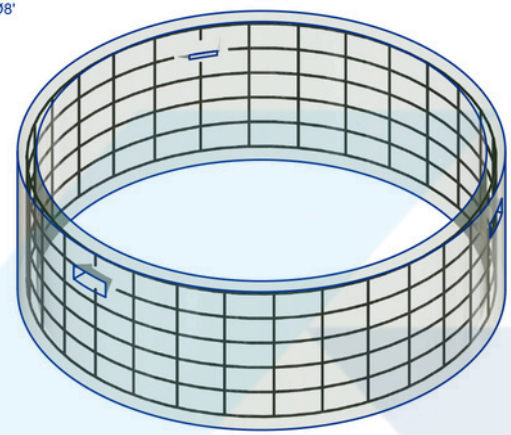


ISOMETRIC VIEW 1:20

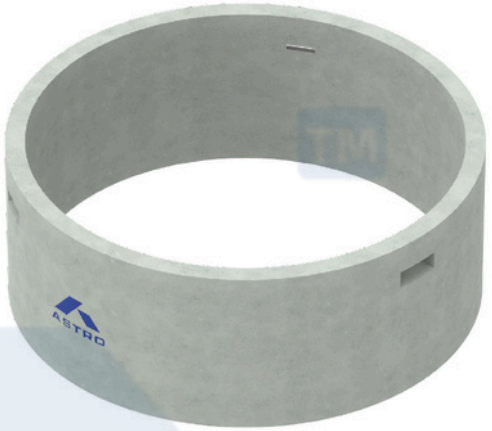


3D RENDER

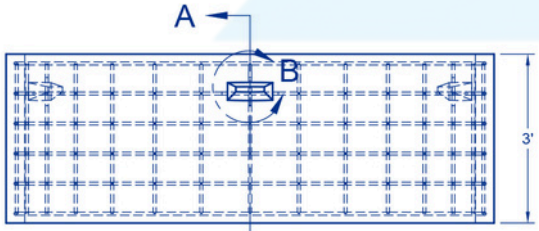

PLAN VIEW 1:20



DETAIL B
SCALE 1:16

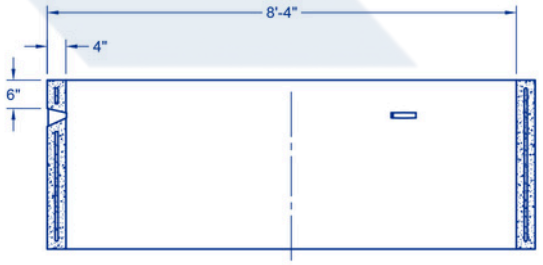

SECTION A-A
SCALE 1:20

ADDITIONAL NOTES:

4 SHPERICAL LIFTING ANCHORS WITH
SWL OF 1500 LBS

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5"
MIN COVER.

PRODUCT NO.	AR 83 SR
DESCRIPTION	8' X 3' SOLID RING
STANDARD	SUFFOLK & NASSAU COUNTY
WALL THICKNESS	4" INCHES
DRAIN WALL AREA	125 SQ.FT.
DIAMETERS	OUTER - 8'
	INNER - 7'4"
OPENINGS	NO. OF OPENING - 3
	SIZE - 10 X 6 INCH
WEIGHT	2800 LBS
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED.


COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

8' X 3.5' SOLID RING


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

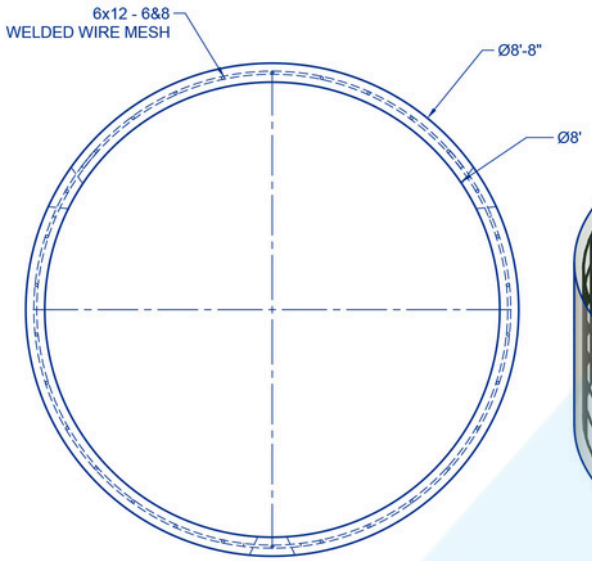


TOP VIEW 1:20

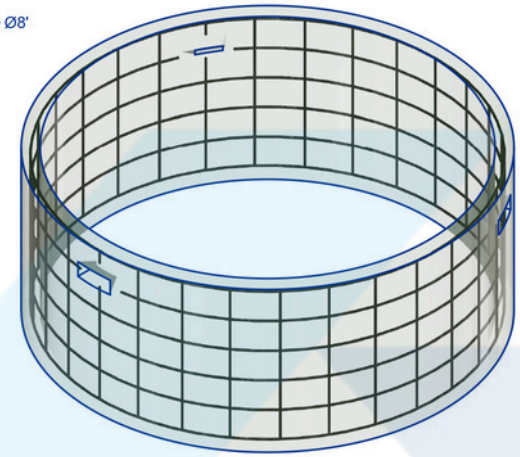


ISOMETRIC VIEW 1:20

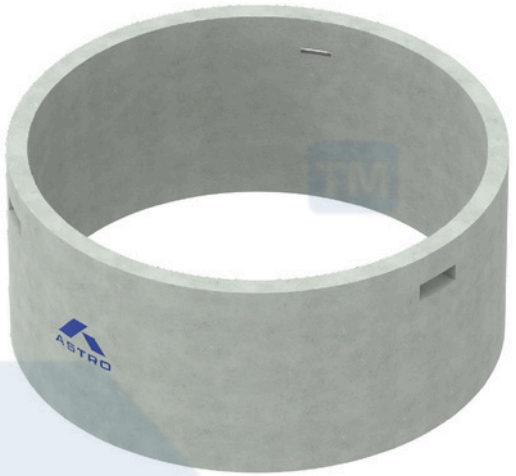

3D RENDER

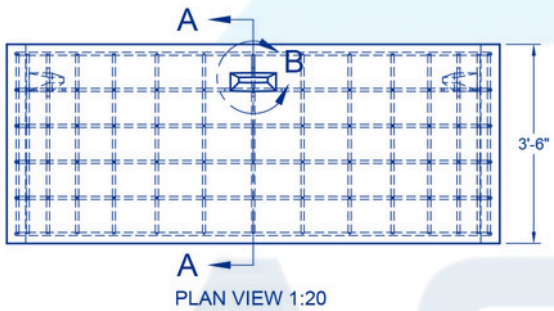

PLAN VIEW 1:20



DETAIL B
SCALE 1:16



SECTION A-A
SCALE 1:20

PRODUCT NO.	AR 835 SR
DESCRIPTION	8' X 3.5' SOLID RING
STANDARD	SUFFOLK & NASSAU COUNTY
WALL THICKNESS	4" INCHES
DRAIN WALL AREA	110 SQ.FT.
DIAMETERS	OUTER - 8'
	INNER - 7'4"
OPENINGS	NO. OF OPENING - 3
	SIZE - 10 X 6 INCH
WEIGHT	2500 LBS
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED.

ADDITIONAL NOTES:

4 SHPERICAL LIFTING ANCHORS WITH SWL OF 000 LBS

REINFORCEMENT: WWF 6" × 12" - 6&8, W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5" MIN COVER.


COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com


ASTRO

8' X 4' SOLID RING


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

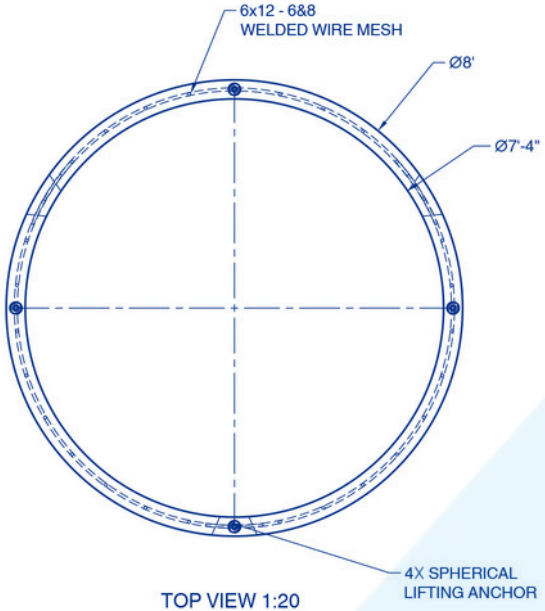


TOP VIEW 1:20

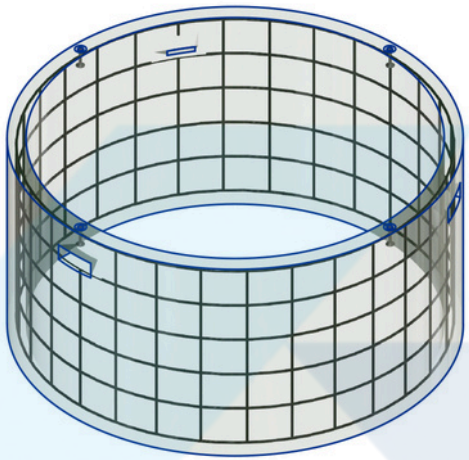


ISOMETRIC VIEW 1:20

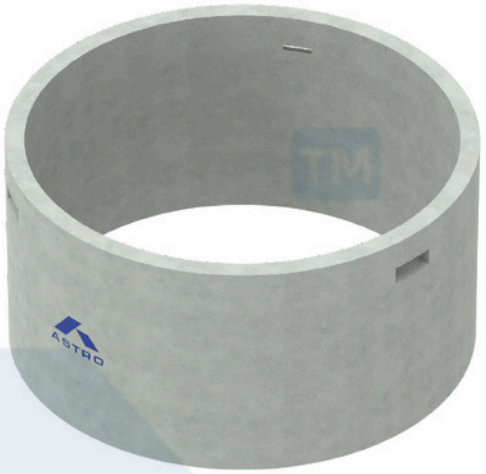


3D RENDER

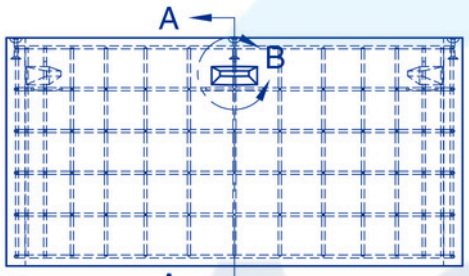

PLAN VIEW 1:20



DETAIL B
SCALE 1:16

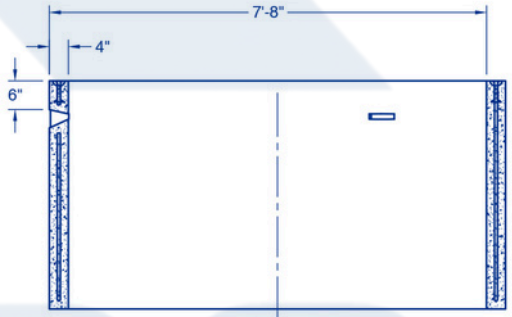

SECTION A-A
SCALE 1:20

PRODUCT NO.	AR 84 SR
DESCRIPTION	8' X 4' SOLID RING
STANDARD	SUFFOLK & NASSAU COUNTY
WALL THICKNESS	4" INCHES
DRAIN WALL AREA	100.5 SQ.FT.
DIAMETERS	OUTER - 8'
	INNER - 7'4"
OPENINGS	NO. OF OPENING - 3
	SIZE - 10 X 6 INCH
WEIGHT	4797 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED.

ADDITIONAL NOTES:

4 SHPERICAL LIFTING ANCHORS WITH SWL OF 2000 LBS


REINFORCEMENT: WWF 6" × 12" - 6&8, W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5" MIN COVER.

COMPANY ADDRESS


928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com

ASTRO


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

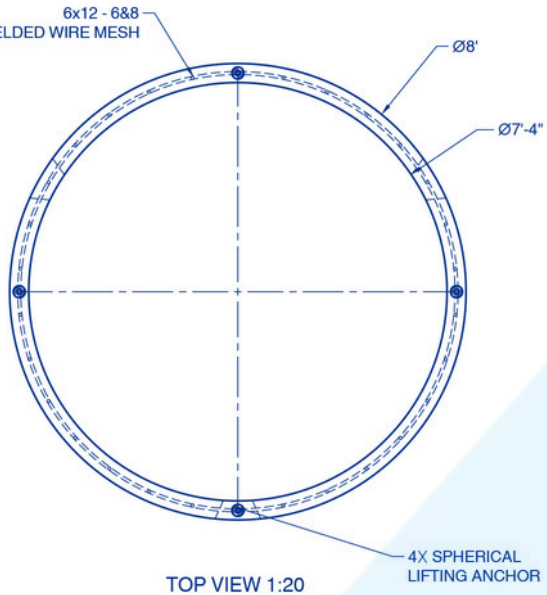


TOP VIEW 1:20

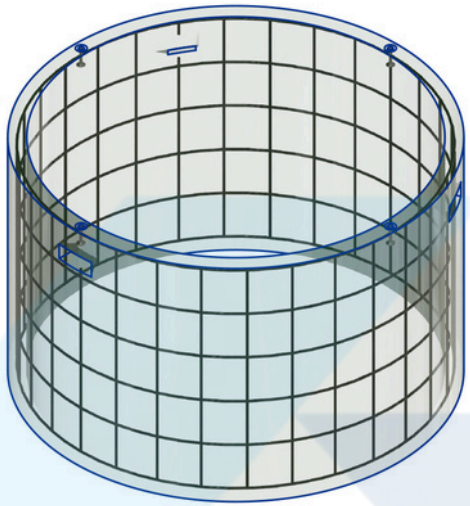


ISOMETRIC VIEW 1:20

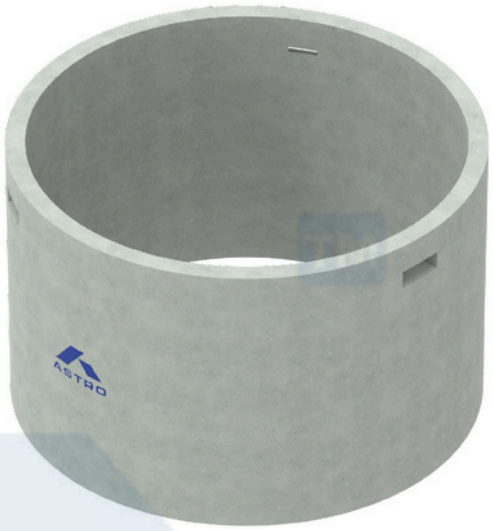


3D RENDER

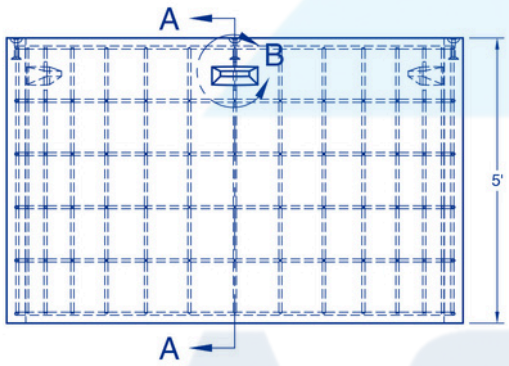

PLAN VIEW 1:20



DETAIL B
SCALE 1:16

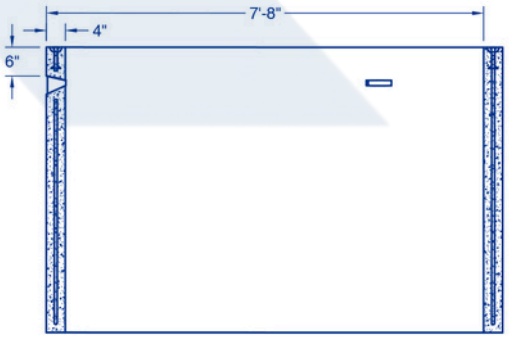

SECTION A-A
SCALE 1:20

PRODUCT NO.	AR 85 SR
DESCRIPTION	8' X 5' SOLID RING
STANDARD	SUFFOLK & NASSAU COUNTY
WALL THICKNESS	4" INCHES
DRAIN WALL AREA	125.7 SQ.FT.
DIAMETERS	OUTER - 8'
	INNER - 7'4"
OPENINGS	NO. OF OPENING - 3
	SIZE - 10 X 6 INCH
WEIGHT	6028 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED.

COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com

ASTRO


ADDITIONAL NOTES:

4 SHPERICAL LIFTING ANCHORS WITH SWL OF 2500 LBS


REINFORCEMENT: WWF 6" × 12" - 6&8, W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5" MIN COVER.

10' X 3' SOLID RING


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

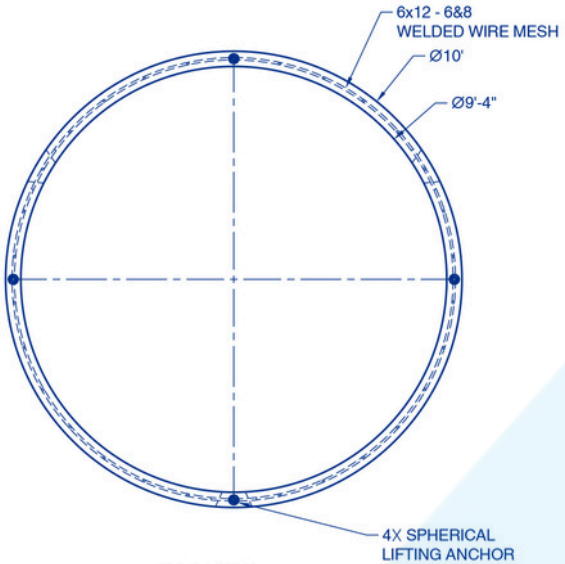


TOP VIEW 1:25

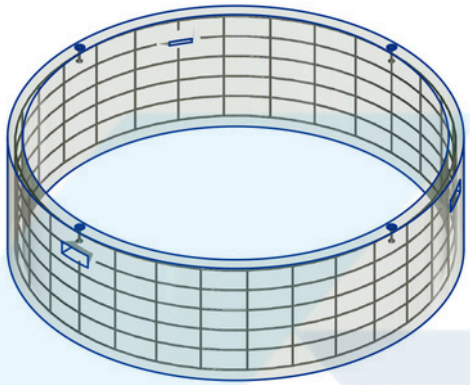


ISOMETRIC VIEW 1:25

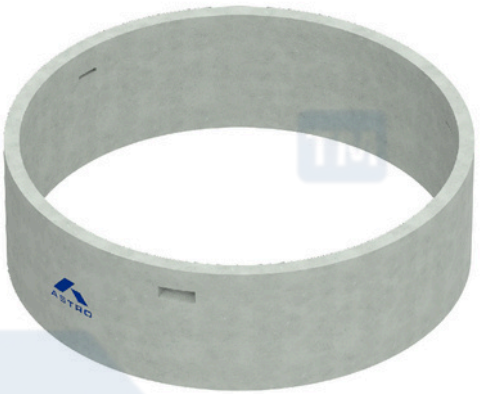


3D RENDER

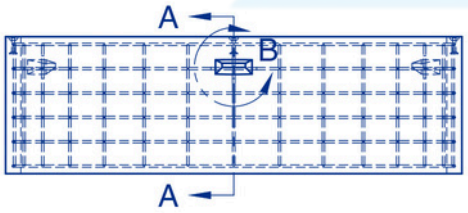

PLAN VIEW 1:25



DETAIL B
SCALE 1:16

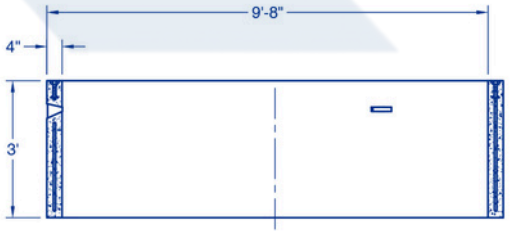

SECTION A-A
SCALE 1:25

ADDITIONAL NOTES:

4 SHPERICAL LIFTING ANCHORS WITH
SWL OF 1500 LBS

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5"
MIN COVER.

PRODUCT NO.	AR 103 SR
DESCRIPTION	10' X 3' SOLID RING
STANDARD	SUFFOLK & NASSAU COUNTY
WALL THICKNESS	4" INCHES
DRAIN WALL AREA	94.2 SQ.FT.
DIAMETERS	OUTER - 10'
	INNER - 9'4"
OPENINGS	NO. OF OPENING - 3
	SIZE - 10 X 6 INCH
WEIGHT	4534LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL


THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED.

COMPANY ADDRESS


928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com

ASTRO


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

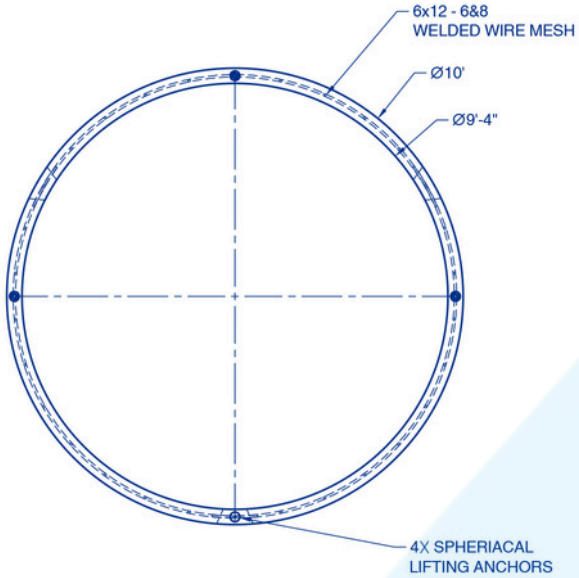


TOP VIEW 1:25

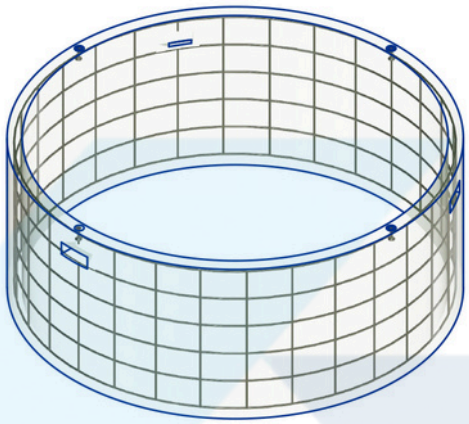


ISOMETRIC VIEW 1:25

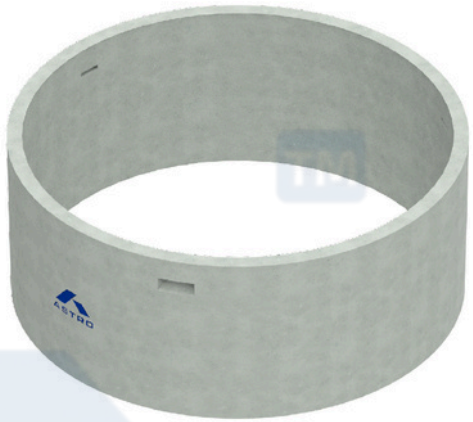


3D RENDER

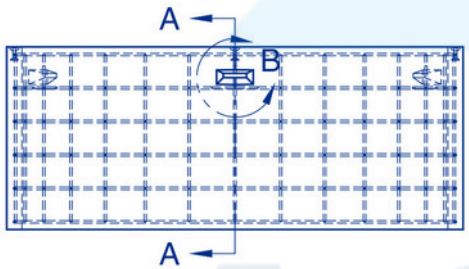

PLAN VIEW 1:25



DETAIL B
SCALE 1:16

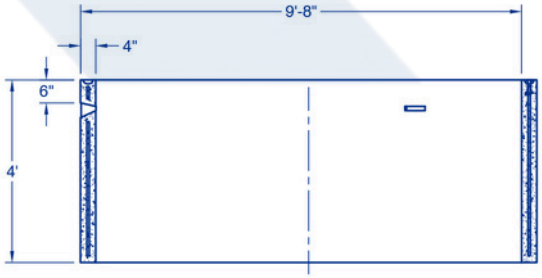

SECTION A-A
SCALE 1:25

PRODUCT NO.	AR 104 SR
DESCRIPTION	10' X 4' SOLID RING
STANDARD	SUFFOLK & NASSAU COUNTY
WALL THICKNESS	4" INCHES
DRAIN WALL AREA	125.7 SQ.FT.
DIAMETERS	OUTER - 10'
	INNER - 9'4"
OPENINGS	NO. OF OPENING - 3
	SIZE - 10 X 6 INCH
WEIGHT	6059 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED.

COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com

ASTRO


ADDITIONAL NOTES:

4 SHPERICAL LIFTING ANCHORS WITH SWL OF 2500 LBS


REINFORCEMENT: WWF 6" × 12" - 6&8, W2.0 × W2.0 (ASTM A1064) MESH CENTERED IN 4" WALL WITH 1.5" MIN COVER.

10' X 5' SOLID RING


ASTRO MASONRY©2025-26 | ALL RIGHTS RESERVED

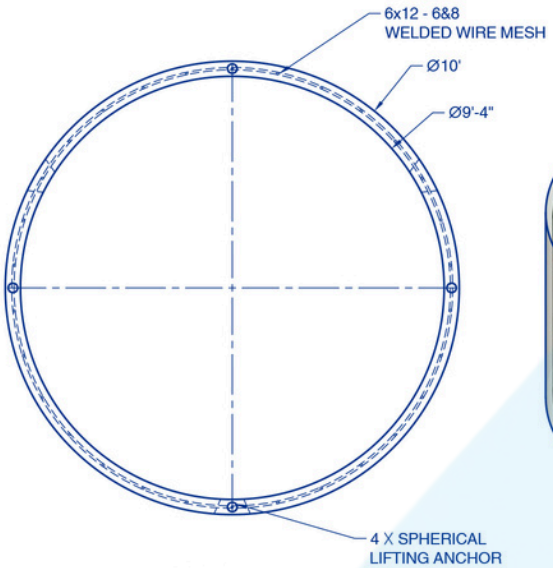


TOP VIEW 1:25

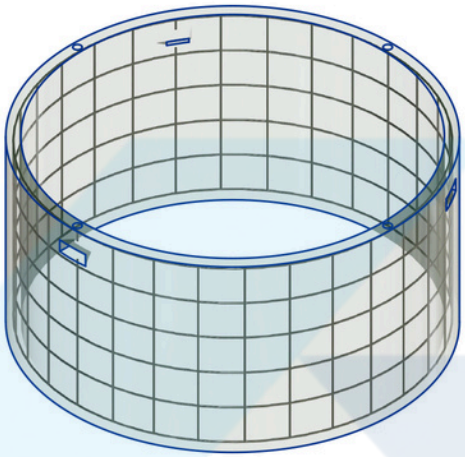


ISOMETRIC VIEW 1:25

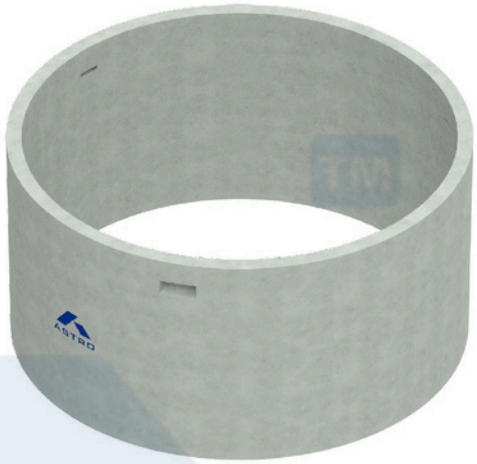


3D RENDER

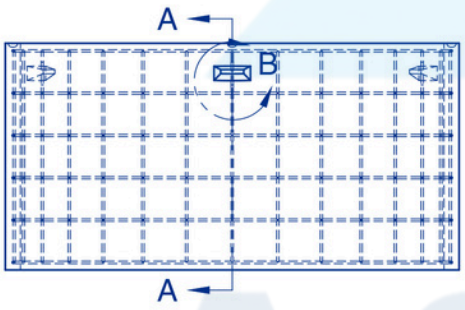

PLAN VIEW 1:25



DETAIL B
SCALE 1:16

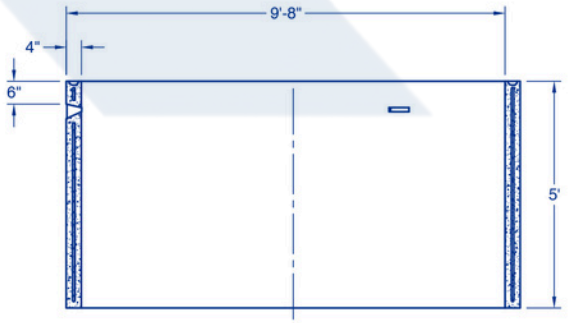

SECTION A-A
SCALE 1:25

ADDITIONAL NOTES:

4 SHPERICAL LIFTING ANCHORS WITH
SWL OF 3000 LBS

REINFORCEMENT: WWF 6" × 12" - 6&8,
W2.0 × W2.0 (ASTM A1064)
MESH CENTERED IN 4" WALL WITH 1.5"
MIN COVER.

PRODUCT NO.	AR 105 SR
DESCRIPTION	10' X 5' SOLID RING
STANDARD	SUFFOLK & NASSAU COUNTY
WALL THICKNESS	4" INCHES
DRAIN WALL AREA	157.1 SQ.FT.
DIAMETERS	OUTER - 10'
	INNER - 9'4"
OPENINGS	NO. OF OPENING - 3
	SIZE - 10 X 6 INCH
WEIGHT	7607 LBS.
LOAD RATING	A.A.S.H.T.O. HS20-44
TESTING BY	ALL ISLAND TESTING
ENGINEERING BY	FIONA S.

ENGINEERS APPROVAL SPACE

SPECIFICATIONS

1. CONCRETE TO HAVE A MINIMUM 28 DAY
2. COMPRESSIVE STRENGTH OF 4000 PSI.
3. REINFORCING STEEL TO COMPLY WITH ASTM A-615 GRADE 60 ASTM A-185-02
4. DRAWING SCALE 1:25
5. ALL DIMENSIONS ARE IN INCHES
6. TOLERANCE X ± 0.5"
7. CONFORMS TO LOCAL STANDARDS & SPECIFICATIONS AS APPLICABLE
8. INSTALLING INSTRUCTIONS AVAILABLE SEPERATELY

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENTS IS THE SOLE PROPERTY OF ASTRO MASONRY. ANY REPRODUCTION, MANUFACTURING, DISCLOSURE IN PART OR AS A WHOLE WITHOUT THE WRITTEN CONSENT OF IS PROHIBITED.

COMPANY ADDRESS

928, LONG ISLAND AVENUE
DEER PARK, NY 11729
☎ 631-667-3300
www.astromasonry.com

ASTRO