



Power inlet: Single cell Li-Po battery, or any power source where $2.5 < V_{out} < 7V$
See sheet 2 for regulator circuit.

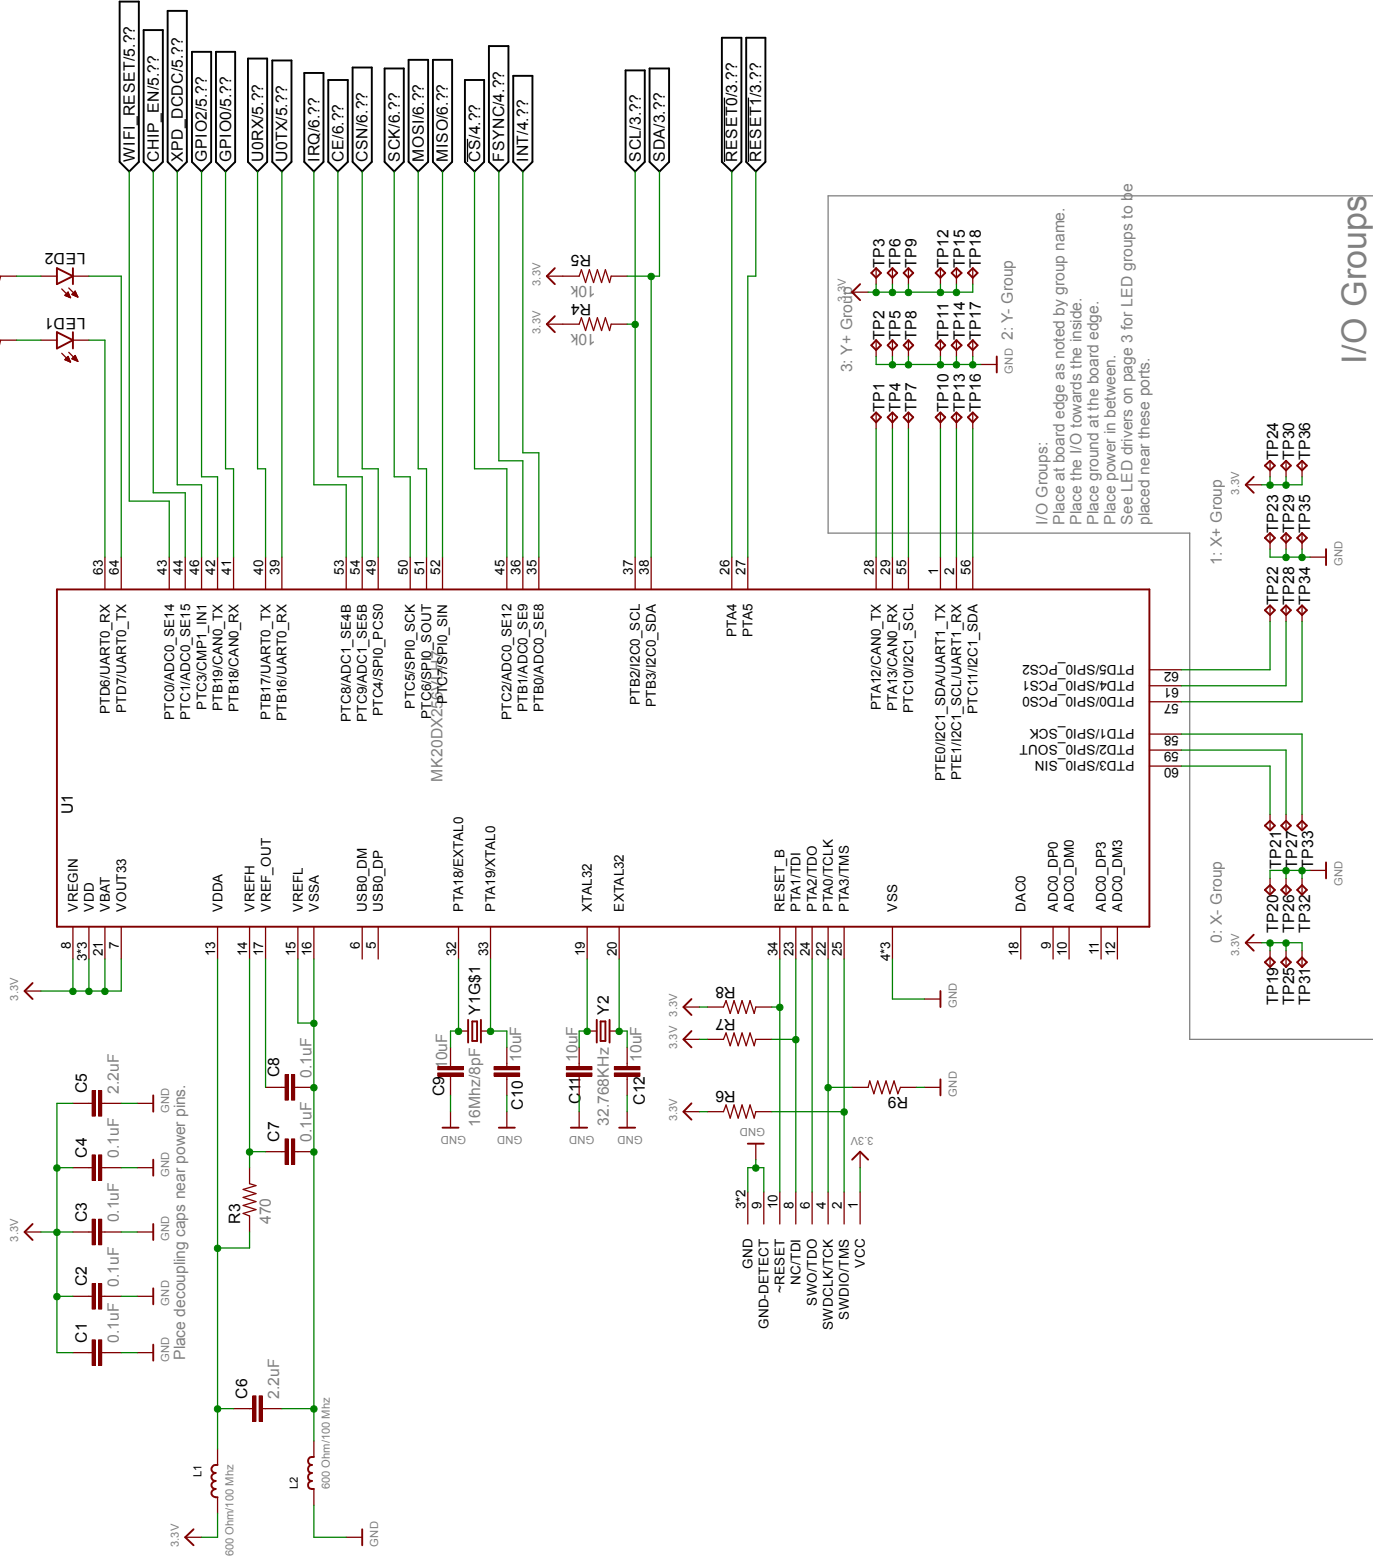

I/O Groups

I/O Groups:
Place at board edge as noted by group name.
Place the I/O towards the inside.
Place ground at the board edge.
Place power in between.
See LED drivers on page 3 for LED groups to be placed near these ports.

