




Place decoupling caps near VDD pins on drivers



NOTES

I2C Address: 1100<A2><A1><A0>
Refer to sheet 1 for GPIO blocks.
Place three LEDs as grouped
next to each GPIO block.

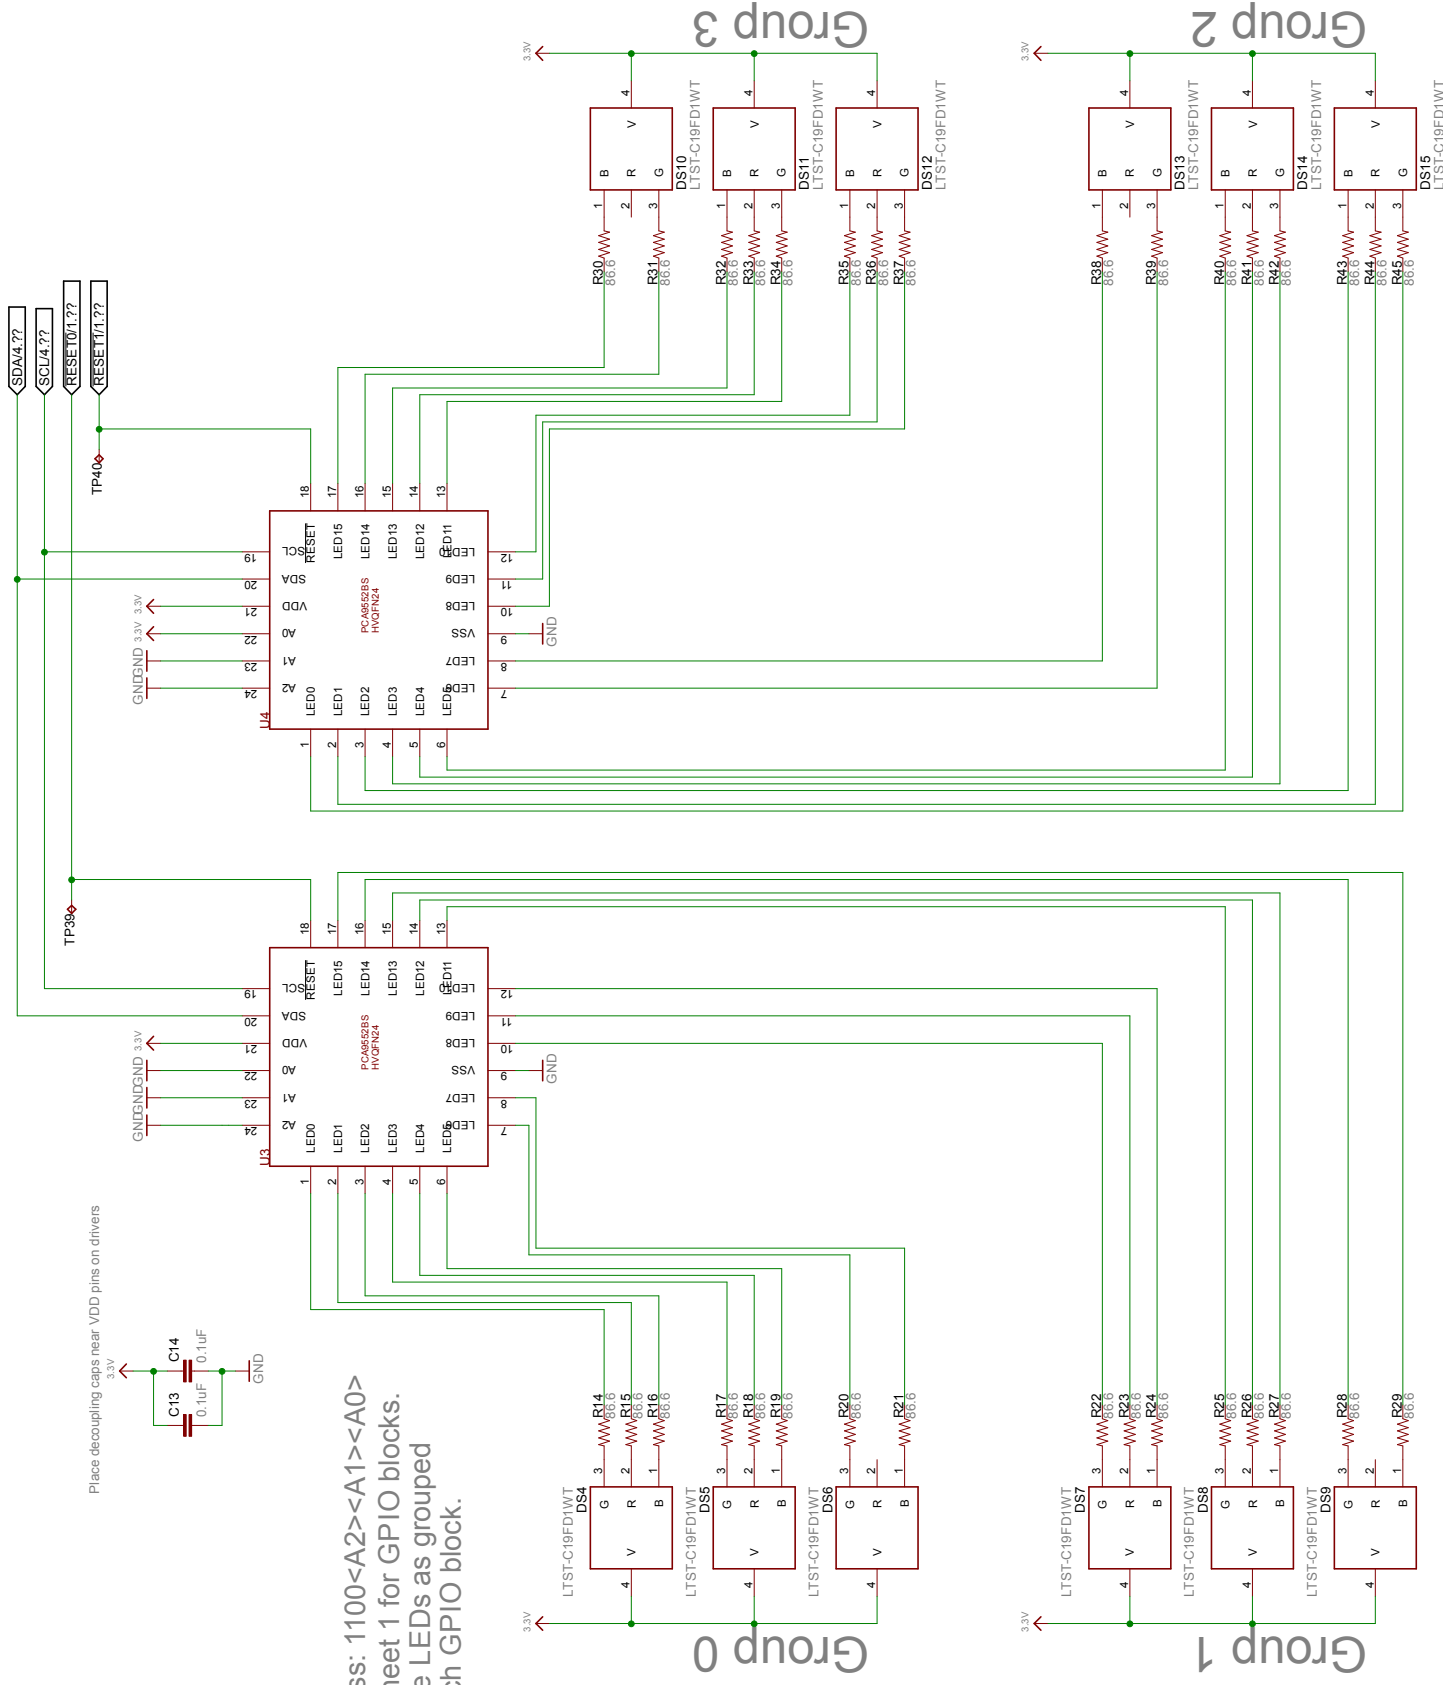

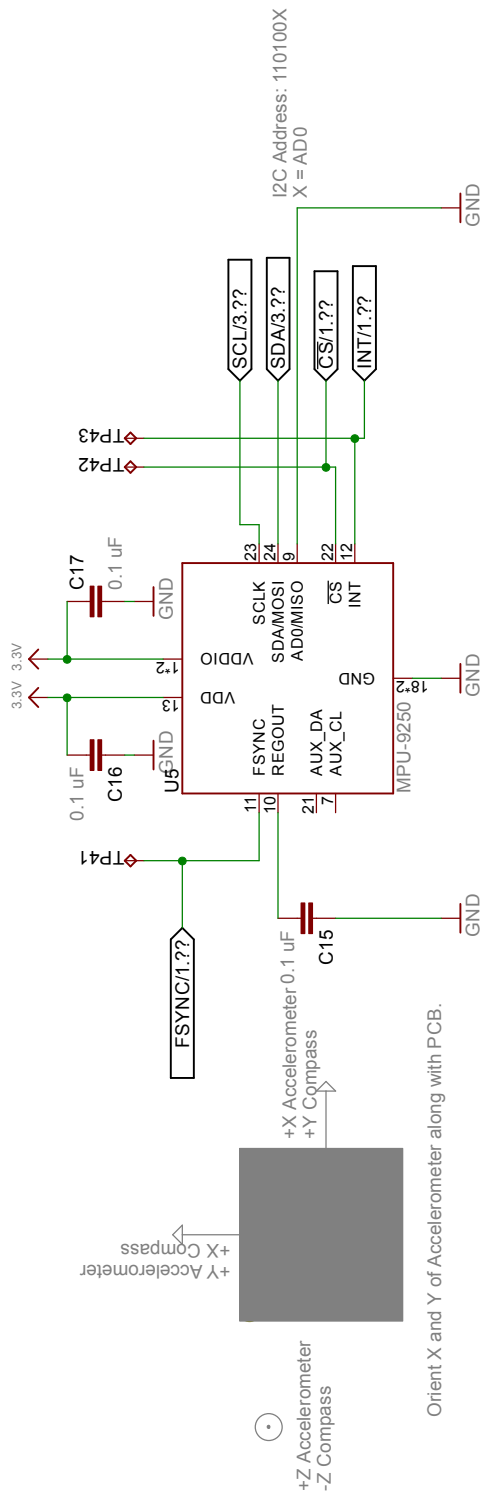

Orient X and Y of Accelerometer along with PCB.

