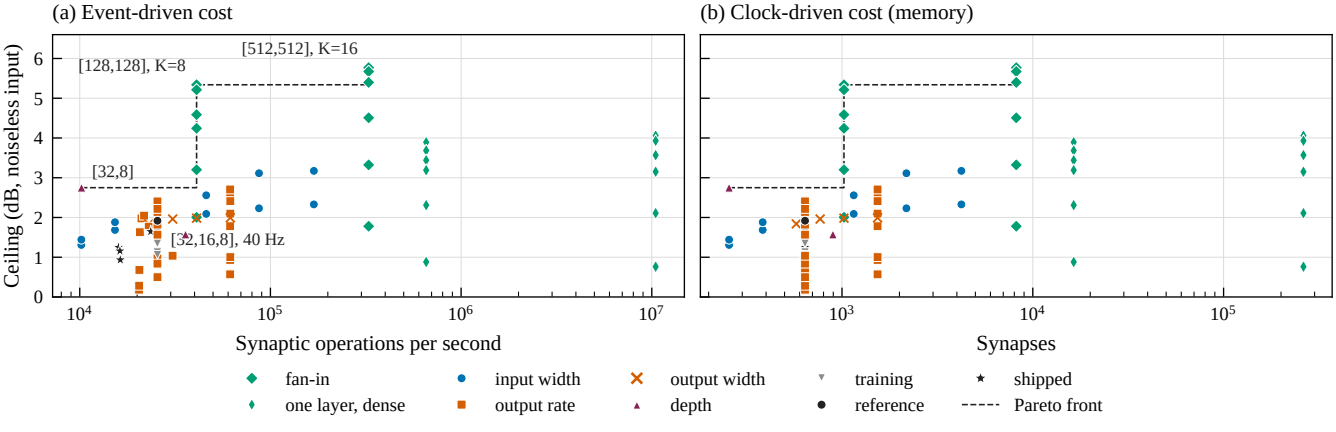
(a) Event-driven cost
(b) Clock-driven cost (memory)
Ceiling (dB, noiseless input)
[512,512], K=16
[128,128], K=8
[32,8]
[32,16,8], 40 Hz
Synaptic operations per second
Synapses
fan-in
one layer, dense
input width
output rate
output width
depth
training
reference
shipped
Pareto front